



Technical Reference

QAD Business Intelligence

QAD BI OpenEdge 10 Edition
QAD BI Progress 9 Edition
Reference

78-0652D
QAD BI Version 2.5
September 2007

This document contains proprietary information that is protected by copyright and other intellectual property laws. No part of this document may be reproduced, translated, or modified without the prior written consent of QAD Inc. The information contained in this document is subject to change without notice.

QAD Inc. provides this material as is and makes no warranty of any kind, expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. QAD Inc. shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance, or use of this material whether based on warranty, contract, or other legal theory.

QAD and MFG/PRO are registered trademarks of QAD Inc. The QAD logo is a trademark of QAD Inc.

Designations used by other companies to distinguish their products are often claimed as trademarks. In this document, the product names appear in initial capital or all capital letters. Contact the appropriate companies for more information regarding trademarks and registration.

Copyright © 2007 by QAD Inc.

QAD Inc.

100 Innovation Place

Santa Barbara, California 93108

Phone (805) 684-6614

Fax (805) 684-1890

<http://www.qad.com>

Contents

About This Guide	1
Overview	2
Other Related Documentation	2
QAD Web Site	3
Conventions	4
Section 1 QAD BI OpenEdge 10 Edition	5
Chapter 1 Installing QAD BI, OpenEdge 10 Edition	7
Overview	8
System Requirements	8
Supported Platforms	8
Minimum Hardware Requirements	8
Supported MFG/PRO Versions	9
Prerequisite Software Components	9
Performance	11
Installation Media	11
Installation Steps	12
Verify Prerequisite Components	12
Set Up Language Support	14
Install the QAD BI Data Transformer Files	14
Install the Common Components and Business Models	17
Install the Cognos Components	18

Install QAD ReportNet Bundle	30
------------------------------------	----

Chapter 2 Upgrading QAD BI, OpenEdge 10 Edition..... 35

Overview	36
Upgrade Summary	36
Prior to Upgrading	36
Install the New Data Transformer Files	36
Convert the DWH Database	37

Chapter 3 Using QAD BI, OpenEdge 10 Edition..... 39

Overview	40
MFG/PRO	41
QAD BI Data Transformer	41
Data Warehouse	42
BI Monitor	42
Impromptu Query Definition (.iqd) files	42
Cognos PowerPlay	43
QAD-Provided Business Models	43
QAD-Provided Dashboards	44
Data Transformer User Interface	45
Starting	45
Navigating	46
Setting Up the QAD BI Data Transformer	51
Define Database Connections	52
Manage Domains	60
Select Tables	61
Set Up Replication	63
Rename Table	72
Create Subsets	74
Add Indexes	75
Add Business Key Indexes	76
Modify Business Key Index Definition File	79
Load Business Key Index File	80
Remove Business Key Indexes	82

Preview Data	83
Delete Target Data	84
Validate Tables	85
Create Custom Tables	88
Create Custom ETL Scripts	89
Merge Data from Multiple Databases	91
Use System Tasks	92
Use the Task List	94
Export Tables	96
Rebuild Links	97
Working with the Model	99
Using QAD-Provided Model Data	103
Load Metadata	103
Bulk Generate and Validate Scripts	106
Complete Model Setup	107
Modifying Application Settings	107
Data Warehouse	108
ODBC Connection	110
Cognos Transformer	111
Replication	112
Batch Process	113
AppServer	116
Notification	118
Performing Administration Tasks	118
Update User Records	118
Set Up Windows Task Scheduler	120
Using BI Monitor	121
BI Monitor User Interface	121
Monitor and Manage Currently Running Tasks	123
View Tasks and Task Sets Logs	124
Archive Tasks and Task Sets Logs	124
Installing and Configuring QAD-Provided Dashboards	125
Create Data Source Connections	125
Install QAD-Provided Dashboards	127
Configure Report Server Settings	131

Perform Report Synchronization	133
Create Menu Entries for the Dashboards	135

Section 2 QAD BI Progress 9 Edition.....137

Chapter 4 Installing QAD BI, Progress 9 Edition 139

Overview	140
System Requirements	140
Supported Platforms	140
Minimum Hardware Requirements	140
Supported MFG/PRO Versions	141
Third-Party Software Components	141
Performance	142
Installation Media	143
Installation Steps	143
Verify the Prerequisite Components	144
Set Up Language Support	146
Prepare the DataDirect SequeLink Components	147
Install the Cognos Components	152
Install QAD BI Data Transformer Files	161
Update the ODBC Account	163
Install the Common Components and Business Models	165

Chapter 5 Upgrading QAD BI, Progress 9 Edition 167

Overview	168
Upgrade Summary	168
Prior to Upgrading	168
Install the New Data Transformer Files	168
Convert the DWH Database	168

Chapter 6 Using QAD BI, Progress 9 Edition 171

Overview	172
MFG/PRO	173
QAD BI Data Transformer	173
Data Warehouse	173
Microsoft Access Database	174
Cognos PowerPlay	174
QAD-Provided Models	174
Data Transformer User Interface	175
Starting	176
Navigating	177
Setting Up QAD BI Data Transformer	182
Define Database Connections	183
Manage Domains	188
Select Tables	189
Set Up Replication	191
Rename Table	200
Create Subsets	202
Add Indexes	203
Add Business Key Indexes	206
Preview Data	207
Delete Target Data	208
Validate Tables	209
Create Custom Tables	212
Create Custom ETL Scripts	213
Merge Data from Multiple Databases	216
Use the Task List	217
Update Links	218
Export Tables	219
Rebuild Links	219
Working with the Model	221
Using QAD-Provided Model Data	224
Load Metadata	225
Bulk Generate and Validate Scripts	227

Complete Model Setup	228
Modifying Application Settings	228
Data Warehouse	229
Table Linking	230
Cognos Transformer	232
Batch Process	233
Notification	235
AppServer	236
Performing Administration Tasks	237
Update User Records	237
Set Up Windows Task Scheduler	239

Section 3 QAD BI Reference 241


Chapter 7 Reference 243

QAD BI Parallel Replication Setup	244
Overview	244
Configure the AppServer	244
Configure Data Transformer	249
Multicurrency Configuration	250
Overview	250
Configure the Data Warehouse Currency	251
Configure Multicurrency Custom Scripts	251
Modifying Currency	253
Setting the Replication Task Sequence	255
Overview	255
Single-Currency Sequence Dependencies	255
Multicurrency Sequence Dependencies	256
Creating Translatable Cognos Transformer Models	257
Overview	257
Cognos Transformer Model	257
Data Transformer User-Defined Labels	258
Manually Loading Custom Scripts	260

Overview 260

Load Custom Scripts 260

Index 265

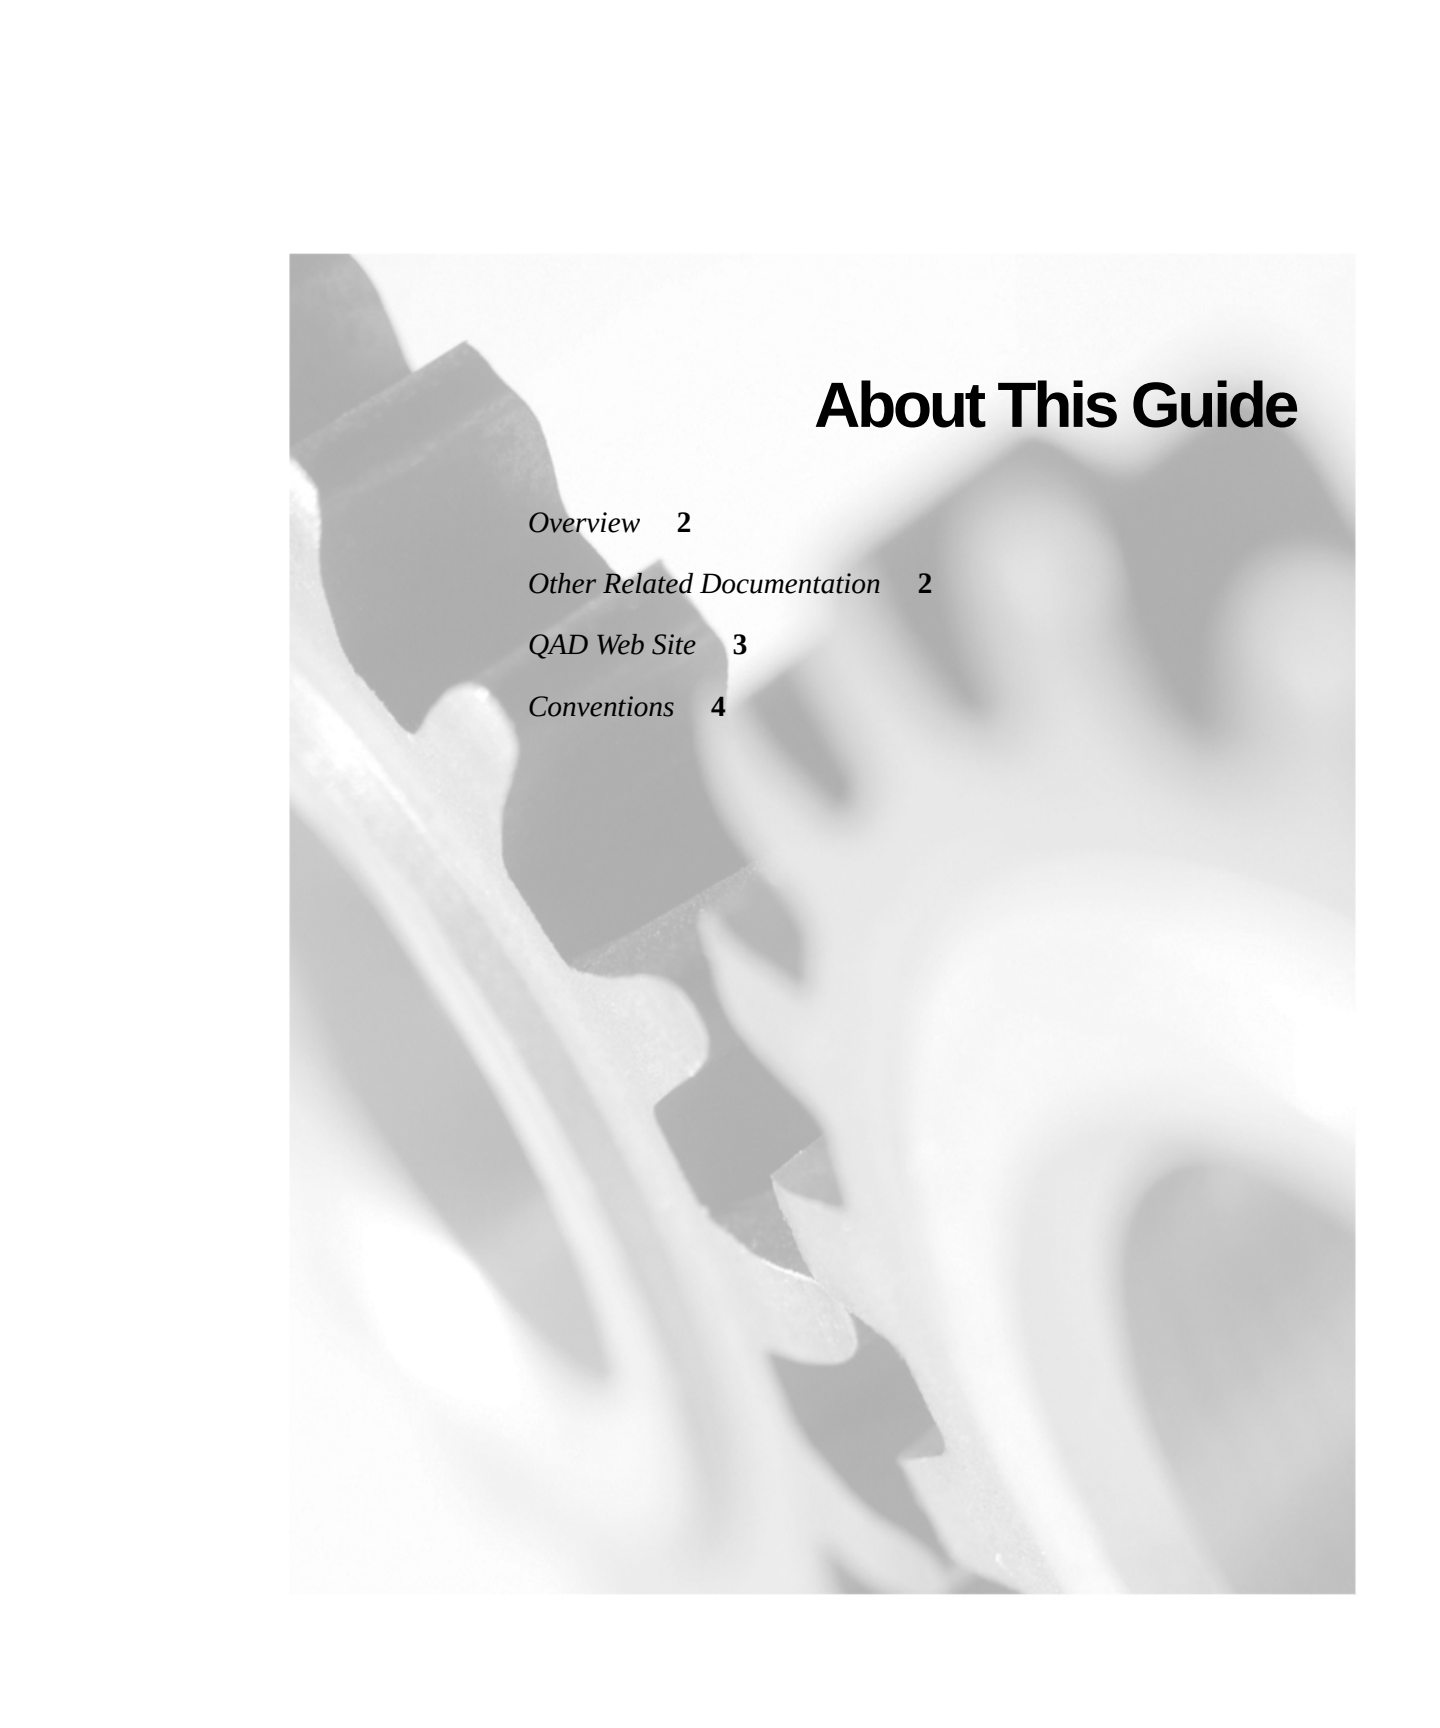

About This Guide

Overview 2

Other Related Documentation 2

QAD Web Site 3

Conventions 4

Overview

This document describes how to install, implement, and use QAD Business Intelligence.

The product is available in two editions: one for Progress 9 implementations of MFG/PRO, and another for OpenEdge 10 implementations.

For ease of use, the document provides a stand-alone section that covers installation and use of each edition:

- Section 1, “QAD BI OpenEdge 10 Edition,” beginning on page 5
- Section 2, “QAD BI Progress 9 Edition,” beginning on page 137

Additionally, Section 3, “QAD BI Reference,” beginning on page 241, provides reference information that applies to both editions.

Note As of Service Pack 5, the name of MFG/PRO eB2.1 was changed to QAD Enterprise Applications 2007 (QAD 2007). Subsequent versions are identified by a decimal number; for example, QAD 2007.1. General references in this document to MFG/PRO and MFG/PRO eB2.1 also apply to QAD 2007.

Other Related Documentation

- For information about Cognos 8, see the documentation from Cognos.
- For information on the QAD-provided models and key performance indicators (KPIs), see *Reference Guide: QAD Business Intelligence Key Performance Indicators*. This is provided on the installation CD for each model you purchased.
- For information about functions in MFG/PRO, see the relevant MFG/PRO user guide.

- For information about implementing the QAD .NET user interface, see *Installation Guide: QAD User Interfaces*.
- For information about QAD ReportNet Bundle, see *QAD .NET UI 2.5 Release Notes*.
- For information about Access, see the documentation from Microsoft Corporation.

QAD Web Site

The QAD Web site provides a wide variety of information about the company and its products. You can access the Web site at:

<http://www.qad.com/>

If you have a QAD Web account, product documentation is available for viewing or downloading at:

<http://support.qad.com/>

Register for a QAD Web account by accessing the Web site and clicking the Accounts link at the top of the screen. Your customer ID number is required. Access to certain areas is dependent on the type of agreement you have with QAD.

You can register for a QAD Web account by accessing the Web site and clicking the Accounts link at the top of the screen. Your customer ID number is required. Access to certain areas is dependent on the type of agreement you have with QAD.

Most user documentation is available in two formats:


- Portable document format (PDF). PDF files can be downloaded from the QAD Web site to your computer. You can view them with the free Adobe Acrobat Reader. A link for downloading this program is also available on the QAD Web site.
- HTML. You can view user documentation through your Web browser. The documents include search tools for easily locating topics of interest.

Features also include an online solution database to help QAD BI users answer questions about setting up and using the product. Additionally, the QAD Web site has information about training classes and other services that can help you learn about QAD BI.

Conventions

This document uses the text or typographic conventions listed in the following table.

If you see:	It means:
monospaced text	A command or file name.
<i>italicized monospaced text</i>	A variable name for a value you enter as part of an operating system command; for example, <i>YourCDROMDir</i> .
indented command line	A long command that you enter as one line, although it appears in the text as two lines.
Note	Alerts the reader to exceptions or special conditions.
Important	Alerts the reader to critical information.
Warning	Used in situations where you can overwrite or corrupt data, unless you follow the instructions.

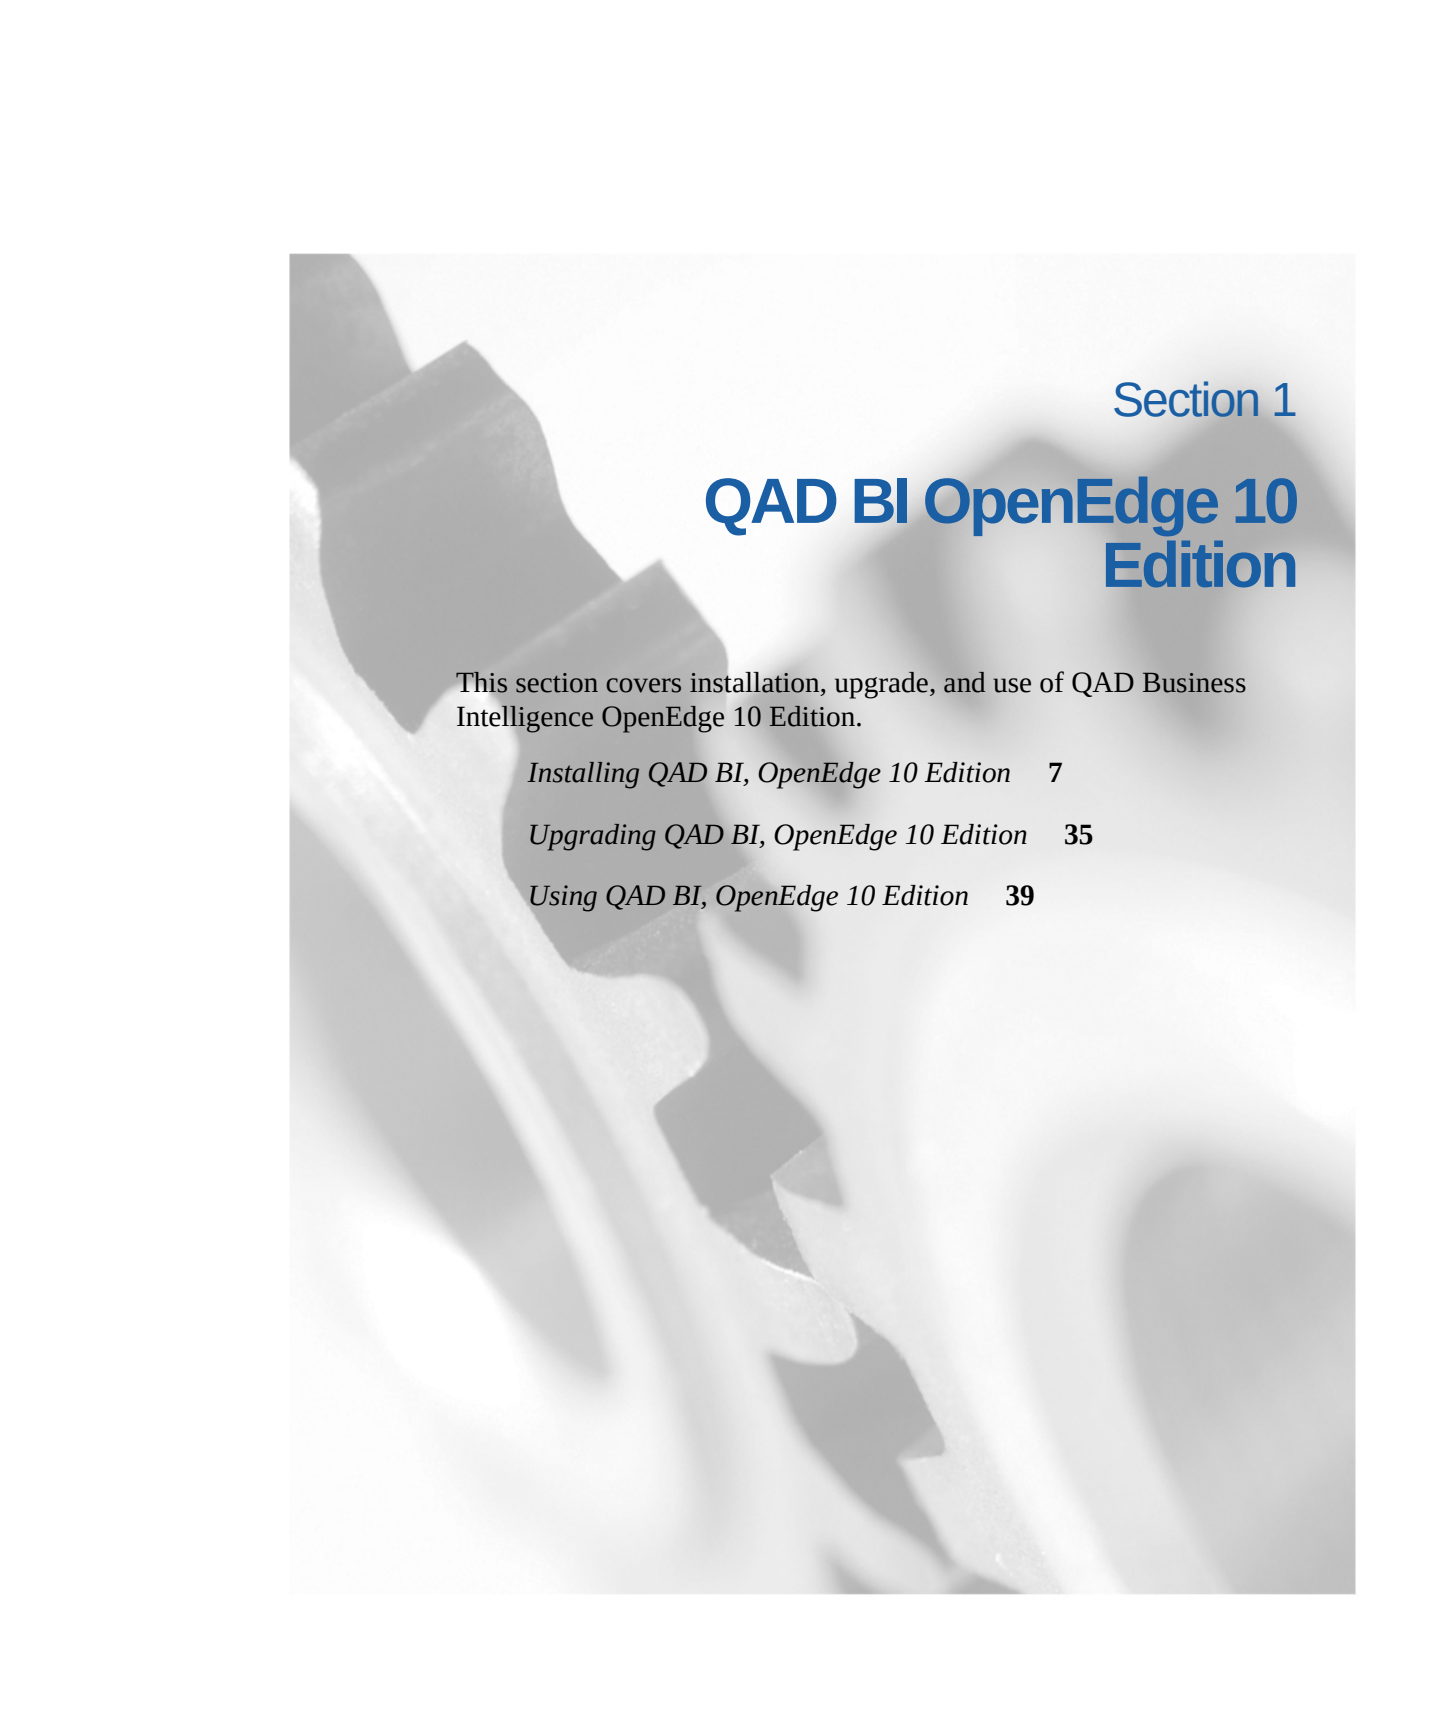The background of the page features a grayscale image of several interlocking gears. The gears are of different sizes and are positioned in a way that creates a sense of depth and mechanical complexity. The lighting is soft, highlighting the teeth of the gears and creating subtle shadows.

Section 1


QAD BI OpenEdge 10 Edition

This section covers installation, upgrade, and use of QAD Business Intelligence OpenEdge 10 Edition.

Installing QAD BI, OpenEdge 10 Edition **7**

Upgrading QAD BI, OpenEdge 10 Edition **35**

Using QAD BI, OpenEdge 10 Edition **39**

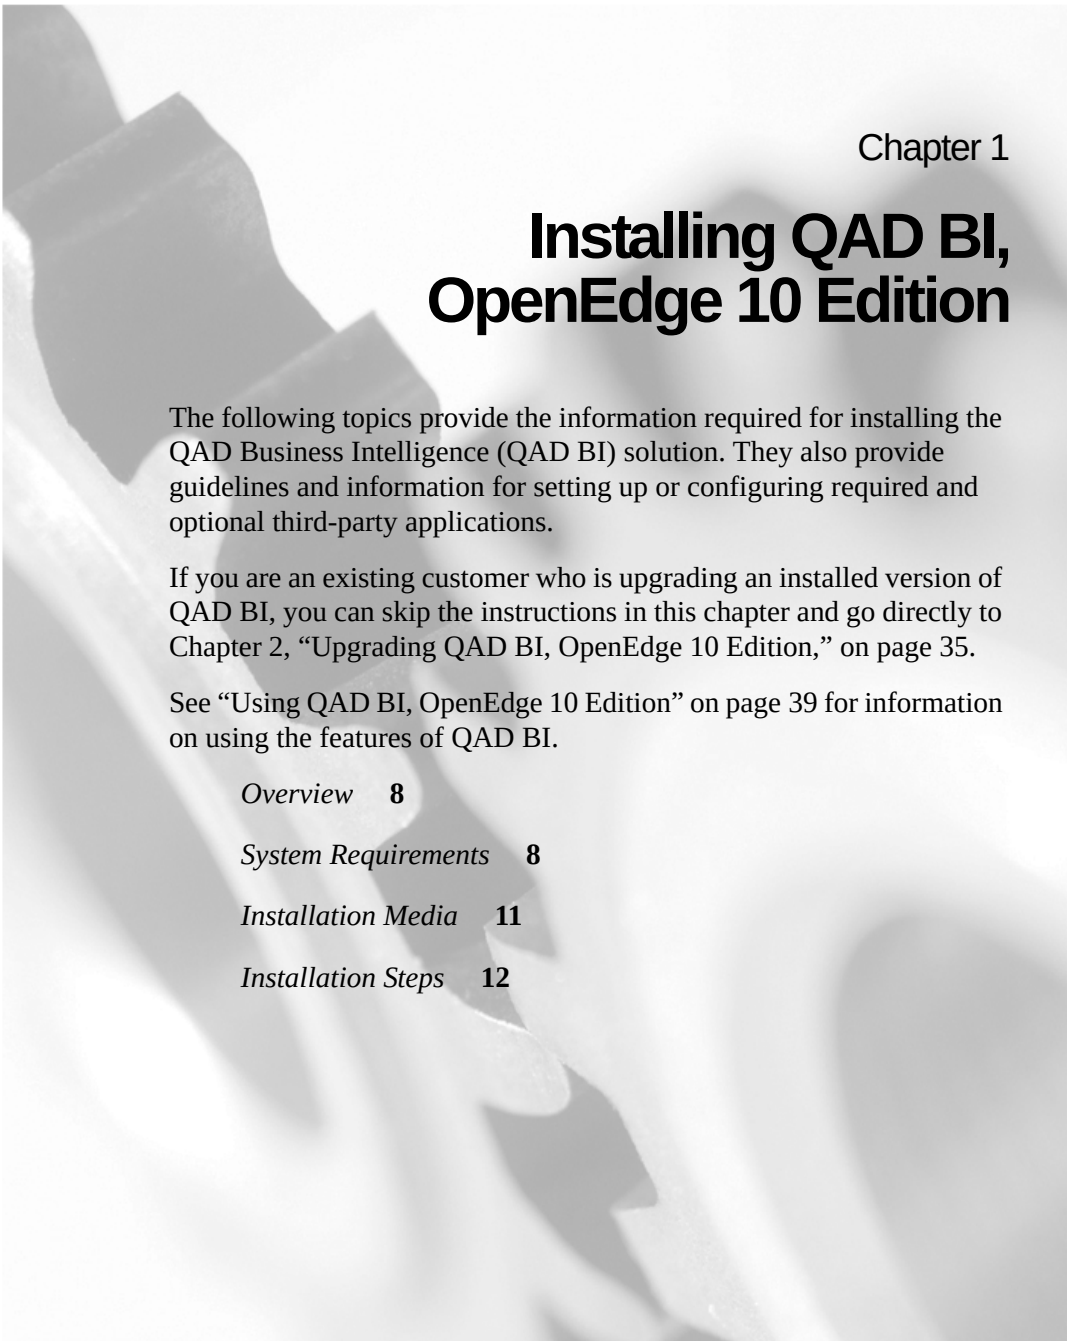

Chapter 1

Installing QAD BI, OpenEdge 10 Edition

The following topics provide the information required for installing the QAD Business Intelligence (QAD BI) solution. They also provide guidelines and information for setting up or configuring required and optional third-party applications.

If you are an existing customer who is upgrading an installed version of QAD BI, you can skip the instructions in this chapter and go directly to Chapter 2, “Upgrading QAD BI, OpenEdge 10 Edition,” on page 35.

See “Using QAD BI, OpenEdge 10 Edition” on page 39 for information on using the features of QAD BI.

Overview **8**

System Requirements **8**


Installation Media **11**

Installation Steps **12**

Overview

QAD BI provides a complete business intelligence solution for analyzing data residing in MFG/PRO and other data sources. It extracts and transforms data from one or many data sources using flexible rules and stores this information in a data warehouse. Prebuilt MFG/PRO models support powerful multidimensional analysis against the data warehouse using Cognos 8. Figure 1.1 illustrates the overall structure of the solution.

Fig. 1.1
Component
Overview

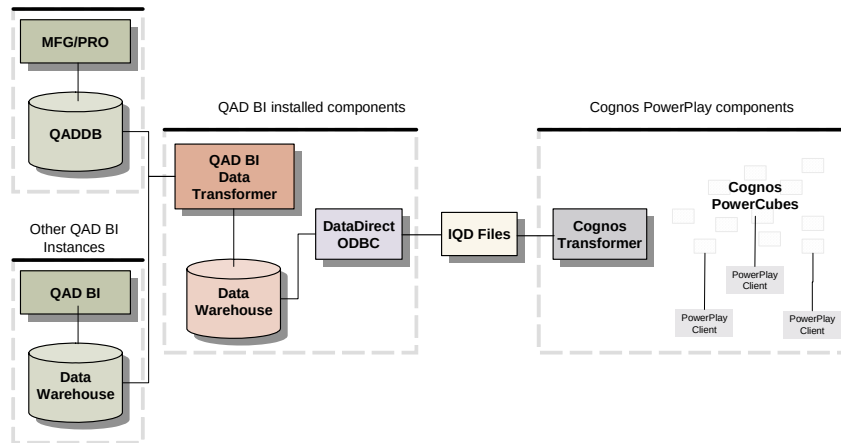

System Requirements

Supported Platforms

Data Transformer runs on Windows 2000, XP, and 2003.

Data warehouse can be installed on both Windows and Unix.

Minimum Hardware Requirements

- Pentium III, 500 MHz or higher
- Minimum 1 GB RAM
- 1 GB hard disk space or more depending on the size of the data warehouse

Note Generalizations about hardware must be evaluated with an understanding of the amount of data that will be processed through QAD BI. The server hosting the data warehouse should follow recommended practices for supporting Progress databases and (if implemented) Cognos Cubes.

For minimum hardware requirements to install and run Cognos 8 components, see Chapter 5, “Installing Cognos 8,” in the *Cognos 8 Business Intelligence Installation and Configuration Guide*.

Supported MFG/PRO Versions

Data Transformer works with any service pack level of MFG/PRO 9.0, eB eB2, and eB2.1, as well as QAD 2007, running on Progress 9 or OpenEdge 10.

QAD BI is available in the following languages: English, French, Spanish, German, Dutch, Simplified Chinese, Traditional Chinese, Japanese, Korean, and Polish.

Prerequisite Software Components

The following components are required for the installation of the QAD BI Data Transformer:

- OpenEdge 10.1B with the following components:
 - OE Application Server Basic or OE Application Server Enterprise
 - OE Enterprise RDBMS
 - 4GL Development System
- Microsoft Office

The following component is required when creating Cubes for use with Cognos 8:

- Cognos PowerPlay Transformer Edition

The following component is required when creating and managing business-related metadata for use in Cognos 8 analysis and reporting:

- Cognos Framework Manager

The following components are required when implementing Web-based Cognos 8 interfaces:

- Cognos 8 Server
- HTTP Server
 - On Windows 2000 or Windows XP: Microsoft Internet Information Services
 - On Windows 2003: Application Server

The following components are required when extracting data from non-Progress data sources:

- OpenEdge Oracle DataServer
- OpenEdge MS SQL Server DataServer
- OpenEdge ODBC DataServer

The following component is required to process data warehouse tasks in parallel:

- OpenEdge AppServer

The following components are required to publish QAD-provided dashboards in the QAD .NET user interface:

- QAD 2007.1
- QAD .NET UI 2.5 with QAD ReportNet Bundle 1.0.

Important QAD ReportNet Bundle 1.0 is delivered on the QAD .NET UI 2.5 installation media. It must be installed after QAD .NET UI 2.5 and Cognos 8.2 are installed and properly configured. See “Install QAD ReportNet Bundle” on page 30.

For information on implementing the dashboards, see “Installing and Configuring QAD-Provided Dashboards” on page 125.

In addition, the following component is required if you want to customize or design your own reports and dashboards:

- Cognos Report Studio

Performance

The following suggestions are general recommendations that should boost performance in most implementations:

- The data warehouse database should be located on the same server as the QAD BI Data Transformer.
- The Cognos Cubes should be generated on the same server as the QAD BI Data Transformer.
- The network connections between the server hosting Data Transformer and the MFG/PRO servers should be capable of supporting large data transfers efficiently.

Installation Media

The QAD BI software suite is packaged on multiple CDs. Depending on your purchase order, you may have received a CD to install the QAD BI Data Transformer, a CD to install the common business model architecture components, as well as CDs to install each of the QAD-provided business models.

The complete QAD BI suite includes the following media:

- QAD BI Data Transformer
- QAD BI Common Model components
- QAD BI Sales Analysis Model
- QAD BI Financial Controlling Model
- QAD BI Service Performance Model
- QAD BI Manufacturing Performance Model
- QAD BI Inventory Monitoring Model
- QAD BI Forecasting Model
- QAD BI Purchasing Model
- QAD BI Dashboards (Sales Management, Warehouse Management, Purchasing Management)

Installation Steps

Installing QAD BI is a multi-step process. Each step is detailed in the following sections. Complete each step before moving on to the next. Each task is discussed in its own section:

- Verify Prerequisite Components
- Set Up Language Support
- Install the QAD BI Data Transformer Files
- Install the Common Components and Business Models
- Install the Cognos Components

Note QAD recommends you install QAD BI in a test environment first.

Verify Prerequisite Components

Progress

QAD BI requires the Enterprise database components of OpenEdge 10.1B. Use the OpenEdge installation instructions to install the necessary components. Once they have been installed, verify that they are functioning properly by stopping and starting the OpenEdge AdminService and connecting to the service using the Progress Explorer tool.

To stop and start the OpenEdge AdminService:

- 1 Launch the Windows Services Manager (Start|Control Panel|Administrative Tools|Services).
- 2 Right-click AdminService for OpenEdge and choose Stop.
- 3 Right-click AdminService for OpenEdge and choose Start.

To connect to the service using the Progress Explorer tool:

- 1 Launch the Progress Explorer (All Programs|OpenEdge|Progress Explorer).
- 2 Right-click the Progress Explorer node and choose Add Progress Server.

- 3 Choose OK to configure a local server.
- 4 Right-click the localhost node and choose Connect.

Important QAD recommends setting the OpenEdge AdminService startup type to Manual. On some systems, Progress errors occur periodically when the service is set to Automatic. Anytime the server is rebooted, the service must be manually started.

Progress System Variables

Before you proceed with the QAD BI installation, you should:

- Verify that the DLC and PROMSGS system variables are set.
- Verify that the *ProgressInstallDir\bin* directory is in the system path variable.

Use these steps to verify the system variable and path information:

- 1 On your Windows Desktop, right-click My Computer and choose System Properties.
- 2 Click the Advanced tab and choose Environment Variables.
- 3 Verify that DLC and PROMSGS are set. If they are not, click New and enter the variable name and value to set the missing variables:
`DLC=ProgressInstallDir`
`PROMSGS=ProgressInstallDir\promsgs`
- 4 Double-click the Path system variable. Review the value to make sure the *ProgressInstallDir\bin* directory is included. If it is not included, add it to the end of the path, delimited by a semicolon (;).

SMTP Mail Server Account

A valid SMTP (outgoing) mail server account is required when configuring Cognos 8 Server. The account will be used to send reports by e-mail.

Make sure you know the following information:


- Host name and port of your SMTP mail server
- Account and password for the SMTP mail server

Set Up Language Support

To support different languages when displaying Cubes in Cognos PowerPlay Transformer, you must set special language encoding and fonts in the Windows operating system:

- 1 To set language encoding, choose Start|Control Panel|Regional and Language Options|Advanced.

Fig. 1.2
Regional and
Language Options

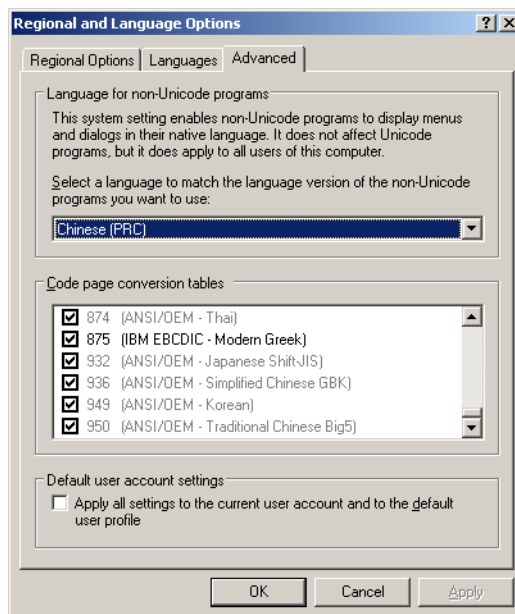

- 2 From the Language for non-Unicode programs frame, choose the language you require.
- 3 From the Code page conversion tables frame, select the code page conversion tables you require.

Install the QAD BI Data Transformer Files

This section includes the information you need to install the QAD BI Data Transformer program and data files using the QAD BI Data Transformer installation CD.

To begin the installation of Data Transformer, launch `install.bat` from the `etl-progress10` directory on the installation CD; To install data warehouse on Unix, launch `install.sh`. You are then prompted to provide several installation parameters. Use the following descriptions as a guide.

Note The values you provide are saved in the system registry and are used as defaults on subsequent QAD BI installations.

Important If you specify a Program Files directory where the QAD BI Data Transformer was previously installed, you are prompted either to upgrade or to replace the existing installation.

- Choosing to upgrade the existing installation updates the QAD BI program files to the installed version while retaining the existing data warehouse configuration and data.
- Choosing to replace the existing installation completely replaces all program and data files.

BI component to install. Specify which BI Data Transformer component you want to install on this machine:

- Enter 1 to install the data warehouse database
- Enter 2 to install the administration database
- Enter 3 to install the ETL tool
- Enter 4 to exit the installation program.

Important Data Transformer lets you deploy the data warehouse database (dwh), the administration database (dwh-admin), and the ETL Tool separately on different machines. However, you must install the database components before installing the ETL tool.

Install the Data Warehouse Database

Note The data warehouse is deployed using the utf-8 code page by default.

Progress Directory. Enter the location where Progress is installed.

DWH Directory. Specify the directory where the data warehouse database will be installed. The directory name should not contain spaces.

DWH Database Structure Description File Location. Specify the location of the DWH database structure description file. By default, it is `/etl-progress10/data/db/dwh.st` on the installation CD.

Data Warehouse Database Name. Specify the name assigned to the data warehouse database in the Progress Explorer tool.

Data Warehouse Database Port. Specify the TCP-IP port to use for the data warehouse database server in the Progress Explorer tool.

Install the Administration Database

Note The administration databases is deployed using the utf-8 code page by default.

Progress Directory. Enter the location where Progress is installed.

Administration Database Directory. Specify the directory where the data warehouse administration database will be installed. The directory name should not contain spaces.

Administration Database Structure Description File Location. Specify the location of the DWH database structure description file. By default, it is `/etl-progress10/data/db/dwh-admin.st` on the installation CD.

Administration Database Name. Specify the name assigned to the Administration database in the Progress Explorer tool.

Administration Database Port. Specify the TCP-IP port to use for the Administration database server in the Progress Explorer tool.

Install the ETL Tool

Progress Directory. Specify the directory where Progress is installed.

Program Files Directory. Specify the directory where program files will be installed. The directory name should not contain spaces.

Data Directory. Specify the directory where the data warehouse and administration databases will be installed. The directory name should not contain spaces.

Data Warehouse Database Name. Enter the name assigned to the data warehouse database in the Progress Explorer tool.

DWH Server Address. Enter the address where the Data Warehouse database server resides.

Data Warehouse Database Port. Enter the TCP-IP port used by the data warehouse database server in the Progress Explorer tool.

Administration Database Name. Enter the name assigned to the Administration database in the Progress Explorer tool.

DWH Administration Server Address. Enter the address where the Data Warehouse Administration database server resides.

Administration Database Port. Specify the TCP-IP port to use for the Administration database server in the Progress Explorer tool.

Program Group. Specify the name of a program group where application shortcuts will be installed.

After you enter the required installation parameters, several automated tasks execute and a status screen displays.

After the installation script completes, exit the DOS screen.

Install the Common Components and Business Models

Your QAD BI package may include several business model CDs. This section includes information to help you install the common model components and the business models. The same steps are used to install each of these components. You can install the business model CDs in any order once the common model components have been installed.

To begin the installation, launch `install.bat` from the selected CD.

You are then prompted to provide several installation parameters. Use the following descriptions as a guide.

Note The values you provide are saved in the system registry and are used as defaults on subsequent QAD BI installations.

Program Files Directory. Specify the directory where program files will be installed. The directory name should not contain spaces.

Data Directory. Specify the directory where the business models will be installed. The directory name should not contain spaces.

Install the Cognos Components

The installation steps described here assume that you are installing all Cognos 8 components on one computer. For other Cognos 8 installation options, see Chapter 7, “Installation Options,” in the *Cognos 8 Architecture and Planning Guide*.

Use the steps in this section to install and configure:

- Cognos PowerPlay Transformer
- Cognos Server
- Cognos Framework Manager

Install and Configure Cognos PowerPlay Transformer

Installing Cognos PowerPlay Transformer

- 1 Insert the Cognos 8 Business Intelligence OLAP Modelling Windows CD.
- 2 On the Cognos 8 Business Intelligence OLAP Modelling for Windows screen, select Install Cognos 8 Business Intelligence OLAP Modelling Windows.
- 3 Select all default options unless using a double-byte language.
If you need to use a double-byte language in BI, on the Character Set Selection screen, select Locales for other languages.
- 4 On the Component Configuration screen, select the following option button and click Next.

Exit the Installation Wizard without configuring components. You must later configure the components to complete the installation.
- 5 On the Finish screen, click Finish.
- 6 On the Cognos 8 Business Intelligence OLAP Modelling Windows screen, click Exit.

Applying the Current Configuration

- 1 From the Windows Start menu, choose All Programs|Cognos 8|Tools|Configuration Manager.
- 2 On the Cognos Configuration Manager Welcome screen, choose the Open the current configuration option under the Start tab.
- 3 In the Configuration Manager Explorer panel, right-click the top-level node that has your computer name and choose Apply Selection.
- 4 Click Yes at the prompt for confirmation.
- 5 The Configuration Manager application progress bar displays. When the application process is complete, click OK and exit Configuration Manager.

Note When the following warning message displays, ignore it and choose OK:

Warning: Could not complete Apply for
YourComputerName.

Set Up Cognos Access Manager

You must set up Cognos Access Manager to use Impromptu Query Definition (.iqd) files to create Cubes.

Defining Administration Settings

- 1 From the Windows Start menu, select All Programs|Cognos 8|Tools|Access Manager–Administration.
- 2 In the left pane, right-click Local Authentication Export Files and select Add .LAE File.
- 3 Click the General tab and enter the following values:
 Logical name: QADBIsecurity
 File name: *CognosInstallDir\cerN\bin\qadbi.lae*
 Where *N* is the rendition number of the Cognos version you installed, such as cer3 or cer4.
- 4 Click the Ticket Server tab and enter the following values:

Host: localhost

Port: 9010

5 Click OK.

6 Click Yes at the following prompt:

The ticket server host and port are not valid or the ticket server is not responding. Are you sure you want to save this ticket server information?

7 Click No at the following prompt:

Does this LAE file need to be compatible with Series 7.0 and earlier versions?

8 Right-click QADBIsecurity and select Add Namespace.

9 On the namespace screen, enter the following value:

Name: QADBINamespace

10 Click OK.

11 Choose File|Save As and enter the following value:

File name: *CognosInstallDir\cerN\bin\qadbi.csa*

Where *N* is the rendition number of the Cognos version you installed, such as cer3 or cer4.

12 Click Save.

13 Choose File|Exit.

Note See the *Cognos Access Manager Administrator Guide* for information on how to control access to Cognos resources by creating users and user classes.

14 From the Windows Start menu, select All Programs|Cognos 8|Tools|Access Manager–Configuration Wizard.

15 On the Access Manager–Configuration Wizard screen, click Next.

16 Select the Custom radio button and click Next.

17 Select the Local Authentication Export file (LAE) configuration check box and click Next.

- 18** Click Browse and select the qadbi.lae file created earlier and click Next.
- 19** Select the QADBINamespace radio button and click Next.
- 20** Select the Local Authentication Export file (LAE) radio button and click Next.
- 21** Select the Accept the settings check box and click Finish.

Defining the Data Warehouse Database in Access Manager

- 1** In Access Manager, select the Data Sources folder and from the Action menu, click Add Database.
- 2** The Database Properties dialog box appears. On the General tab, in the Name box, type a name for the data warehouse database; for example, dwh.
- 3** Click the Connection tab.
- 4** In the Database Type drop-down list, select ODBC.
- 5** To specify the connection string, click Edit.
- 6** The Database Definition dialog box appears. Enter the required connection information.

Logical Database Name. Enter a logical database name for the data warehouse database, such as dwh.

ODBC Data Source. Select the ODBC Data Source Name (DSN) created by the installation using the Data Warehouse Database Name installation parameter.

User ID and Password. Select both options.

- 7** Click OK.

Setting Up Auto-Access for the Data Warehouse Database

To set auto-access to the data warehouse database, you must create a signon for the database using a user ID and password. After the signon is created, it applies to Administrator for anonymous access. This provides the account auto-access to the database so that Cognos Transformer can log on to Access Manager without prompting for user ID and password.

- 1 In Cognos Access Manager, double-click the Data Sources folder to open it.
- 2 Double-click the dwh data source.
- 3 Select the Signons folder.
- 4 From the Action menu, click Add Database Signon.
- 5 In the User ID box, type dwh, which is the user ID required to access the data warehouse database.
- 6 Enter the database password—admin—in the Password and Verify Password boxes.
- 7 Click OK.
- 8 Under the Authentication Information folder, double-click Users|Administrator.
- 9 The User Properties dialog box appears. Click Set and select the dwh signon; then click OK.
- 10 Right-click QADBINamespace and choose Properties.
- 11 The Namespace Properties dialog box appears. Under the Settings tab, select Use the following account for anonymous access and enter Administrator in this field; then click OK.

Applying Access Manager Configurations

- 1 In Access Manager, choose Tools|Runtime Configuration.
- 2 Configuration Wizard appears. Select Local Authentication Export file (LAE) configuration and keep clicking Next till you finish the wizard.

Install and Configure Cognos 8 Server

Installing Cognos 8 Server

- 1 Launch the Cognos 8 Server installation program from the Cognos Server installation CD.
- 2 Select all default options unless using a double-byte language.
If you need to use a double-byte language in BI, on the Character Set Selection screen, select Locales for other languages.
- 3 Select Cognos Content Database in the installation wizard.
- 4 On the Finish screen, click Finish.

Creating the Content Store

The content store is a database that Cognos Content Manager uses to store global configuration data, global settings (such as the language and currency formats shown in the user interface), connections to data sources, and product-specific content. Design models and log files are not stored in the content store.

By default, Cognos 8 products share the content store database.

Use Cognos content database as the content store database. For details on how to create the content store in Cognos Configuration, see *Cognos 8 Installation and Configuration Guide*.

Installing HTTP Server

To access Cognos 8 interfaces through the Cognos 8 Web portal, you must install and configure an HTTP server to host Cognos 8 Server files and components.

Use Microsoft Internet Information Services on Windows 2000 or Windows XP; use Application Server on Windows 2003.


- 1 From the Windows Start menu, choose Control Panel|Add or Remove Programs.
- 2 In the left pane, click Add/Remove Windows Components.

- 3 On the Windows Components Wizard screen, check one of the following:
 - Internet Information Services (IIS) box when the target machine is running Windows 2000 or Windows XP
 - Application Server when the target machine is running Windows 2003
- 4 Click Next.
- 5 Accept the default options to complete the installation unless you are using IIS 6.0.

If you use IIS 6.0, ensure that the CGI extension can be executed by doing this:

- a Go to your IIS 6.0 control panel.
- b Select Web Service Extensions from the left tree.
- c Select All Unknown CGI Extensions and click Allow.
- d When prompted to confirm, click Yes.

Fig. 1.3
Internet
Information
Services Manager

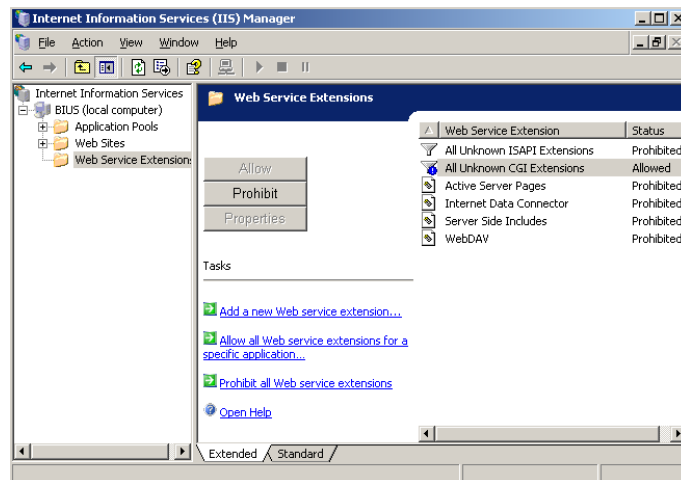

Configuring HTTP Server

Before you use Web pages generated by Cognos 8, you must configure your Web server. You must set up virtual directories, also known as Web aliases, for the directories that contain the HTML and Web files for Cognos 8.

Alias	Location	Permission
cognos8	<i>CognosSvrInstallDir</i> \webcontent	Read, Run-scripts
cognos8/cgi-bin	<i>CognosSvrInstallDir</i> \cgi-bin	Read, Run-scripts, Execute
cognos8/help	<i>CognosSvrInstallDir</i> \webcontent\documentation	Read, Run-scripts


Note *CognosSvrInstallDir* is the directory where you installed Cognos 8 Server.

Use these steps to configure Internet Information Server:

- 1 In the left pane of the Internet Information Services Manager window, expand the folder that has your computer name and then expand the Web Site folder.
- 2 Right-click the folder that contains the Web site where you will run your Cognos product and choose New|Virtual Directory. If you have only one Web site, its default name is Default Web Site.
- 3 In the Virtual Directory Creation Wizard dialog box, click Next.
- 4 In the Alias text box, enter cognos8, and then click Next.
- 5 Click Browse, select the *CognosSvrInstallDir*\webcontent folder, and then click Next.
- 6 Ensure that the Read and Run-scripts check boxes are selected, and then click Next.
- 7 Click Finish.
- 8 In the left pane of Internet Information Services Manager, right-click the Cognos8 folder you just created and choose New|Virtual Directory.
- 9 In the Virtual Directory Creation Wizard dialog box, click Next.

- 10 In the Alias text box, enter `cgi-bin`, and then click Next.
- 11 Click Browse, select the *CognosSvrInstallDir\cgi-bin* folder, and then click Next.
- 12 Ensure that the Read, Run-scripts, and Execute check boxes are selected, and then click Next.
- 13 Click Finish.
- 14 In the left pane of Internet Information Services Manager, right-click the Cognos8 folder and choose New|Virtual Directory.
- 15 In the Virtual Directory Creation Wizard dialog box, click Next.
- 16 In the Alias text box, enter `help`, and then click Next.
- 17 Click Browse, select the following folder, and then click Next:
CognosSvrInstallDir\webcontent\documentation
- 18 Ensure that the Read and Run-scripts check boxes are selected, and then click Next.
- 19 Click Finish.
- 20 The HTTP server is configured. Exit IIS Manager.

Fig. 1.4
Configure Internet
Information
Services

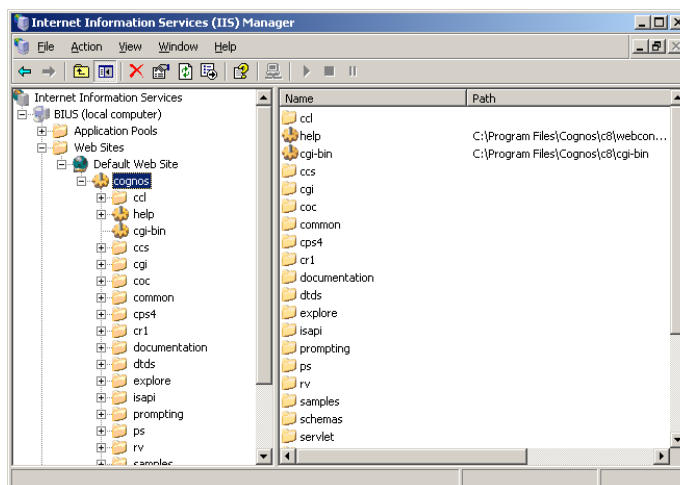

Configuring Web Browsers

Cognos 8 uses the default browser configurations provided by Microsoft, Netscape, and Firefox. For all browsers, you must ensure that settings are enabled for cookies and Java scripts. Additional required settings are specific to the browser.

Browser	Setting	Cognos Component
Internet Explorer	Run ActiveX controls and plug-ins Script ActiveX controls marked safe for scripting	Analysis Studio
Netscape	Allow Cookies JavaScript	Cognos Connection
Firefox	Allow Cookies Enable Java Enable JavaScript Load Images	Cognos Connection

Table 1.1
Web Browser
Settings

Configuring Cognos Server Components

After you install the Cognos 8 Server components, the following configuration tasks are required.

Specifying a Mail Server Account

If you want to send reports by e-mail, you must configure a mail server account.

- 1 In the Cognos Configuration Explorer window, under Data Access, click Notification.
- 2 In the Properties window, for the SMTP mail server property, enter the host name and port of your SMTP (outgoing) mail server.
- 3 Click the Value box next to the Account and password property and then click the edit button when it appears.
- 4 Enter the appropriate values in the Value – Account and password dialog box and then click OK.

Note If log-on credentials are not required for the SMTP server, remove the default information for the Account and password property. When you are prompted for confirmation to leave this property blank, click Yes. Ensure that the default user name has been removed. Otherwise, the default account is used and notifications will not work properly.

- 5 In the Properties window, enter the appropriate value for the default sender account.
- 6 Right-click Notification in the Explorer window and choose Test to test the mail server connection.
- 7 On the File menu, click Save.

Testing the Server Components

You can test your configuration settings by running the test feature before you start the Cognos 8 service. Then you can test the installation by starting the Cognos 8 service and then opening Cognos Connection. On Windows, the Cognos 8 service is configured to start automatically by default.

- 1 Start Cognos Configuration.
- 2 Ensure that you save your configuration; otherwise, you will not be able to start the Cognos 8 service.
- 3 In the Explorer window, click Local Configuration.
- 4 On the Actions menu, click Test.

Cognos Configuration checks the CSK availability; tests the namespace configuration; and tests the connections to the content store, logging database, notification database, and mail server.

- 5 If any test fails, reconfigure the affected properties and then test again. Do not start the service until all tests pass.
- 6 On the Actions menu, click Start.

It may take a few minutes for the Cognos 8 service to start. This action starts all installed services that are not running. If you want to start a particular service, select the service node in the Explorer window and then click Start on the Actions menu.

- 7 Open a Web browser.
- 8 Enter the following in the address bar and press Enter, where cognos8 is the virtual directory you created when you configured the Web server:
`http://host_name:port/cognos8`
- 9 It may take a few minutes for the Web page to open. If you see the Welcome page of Cognos Connection, your Cognos 8 installation is working.

Install and Configure Cognos Framework Manager

You must install and configure Framework Manager before you can use Cognos 8 for analysis.

Use these steps to install Cognos Framework Manager:

- 1 Launch the Cognos Framework Manager installation program from the Cognos 8 Business Intelligence Modelling Windows CD.
- 2 Select all default options.
- 3 Click Yes at the following prompts:
Warning: You are installing to the same location as a previous installation. Do you want to continue?
This installation will replace existing files.
Select Yes to automatically create a backup of all files that are replaced.
- 4 On the Finish screen, click Finish.

Configure an NTLM or LDAP Namespace

You can configure Cognos 8 components to use the Windows native security, NT LAN Manager (NTLM), as the authentication source, or configure a new LDAP namespace for use with Sun ONE Directory Server.

See the related Cognos 8 documentation for information about how to configure namespaces in Cognos.

Install QAD ReportNet Bundle


Note This step is only required if you want to implement the advanced reporting and dashboard functionality to create QAD-provided dashboards or custom reports in the QAD .NET user interface.

QAD ReportNet Bundle 1.0 is delivered on the QAD .NET UI 2.5 media. It must be installed after QAD .NET UI 2.5 and Cognos 8.2 are installed and properly configured.

Perform the following steps to install QAD ReportNet Bundle 1.0 on the Cognos report server.

- 1 If the Cognos 8 service is running, launch Cognos Configuration and choose Action|Stop to stop the Cognos 8 service.
- 2 Launch `install.exe` from the QAD ReportNet Bundle installation CD; to install QAD ReportNet Bundle on Unix, launch `install.sh`.
- 3 An introduction screen displays. Choose Next to continue.
- 4 The Cognos Server Configuration screen displays.

Fig. 1.5
Cognos Server
Configuration

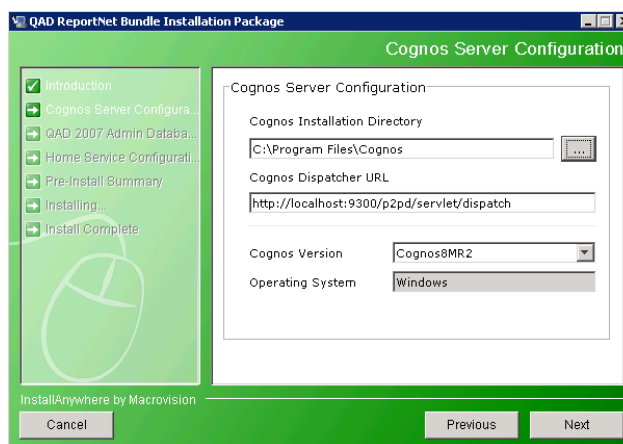

Enter or view the following information:

Cognos Installation Directory. Enter the directory where Cognos is installed.

Cognos Dispatcher URL. Use the default dispatcher URL value.

Cognos Version. Indicates the version of Cognos installed.

Operating System. Indicates the server operating system.

Choose Next to continue.

- 5 The installation program checks the status of the Cognos 8 service. If the service is running, you will be asked to stop it first before proceeding.
- 6 On the QAD 2007 Admin Database Configuration screen, enter the correct information to connect to the QAD 2007.1 administration database.

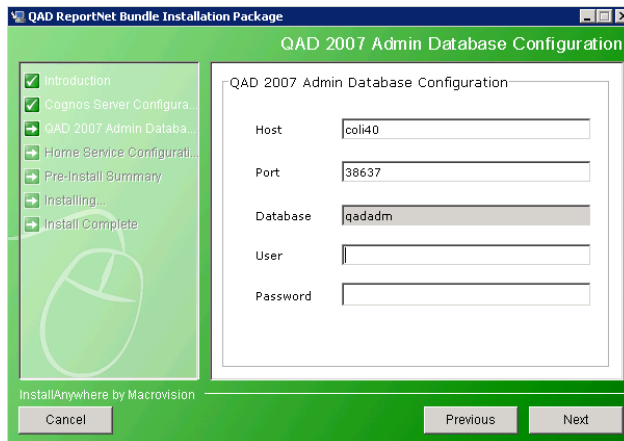


Fig. 1.6
QAD 2007 Admin
Database
Configuration

Host. Enter the QAD 2007.1 database server name.

Port. Enter the TCP/IP port on which the QAD 2007.1 administration database is listening for connections.


Database. Enter the logical name of the QAD 2007.1 administration database.

User and Password. Enter the correct user/password combination for connecting to the QAD 2007.1 administration database. Contact your QAD 2007 administrator for this information.

Choose Next to continue.

- 7 On the Home Service Configuration screen, enter the correct information relating to the QAD .NET UI 2.5 implementation.

Fig. 1.7
Home Service
Configuration

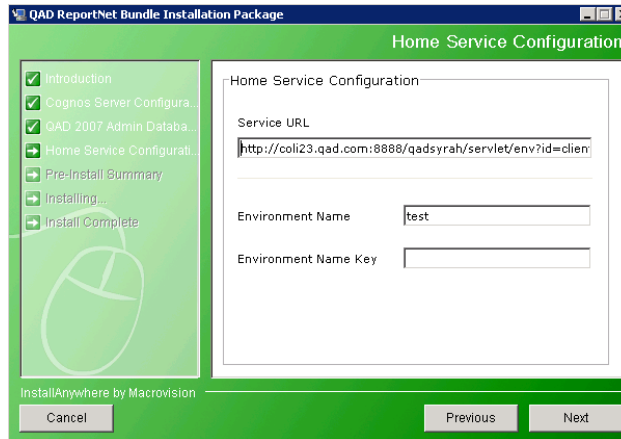

Service URL. Enter the URL pointing to the QAD .NET UI home server (the Tomcat instance where it is running).

Environment Name. Specify a system environment as defined on the QAD .NET UI home server in the `../configurations/SysEnv` directory.

Environment Name Key. Leave this field blank. The field is currently not used.

Choose Next to continue.

- 8 An installation summary screen displays. If all information is correct, click Install to proceed with the installation.

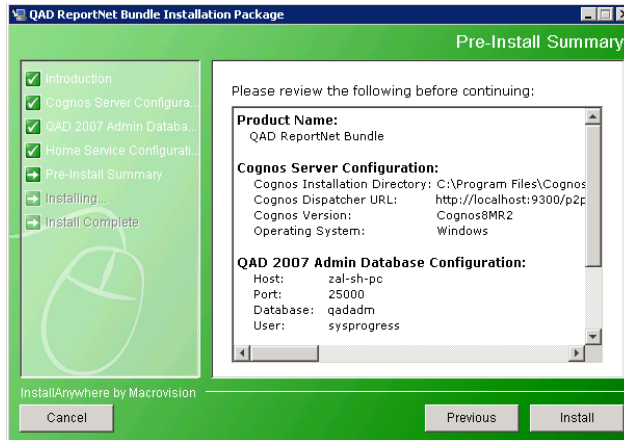
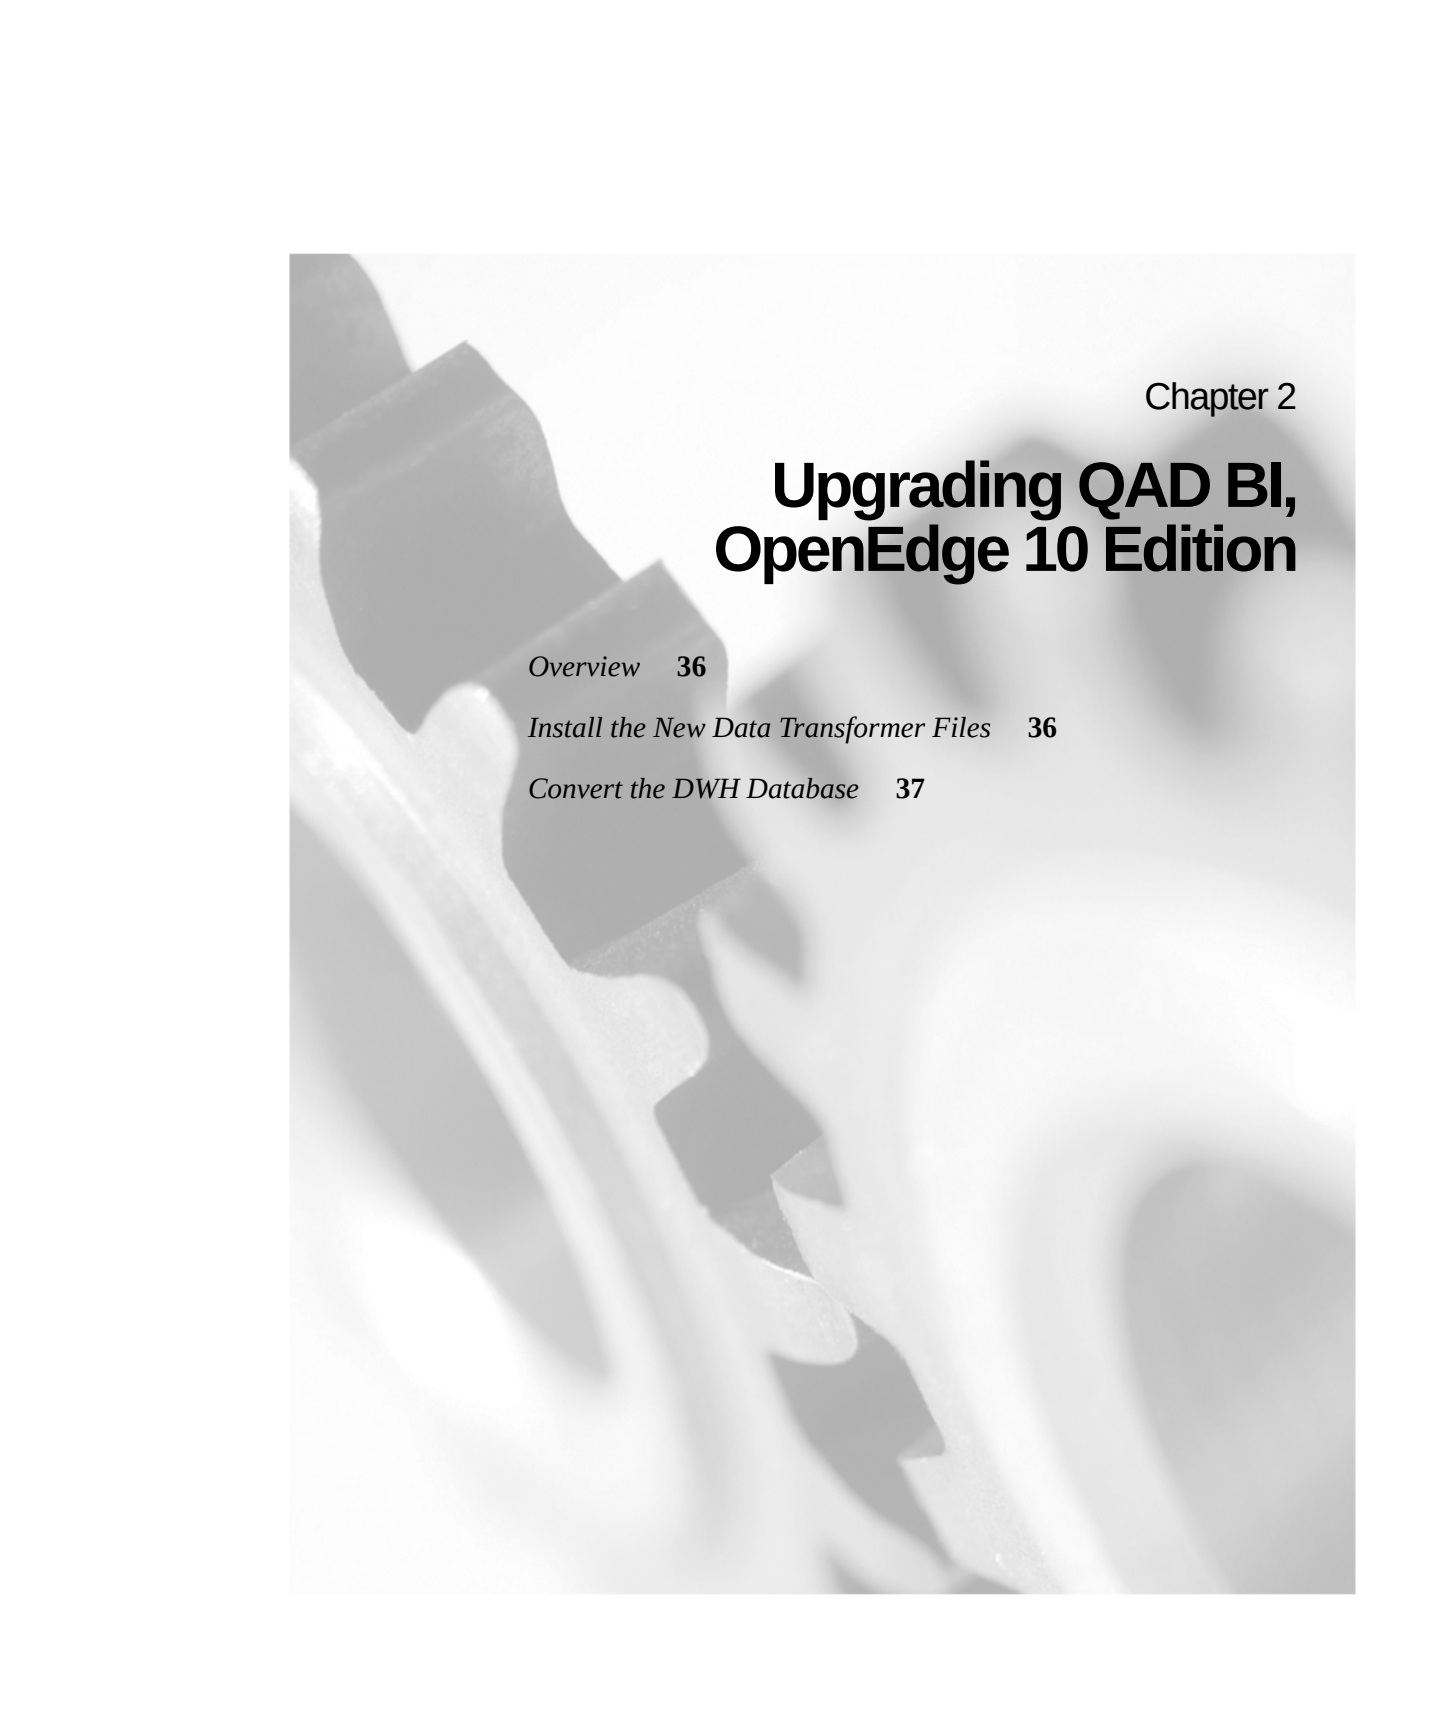


Fig. 1.8
Installation
Summary

- 9 When installation is complete, exit the installation program.
- 10 Start the Cognos 8 service.

The background of the page is a grayscale image of several interlocking gears. The gears are of different sizes and are positioned in a way that creates a sense of depth and mechanical complexity. The lighting is soft, highlighting the teeth of the gears and creating subtle shadows.

Chapter 2

Upgrading QAD BI, OpenEdge 10 Edition

Overview **36**

Install the New Data Transformer Files **36**

Convert the DWH Database **37**

Overview

If you are upgrading QAD BI to release 2.5 from a release prior to 2.3.2, you must upgrade to QAD BI 2.3.2 first. For details on upgrading to QAD BI 2.3.2, see *QAD Business Intelligence 2.3.2 Technical Reference Guide*.

Upgrade Summary

For all previous releases, you must

To upgrade QAD Business Intelligence from version 2.3.2 to 2.5, you must complete the following steps:

- Install the new QAD BI Data Transformer files
- Convert the DWH database

Prior to Upgrading

Make sure you back up your data warehouse prior to upgrading QAD BI.

If you are upgrading from QAD BI Progress 9 Edition or OpenEdge 10.1A, you must first convert your data warehouse and administration databases (dwh and dwh-admin) to OpenEdge release 10.1B. For information on converting previous versions of Progress databases to OpenEdge release 10.1B, see *OpenEdge Data Management: Database Administration Guide*.

Install the New Data Transformer Files

See “Installation Steps” on page 12 for detailed information on installing the new QAD BI Data Transformer program and data files.

Convert the DWH Database

Use the following steps to convert the old DWH database.


- 1 Edit the `DWH_Repl_To_BI25.pf` file located in the `qadbiinstalldir\data\utilities\conv_tool` directory to connect to both the old QAD BI 2.3.2 DWH database and the new QAD BI 2.5 empty DWH database.

Use the following as an example:

```
# QAD BI 2.3.2 DWH Database
-db dwh.db -H juy-sh-pc2 -S 30000 -ld sdwh -U dwh -P admin
# QAD BI 2.5 DWH Database
-db dwh.db -H localhost -S 24000 -ld tdwh -U dwh -P admin
-cpinternal UTF-8 -cpstream UTF-8
```

- 2 In the Command Prompt window, run `Start_DWH_Repl_To_BI25.p` from the `qadbiinstalldir\data\utilities\dwh_conv` directory to replicate data from the old QAD BI 2.3.2 DWH database to the new QAD BI 2.5 DWH database:

```
prowin32 -p Start_DWH_Repl_To_BI25.p -pf DWH_Repl_To_BI25.pf
```

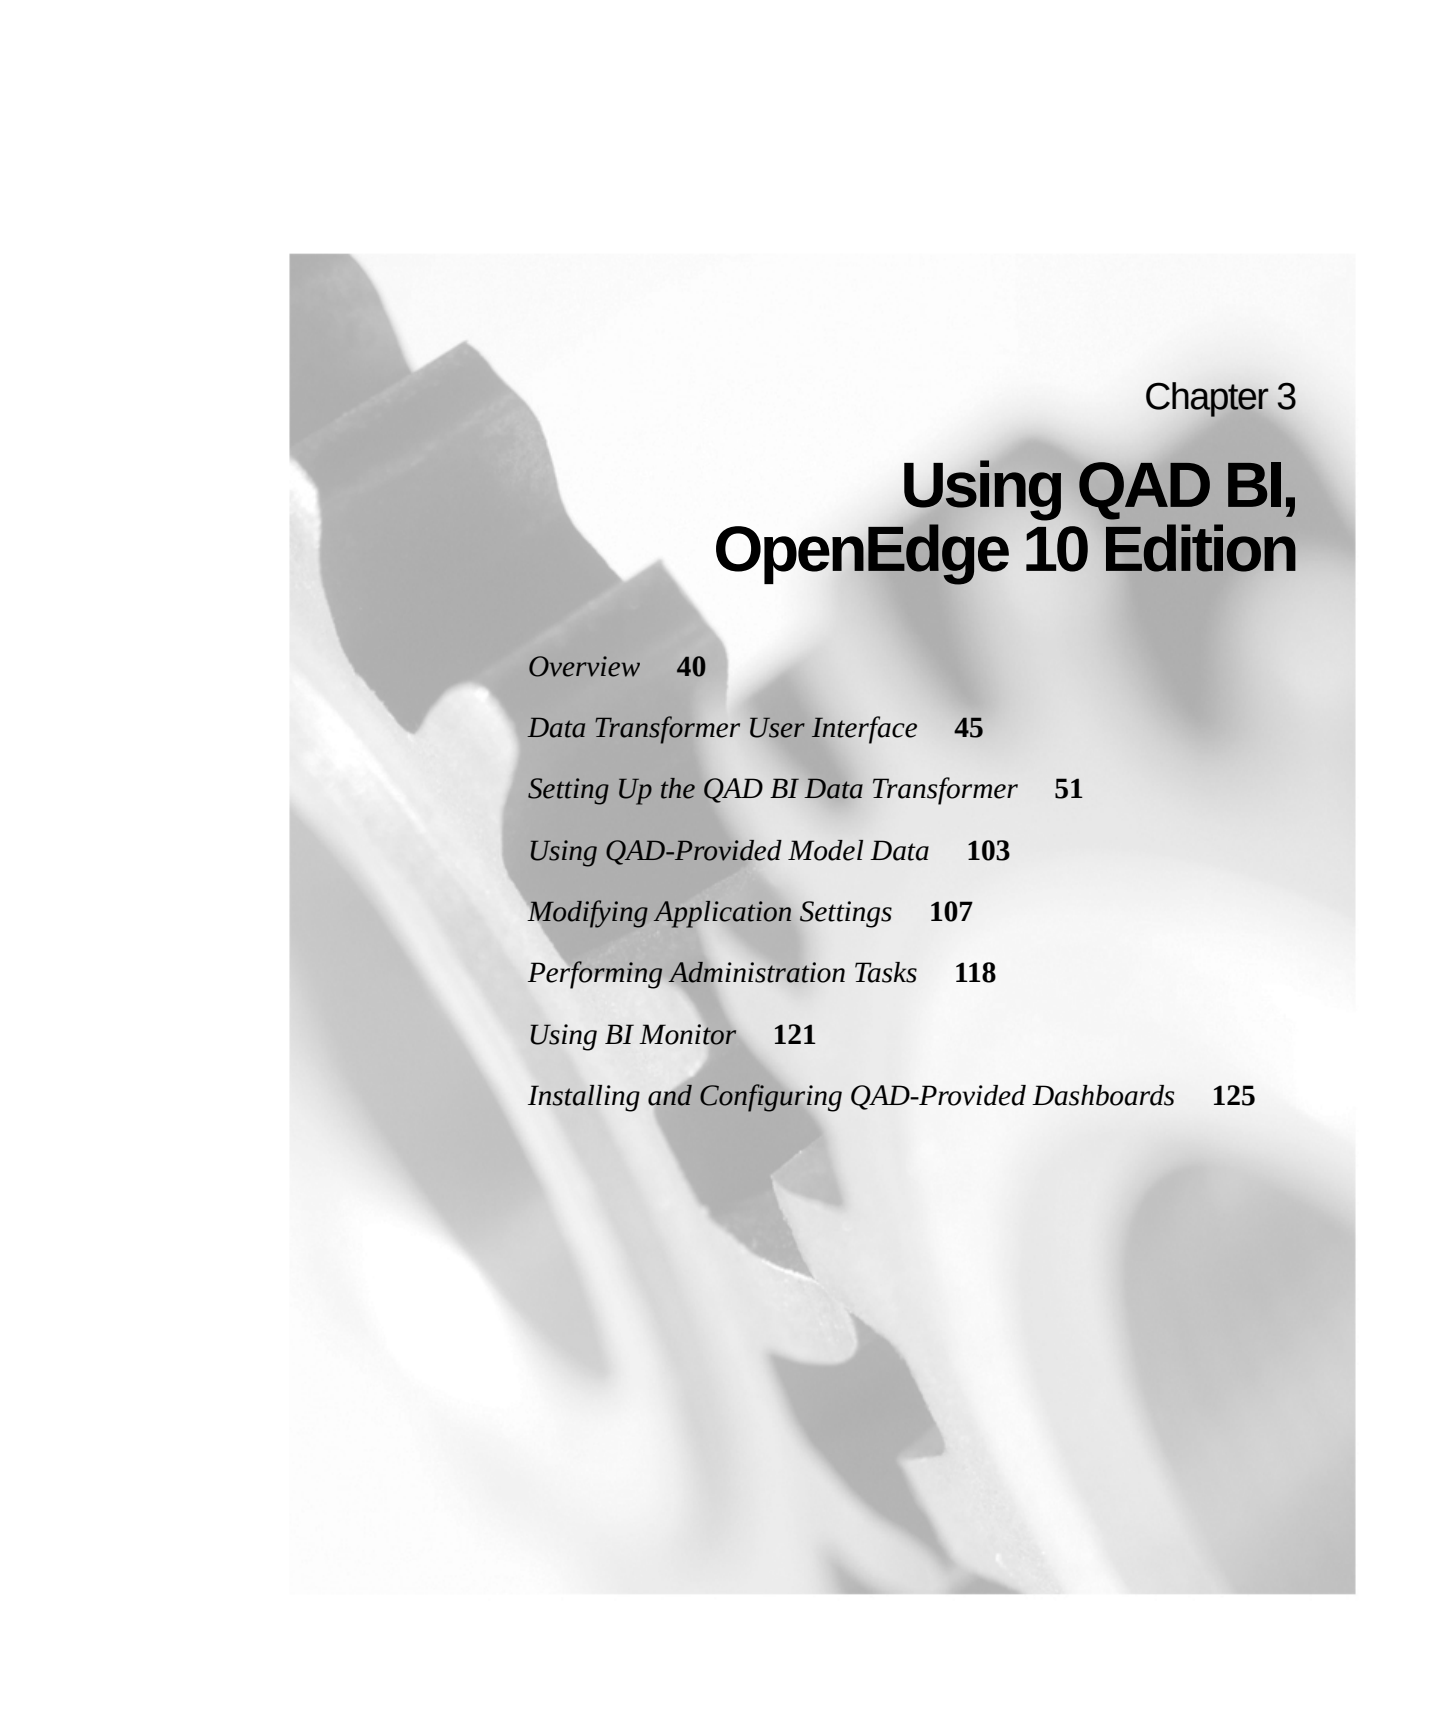Chapter 3

Using QAD BI, OpenEdge 10 Edition

<i>Overview</i>	40
<i>Data Transformer User Interface</i>	45
<i>Setting Up the QAD BI Data Transformer</i>	51
<i>Using QAD-Provided Model Data</i>	103
<i>Modifying Application Settings</i>	107
<i>Performing Administration Tasks</i>	118
<i>Using BI Monitor</i>	121
<i>Installing and Configuring QAD-Provided Dashboards</i>	125

Overview

The QAD Business Intelligence (QAD BI) product lets users extract and restructure data from MFG/PRO and other data sources into a Progress-based data warehouse presenting a business-oriented view of the enterprise. Analysts can use Cognos 8 to perform powerful multidimensional analysis against the data warehouse.

QAD BI Data Transformer can also connect to other QAD BI data warehouse databases as its data source. Multiple data warehouse databases can be chained together where data residing in lower-level databases are aggregated to the high-level data warehouse for analysis.

This multi-layer data warehousing architecture has several benefits:

- Data residing in legacy databases that can not be directly accessed by QAD BI Data transformer can be retrieved through intermediate data warehouse databases.

For example, if you installed QAD BI on OpenEdge 10, QAD BI Data Transformer can not directly connect to legacy Progress 8 data sources due to Progress backward compatibility limitations.

However, you can overcome this by connecting to a QAD BI Progress 9 edition data warehouse that stores data extracted from Progress 8 databases.

- Data replication performance is boosted.
- Data Transformer can extract data from physically distributed data sources more efficiently.
- QAD BI can work in conjunction with previous versions of QAD BI in extracting, transforming, and loading data.

The QAD BI solution includes:

- One or more existing data sources
- Data Transformer Extract-Transform-Load (ETL) tool
- Data warehouse
- BI Monitor
- Impromptu Query Definition (.iqd) files
- The PowerPlay application from Cognos
- QAD-provided business models

- QAD-provided dashboards

Figure 3.1 illustrates the overall structure of QAD BI.

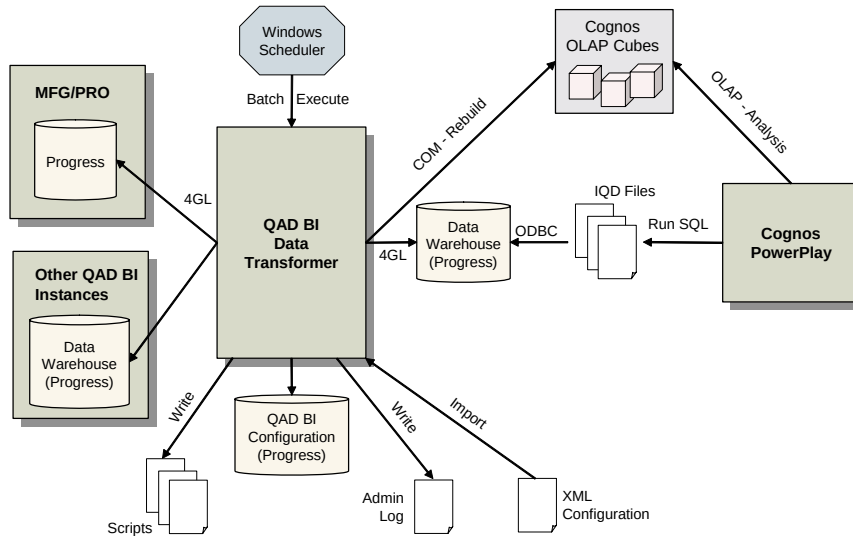


Fig. 3.1
QAD BI Overview

The following sections summarize the role each element plays in QAD BI. See Chapter 1, “Installing QAD BI, OpenEdge 10 Edition,” for information on installing and configuring the individual components.

MFG/PRO

MFG/PRO databases are the primary source of the data that is made available within the data warehouse by the ETL process for analysis in Cognos PowerPlay.

In a multi-database environment, the data warehouse can be configured to populate the same table from more than one source database.

QAD BI Data Transformer

Data Transformer is an ETL tool for building and maintaining a data warehouse specifically designed to support analysis. You can use Data Transformer to configure tasks to structure the data warehouse or load and then modify predefined business models from QAD.

Data Transformer generates a set of Progress scripts to synchronize the data warehouse with the source databases. Progress developers can customize the automatically generated scripts or create new scripts to extend the ETL process.

This guide includes detailed information on using the features of Data Transformer to configure your QAD BI environment.

Data Warehouse

The data warehouse is a Progress database that is populated with data from MFG/PRO and/or other data sources during the ETL process. The data warehouse is an environment separate from the source databases where data can be specially structured to support analysis.

BI Monitor

BI Monitor is a tool for monitoring and managing tasks. You can use BI monitor to:

- View detailed information of currently running tasks and task batches.
- Stop a running task.
- View logs of tasks and task batches stored in the administration database.
- Archive logs of tasks and task batches in the administration database.

Impromptu Query Definition (.iqd) files

Impromptu Query Definition (.iqd) files are query definition files to be used in Cognos PowerPlay Transformer. One file with native SQL corresponds to each query subject or dimension externalized for use in Transformer.

See the Cognos 8 documentation for details on the IQD method.

Cognos PowerPlay

An important part of the QAD BI solution is supplied by Cognos PowerPlay—an online analytical processing (OLAP) software application that lets users perform multidimensional analysis, create reports, and share them to make better decisions.

PowerPlay draws information from the data warehouse using the proxy to model and build Cubes—the Cognos term for optimized, multidimensional data sets that enable users to perform analysis with quick response times.

See the Cognos documentation for information on configuring and using PowerPlay, as well as on how to configure Cubes.

QAD-Provided Business Models

QAD sells the following seven models to provide out-of-the-box analysis for standard MFG/PRO installations. The seven models together provide support for more than 100 key performance indicators (KPIs).

- Inventory monitoring, for insight into current and historic inventory trends
- Manufacturing performance, including statistics on work orders, production costs, productivity, and throughput
- Forecasting performance
- Sales analysis, including statistical trends in sales and revenue margins
- Financial controls, encompassing gauges for profitability, investments, and the effectiveness of financial management
- Purchasing controls, from patterns in purchase price and cost, to materials delivery
- Service performance insights, including service profitability and trends in customer calls and contract selection

For information on the models and KPIs, see *Reference Guide: QAD Business Intelligence Key Performance Indicators*. This is provided on the installation CD for each model you purchased.

A model is realized by the following components:

- Replication tasks to extract, transform, and load selected data from MFG/PRO into the data warehouse.
- Relationship definitions for the model tables in the data warehouse defined in IQD files.
- Cognos OLAP model defining the multidimensional representation of the tables in the data warehouse. Building the OLAP model creates an OLAP cube that can be analyzed using the Cognos reporting tools.

See “Using QAD-Provided Model Data” on page 103 for information on how to implement models.

QAD-Provided Dashboards

A dashboard is a collection of navigable reports accessible from a dashboard home page. These reports graphically represent business-critical KPIs in the form of charts.

Dashboards add an interactive element to reports. They let you:

- Drill up and down to see higher and lower levels of detail.
- Include multiple charts derived from different data sources in a single report.

Note You can only view the dashboards through the QAD .NET UI 2.5 and QAD 2007.1.

QAD sells the following three dashboards to provide out-of-the-box navigable reports for standard MFG/PRO installations.

- Sales Management, a collection of reports on sales revenue, gross margin, product profitability, forecast, and so on, providing at-a-glance business visibility to CEOs, sales VPs, and sales directors alike.
- Warehouse Management, a collection of reports on inventory turnover, on-hand quantity, warehouse usage, inventory carrying cost, and so on.
- Purchasing Management, a collection of reports on received and returned purchased quantities, goods receipt efficiency and related cost, and so on. It helps better manage raw material costs and supplier performance.

You can add new users or change the default user with the Progress Data Dictionary tool connected to the data warehouse database. See “Update User Records” on page 118 for details.

The language selected from the drop-down list determines the language in which text labels and menus display.

Navigating


Navigation within Data Transformer provides up to three methods of accessing individual functions, depending on the type of action being performed:

- Menus on the Data Transformer main screen
- Toolbar commands
- Context-sensitive shortcut menus

The primary view of Data Transformer is the main screen, which includes a toolbar, a menu bar, and a two-pane navigation tree.

The left pane shows the current structure of the data warehouse. When completely minimized, the top-level tree is a series of category folders. When completely maximized, it lists all the tables and custom scripts in the warehouse. Select a table to display its fields in the right pane.

Fig. 3.3
QAD BI Data
Transformer Main
Screen

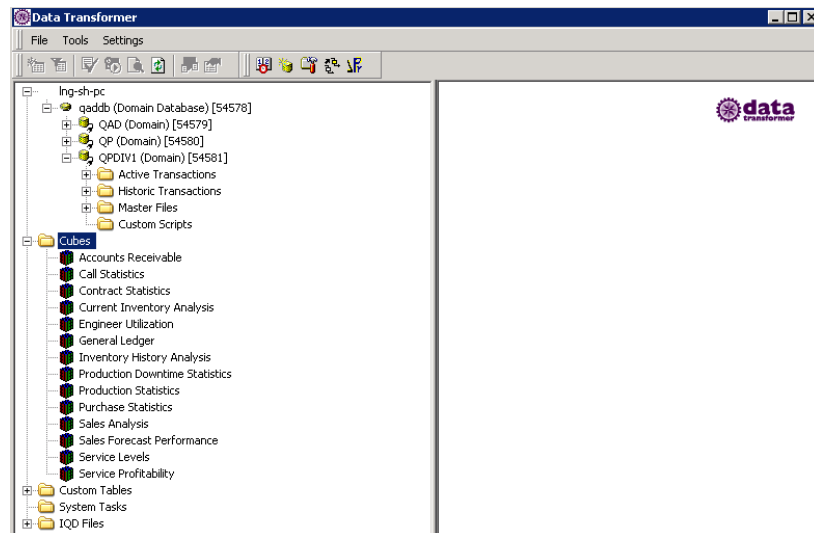

Some functions are available using any of these methods. For example, when a table is selected in the main menu, you can define subsets by clicking Subset on the Tools menu, clicking the Subset command on the toolbar, or right-clicking the table name and selecting Subset. Whichever method you use, the same Map Table screen displays.

Note Some screens include their own toolbars, typically containing two or three additional commands that apply only to the current function.

Other functions are available using only one method. For example, on the Indexes screen, you must click a command to add or delete an index, or to define a primary index.

Toolbar Commands and Menu Functions

Table 3.1 through Table 3.5 list the menu functions and related toolbar commands.

Command	Menu Function
	Replication Setup
	Subset
	Check Scripts
	Execute Now
	Preview Data (data warehouse)
	Refresh
	Field Mapping
	Properties

Table 3.1
Main Screen
Toolbar Commands

Command	Menu Function
	Task List
	Add Database
	Application Settings
	Rebuild Links
	Internal Progress Editor

Table 3.2
Field Selection
Toolbar Commands

Command	Menu Function
	Field Properties
	Add Field
	Delete Field (custom tables only)

Table 3.3
Indexes Toolbar
Commands

Command	Menu Function
	Add Index
	Delete Index
	Designate as Primary Index
	Designate as Business Key Index

Command	Menu Function
	Delete Business Key Index
	Designate as Complete Business Key Index
	Designate as Incomplete Business Key Index

Table 3.4
Import Metadata
Toolbar Commands

Command	Menu Function
	Open and load metadata file
	Exit screen without loading metadata

Table 3.5
Tasklist Toolbar
Commands

Command	Menu Function
	Select all on this page
	Deselect all on this page
	Select all on all pages
	Deselect all on all pages

Note Toolbar commands are context sensitive; they are enabled only when the function they represent is appropriate to the current task or selection. Unavailable commands display in gray.

Other situations require you to right-click to display and choose available functions. For example, to assign tables to the data warehouse structure, you must right-click the appropriate database and choose the Select Tables command. There is no other access point for this function.

Source System Icons

Data Transformer distinguishes items in the left pane of the main screen (the tree) using icons. Table 3.6 lists the icons and their descriptions.

Table 3.6
Source System
Icons

Icon	Description	Icon	Description
	Server		Table with script error
	Schema holder		Subset
	Connected domain database		Validated code table
	Disconnected domain database		Non-validated code table
	Connected database or domain		Code table with script error
	Disconnected database or domain		Validated custom script
	Logical grouping		Non-validated custom script
	Source table prior to replication setup		Custom script with script error
	Validated table		Cube
	Non-validated table		Custom table
			Merged table

Setting Up the QAD BI Data Transformer

This section describes the steps necessary to connect to an MFG/PRO database that provides source data to the QAD BI analysis tools, as well as define the tables and fields that are included in the analysis models. Additionally, you control how and when data is replicated between this database and the data warehouse, which serves as the actual source of data used in analysis.


You can use one of the following methods to set up Data Transformer:

- Perform a manual setup by defining tables and fields based on the MFG/PRO database schema.
- If you purchased one or more of the QAD-developed business models, load table definitions and scripts; then use Data Transformer tools to fine-tune your environment as needed.

See “Using QAD-Provided Model Data” on page 103 for information.

Figure 3.4 summarizes the work flow used in the setup tasks. Subsequent paragraphs describe each task.

Fig. 3.4
QAD BI Setup
Work Flow

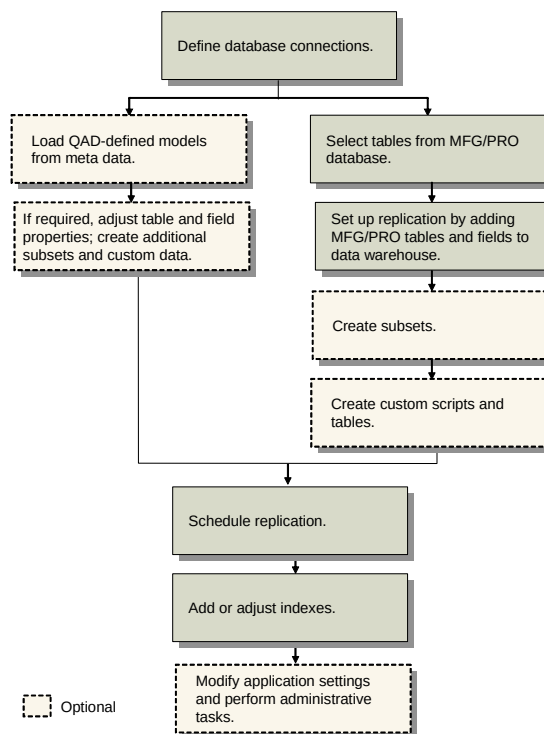

Define Database Connections

Note Many required connection settings are specified during QAD BI installation. See “Modifying Application Settings” on page 107 if you need to modify any of this information.

To add a new source database connection, select File|Add Database or click the Add Database command. To edit an existing source database connection, right-click the database on the main Data Transformer screen and select Properties.

The data warehouse and administration databases were deployed using the utf-8 code page by default. Data Transformer can connect to multiple source databases using different code pages and data is automatically converted to utf-8 when replicated to the data warehouse.

If you update existing properties, you must disconnect and reconnect to the database to use the new settings.

MFG/PRO Database Data Sources

Before you begin mapping fields from the source MFG/PRO database to the data warehouse, you must define the connection parameters for the MFG/PRO database. Data Transformer reads the source schema, which are used to define the tables and fields that make up the data warehouse structure.

Database Properties (1861)

Database Properties

Database

Physical Name:

Logical Name:

☒ Active Data Source Type: Version:

Connection Details

☒ Remote ☐ Single-User

Host: Service:

Other Parameters:

Connection String

Domain Selection:

Fig. 3.5
Database Properties
(QADDB)

Physical Name. Specify the name of the database to connect.

Logical Name. Specify a logical database name that will be used to uniquely identify the database and its data within the data warehouse. This field can only be updated when a connection is first defined.

Active. Indicate whether this is an active connection. Databases marked as active are automatically connected when Data Transformer is started. Tasks associated with databases marked as inactive are not executed during batch (non-interactive) replication.

Data Source Type. Indicate if this is an MFG/PRO database, a QAD BI data warehouse database (DWH), or other type of data source such as ODBC.

See “QAD BI Data Warehouse Database Data Sources” on page 54.

Version. When the data source type is QADDB, select the MFG/PRO version associated with the MFG/PRO database.

See “Domain Database Data Sources” on page 57.

Remote. Indicate whether the database server is local or remote.

Host. When Remote is Yes, enter the host where the database server is running.

Service. When Remote is Yes, specify the service name or TCP-IP Port on which the remote database server is listening for database connections.

Single-user. When Remote is No, indicate if this is a single-user or a multi-user connection.

Other Parameters. Specify any additional Progress connection parameters to apply to this connection.

Connection String. The system displays the connection string based on the settings entered on the screen after the connection configuration has been accepted.

QAD BI Data Warehouse Database Data Sources

QAD BI Data Transformer can connect to other QAD BI 2.5 data warehouse databases as its data source. Multiple data warehouse databases can be chained together where data residing in lower-level databases are aggregated to the high-level data warehouse for analysis.

Important If you want to connect to DWH databases of previous versions of QAD BI, you must upgrade prior releases of QAD BI to QAD BI 2.5 first. For information on upgrading QAD BI, see “Upgrading QAD BI, OpenEdge 10 Edition” on page 35.

To connect to QAD BI data warehouse databases, select DWH as data source type in the Database Properties window.

The screenshot shows the 'Database Properties' dialog box. The 'Database' section contains 'Physical Name' (D:\qadbi232\dwh\dwh.db) and 'Logical Name' (DWH01). The 'Active' checkbox is checked, 'Data Source Type' is set to 'DWH', and 'Version' is 'eB2.1'. The 'Connection Details' section includes 'Remote' and 'Single-User' checkboxes, and fields for 'Host', 'Service', 'User', and 'Password'. The 'Connection String' section is empty. The 'Domain Selection' section shows 'DWH-ADMIN Host' as 'localhost' and 'DWH-ADMIN Service' as '24001', with an 'Import from DWH-ADMIN' button. A list of domains (QAD, QP, QPDIV1) is shown with checkboxes, where 'QAD' and 'QP' are checked.

Fig. 3.6
Database Properties
(DWH)

Physical Name. Specify the name of the database to connect.

Logical Name. Specify a logical database name that will be used to uniquely identify the database and its data within the data warehouse. This field can only be updated when a connection is first defined.

Important Do not use DWH as logical name. The name is reserved by the system.

Active. Indicate whether this is an active connection. Databases marked as active are automatically connected when Data Transformer is started. Tasks associated with databases marked as inactive are not executed during batch (non-interactive) replication.

Data Source Type. Indicate if this is an MFG/PRO database (QADDB) or a QAD BI data warehouse database (DWH).

Version. When the data source type is QADDB, select the MFG/PRO version associated with the MFG/PRO database.

See “Domain Database Data Sources” on page 57.

Remote. Indicate whether the database server is local or remote.

Host. When Remote is Yes, enter the host where the database server is running.

Service. When Remote is Yes, specify the service name or TCP-IP Port on which the remote database server is listening for database connections.

Single-user. When Remote is No, indicate if this is a single-user or a multi-user connection.

User and Password. Enter the user name and password for connecting to the database server if required.

Other Parameters. Specify any additional Progress connection parameters to apply to this connection.

Connection String. The system displays the connection string based on the settings entered on the screen after the connection configuration has been accepted.

DWH-ADMIN Host. Enter the host where the data warehouse administration database server is running.

DWH-ADMIN Service. Specify the service name or TCP-IP Port on which the data warehouse administration database server is listening for database connections.

Domain Selection. Click the Import from DWH-ADMIN button to retrieve a list of all domains defined in the data warehouse database; then from the domain list, select the domains you want to connect to.

Domain Database Data Sources

The introduction of the domain concept in the MFG/PRO database provides flexible implementation options for supporting multiple business operations within a single database and eliminates the need for a single database-wide base currency or database-wide control settings. The domain is essentially a logical partition within a single database. Any number of domains can be set up in one physical database—each domain with its own base currency, chart of accounts, and operating controls.

You add the domain database just as any other database, indicating the version as eB2.1. Data Transformer retrieves a list of all domains defined in the database; each domain is displayed as a subnode of the domain database. From that point forward, a domain is treated exactly as any other database in the system and represented with the Database Connected and Database Disconnected icons.

Important Only the domain database itself can be connected or disconnected. Individual domains cannot be connected or disconnected because they are physically realized in a single database. All domains are connected based on their domain database's status.

Text is appended to the logical names of the domain database and each domain in the tree, to indicate the type of source system—domain database or domain blade, which represents the individual domains within the database. Additionally, the Database Properties screen for an individual domain blade allows only the Active field to be modified. All other fields are read-only and based on the information entered for the domain database.

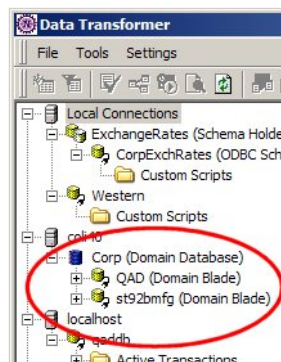


Fig. 3.7
Domain Database
in the Tree

Non-Progress Data Sources

You can connect to non-Progress relational databases using the Progress DataServer technology. See the *OpenEdge Data Management: DataServer for Oracle Guide*, the *Data Management: DataServer for Microsoft SQL Server Guide*, or the *Data Management: DataServer for ODBC Guide* to learn about setting up and configuring DataServers in Progress.

Once the DataServer has been set up, you configure the connection to the schema holder database in Data Transformer as described previously, leaving the QADDB check box cleared. Data Transformer lists all of the schema images associated with the schema holder as child connections after the schema holder has been connected. You can right-click each of the child connections and choose Properties to configure connection information specific to the targeted schema image.

For example, if the schema image references an Oracle database, you will need to provide the following information in the Other Parameters field on the Connection Properties screen to use Oracle SQL*Net networking:

```
-U [ORACLE-USERNAME]@[ORACLE-SID]  
-P [ORACLE-PASSWORD]
```

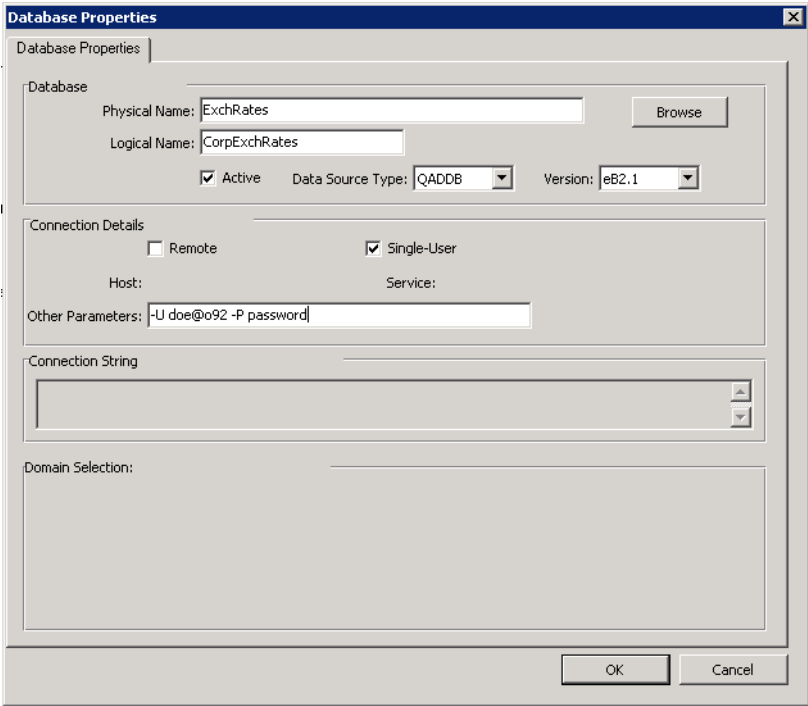


Fig. 3.8
Schema Image
Database Properties

When a schema holder is first added, Data Transformer retrieves all defined schema images and creates additional connection records for each one. You can limit the selection of schema images to include using either the standard Delete function or the Select Schema Images screen.


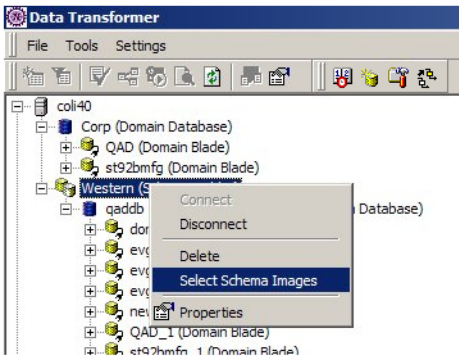


Fig. 3.9
Select Schema
Images Menu Item

Use the Select Schema Images screen to choose which schema images you want to work with and remove those you do not need to replicate. Move schema images from the Available Schema Images list to the Selected Schema Images list to have them show up in the tree.

Fig. 3.10
Select Schema
Images

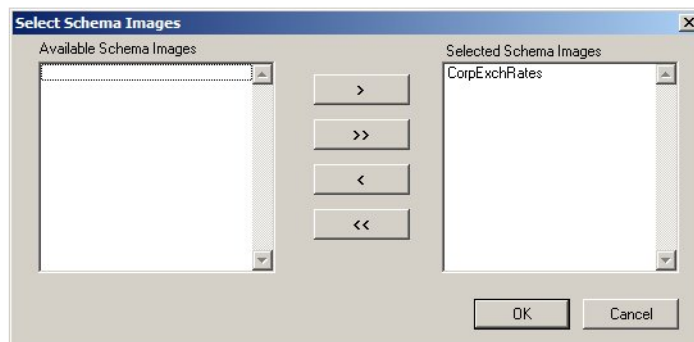


Manage Domains

When a domain database is first added, Data Transformer retrieves all defined domains and creates additional connection records for each one.

These domains are created with the Active field set to false. You must set this field to true for any domains you want to replicate before they can be scheduled for the batch process.

Select domains to include using either the standard Delete function or the Select Domains screen.

Fig. 3.11
Select Domains
Menu Item

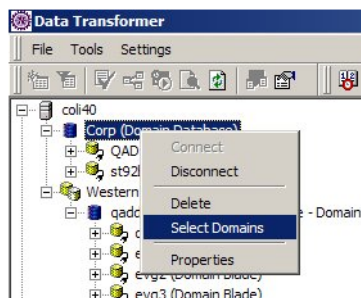

Use the Select Domains screen to choose which domains you want to work with and remove those you do not need to replicate. Move domains from the Available Domains list to the Selected Domains list to have them show up in the tree.

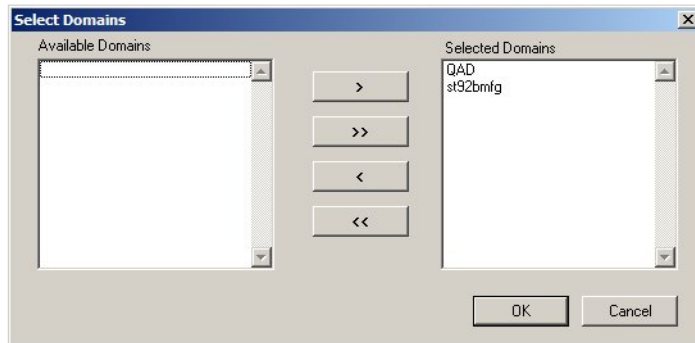


Fig. 3.12
Select Domains

Select Tables


To begin constructing the data warehouse, you first select the tables you want to add to the data warehouse from those in the connected data source.

Note If you loaded the table mapping structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default table selections.

To view the available tables, right-click the database icon in the left pane of the main Data Transformer screen. Then choose Select Tables.

The system scans the schema definitions of the connected database and displays the Select Source Tables screen illustrated in Figure 3.13.

Fig. 3.13
Select Source
Tables

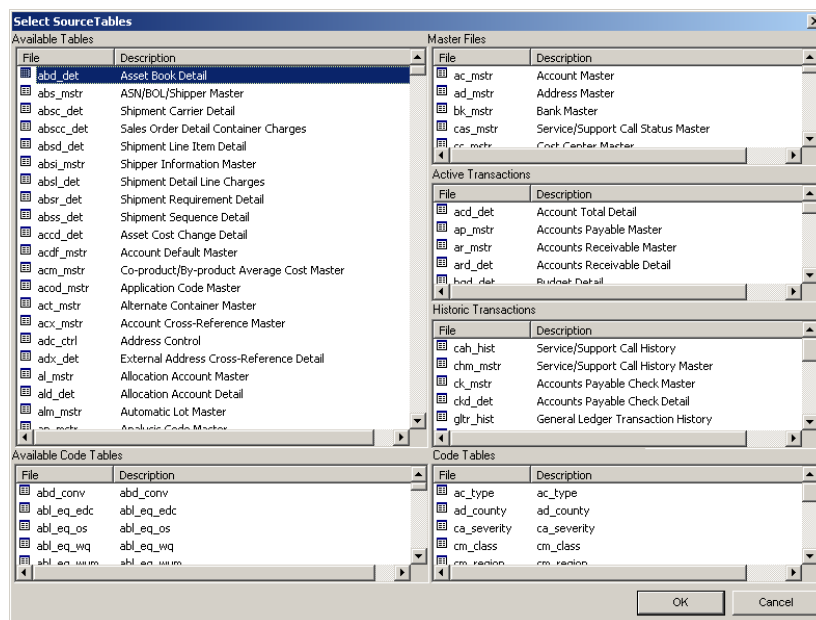

The selection screen consists of six frames:

- The two on the left side represent source tables from the source database. The system separates standard table listings from fields controlled through generalized codes when connecting to a QADDB database.
- The four frames on the right side represent destinations in the QAD BI data warehouse. These are shown in three groups—Master Files, Active Transactions, and Historic Transactions—as well as a fourth division for fields using generalized codes.

Move tables from the left to the right side using drag-and-drop. You can move tables from either frame on the left into any frame on the right.

If this is the first time you have selected tables from the database—unless you added tables by loading QAD-provided metadata—the frames on the right will be blank. Otherwise, tables you moved in earlier sessions display in the frames where they were placed. Once a table has been moved, it no longer displays in the source frame.

Note Drag-and-drop works in both directions. If you decide you do not want a table to be replicated to the data warehouse, you can move it back to the left side of the screen. If you save your changes and then decide you want to remove a table that has not yet been set up for replication, reopen the Select Tables screen and drag the table to its source location.

Important Removing a table from the right to the left once replication setup has been completed has no effect on the structure of the data warehouse. To remove a replicated table from the data warehouse, select it on the main screen and choose Tools|Delete.

When you finish selecting tables, close the screen. The system prompts you to save your changes.

The directory tree on the main screen updates to display a folder for each of the destination frames that have had tables added.

Set Up Replication

After selecting the tables to be included in the data warehouse, you must define how data should be extracted from the source table into the data warehouse. Activities include:


- Map the source table to a new data warehouse table and apply filters.
- Select fields to be replicated and create calculated fields.
- Define replication and scheduling modes.

Map Tables to Warehouse Tables

To start the replication setup, select a table from the main screen and choose Tools|Replication Setup. The Map Table screen displays (Figure 3.15).


Important You cannot choose this option for a table that has already been set up. Instead, select a table and choose individual options from the Tools menu for the function you want to perform. For example, choose Properties to modify the table mapping structure. If the table type is code table, you can use the WHERE clause to define a filter (Figure 3.14).

Fig. 3.14
Table Properties
Mapping Filter

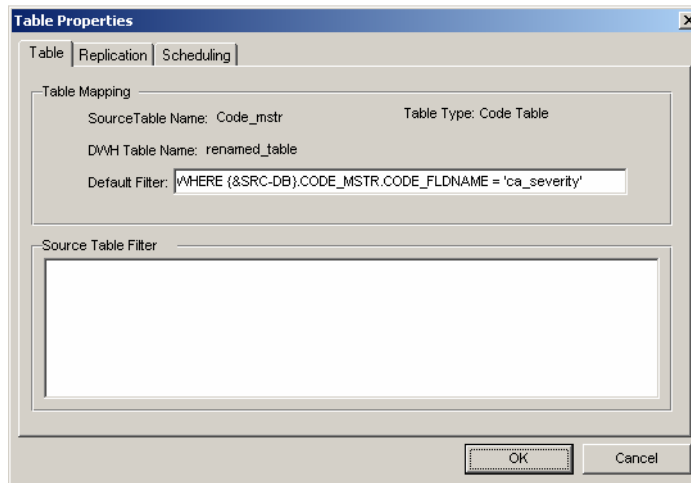

You can configure replication for all of the records in the table or for a subset of the records in the table by applying a filter. Filters can also be used to split a table into multiple table-like entities known as subsets, each of which can be a replication target. See “Create Subsets” on page 74 for details.

Fig. 3.15
Map Table

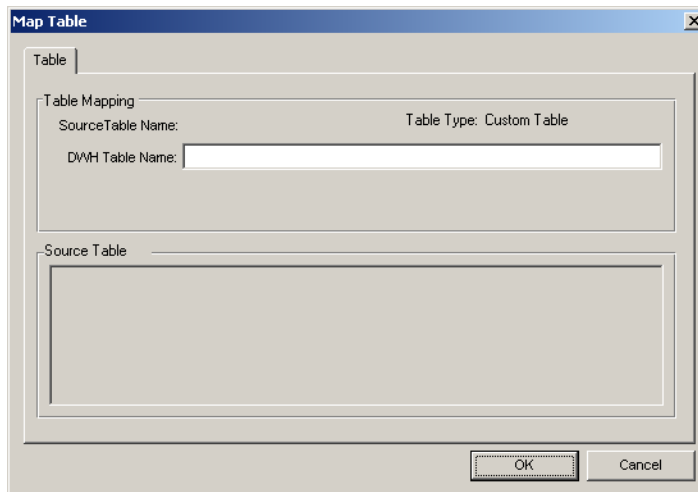

Source Table Name. The system displays the source table name.

Table Type. Read-only field that displays the table type—active, historic, master, or code. The system categorizes the tables based on this value.

DWH Table Name. Enter the name of a new data warehouse table that will be created to hold data from the source table.

Source Table Filter. Enter Progress code to filter records that are replicated to the data warehouse. Syntax for the filter always has the same format:

```
WHERE {&SRC-DB}.tablename.fieldname [operator] <value>
AND/OR {&SRC-DB}. tablename.fieldname [operator] <value>
[Operator] can have the following values: = , >= , <= , <> , matches ,
begins.
```

When this is blank, all records are replicated. When you save your changes, the system validates the syntax.

Click OK to save your changes and display the field mapping screen.

Map Fields to Warehouse Fields

Use the Field Selection frame to select the fields from the source table that will be replicated to the data warehouse table.


Note After initial replication setup, access this function by selecting a table and choosing Tools|Field Mapping.

Note If you loaded the database structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default field mapping structure.

The first column indicates whether a field is included in the replication process. When a field is selected on this screen, values are copied from the source database to the data warehouse during replication.

Important When you first set up table replication, the DB-NAME (and REC-ID for Progress data sources) fields are automatically configured. These system-defined fields are used to maintain links between the data source and the data warehouse. You cannot deselect them.

Fig. 3.16
Field Selection

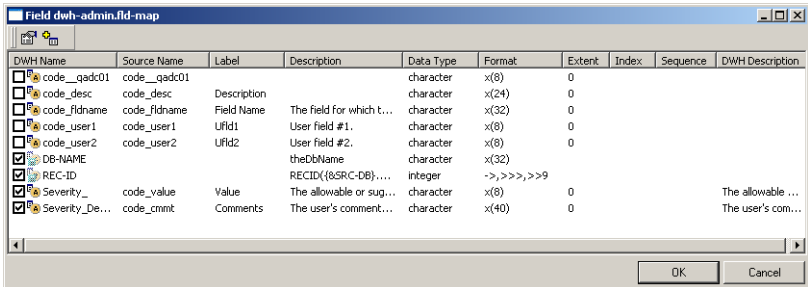


DWH Name	Source Name	Label	Description	Data Type	Format	Extent	Index	Sequence	DWH Description
☐ code_qad01	code_qad01			character	x(8)	0			
☐ code_desc	code_desc	Description		character	x(24)	0			
☐ code_fldname	code_fldname	Field Name	The field for which t...	character	x(32)	0			
☐ code_user1	code_user1	UfId1	User field #1.	character	x(8)	0			
☐ code_user2	code_user2	UfId2	User field #2.	character	x(8)	0			
☒ DB-NAME			theDbName	character	x(32)				
☒ REC-ID			RECID{(8SRC-DB)...	integer	->, >>>, >>9				
☒ Severity_...	code_value	Value	The allowable or sug...	character	x(8)	0			The allowable ...
☒ Severity_De...	code_cmmt	Comments	The user's comment...	character	x(40)	0			The user's com...

Specifying Field Properties

To define the properties associated with each field, select it and click the Properties command.

Note You can also define custom calculated fields by clicking the Add Field command. The system displays a Field Properties screen with all data fields blank and input enabled.

Fig. 3.17
Field Properties

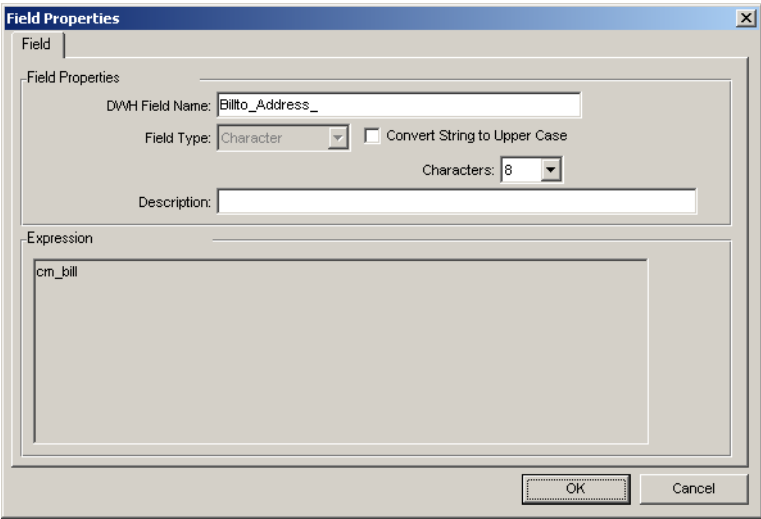

Field Properties

Field

Field Properties

DWH Field Name:

Field Type: ☐ Convert String to Upper Case

Characters:

Description:

Expression

OK Cancel

DWH Field Name. Enter the name used to represent this field in the data warehouse. The default is the MFG/PRO schema field name.

Note You also can rename a field directly on the field selection screen by selecting its name and overtyping it.

Field Type. The system displays the field data type from the MFG/PRO schema. You cannot change it.

Convert String to Upper Case. If the field type is Character, set this to Yes to convert the field values to upper-case in the ETL script. This can be used to rationalize data that is entered in mixed cases in the data source for use in Cognos PowerPlay (a case-sensitive tool).

Description. Enter a text description of the field.

Expression. The system displays the field name or formula associated with the field.

Click OK to save the properties of an individual field. When you finish specifying field properties for the table, click OK to save your configuration.

The system validates each field record for syntax.

- **Valid:** A green triangle on the table icon on the main screen indicates that replication setup is complete for the table.
- **Invalid:** A yellow exclamation point displays on the table icon and a message indicates the nature of the error.


Important To modify field properties for tables that have already completed replication setup, you cannot access the Field Mapping function through the Replication Setup screen. You must first select the table on the main screen, and then choose Tools|Field Mapping. Select the field you want to edit and click the Field Properties command.

Define Replication Method

To specify how the system replicates data between the data source and the data warehouse, select a table on the main screen and choose Tools|Properties. Then click the Replication tab.

Important The Properties tool is available only for tables that have completed the replication.

Fig. 3.18
Table Properties,
Replication Tab

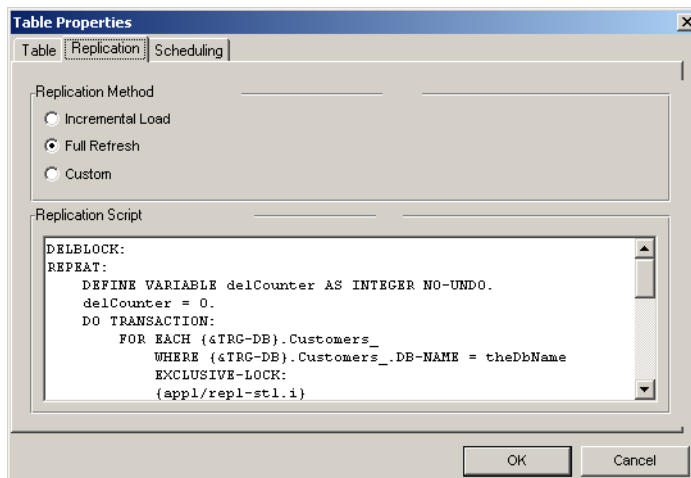

Note If you loaded the table warehouse structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default setup.

Choose one of three replication methods:

- **Incremental Load.** Only records that have never been replicated to the data warehouse are selected for replication. This method is typically used for tables that contain historical records such as tr_hist and ih_hist, or a combination of historical and active transaction records such as wod_det or pod_det. Incremental load generally is not as time consuming as a full refresh.

Important The replication process for incremental load does not determine whether a record has been modified since the last replication—only that it has been created. Be aware that using this method for records that are commonly updated—master records, for example—can create data synchronization problems between MFG/PRO and the data warehouse.

- **Full Refresh.** The system performs the following actions:
 - Updates records that already exist in the data warehouse
 - Copies records that have never been replicated to the data warehouse
 - Deletes all other records in the data warehouse that are neither updated nor newly created in this full refresh

A new integer field `Updated_Seq_` is available for each table in the data warehouse to identify each full refresh.

This is typically used to replicate master data—often including tables that do not contain more than 10,000 records. It is the default for newly defined tables.

- Custom. Whether a table is replicated depends on some user-defined condition; for example, replication only takes place when an item is associated with a product line.

The system displays a default Progress replication script based on the selected method. If you modify the code, Replication Mode is automatically set to Custom. When you click OK, the system validates the syntax. If there are errors, the table icon on the main screen displays a yellow warning indicator to indicate that a problem exists.

Replicate Data

You can synchronize data between a data warehouse table and the associated MFG/PRO table using two methods:

- Automatically, by setting up scheduling for each table
- Manually, by selecting the table on the main screen, then clicking **Execute Now** on the **Tools** menu

The following sections describe these methods.

Scheduling Automatic Replication

Automatic replication takes place using either a serial or parallel strategy. In serial replication, each task is processed sequentially based on its defined sequence—that is, its priority. With parallel replication, a pool of processors is created and each processor is assigned a task to process. As a processor finishes a task, it is assigned another task to be processed until all tasks have been performed with respect to sequence order.

Note The processor pool size is set to one less than the value of the **Minimum** and **Maximum Servers** settings on the **AppServer** properties screen. See “Pool Size of Script” on page 116 for details.


In order to use parallel replication, the Progress AppServer must be installed and configured on the same machine as the QAD BI Data Transformer. For information on setting up and using parallel replication and configuring the AppServer, see “QAD BI Parallel Replication Setup” on page 244.

Use the Scheduling tab to define when replication takes place for each table in the data warehouse. You can set up different scheduling methods for individual tables based on the frequency of changes to the source table.

Important Automatic scheduling uses the Windows Task Scheduler to start a QAD BI process to review the scheduled replication tasks on a periodic basis.

See “Set Up Windows Task Scheduler” on page 120 for information.

Fig. 3.19
Table Properties,
Scheduling Tab

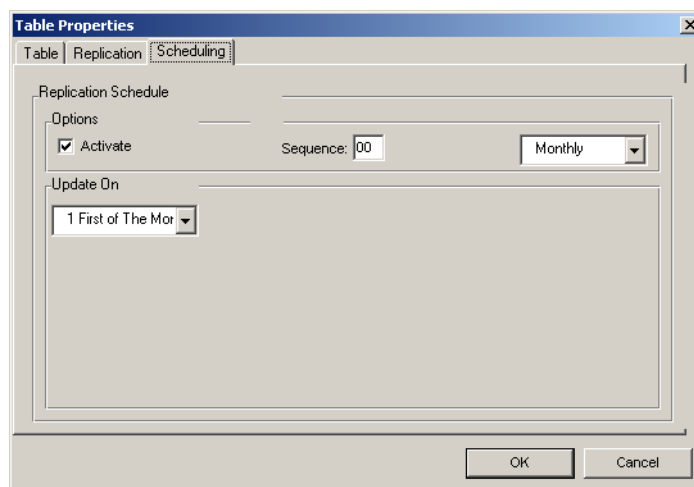

Activate. Select this field to have automatic replication take place on the specified schedule. When Activate is not selected, you must replicate this table manually using Tools|Execute Now.

When a database is marked as Inactive, you cannot change the Activate check box. To set the database’s Active/Inactive status, use the Database Properties screen.

Sequence. Specify the relative order in which the task associated with this table should be replicated. Tasks are executed from low sequences to higher sequences. Tasks that share the same sequence may be executed in any order among themselves. In general:

- Tasks that pull data from sources into the data warehouse should be scheduled to precede tasks that operate on data within the data warehouse.
- Tasks that generate Cognos Cubes should be scheduled to run after all other tasks.

For a more detailed discussion of setting the sequence for a replication task, see “Setting the Replication Task Sequence” on page 255.

Frequency. Specify how often the replication task for this table should be run. Options are:

- Daily (the default). The table is replicated each day when the Windows scheduler starts up.
- Weekly. The system displays a list of weekdays; select the days you want this table to be replicated. Use Ctrl+Click to select more than one list entry.
- Monthly. The system displays available dates, as well as First of the Month and Last of the Month options.

Note The Windows Task Scheduler should be configured to run the QAD BI process at least as frequently as the most frequent replication task. For example, if the Windows Task Scheduler is set to run every week, even if a table replication task is scheduled to run every day, it will only be run every week.


Running Manual Replication

In addition to setting up scheduled replication processes, you can refresh a data warehouse table with updated values from the source database at any time.

Select the table on the main screen and choose Tools|Execute Now. Click Start on the Record Processing Status screen. The system runs the replication task, listing status messages to indicate its progress.

Note The moving status bar at the top of the screen will not necessarily fill completely to the right when the replication task completes. Since each new status message is added to the top of the list, you can determine that replication is finished when the Total Update Time message displays.

Fig. 3.20
Record Processing
Status

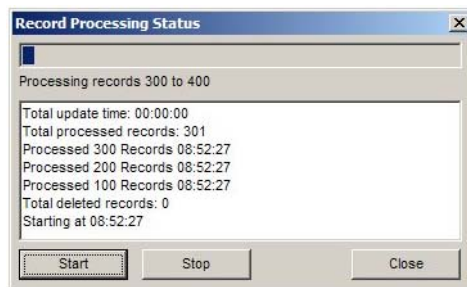

The buttons at the bottom of the screen control this function:

- Click Start to begin replication.
- Click Stop to end replication.


Note Replication may not stop immediately when you click the button depending on the nature of the script being executed.

- Click Close to exit the screen.

Rename Table

When you perform Replication Setup, tables are created in the data warehouse. If necessary, you can change a table name by using the Rename Table function on the Data Transformer|Tools menu. This function opens the Rename Table screen.

Fig. 3.21
Rename Table

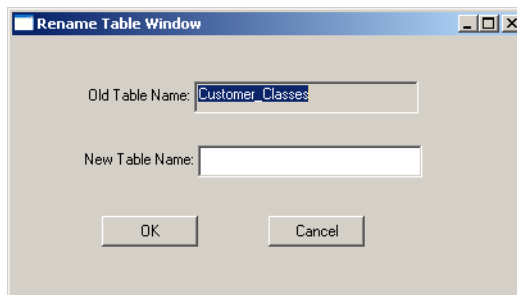

If the old table name cannot be found in the data warehouse, an error message is displayed. An error message also displays if a user enters:

- A blank table name
- Reserved words
- A table name that is already in use

When you click OK and Automatically Check ETL-Scripts and Automatically Refresh Linked Tables is selected in Data Transformer|Settings|Applications Settings, the validation and linking of scripts and tables is automatically performed. See “Modifying Application Settings” on page 107 for details.

When the validation is successful and the linked table refreshed, the new table name is displayed on the main directory tree and a green triangle placed on the table icon. If there is an error, a yellow exclamation point appears on the table icon.

After successfully renaming a table, the field mapping screen is displayed.

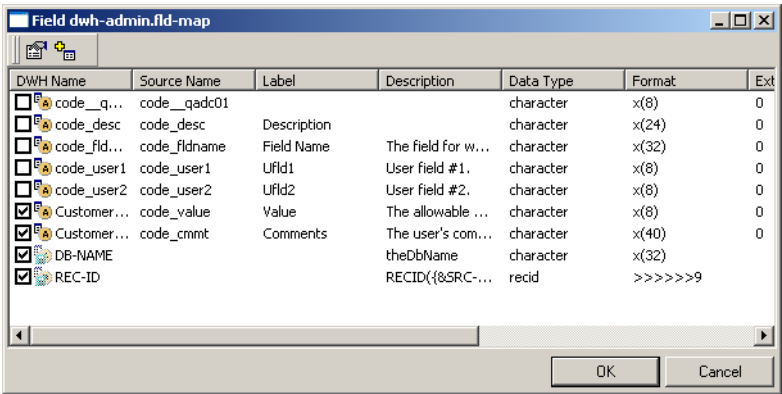


Fig. 3.22
Field Mapping

From the field mapping screen, select the fields in the source table that you want to replicate to the data warehouse table. Then click OK.

The system validates each field record for syntax and, when successful, places a green triangle on the table icon on the main screen to indicate that replication setup is completed for that table. If validation fails, a message is displayed to indicate the nature of the error, and the table icon is set to a yellow exclamation point.

Create Subsets

Within the data source, data from different functional areas is sometimes stored in the same table. For example, the MFG/PRO transaction history table (tr_hist) stores data related to sales orders—but it also contains many other types of business documents as well. You can define subsets to isolate the data of interest in a data warehouse table.

In QAD BI Data Transformer, defining a subset is similar to setting up a table for replication. The main difference is that the subset definition includes a filter specification to select the area of interest in the source table.

Instead of Tools|Replication Setup, choose Tools|Subset.

Fig. 3.23
Subset Definition

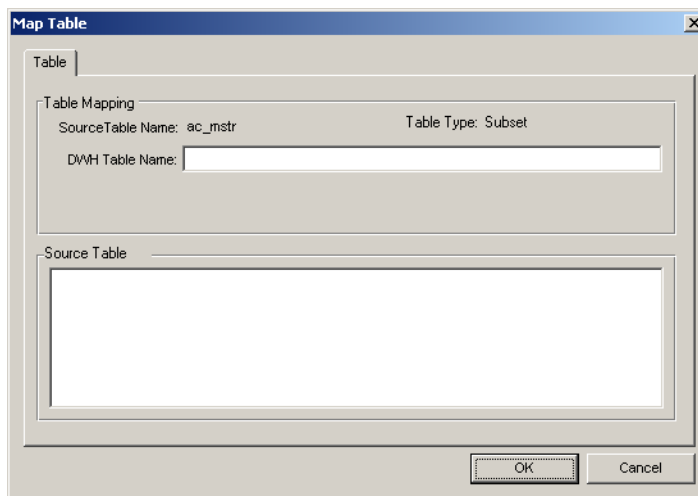


Table Type defaults to Subset; you cannot change it. Specify the data warehouse table name. Then enter Progress code to filter the records that should be replicated in the data warehouse.

Syntax for the filter always has the same format:

```
WHERE {&SRC-DB}.tablename.fieldname [operator] <value>
AND/OR {&SRC-DB}. tablename.fieldname [operator] <value>
```

[Operator] can have the following values: = , >= , <= , <> , matches , begins.

After defining the subset, you can continue to define fields and replication settings just as in the standard replication setup.

Add Indexes

When you select tables for the data warehouse, the system disregards any indexes defined in the data source. Instead, you can custom-design indexes for each table after adding it to the warehouse. This lets you test the performance of your data models first, then add indexes that are appropriate to your specific needs.

Note You can view a list of indexes defined in the data source by selecting the table on the main screen and choosing Tools|Source indexes.

To add an index to a table, select the table on the main screen and choose Tools|Target Indexes. The Indexes screen displays any existing indexes.

Note By default, the system creates a primary index for each table called DB-NAME. It includes the system-maintained DB-NAME field (and REC-ID for Progress data sources). You cannot modify or delete this index, unless you create a new index and set it as the primary index.


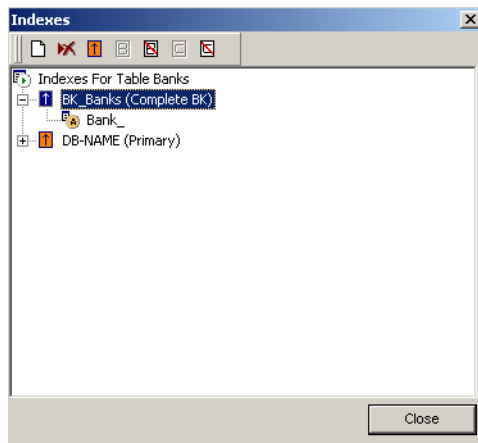


Fig. 3.24
Indexes

Use the commands at the top left to add or delete an index, or designate it as primary.

When you click the Add Index command, the screen illustrated in Figure 3.25 displays.

Fig. 3.25
Add Index

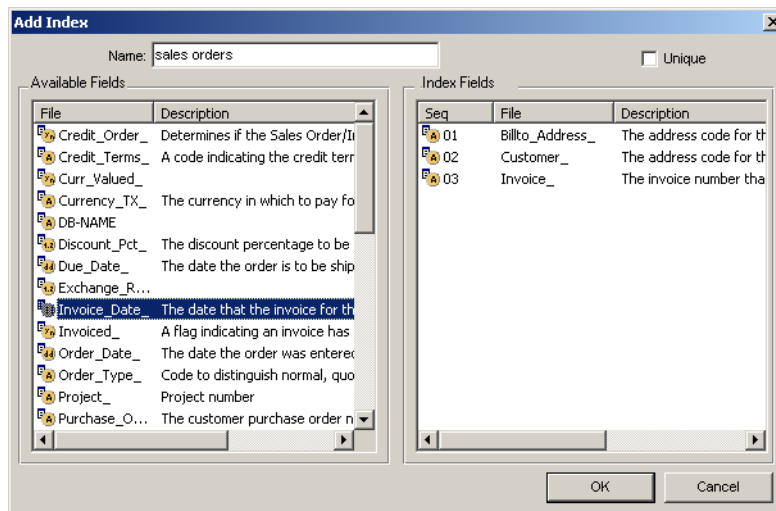

Enter a name for the new index. The left pane displays all the fields in the data warehouse table or subset that are available for indexing. Drag-and-drop fields to the right pane to include them in the index.

Important After adding or deleting an index, you should validate the synchronization script using these steps:

- 1 Select the updated table on the main screen.
- 2 Choose Check Scripts.

If the new index validates properly, a green triangle displays on the table icon. Otherwise, a yellow warning icon displays.

Add Business Key Indexes

For Progress data sources, QAD BI Data Transformer uses the DB-NAME and REC-ID fields to maintain links between the data source and the data warehouse. However, this approach is not always reliable in some circumstances:

- When the user dumps and loads tables in the source database, the REC-ID values of the records in these tables are changed.

- Data is archived and no longer exists in the source database.

In both cases, the links between the data source and the data warehouse are broken and can no longer be used for replication purposes. Continuing to perform data replication without first rebuilding the links may cause data corruption in the data warehouse.

This is where business key index comes into play. You can designate indexes that can represent unique identifiers of records as business key indexes to construct more reliable links between the data source and the data warehouse. You can then use the business key indexes to synchronize the REC-ID values between the source and target databases to re-establish the links based on the REC-ID field for replication purposes.


Note REC-ID cannot be designated as business key index due to the reason stated previously.

You can only define one business key index for a table. If you are certain the business key index you define can uniquely identify each record, designate it as a complete business key index; otherwise, designate it as an incomplete business key index to have the system validate uniqueness and maximize accuracy when rebuilding data links.

Note When processing incomplete business key indexes, the system maximizes accuracy by performing additional operations during data link update, which may require longer execution time.

To designate an index as business key index in a table, select the table on the main screen and choose Tools|Indexes. The Indexes screen displays any existing indexes.

Fig. 3.26
Business Key
Indexes

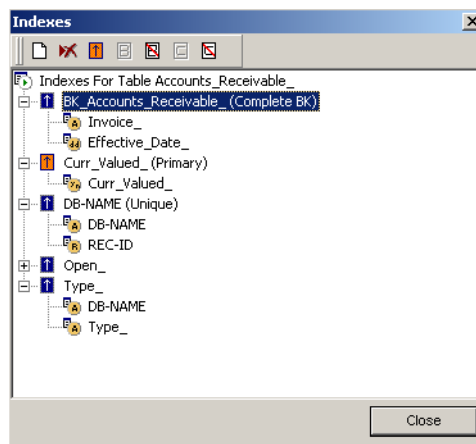

Use the commands at the top left to designate an index as a complete business key index or incomplete business key index.

- To designate an index as a complete business key index, select the index and click the Set to BK icon.
- Use the Complete BK and Incomplete BK icons to switch the business key index between complete and incomplete.
- To remove the business key index, select the index and click the Cancel BK icon.

Note Custom tables do not support business key indexes. Business key index command icons are always grayed-out in the Indexes window of a custom table.

Apart from manually adding business key indexes, you can also load the predefined business key index definition file for the standard tables in the QAD-provided models or modify and load it to customize business key indexes. See “Modify Business Key Index Definition File” on page 79 and “Load Business Key Index File” on page 80 for information on how to modify and load the business key index definition file.

Business key indexes degrade system performance during data replication, and therefore should only be added when you need to perform a data link rebuild. It is recommended that you remove all business key indexes from the data warehouse after rebuilding data links to improve system performance. See “Remove Business Key Indexes” on page 82.

Modify Business Key Index Definition File

The business key index definition file is used to define business key indexes for the standard tables in the QAD-provided models.

If you have made changes to the table schema of the QAD-provided models in the data warehouse, you may need to modify the business key index definition file to reflect the schema changes.

- 1 Locate the `bk_index.xml` file in the following directory:
`qadbiinstall\dir\data\utilities\bk_utilities`
- 2 Open `bk_index.xml` in a text editor. Use Table 3.7 to inspect and modify the file.

Tag	Description
<TABLE>	Schema definition of the table in the data warehouse.
<TABLE-NAME>	Name of the table.
<MAPPED-FIELD>	Definition of new field to be added to the table.
<INDEX>	Business key index definition for the table.
<INDEX-NAME>	Name of the index.
<INDEX-FULL>	Indicate whether the index is a complete business key index: Yes: Complete business key index No: Incomplete business key index
<INDEX-ACTIVE>	Indicate whether the index is an active business key index: Yes: Active business key index No: Inactive business key index
<INDEX-UNIQUE>	Indicate whether the index is unique: Yes: Unique index No: Non-unique key index
<INDEX-FIELD>	Specify the fields that make up the index.

Table 3.7
Business Key Index
Definition File Tags

Example You need to define three fields: `Reference_`, `gltr_line`, and `gltr_rflag` as the business key index for the `General_Ledger_Transactions` table. However, the `gltr_line` and `gltr_rflag` fields are currently not available in the standard QAD-

provided table schema in the data warehouse. So, you need to modify the business key definition file to add two new fields and define a business key index for the table, as shown in the following sample script.

```
<TABLE>
  <TABLE-NAME>General_Ledger_Transactions_</TABLE-NAME>
  <MAPPED-FIELD>
    <SRC-TABLE>gltr_hist</SRC-TABLE>
    <SRC-FIELD>gltr_line</SRC-FIELD>
    <TRG-FIELD>gltr_line</TRG-FIELD>
    <DATA-TYPE>integer</DATA-TYPE>
    <FIELD-FORMAT>&gt;&gt;&gt;9</FIELD-FORMAT>
    <FIELD-DESC>The line number</FIELD-DESC>
  </MAPPED-FIELD>
  <MAPPED-FIELD>
    <SRC-TABLE>gltr_hist</SRC-TABLE>
    <SRC-FIELD>gltr_rflag</SRC-FIELD>
    <TRG-FIELD>gltr_rflag</TRG-FIELD>
    <DATA-TYPE>logical</DATA-TYPE>
    <FIELD-FORMAT>yes/no</FIELD-FORMAT>
    <FIELD-DESC>Set to yes</FIELD-DESC>
  </MAPPED-FIELD>
  <INDEX>
    <INDEX-NAME>BK_General_Ledger_Transactions_</INDEX-NAME>
    <INDEX-FULL>yes</INDEX-FULL>
    <INDEX-ACTIVE>yes</INDEX-ACTIVE>
    <INDEX-UNIQUE>no</INDEX-UNIQUE>
    <INDEX-FIELD>Reference_</INDEX-FIELD>
    <INDEX-FIELD>gltr_line</INDEX-FIELD>
    <INDEX-FIELD>gltr_rflag</INDEX-FIELD>
  </INDEX>
</TABLE>
```

3 Save the changes.

Load Business Key Index File

Before you rebuild data links, you need to load the business key index file to add predefined—or, if you have modified the file, customized—business key indexes to the tables in the data warehouse.

Note Business key indexes were not automatically added for the standard tables when you installed QAD-provided business models.

Note Loading the business key index definition file overwrites all the existing business key indexes in the data warehouse.

To load the business key index file:

- 1 On the QAD BI Data Transformer main screen, click the Internal Progress Editor icon on the toolbar to launch Procedure Editor.
- 2 In the Data Source Select window, just select the data warehouse and administration databases.

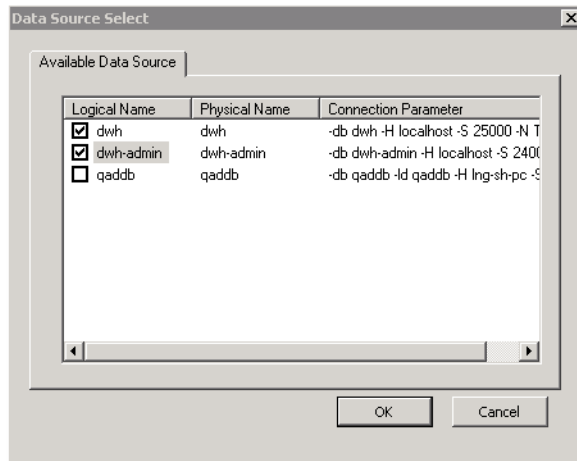


Fig. 3.27
Data Source Select
Window

- 3 Provide the user ID and password for the data warehouse database:
 User ID: dwh
 Password: admin
- 4 On the Procedure Editor screen, choose File|Open or press F3 to open the following file:
`qadbiinstall\dir\data\utilities\bk_utilities\Tool_LoadBKToDWH.p`
- 5 Choose Compile|Run or press F2 to run the program.
- 6 Exit Procedure Editor. All business key indexes defined in the definition file are added to the tables in the data warehouse.


Remove Business Key Indexes

Business key indexes degrade system performance during data replication, and therefore should only be added when you need to perform a data link rebuild. It is recommended that you remove all business key indexes from the data warehouse after rebuilding data links to improve system performance.

To remove all business key indexes from the data warehouse:

- 1 On the QAD BI Data Transformer main screen, click the Internal Progress Editor icon on the toolbar to launch Procedure Editor.
- 2 In the Data Source Select window, just select the data warehouse and administration databases.

Fig. 3.28
Data Source Select
Window

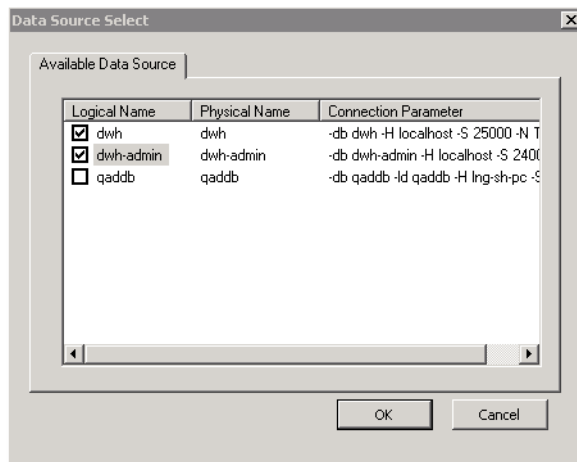

- 3 Provide the user ID and password for the data warehouse database:
User ID: dwh
Password: admin
- 4 Provide the user ID and password for the data warehouse administration database:
User ID: admin
Password: Qzw4ex5r

- 5 On the Procedure Editor screen, choose File|Open or press F3 to open the following file:
`qadbiinstall\dir\data\utilities\bk_utilities\Tool_RemoveBK.p`
- 6 Choose Compile|Run or press F2 to run the program.
- 7 Exit Procedure Editor. All business key indexes are removed from the data warehouse.

Preview Data

You can view data both after it has been replicated to the data warehouse and in its original form, in the data source.

First, select a table on the main screen. Then:


- To view the data records in the data warehouse, choose Tools|Preview Target Data.
- To view the source database records, choose Tools|Preview Source Data.

Figure 3.29 shows the contents of the address master (ad_mstr) table in MFG/PRO, as well as the corresponding Address table in the data warehouse. Note that the MFG/PRO table shows all fields in the schema, identified by the schema field names; the data warehouse displays only the mapped fields.

To sort the records based on values in a specific column, click the column heading.

Records are displayed in a paginated view with a maximum of 50 records on each page. You can use the navigation controls at the bottom of these screens to easily page through records or jump to a page by its number.

Fig. 3.29
Table Preview

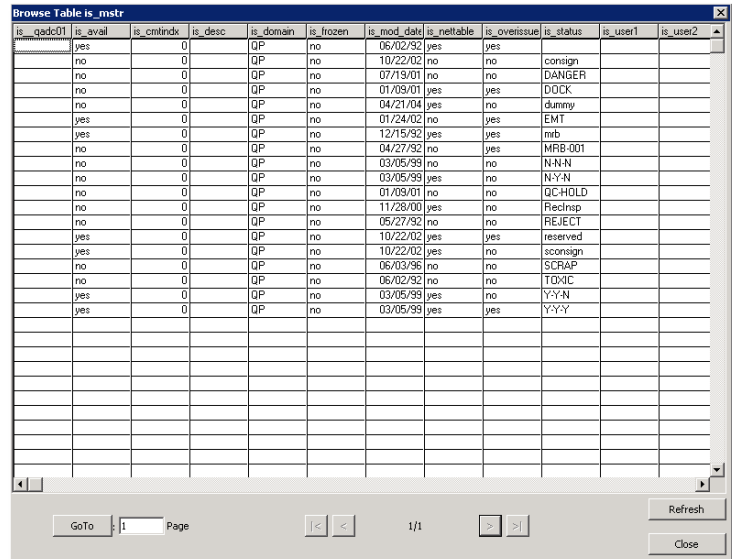


is_qadc01	is_eval	is_cmtindx	is_desc	is_domain	is_frozen	is_mod_date	is_reliable	is_ovenssue	is_status	is_user1	is_user2
yes	0	0	QP	no	06/02/92	yes	yes				
no	0	0	QP	no	10/22/02	no	no	consign			
no	0	0	QP	no	07/19/01	no	no	DANGER			
no	0	0	QP	no	01/09/01	yes	yes	DOCK			
no	0	0	QP	no	04/21/04	yes	no	dummy			
yes	0	0	QP	no	01/24/02	no	yes	EMT			
yes	0	0	QP	no	12/15/92	yes	yes	mrh			
no	0	0	QP	no	04/27/92	no	yes	MRB-001			
no	0	0	QP	no	03/05/99	no	no	N-N-N			
no	0	0	QP	no	03/05/99	yes	no	N-Y-N			
no	0	0	QP	no	01/09/01	no	no	QC-HOLD			
no	0	0	QP	no	11/28/00	yes	no	Reclasp			
no	0	0	QP	no	05/27/92	no	no	REJECT			
yes	0	0	QP	no	10/22/02	yes	yes	reserved			
yes	0	0	QP	no	10/22/02	yes	no	sconsign			
no	0	0	QP	no	06/03/96	no	no	SCRAP			
no	0	0	QP	no	06/02/92	no	no	TOMC			
yes	0	0	QP	no	03/05/99	yes	no	Y-Y-N			
yes	0	0	QP	no	03/05/99	yes	yes	Y-Y-Y			

Delete Target Data

You can delete data records after they have been replicated to the data warehouse. You can delete all data records from a table while preserving its table mapping information.

Choose Delete Target Data from the Data Transformer|Tools menu to open the Record Deletion Status screen.

Fig. 3.30
Delete Data
Records from Data
Warehouse

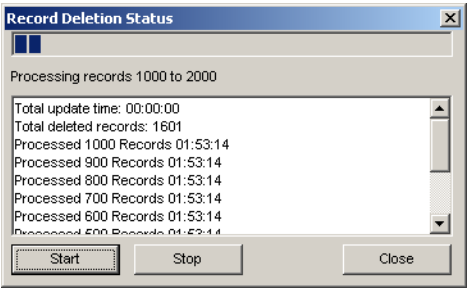

To start the deletion process, click Start. If it is necessary to stop the deletion before completion, click Stop.

Validate Tables

The Validate Table function on the Data Transformer|Tools menu lets you validate table and field mappings between source tables and data warehouse tables.

Validation takes place in two phases. The system first checks for valid tables; then it checks each field mapping between source table and data warehouse table.

When checking for valid tables, the system determines whether a table has changed, is unchanged, or is missing. This information displays in the Source Table Status and DWH Table Status columns of the Table Mapping frame shown in Figure 3.31.

When checking field mappings, the system determines the field mapping status and displays this information in the Field Mapping frame. If any field mapping status is Mismatching or Invalid, the status Corrupted displays in the Status column of the Table Mapping frame. You should fix the field mapping problems before attempting to recreate a table.

Using this status information, you can detect and recover any corrupted mapping that may have occurred after activities such as database replication.

DWH Table Mapping Report

Table Mapping

Status	Description	Source DB Logical Name	Source DB	Source Table	DWH Table	Source Table Status	DWH Table Status
CORRUPTED		qadddb	C:\projects\qadbi\build\trunk\d...	cm_mstr	Customers_	CHANGED	UNCHANGED

Delete Table Mapping

Recreate DWH Table

Field Mapping

Status	Description	Source Field	DWH Field	DWH Expression	Function
☒ OK			DB-NAME	theDbName	
☒ OK			REC-ID	RECID((&SRC-DB) cm_mstr)	
☒ MISMAT...	format mismatching x(8) to x(12);	cm_addr	Customer_		CAPS
☒ MISMAT...	DWH field 'Bilto_Address_' is missing;	cm_bill	Bilto_Address_		
☒ OK		cm_class	Customer_Class_		CAPS
☒ OK		cm_cr_hold	Credit_Hold_		
☒ OK		cm_cr_hold	Customer_Region_		
☒ OK		cm_slaspt(1)	Salesperson_1_		CAPS
☒ OK		cm_slaspt(2)	Salesperson_2_		CAPS
☒ OK		cm_slaspt(3)	Salesperson_3_		CAPS
☒ OK		cm_slaspt(4)	Salesperson_4_		CAPS
☒ OK		cm_sort	Sort_Name_		
☒ INVALID	Source field 'cm_type' is missing;	cm_type	Customer_Type_		CAPS

Delete Field Mapping

Close

Fig. 3.31
DWH Table
Mapping Validation

Table Mapping Display and Functions

The following fields display in the Table Mapping frame:

Status. Displays the status of the table, based on the status of associated fields:

OK: No invalid or mismatched field mappings exist.

Corrupted: At least one invalid or mismatched field mapping exists.

Description. This field displays detailed table error information, such as a table is missing.

Source DB Logical Name. The alias for the source database.

Source DB. The physical path to the source database.

Source Table. The name of the table from the source database.

Source Table Status and DWH Table Status. These status fields indicate if mappings between the source and data warehouse are new, unchanged, or missing:

Unchanged: Field mappings are unchanged.

Changed: Field mappings have changed. Either source table fields or data warehouse fields have changed.

Missing: Either the source table or the data warehouse table is missing.

Use the two buttons in the Table Mapping frame to delete tables or recreate them.

Deleting Table Mapping

Clicking the Delete Table Mapping button lets you delete both table and field mapping information. The data warehouse table is also deleted.

Recreating Data Warehouse Table

You can use the Recreate DWH Table button to resolve any mismatching between source and data warehouse tables. You can also use it to delete data from the data warehouse table.

When you click the Recreate DWH Table button, the system:

- 1 Deletes all mapped data from the data warehouse table and deletes the data warehouse table
- 2 Creates a data warehouse table based on the original table mapping stored in data warehouse-admin

Before recreating a data warehouse table, ensure that you have deleted any field mappings with the status of Invalid shown in the Field Mapping frame.

Field Mapping Display and Functions

The following fields display in the Field Mapping frame:

Status. Status information is displayed as follows:

OK: Both source and data warehouse fields exist and are consistent.

Invalid: The source table field cannot be found and the field mapping must be deleted.

Mismatch: The source table field or the data warehouse field has changed and are inconsistent. This field mapping can be rebuilt by overriding the target field with the source field.

Description. For mismatched or invalid fields, a brief description of the error.

Source Field. The name of the field in the source table.

DWH Field. The name of the field in the data warehouse table.

DWH Expression. The expression used to calculate the value that populates the data warehouse field.

Function. Currently not used.

When you click Delete Field Mapping after selecting the relevant check boxes, the selected field mapping information stored in data warehouse-admin is deleted but the field data in the data warehouse tables is retained.

When you click Close after performing Delete Field Mapping, the system performs the Recreate DWH Table function.


Create Custom Tables

Not all tables in the data warehouse have to be based on table definitions from the connected data sources. You can create custom tables that exist only in the data warehouse.

Custom tables are populated with data using custom scripts. They can contain virtually any data the designer wants to put in them.

To create a new table, right-click the Custom Tables folder on the main screen and select Create Table. The Map Table screen displays.

Fig. 3.32
Custom Table
Setup

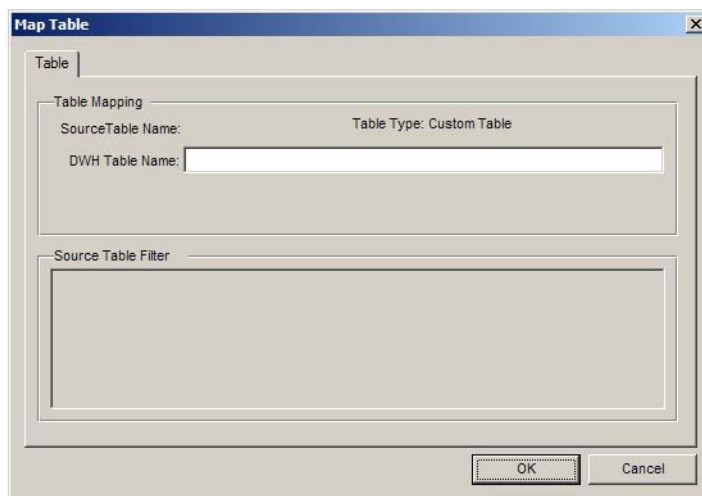The image shows a 'Map Table' dialog box with a blue title bar and a close button. It has a 'Table' tab selected. Inside, there are two main sections. The top section is 'Table Mapping', which contains a 'SourceTable Name:' label, a 'Table Type: Custom Table' label, and a 'DWH Table Name:' label followed by an empty text input field. The bottom section is 'Source Table Filter', which contains an empty rectangular area. At the bottom right of the dialog are 'OK' and 'Cancel' buttons.

While the overall process is similar to mapping an MFG/PRO table to the data warehouse, you can only access one field—DWH Table Name. Table Type is automatically set to Custom Table, and you cannot define code to filter records because a custom table is not directly based on any source table.

Click OK to display the field mapping screen. Again, navigation is similar to standard table setup. Use the Field Properties and Add Field commands in the upper left corner of the screen to update an existing field or add a new one.

You can define a field to be any data type supported by Progress. However, once you have initially specified a data type, you cannot change it. Instead, delete the field and add a new one with the correct data type.

Once you have created the custom table and defined its fields, you can define indexes for the table using the Indexes right-click option while the custom table is selected in the tree.

Create Custom ETL Scripts

Because of the way some types of data are stored in data sources, data is not always directly usable as management information. In such cases, Data Transformer lets you reference custom ETL scripts that you have written to convert MFG/PRO data into warehouse data more appropriate for use in analysis. Custom scripts are associated with custom tables, which were described in the previous section.

Important You must be familiar with writing Progress queries to create custom scripts. See the Progress documentation for information.

Note Custom ETL scripts are used to restructure data in the data warehouse. A related type of script—a custom replication script—is used when the Replication Method of a table replication task is set to Custom. It moves data into the data warehouse using custom extraction logic.

Script Guidelines

For a custom script to be usable by QAD BI, it should follow several guidelines:

- Field references must include the full namespace reference to the field, from the database level down; for example, `databasename.tablename.fieldname`.
- The database name must be the logical database name for the data warehouse, followed by the letter q; for example, `dwhq`. The following shows an example of a correct field reference:
`dwhq.Balance_Sheet_totals_.Cost_Center_`
- For scripts that reference the data warehouse, include the following alias as the first line to be used in the script implementation:
`&SCOPED-DEFINE TRG-DB DWHQ`
- Similarly, for scripts that reference the source database, include the following alias:
`&SCOPED-DEFINE SRC-DB SRCDB`

- Check the syntax of the saved script using the Progress tools or use the Check Scripts function after adding it.

Figure 3.33 shows an example of a completed script.

Fig. 3.33
Sample Custom
ETL Script

```

$SCOPED-DEFINE TRG-DB DWHQ

define variable tooearly like dwhq.Sales_Performance_.Too_early no-undo.
define variable ontime like dwhq.Sales_Performance_.On_time no-undo.
define variable toolate like dwhq.Sales_Performance_.Too_late no-undo.

for each dwhq.Sales_Performance_ exclusive-lock:
  delete dwhq.Sales_Performance_.
end.

for each dwhq.Transaction_History_ NO-LOCK
  where dwhq.Transaction_History_.tr_type = "ISS-50",
  each dwhq.Invoice_Lines_ NO-LOCK
    where dwhq.Invoice_Lines_.Invoice = dwhq.Transaction_History_.tr_rnks
    and dwhq.Invoice_Lines_.idh_line = dwhq.Transaction_History_.tr_line
    and dwhq.Invoice_Lines_.idh_due_date <> ?
  break by dwhq.Transaction_History_.Order_number by dwhq.Transaction_History_.tr_line:

  if first-of(dwhq.Transaction_History_.tr_line) then
    do:
      ASSIGN
        tooearly = 0
        ontime = 0
        toolate = 0.
    end.

    if dwhq.Transaction_History_.tr_effdate < dwhq.Invoice_Lines_.idh_due_date then
      tooearly = tooearly +
        ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).
    else if dwhq.Transaction_History_.tr_effdate = dwhq.Factuur_Regels_.idh_due_date then
      ontime = ontime +
        ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).
    else
      toolate = toolate +
        ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).
  end.

```

Adding Scripts to Data Transformer

To add a custom script, right-click the Custom Scripts folder on the main screen and select Add Script.

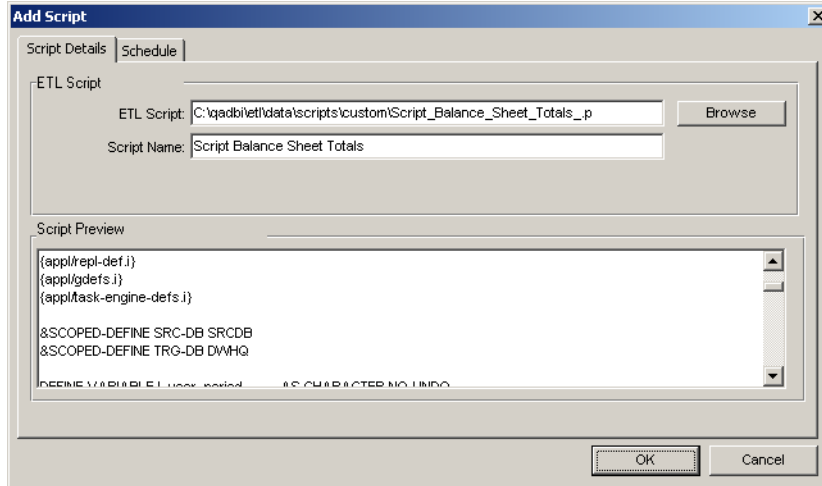


Fig. 3.34
Add Custom Script

Click Browse to navigate to the directory containing the Progress script. The system displays the contents of the script. You can update the default script name as needed. However, you cannot update the content of the script itself on the preview screen.

On the Schedule tab, specify when this script is run. This is the same as scheduling replication for standard tables.


For a more detailed discussion of setting the sequence for a replication task, see “Setting the Replication Task Sequence” on page 255.

Merge Data from Multiple Databases

You can use the merge feature in Data Transformer to consolidate data from multiple data sources that share the same underlying table definitions. After defining replication for one database, use the Merge command to configure additional databases to reuse the replication configuration of the configured database.

To merge in data from a data source, right-click the data source and select Merge Tables. The system displays the data warehouse structure associated with all other data sources.


Fig. 3.35
Merge Tables

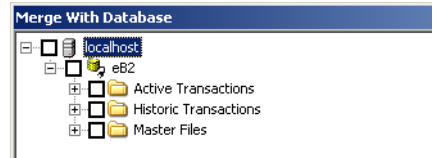

To use the same replication configuration as another data source, select the check box associated with the replication tasks you want to reuse.

When you choose Settings|Task List, the system displays a separate ETL script for each database.

Fig. 3.36
Task List with
Merged Item Tables

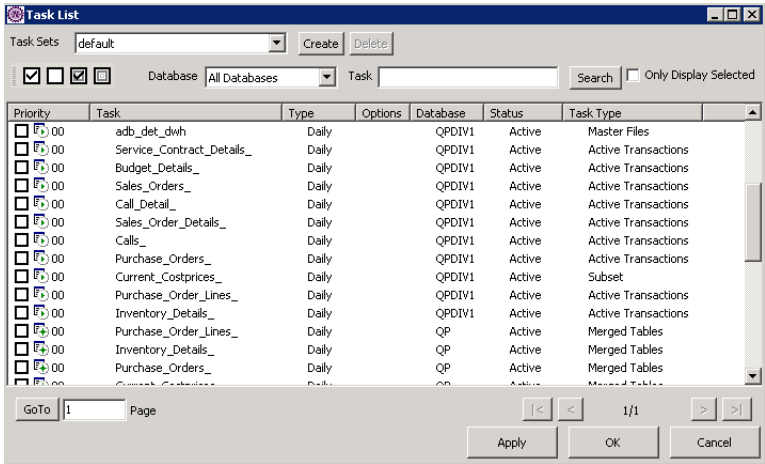

Use System Tasks

This function lets you reference custom scripts that you have written to perform system maintenance tasks, such as updating statistical data in the data warehouse.

Important You must be familiar with writing Progress queries to create custom system task scripts. See the Progress documentation for information.

Adding Custom System Task Scripts

To add a custom system task script, right-click the System Tasks folder on the main screen and select Add Script.

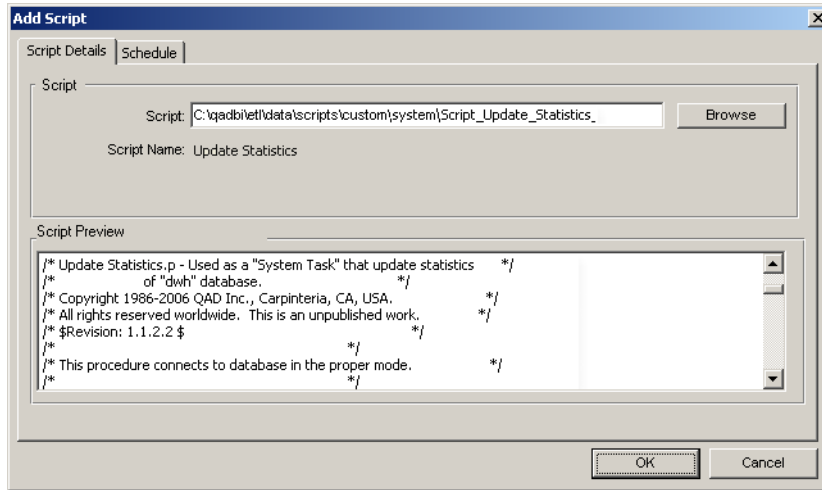


Fig. 3.37
Add Custom
System Task Script

Click Browse to navigate to the directory containing the Progress script. The system displays the contents of the script. You can update the default script name as needed. However, you cannot update the content of the script itself on the preview screen.

On the Schedule tab, specify when this script is run. This is the same as scheduling replication for standard tables.

For a more detailed discussion of setting the sequence for a system task, see “Setting the Replication Task Sequence” on page 255.

Validate System Task Scripts

After loading custom system task scripts, you can have the system regenerate and check all the scripts at the same time based on the data warehouse structure.

Select the System Tasks folder on the main screen directory tree, and then choose Tools|Check Scripts.

The system updates the script icons in the directory tree to show whether they passed validation. A green triangle indicates a validated script; a yellow exclamation point indicates a problem.


You can check an individual system task script by right-clicking the script under the System Tasks folder, then selecting Check Scripts.

Use the Task List

The Task List provides a consolidated view of all scheduled tasks (whether activated or not) on a single screen. It is an alternative to selecting each element in the application tree and scheduling it using the Properties function. Use it to select and deselect elements scheduled for automated replication.

To view the task list, click the Task List command on the toolbar.

Fig. 3.38
Task List

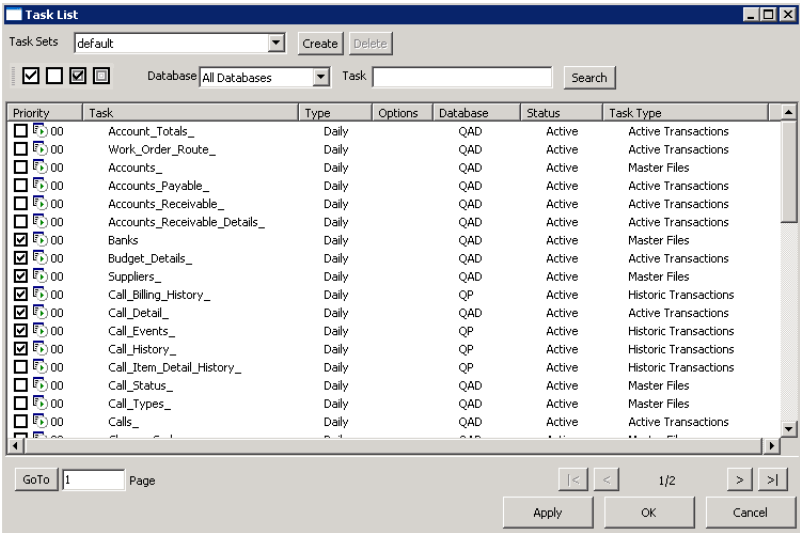

Task Sets

Tasks can be grouped into task sets and scheduled respectively to run in separate batches. When you first use QAD BI Transformer, a Default task set exists. You can create new task sets to contain groups of selected tasks.

To create a new task set:

- 1 Click the Create button next to the Task Set drop-down list.
- 2 In the New Task dialogue box, enter a task set name and select an existing task set to copy from.
- 3 Click OK. The screen displays the tasks in the new task set as selected.
- 4 Select tasks to add them to the current task set or deselect tasks to remove them from the current task set; then click Apply to save the task set.

To delete a task set, select the task from the Task Set drop-down list and click the Delete button.

Note The Default task set is the system task set and can not be deleted.

Selecting a task set from the Task Set shows the corresponding task set view. Tasks in the task set are displayed as selected.

Note If a table is deleted from the data warehouse database, the corresponding task is removed from all task sets it belongs to.

Tasks

Tasks are displayed in a paginated view with a maximum of 50 records on each page. Use the navigation controls at the bottom of the screen to easily page through records or jump to a page by its number.

You can select or deselect tasks individually. To select or deselect all the tasks on the current page at once, use the Select All on This Page and Deselect All on This Page commands. To select or deselect all the tasks on all pages, use the Select All on All Pages and Deselect All on All Pages commands.


Enter the whole task name (or part of one) in the Task text box and choose from the Database drop-down list; then click Search to display tasks that meet the search criteria or filter tasks by databases.

Database Status

A source system (database) can be either active or inactive, as defined on the Database Properties screen. When a source system is marked as inactive, none of its tasks will execute under the batch replication process. You can determine if a task is from an inactive database by viewing the Active/Inactive column in the Task List or by observing the icon for the task. Inactive tasks display a grayed-out icon. See page 54 for details.

When a database is marked as Inactive you cannot change the Activate check box. To set the database's Active/Inactive status, use the Database Properties screen.

Fig. 3.39
Database Status in
the Task List

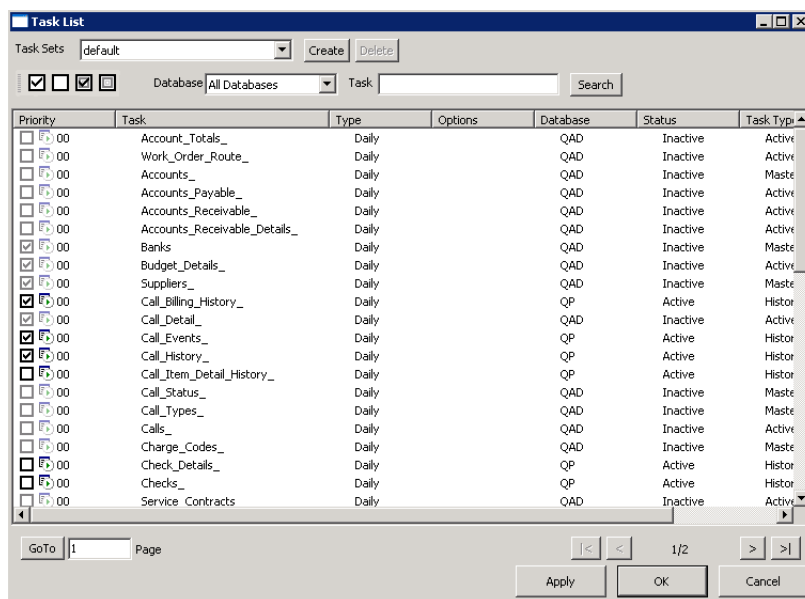

Export Tables

You can export table information in XML format on any level of the main screen directory tree by selecting the icon on the appropriate level and choosing an export command from the Tools menu. For example, to export the entire directory structure, select the database icon and choose Tools|Export Tables. For an individual table, select the table and choose Tools|Export Table Meta Data.

The system prompts you to enter a directory path and file name for the exported data.

The resulting XML file includes the table structure of the selected items in the data warehouse, as well as the contents of the replication scripts.

If your company has multiple instances of QAD BI installed, you can use this feature to synchronize the setup data. Additionally, you can use the XML file as a backup.

To reload data from exported files, use the Load Meta Data function, described on page 103.

Rebuild Links

For Progress data sources, QAD BI Data Transformer uses the DB-NAME and REC-ID fields to maintain links between the data source and the data warehouse. However, this approach is not always reliable in some circumstances:

- When the user dumps and loads tables in the source database, the REC-ID values of the records in these tables are changed.
- Data is archived and no longer exists in the source database.


In both cases, the links between the data source and the data warehouse are broken and can no longer be used for replication purposes. Continuing to perform data replication without first rebuilding the links may cause data corruption in the data warehouse.

QAD BI Data Transformer lets you rebuild links by synchronizing the REC-ID values between the source and target databases based on the REC-ID field so that you can continue to perform replication without data loss or corruption. See “Add Business Key Indexes” on page 76 for details on business key index.

Note The rebuild links function does not update custom tables. You need to write Progress scripts in the `updateCustomTables.p` file under the `DWHWorkDir\appl` directory to customize custom tables. `DWHWorkDir` is the data warehouse work directory that you set during installation or in Application Settings. See “Modifying Application Settings” on page 107 for details.

To rebuild links, click the Rebuild Link icon on the Data Transformer main screen. Click Start to start on the status screen. The system runs the rebuilding task, listing status messages to indicate its progress.

Fig. 3.40
Rebuild Links

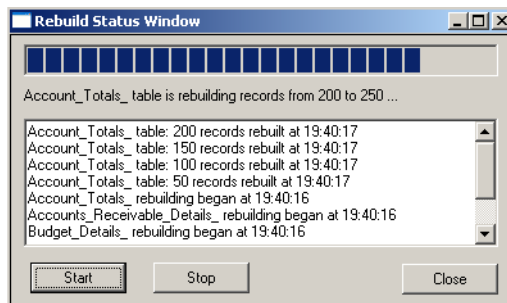

The buttons at the bottom of the screen control these functions:

- Click Start to begin update.
- Click Stop to end update.
- Click Close to exit the screen.

After rebuilding links is complete, you can review the `rebuild.log` log file generated in the `DWHWorkDir\log` directory for more detailed processing and error information.

Important Every time you want to dump/load table or archive data in the source database, make sure you perform these operations in the following order:

- 1 Perform replication to refresh the data warehouse tables with updated values from the source database. See “Replicate Data” on page 69 for details.
- 2 Perform table dump/load or data archiving.
- 3 Rebuild links.

If you do not exactly follow this order or if you perform other operations that affect either the source database or the data warehouse in-between these steps, data integrity may be compromised and data corruption may occur in future replications.

Working with the Model

Cognos models supporting multidimensional analysis of business process areas can be purchased from QAD. The models map the contents of the data warehouse to concepts supported by the PowerPlay product such as dimensions, levels, categories, and measures. The product of executing a model against the data warehouse is a Cognos PowerCube.

The location of the models is referenced in the Cognos Transformer tab on the Application Settings screen. See Figure 3.51 on page 111 for details.

Note Cubes can only be built after data has been replicated to the data warehouse database.

You can:

- Create the Cube.
- Check the model.
- View the model properties to specify the replication schedule and select the languages in which Cubes are generated.

Create the Cube

You can create the Cube by using the Create Cube function of Data Transformer, or by using a batch task. Cubes can only be built after data has been replicated to the data warehouse database.

Check the Model

The Cognos PowerPlay Transformer includes a function that verifies the correctness of the model file. Select a cube in the Cubes folder on the main QAD BI screen and choose File|Check Model. The system uses the Cognos function to verify the model and displays an appropriate message.


Specify Model Properties

To display the Model Properties screen, select a model and choose Tools|Properties. The screen contains three tabs.

Cube Details

The Cube Details tab contains read-only displays of the Cognos Transformer model name and path.


Fig. 3.41
Cube Properties,
Cube Details Tab

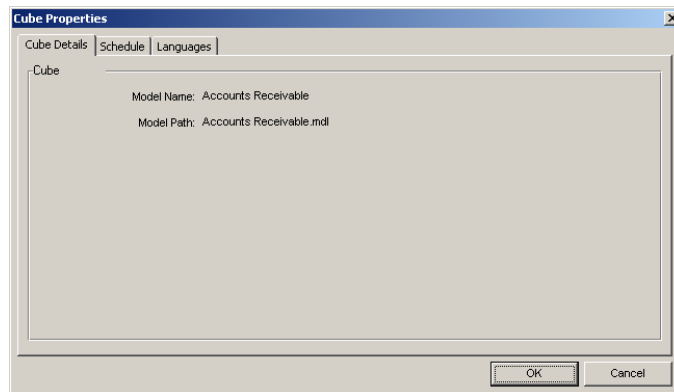

Schedule

The Schedule tab is the same as the Table and Custom Script Schedule tabs. Select Active and enter a sequence number to enable cube generation within the automated replication.

Fig. 3.42
Cube Properties,
Schedule Tab

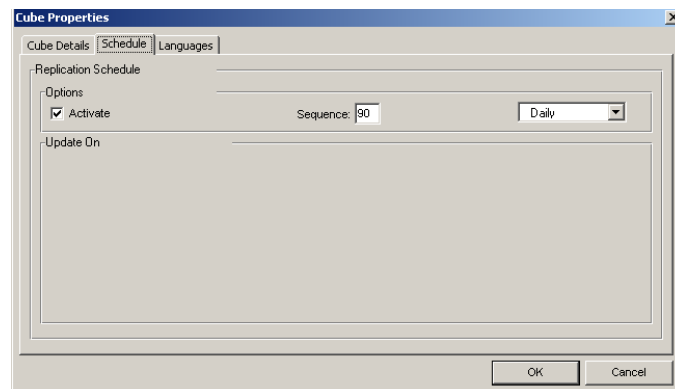

Languages

The Languages tab allows for the selection of the language or languages in which multilingual cubes should be created.

Note Single-language cubes ignore these settings.

Important To support different languages when displaying Cubes in Cognos PowerPlay Transformer, you must set special language encoding and fonts in the Windows operating system. See “Set Up Language Support” on page 14.

Cubes are created in subfolders of the Cube directory (as specified in the Application Settings Cognos Transformer tab). Subfolders are named using the two-character language identifier for the selected languages. If no language is selected, the cube is built directly within the Cube directory.

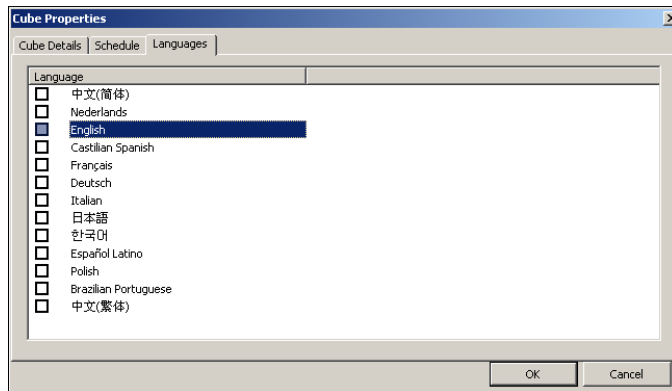


Fig. 3.43
Cube Properties,
Languages Tab

For information on creating or modifying language tokens for translated Cognos Transformer model files, see “Creating Translatable Cognos Transformer Models” on page 257.

Edit IQD Files

Cubes are created by Cognos Transformer using Impromptu Query Definition (.iqd) files. One IQD file with native SQL corresponds to each query subject or dimension externalized for use in Transformer.

By default, IQD files are located in the *qadbiinstall\dir\data\db* directory. You can change the IQD files directory in Application Settings.


You can create new IQD files or edit existing IQD files in Data Transformer using IQD Editor.

To create a new IQD file, right-click the IQD Files folder in the application tree on the main screen and choose Add IQD File; then enter an IQD file name and click OK.

To edit an existing IQD file, right-click the IQD file under the IQD Files folder and choose Edit.

In IQD Editor, click Check Syntax to check the syntax of the sql scripts in the IQD file.

Fig. 3.44
IQD Editor

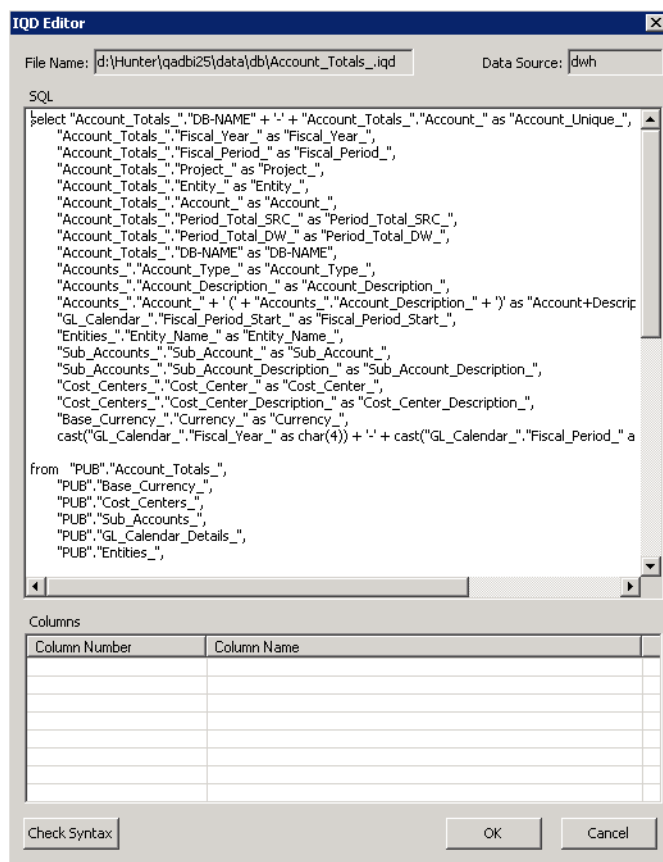

Using QAD-Provided Model Data

If your QAD BI configuration includes one or more of the seven predefined models purchased from QAD, load the schema using Data Transformer's Load Meta Data function instead of building the data warehouse tables manually from MFG/PRO schema. You can then use the table and field tools to customize the schema for the predefined models as needed.

Note In MFG/PRO eB2.1, you must load metadata and scripts for each domain that you want to analyze.


Perform the following tasks to load the model data and make it ready for use:

- 1 Load metadata.
- 2 Load custom scripts.
- 3 Bulk validate custom scripts.
- 4 Complete model setup.

Load Metadata

To load the metadata that describes the data warehouse structure used in the models, right-click a database or a domain name—if you are using an MFG/PRO eB2.1 database—on the main screen and select Import Meta Data. The Choose Import File screen displays.

Fig. 3.45
Chose Import File

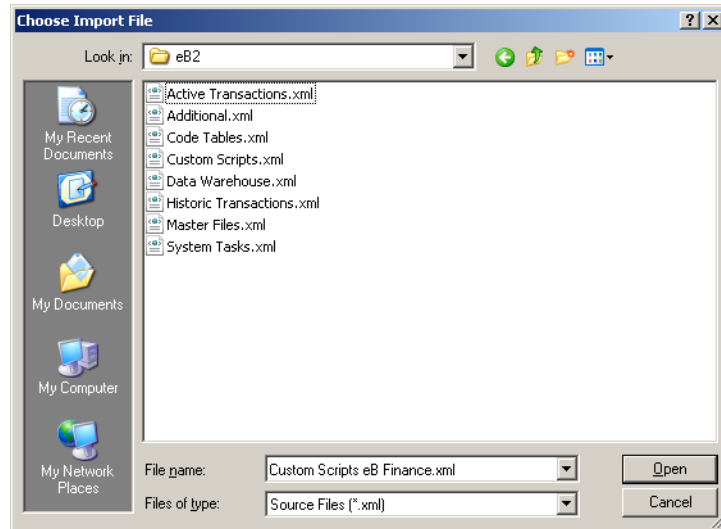

Navigate to the directory where the model source files were placed during installation. Typically, this is:

qadbiInstallDir\data\meta\version

Where version is the MFG/PRO database version; for example:

c:\qadbi\data\meta\EB2.1

Select a file and click Open to load the metadata and create the data warehouse structure. The Meta Filter Window displays.

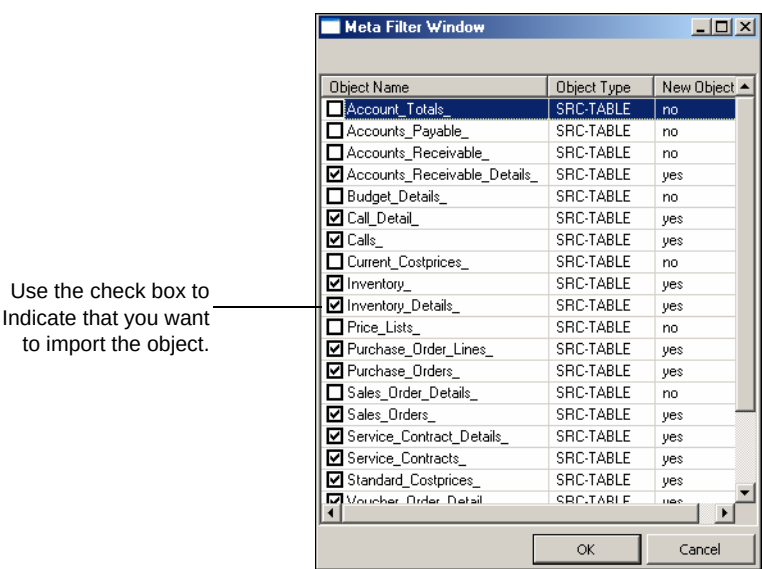


Fig. 3.46
Meta Filter
Window

The Meta Filter Window presents a list of objects and the following information for each object:

- Object Name.* Displays the name of an object.
- Object Type.* Displays the type of the database object: SRC-TABLE, DWH-TABLE, MERGE-TABLE, SCRIPT, or CUBE.
- New Object.* Indicates whether the object already exists in the database or domain.
 - Yes: This is a new object that has not been imported before.
 - No: The object has already been imported.


Use the check box to the left of the object name to indicate whether to import the object. The check box is selected by default when the object is new. If the object is not new, you can select the check box to reimport the object.

Review the list to verify that the selected objects are those you want to import. Then click OK to activate the import. The created data structure then displays on the main screen directory tree. The display includes a green triangle beside a valid object or a yellow exclamation point beside an invalid object.

Note In MFG/PRO eB2.1 and above, metadata must be loaded for each active domain in the database.

Important If this is first time you have loaded the standard XML metafiles, ensure that you load Custom Scripts.xml last. After the custom scripts are loaded, they are automatically compiled. Since the scripts refer to several tables in the data warehouse, the table schemas must have already been loaded for successful compilation to take place. If these schemas have not been created in the data warehouse, compilation will fail.

Fig. 3.47
Metadata Loaded

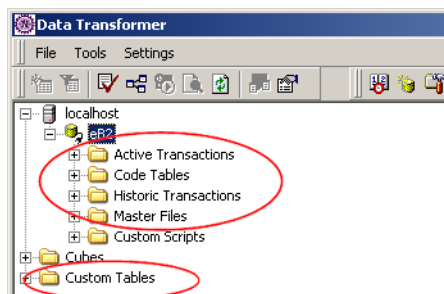

Bulk Generate and Validate Scripts

After loading model data and custom scripts, you can have the system regenerate and check all the scripts at the same time based on the completed data warehouse structure.

Select the database on the main screen directory tree, and then choose Tools|Check Scripts.

The system updates the table icons in the directory tree to show whether they passed validation. A green triangle indicates a validated script; a yellow exclamation point indicates a problem. For example, scripts shown in Figure 3.48 were validated before all the custom scripts were loaded. A secondary custom script, Script Call Lead Time2, failed validation.




Fig. 3.48
Validation Icons

Note You can check the script for an individual table by right-clicking the table on the main screen, then selecting Check Scripts.

Complete Model Setup

After loading model data and checking scripts, complete setup tasks by:

- Updating the table links for all replication and custom tables; see page 39.
- Scheduling automatic replication for each table, custom script, and cube as shown in the relevant sections above.
- Optionally, fine-tuning the data warehouse structure and replication setup. Use the following sections for reference:
 - “Manage Domains” on page 60
 - “Select Tables” on page 61
 - “Set Up Replication” on page 63

Modifying Application Settings

Based on information entered during the installation, most settings required to connect the components of QAD BI are in place when you begin using the application.

Note An important exception to this is the currency setting, which defaults from the MFG/PRO base currency unless:

- You are connecting to a domain database and the base currencies in the domains are different.
- You are connecting to multiple databases and the base currencies in the databases are different.

In both of these cases, the currency setting is blank and you must manually set the currency for the data warehouse database. See “Currency” on page 109.

If for any reason you need to update any of those settings, choose Settings|Application Settings from the main menu. The system displays a screen with the following tabs:


- Data Warehouse
- ODBC Connection
- Cognos Transformer
- Replication
- Batch Process
- AppServer
- Notification

The following sections describe the functions of each tab.

Data Warehouse

The Data Warehouse tab includes parameters applicable to the data warehouse database.

Fig. 3.49
Application
Settings, Data
Warehouse Tab

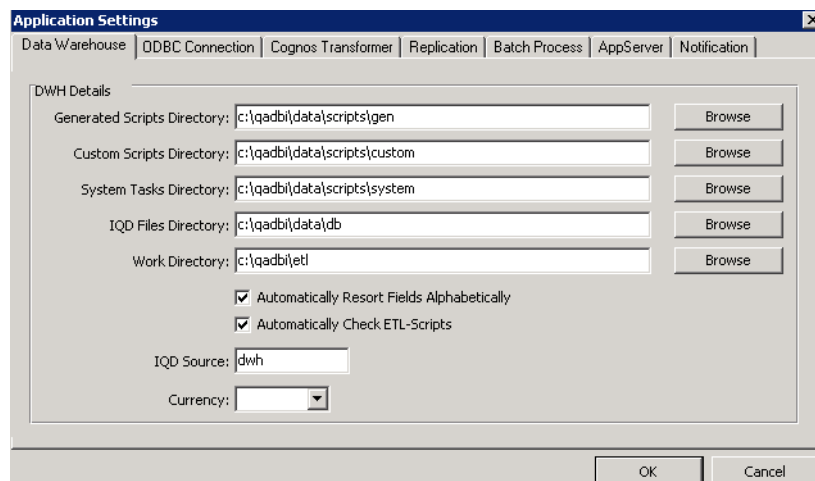

Generated Scripts Directory. Enter or browse to the location where the automatically generated table-replication scripts are to be written.

Custom Scripts Directory. Enter or browse to the location where the custom scripts are located.

System Scripts Directory. Enter or browse to the location where the system task scripts are located.

IQD Files Directory. Enter or browse to the location where the IQD files are located.

Work Directory. Enter or browse to the location of the ETL tool. This directory contains the encrypted source code, log files, and temporary files and should not be changed unless recommended by QAD Support.

Automatically Resort Fields Alphabetically. Select to have the fields (columns) of the mapped table automatically sorted on the field mapping screen.

Automatically Check ETL-Scripts. Select to automatically generate the mapped table scripts and to compile the generated and custom scripts. This process also applies after a metadata import.


IQD Source. Specify the data source name set up in Cognos Access Manager to connect to the data warehouse database. By default, this is dwh.

Currency. Select a currency from the list of currency codes in which to express all currency values defined in the standard business models. The default currency is the MFG/PRO base currency.

ODBC Connection

The ODBC Connection tab includes parameters used by Cognos Transformer to connect to the data warehouse database through IQD files.

Fig. 3.50
Application
Settings, ODBC
Connection

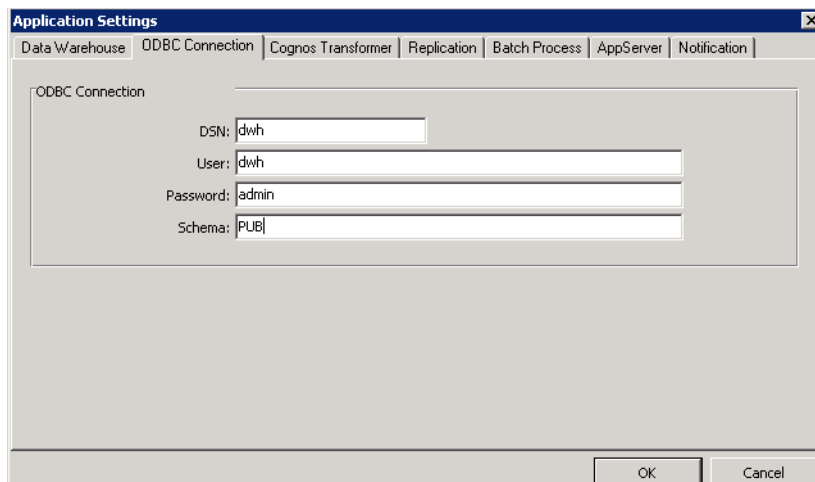The screenshot shows a dialog box titled "Application Settings" with a tabbed interface. The "ODBC Connection" tab is selected. Inside the tab, there are four labeled text input fields: "DSN:" with the value "dwh", "User:" with the value "dwh", "Password:" with the value "admin", and "Schema:" with the value "PUB". At the bottom right of the dialog box are "OK" and "Cancel" buttons.

Note In general, this field should not be changed.

DSN. Enter the Data Source Name created for the data warehouse proxy ODBC connection.

User. Enter the user name for the data warehouse proxy. By default, this is dwh.

Password. Enter the password for the specified user. By default, this is admin.

Schema. Enter the data warehouse Progress schema name. The default set during installation is PUB.

Cognos Transformer

The Cognos Transformer tab includes path preferences used by the Cognos PowerPlay Transformer. The ETL tool uses these settings to set the values in the Cognos Transformer.

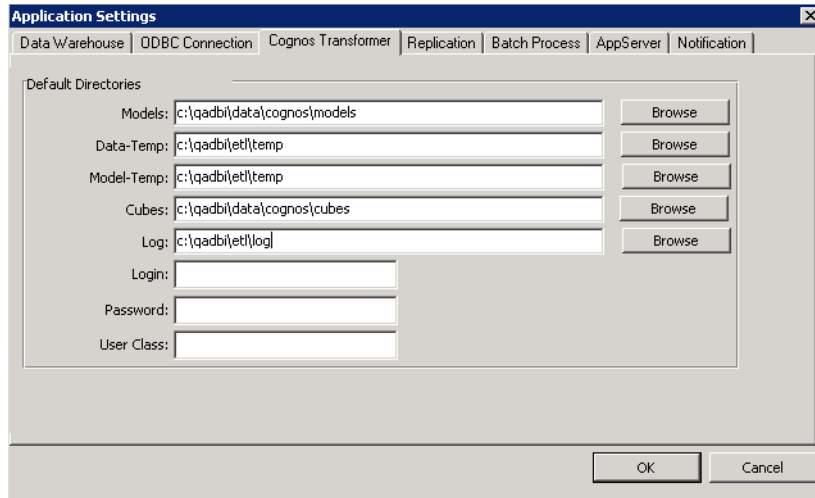


Fig. 3.51
Application
Settings, Cognos
Transformer Tab

Models. Enter or browse to the location where the Cognos model files were installed or copied.

Data-Temp. Enter or browse to the location that the Cognos Transformer should use to store temporary data files created during cube generation.

Model-Temp. Enter or browse to the location that the Cognos Transformer should use to store temporary files created during model operations.

Cubes. Enter or browse to the location where the Cognos Transformer should create the cubes.

Log. Enter or browse to the location where the Cognos Transformer and Data Transformer should write the log files.

The following optional properties are used when building Cognos models in which Cognos security has been enabled. Cognos security is set up using the Cognos Access Manager and stored in a local authentication export (.lae) file or LDAP-compliant namespace.

Login. Specify the log-in for a Cognos user whose authority will be used to regenerate the models.

Password. Specify the password for a Cognos user whose authority will be used to regenerate the models.


User Class. Specify a Cognos User Class to which the specified log-in user belongs and which will be used to regenerate the models.

For additional information regarding the use of the Cognos cube security and Transformer, see the Cognos Transformer online help and user documentation.

Replication

Use the settings on the Replication tab to determine the replication strategy.

Fig. 3.52
Application
Settings,
Replication Tab

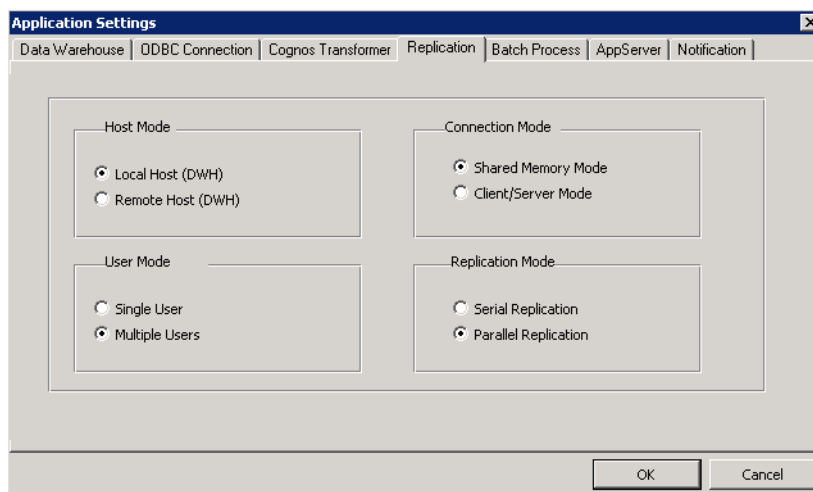

Host Mode. Choose how QAD BI is deployed.

Local Host (DWH): Choose this if the data warehouse database is located on the same server as the QAD BI Data Transformer.

Remote Host (DWH): Choose this if the data warehouse database and QAD BI Data Transformer are installed on different servers.

Connection Mode. Choose which method QAD BI Data Transformer uses to exchange data.

Shared Memory Mode: The application exchanges data through shared memory. Choose this if QAD BI is deployed in local host mode since it is a faster way of exchanging data. Using a designated area of shared memory, the data can be made directly accessible to both client and server processes without having to use the system services.

Client/Server Mode: The application transfers data through TCP/IP.

Note If QAD BI is deployed in remote host mode, only client/server mode can be used and the connection mode options are grayed-out.

User Mode. Choose whether the application runs in single-user or multiple-user mode.

Single User: Only one user can exclusively connect to the data warehouse database.

Multiple Users: Multiple users can connect to the data warehouse database simultaneously.

Note If the connection mode is client/server, only the multiple-user mode can be used and the user mode options are grayed-out.

Replication Mode. Choose the replication strategy.

Serial Replication: Each task is processed sequentially based on its defined sequence—that is, its priority.

Parallel Replication: Choose this strategy to allow for more than one replication task to be processed concurrently by separate Progress processes. With parallel replication, a pool of processors is created and each processor is assigned a task to process. As a processor finishes a task, it is assigned another task to be processed until all tasks have been performed with respect to sequence order.

Batch Process

Use settings on the Batch Process tab to customize QAD BI in the following areas:

- Improve performance.
- Allow concurrent access to the data warehouse while the batch is run.

- Use the Progress-supplied database server administration.
- Use custom scripts (batch files) to start and stop the data warehouse.

Fig. 3.53
Application
Settings, Batch
Process Tab

The screenshot shows the 'Application Settings' dialog box with the 'Batch Process' tab selected. The 'Database' field is set to 'c:\qadbi\DW\dw\dw.db' and the 'Repository' field is set to 'c:\qadbi\dw-admin\dw-admin.db'. The 'Database Management' dropdown is set to 'Progress Explorer'. The 'Log Language' dropdown is set to 'English' and the 'Log Level' dropdown is set to 'Error'. The 'Scripts' section has 'Start' and 'Stop' fields with 'Browse' buttons. The 'Progress Explorer' section has 'Database' (dw), 'Host' (localhost), 'Config' (defaultConfiguration), 'Port' (20931), 'User' (empty), and 'Password' (empty) fields.

Database. Enter or browse to the location of the data warehouse file. By default, this is the `dw\dw.db` file in the directory where QAD BI is installed.

Repository. Enter or Browse to the location of the data warehouse repository. By default, this is the `dw-admin\dw-admin.db` file in the directory where QAD BI is installed.

Database Management. Select the method to use to start and stop the data warehouse—Progress Explorer or Scripts. Depending on this setting, you can update the fields in the appropriate frame.

Single User Batch Process. Specify whether the data warehouse database is started in single-user mode when running the batch process. If selected, no other connections to the data warehouse are accepted until the batch process completes. This field is not available when parallel replication is selected on the AppServer tab—that is, the Use AppServer check box is selected.

Use non-integrity parameter. Specify whether the data warehouse is started in non-integrity mode. When this option is selected, Progress runs without using the database integrity or database recovery features.

Important Selecting this option can improve system performance. However, if Progress fails for any reason, you cannot recover the database. Use this feature with caution and make sure you have an adequate database backup strategy.

Log Language. Select the language in which the log information is written.

Log Level. Select the level of log information to be captured.

Error: Displays functional errors

Warn: Displays activities that may cause errors, as well as errors

Info: Displays trace of user activities, as well as errors and warnings

Debug: Displays debug information for developers, as well as errors and warnings

Log to DB. Specify whether to store log information in the administration database as well as write log files.

Note Whether or not you choose to log to the administration database, log files are always generated.

Start. If Database Management is Scripts, enter or browse to the appropriate script files that are used to start the data warehouse.

Stop. If Database Management is Scripts, enter or browse to the appropriate script files that are used to stop the data warehouse.

Database. Enter the data warehouse database name as defined in the Progress Explorer.

Host. Enter the Progress server defined in the Progress Explorer and assigned to manage the data warehouse.

Config. Enter the Progress Explorer Configuration to use to start and stop the data warehouse.

Port. Enter the port or service the data warehouse runs under. This is defined in the Progress Explorer Configuration.

User. Enter a user authorized to start and stop the data warehouse.

Password. Enter the password of the user authorized to start and stop the data warehouse.

AppServer

The AppServer tab includes the AppServer configuration information when parallel replication is used. For more details on parallel replication, see “QAD BI Parallel Replication Setup” on page 244.

Note When serial replication is used, all the fields under the AppServer tab are disabled.

Fig. 3.54
Application
Settings,
AppServer Tab

Field	Value
AppService	asbroker
AppServer Host	localhost
NameServer Port	5162
Pool Size Of Script	4
AppServer Log Directory	c:\qadbi\etl\log
AppServer Error Log	appserver-error.log
AppServer Replication Log	appserver-replication.log
DWH-ADMIN Host	localhost
DWH-ADMIN Service	24001
DWH-ADMIN Network	TCP
Pool Size Of Cube	4

AppService. Enter the name of the AppServer broker. This is the same value that appears in the Progress Explorer tree under the AppServer folder. Also referred to as the AppServer name.

AppServer Host. Enter the name of the server where the AppServer has been installed.

NameServer Port. Specify the port to which the NameServer has been configured to listen. The default is 5162.

Pool Size of Script. Specify the number of AppServer processes that will be available to execute scripts. Four is a good starting value for testing. The value entered here must be one less than the value of the Minimum and Maximum Servers settings on the AppServer properties screen. See “QAD BI Parallel Replication Setup” on page 244 for details.

Pool Size of Cube. Specify the number of AppServer processes that will be available to generate cubes. Four is a good starting value for testing. The value entered here must be one less than the value of the Minimum and Maximum Servers settings on the AppServer properties screen. See “QAD BI Parallel Replication Setup” on page 244 for details.

Note Do not set this value too high. Entering a value that is too large can reduce performance on hardware that is insufficient to handle the processing load.

DWH-ADMIN Host. Specify the name of the server where the administration database is running.

DWH-ADMIN Service. Specify the port to which the administration database is configured to listen. The default is 24001.

DWH-ADMIN Network. Specify the protocol that the administration database is configured to use for communication. Default is TCP.

AppServer Log Directory. Specify the directory to which all log files will be written.

AppServer Error Log. Specify the name of the AppServer error log.

AppServer Replication Log. Specify the name of the AppServer replication log.

For additional information on using parallel replication with Data Transformer, see “QAD BI Parallel Replication Setup” on page 244.

Notification

The Notification tab includes information the system uses to send e-mail messages when an error occurs during batch processing.

Fig. 3.55
Application
Settings,
Notification Tab

The screenshot shows the 'Application Settings' dialog box with the 'Notification' tab selected. The 'Enable Notification' checkbox is checked. The 'SMTP Server' field contains 'smtpServer.somecompany.com', the 'e-mail Address' field contains 'smtpServer.somecompany.com', and the 'Return Address' field contains 'john_doe@somecompany.com'. The 'OK' and 'Cancel' buttons are at the bottom right.

Enable Notification. When this is selected, e-mail is sent when errors occur during batch processing.

SMTP Server. Enter the name of the Simple Mail Transfer Protocol server to use to send the e-mail

e-mail Address. Enter the e-mail address of the person you want to receive the e-mail notifications.

Return Address. Enter the e-mail address of the person you want to be used for the return address on the e-mail.

Performing Administration Tasks

Update User Records

During installation, a single default user is defined with database administrator rights in the Progress Administration database:

Default user ID: dwh

Default password: admin

You can modify this default information, as well as create additional users or delete existing ones, with the following procedure:

- 1 Start Progress Data Administration.
- 2 Select Database|Connect and enter connection information on the Connect Database screen. If the default installation was performed, the connection parameters are:
 - Physical Name: dwh
 - Logical Name: dwh
 - Network: TCP
 - Multiple Users: checked
 - Host Name: localhost
 - User ID: dwh
 - Password: admin

Fig. 3.56
Updating User Data

- 3 Select Admin|Security|Edit User List.
- 4 On the Edit User List screen, click Add, Modify, or Delete to manage users.

For additional information on managing users in a Progress database, see the *Progress System Administration Guide*.

Set Up Windows Task Scheduler

You can use Data Transformer to define the replication schedule for each individual task. See “Scheduling Automatic Replication” on page 69 for information on defining task schedules in Data Transformer.

However, you also must set up an operating-system-level scheduling task to look at the individual task schedules and run the processes accordingly.

Note This procedure is based on Windows XP Professional. It may vary for other versions of Windows.

- 1 To run the Windows Task Scheduler Wizard, select Start|Control Panel|Scheduled Tasks|Add Scheduled Tasks.
- 2 Click Next to continue.
- 3 Click Browse and select the Run Tasks shortcut located in the directory where program files were installed.
- 4 Choose the task schedule:
 - Daily
 - Weekly
 - Monthly
 - One time only
 - When my computer starts
 - When I log on

Depending on your choice, you may be prompted for further scheduling information.

Important The schedule you define here describes when Windows launches its own scheduling task, which in turn looks at Data Transformer scheduling tasks. You should be sure to define the Windows task so that it is appropriate to the schedule granularity defined for Data Transformer. For example, it would not make sense to define a monthly Windows task if you want to replicate tables every day.

- 5 Enter the name of a Windows account with sufficient access privileges to execute Data Transformer on the target machine.
- 6 Select the date and time for the task to begin.

- 7 Click Finish to save the task.

Using BI Monitor

BI Monitor User Interface

This section describes user interface features specific to BI Monitor.

To start BI Monitor, launch the program from the Windows Start menu. By default, choose All Programs|QAD BI|Monitor.

The BI Monitor main screen includes a menu bar, a task set pane, and a task pane.

The task set pane on the left shows execution information of currently running task sets or task sets history logs.

The upper part of the task pane on the right displays execution information of all tasks pertaining to the selected task set in the task set pane. Tasks are displayed in a paginated view. You can use the navigation controls at the bottom of these screens to easily page through records or jump to a page by its number.

The lower part of the task pane displays task details including task type, sequence, number of deleted and copied records, and error messages.


In both panes, you can use the search box at the top to filter records. Use vertical scroll bars to scroll through records and horizontal scroll bars to scroll through details.

Clicking the <| button on the upper-left corner of the task pane hides the task set pane and the button becomes |>. Clicking the button again displays the task set pane.

To exit BI Monitor, click the Exit button at the bottom.

Important To use BI Monitor to monitor and manage tasks, you must set the Log to DB option to Yes under the Batch Process tab of Application Settings. See “Batch Process” on page 113.

Fig. 3.57
QAD BI Monitor
Main Screen

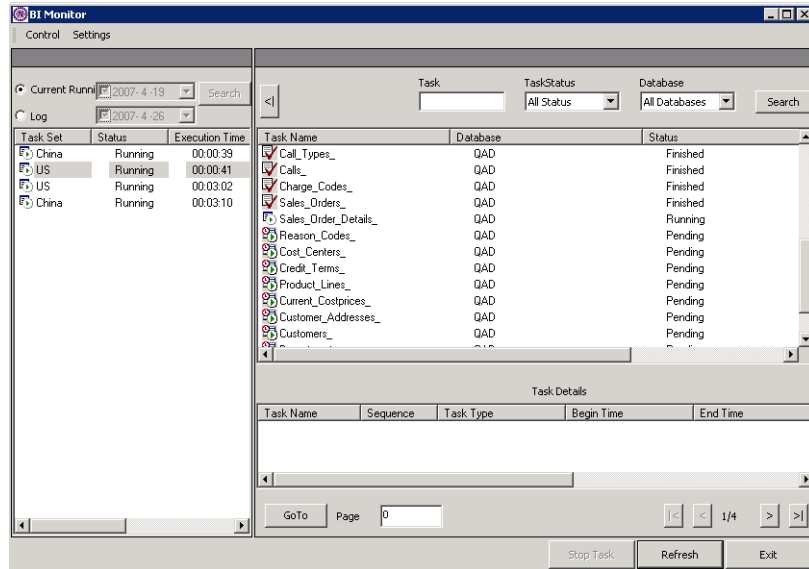

Status Icons

BI Monitor distinguishes tasks and task sets using icons.

There are three task set statuses:

- **Running:** The task set is being executed.
- **Finished:** All tasks in the task set have been executed successfully without any errors.
- **Error:** One or more errors occurred during execution of tasks in the task set.

There are six task statuses:

- **Running:** The task is being executed.
- **Pending:** The task is waiting to be executed.
- **Stopping:** The task is being stopped.
- **Stopped:** The task has stopped.
- **Finished:** The task has been executed successfully without any errors.
- **Error:** Error occurred during execution of the task.

The statuses are represented by the following icons.

Icon	Description	Icon	Description
	Running		Pending
	Stopping		Stopped
	Finished		Error

Table 3.8
Status Icons

Monitor and Manage Currently Running Tasks

By default, BI Monitor displays currently running task sets in the task set pane. Select a task set to display all its tasks in the task pane. Select a task in the task pane to view its detailed information in the lower section of the task pane.

Specify search criteria in the search box at the top of the task pane and click Search to filter tasks by task name, task status, and database.

To stop a currently running task, select it and click the Stop Task button. This stops the selected task and starts execution of the next task in the queue.

By default, the running tasks/task sets screen refreshes every 10 seconds. You can change the refresh rate by choosing Preference from the Settings menu and specifying a new value in the Preference dialogue box. You can also manually refresh the screen by clicking the Refresh button at the bottom. To disable the auto refresh feature, clear the Auto Refresh option from the Control menu.

You can define how often task events are logged by choosing Settings|Preference and specifying the Logging Frequency value in the Preference dialogue box.

View Tasks and Task Sets Logs

To view history information of tasks and task sets, select Log in the search box at the top of the task set pane. Specify a start date and an end date and click Search to view all task set runs executed within this time range.

If no start date is specified (the check box next to the date is cleared), the search lists all task set runs executed before the specified end date. If no end date is specified, the search lists all task set runs executed after the specified start date. If neither start date nor end date is specified, the search lists all executed task set runs.

Select a task set to display all its tasks in the task pane. Select a task in the task pane to view its detailed information in the lower section of the task pane.

Specify search criteria in the search box at the top of the task pane and click Search to filter tasks by task name, task status, and database.

Tasks/task sets log screen does not refresh automatically. You can refresh the screen manually by clicking the Refresh button.

Archive Tasks and Task Sets Logs

Log information stored in the administration database can grow large over time and bring down system performance. Archiving frees up space and improves the performance of the administration database by dumping log data in table contents (.d) files when it is old or not in use anymore. If required, Table contents can be loaded back to store log information in the administration database.

To archive log data:

- 1 Choose Archive from the Control menu.
- 2 In the Archive dialogue box, specify a date range in which log data will be archived and click OK.

If no start date is specified (the check box next to the date is cleared), all log data before the specified end date will be archived. If no end date is specified, all log data after the specified start date will be archived. If neither start date nor end date is specified, all log data will be archived.

- 3 An archiving progress bar displays. When archiving completes, you are returned to the BI Monitor main screen.

Installing and Configuring QAD-Provided Dashboards

If you purchased QAD-provided dashboards, you can implement dashboard reports in QAD 2007.1 using the QAD .NET 2.5 UI.

Before installing QAD dashboards, you must first install required QAD-provided business models and generate corresponding cubes:

For dashboard	Install model	Generate cube
PurchaseManager	QAD BI Purchasing	Purchase Statistics Cube
SalesManager	QAD BI Sales Analysis	Sales Analysis Cube
	QAD BI Forecasting	Sales Forecast Performance Cube
WarehouseManager	QAD BI Inventory Monitoring	Current Inventory Analysis Cube
		Inventory History Analysis Cube

See “Using QAD-Provided Model Data 103” on page 39 and “Working with the Model” on page 99 for details on how to set up QAD-provided business models and create cubes.

Perform the following steps to implement QAD-provided dashboards.

- Create Data Source Connections
- Install QAD-Provided Dashboards
- Configure Report Server Settings
- Perform Report Synchronization
- Create Menu Entries for the Dashboards

Create Data Source Connections

You must create data source connections to the required QAD BI business model cubes in Cognos to use them in dashboard reports.

To create data source connections to QAD BI business model cubes:

- 1 Log in to Cognos Connection.
- 2 On the toolbar, choose Tools|Directory.
- 3 Click the Data Sources tab.
- 4 Click the new data source button.
- 5 In the Name box, type one of the following, and then click Next:
 - Purchase Statistics Cube
 - Sales Analysis Cube
 - Sales Forecast Performance Cube
 - Current Inventory Analysis Cube
 - Inventory History Analysis Cube

Important The name is case-sensitive and you must type exactly the same name as listed above.

- 6 In the connection page, under Type click Cognos PowerCube, and then click Next. The connection string page for the selected database appears.
- 7 In the Read cache size (MB) field, enter the cache size of the cube in megabytes. If you leave this field blank or enter 0, Cognos Connection uses the default value in the `ppds_cfg.xml` file in the configuration folder.
- 8 In the Windows location field, enter the location and name of the cube file for the data source connection.
- 9 To test whether the parameters are correct, click Test.
- 10 Click Finish.
- 11 Repeat the steps 4 through 10 to create data source connections for all the QAD BI business model cubes required for implementing the QAD-provided dashboards.

Install QAD-Provided Dashboards

- 1 Launch `install.exe` from the QAD Dashboard installation CD.
- 2 An introduction screen displays. Choose Next to continue.
- 3 The BI Admin Server Configuration screen displays. Enter the correct information for connecting to the QAD BI administration database.

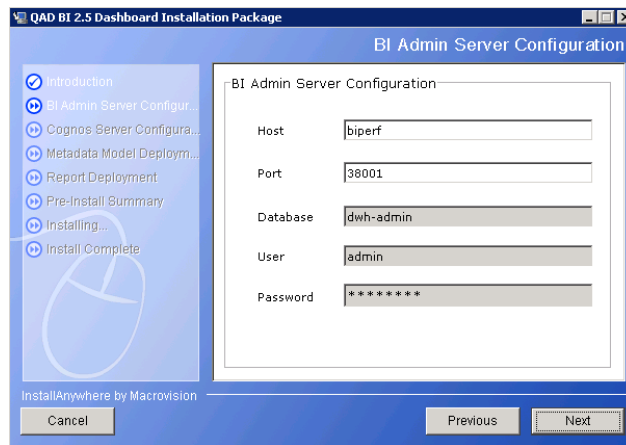


Fig. 3.58
BI Admin Server
Configuration

Host. Enter the host where the QAD BI administration database is running.

Port. Enter the TCP/IP port on which the QAD BI administration server is listening for database connections.


Database. Displays the QAD BI administration database name.

User and Password. Displays the username and password for connecting to the QAD BI administration database.

Click Next to continue.

- 4 On the Cognos Server Configuration screen, enter the correct Cognos server configuration information.

Fig. 3.59
Cognos Server
Configuration

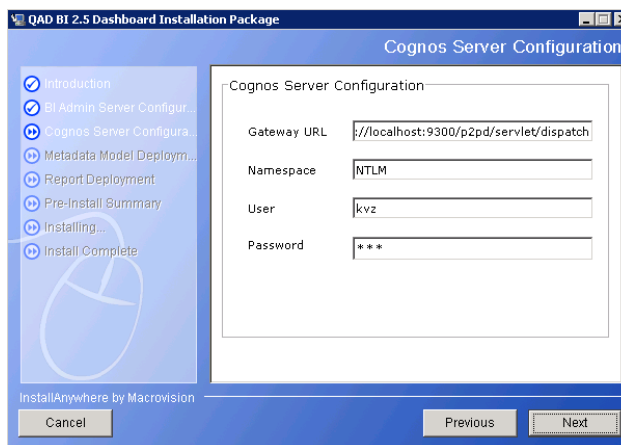

Gateway URL. Enter the gateway URL to connect to the report server. This is a required field.

A gateway is an extension of a Web server program that transfers information from the Web server to another server. Gateways are often CGI programs, but may follow other standards such as ISAPI and Apache Modules.

Namespace. Enter the logon namespace to log on to the report server as a full authentication provider.

Namespace is a configured instance of an authentication provider that allows access to user and group information for authentication and access control.

User and Password. Enter the username and password combination that is authorized to access applications and resources on the report server. The username is part of the credential created on the report server for user authentication.

Click Next to continue.

- 5 On the second Cognos Server Configuration screen, enter the Cognos installation directory.

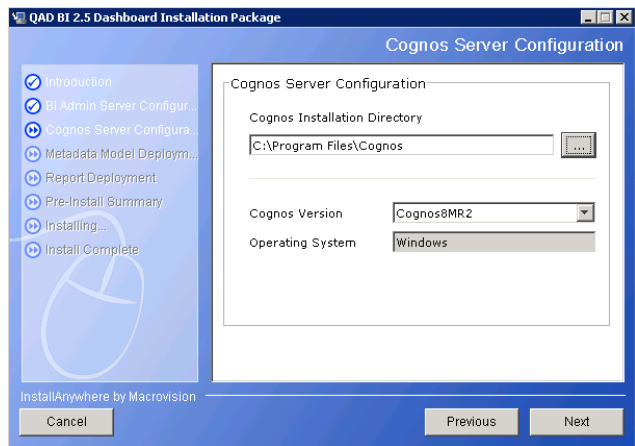


Fig. 3.60
Cognos Server
Configuration

Cognos Installation Directory. Enter the directory where Cognos is installed.

Cognos Version. Indicates the version of Cognos installed.

Operating System. Indicates the server operating system.

Click Next to continue.

- 6 On the Cognos Metadata Model Publish screen, select the dashboard metadata models you want to deploy on the Cognos server.


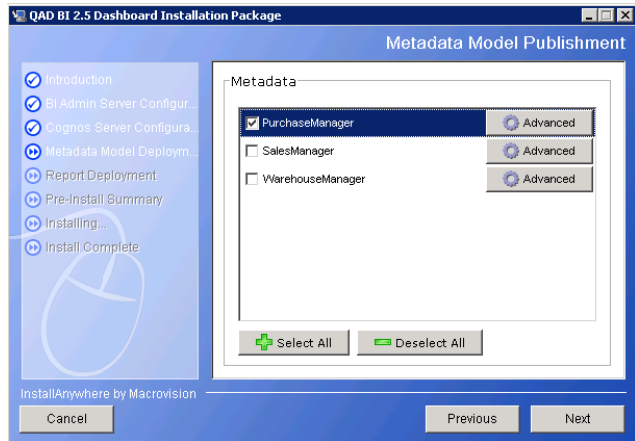


Fig. 3.61
Metadata Model
Publish

If you want to deploy a dashboard metadata model using different package and data source names than the default values, click the Advanced button next to the dashboard. You can then modify package and data source names in the Alias fields. Click Save to save your changes.

Fig. 3.62
Metadata Model
Publish

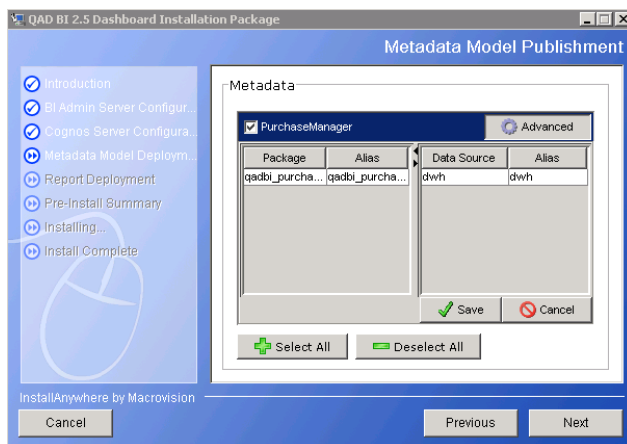


Click Next to continue.

- 7 On the Report Deployment screen, select the dashboard reports you want to deploy on the Cognos server.

Note To successfully implement reports for a dashboard, you should also deploy its metadata model in the previous step.

Fig. 3.63
Report Deployment

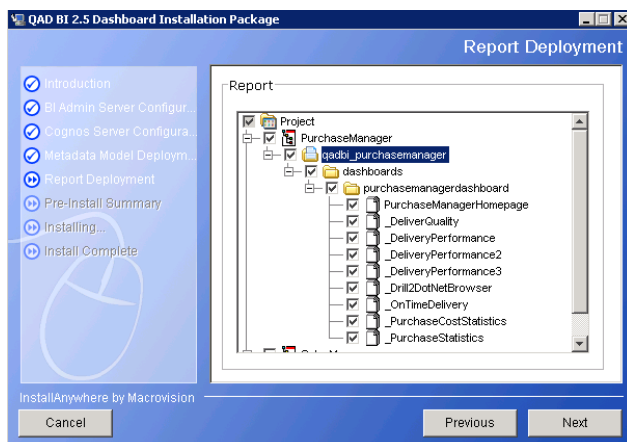

Click Next to continue.

- 8 An installation summary screen displays. If all information is correct, click Install to proceed with the installation.

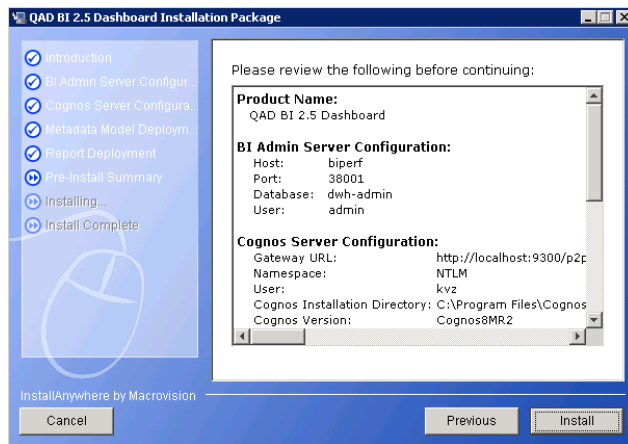


Fig. 3.64
Installation
Summary

- 9 When installation is complete, exit the installation program.

Configure Report Server Settings

Use Report Control to configure report server settings in QAD 2007.1.

- 1 Log in to QAD 2007.1 and go to Report Control (36.4.21.24).
- 2 Enter the correct information that matches the report server settings configured in Cognos.

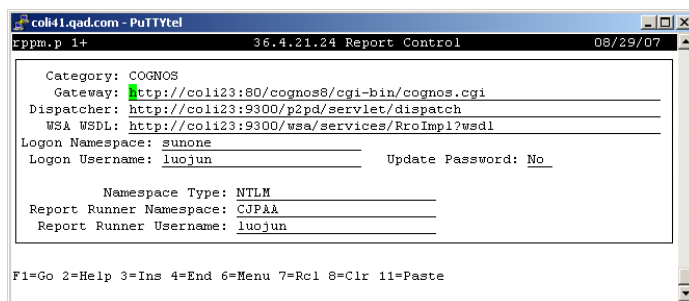


Fig. 3.65
Report Control
(36.4.21.24)

Gateway. Enter the gateway URL to connect to the report server.

A gateway is an extension of a Web server program that transfers information from the Web server to another server. Gateways are often CGI programs, but may follow other standards such as ISAPI and Apache Modules.

Dispatcher. Enter the internal dispatcher URI to connect directly to the dispatcher.

WSA WSDL. Enter the WSDL (Web Services Definition Language) file URL. This is configured when the WSA (Web Services Adapter) is installed.

Logon Namespace. Enter the logon namespace to log on to the report server as a full authentication provider.

Namespace is a configured instance of an authentication provider that allows access to user and group information for authentication and access control.

Logon Username. Enter a username that is authorized to access applications and resources on the report server. The username is part of the credential created on the report server for user authentication.

Note This does not have to be a valid system user ID.

Update Password. Indicate whether you want to change the password associated with Logon Username.

Yes: When you press Go, you will be prompted to enter and confirm the new password.

No: The user's password will not be changed.

Namespace Type. Specify the type of the namespace configured as a third-party trusted signon provider. Two namespace types are supported by the report server: LDAP (LDAP version 3 directory servers) and NTLM (Windows Native Security).

The authentication namespace configuration is part of the Cognos Content Manager installation on the report server.

Report Runner Namespace. Enter the namespace configured as a third-party trusted signon provider to perform user authentication to run reports.

Report Runner Username. Enter a username that is authorized to run reports on the report server. The username is part of the credential created on the report server for user authentication.

- 3 Press Go. Do not change anything on the second screen and exit the program.

Perform Report Synchronization

Use Report Synchronization to synchronize the deployed dashboard reports from the report server to QAD 2007.1 as report resources.

- 1 In QAD 2007.1, go to Report Synchronization (36.4.21.2).
- 2 Accept the defaults on the first screen and press Go. Choose Yes when prompted to confirm the information.


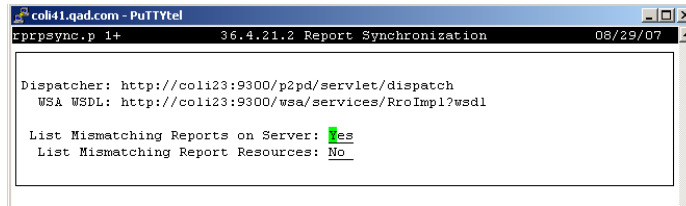


Fig. 3.66
Report
Synchronization
(36.4.21.2)

- 3 The next screen lists all the reports that do not have matching report resources in the system. If installed, you can find the following QAD-provided dashboard home pages:
 - PurchaseManagerHomepage
 - SalesManagerHomepage
 - WarehouseManagerHomepage

Note Dashboard reports accessible from these home pages are not displayed and will be synchronized along with associated home pages.

Fig. 3.67
Mismatching
Reports List

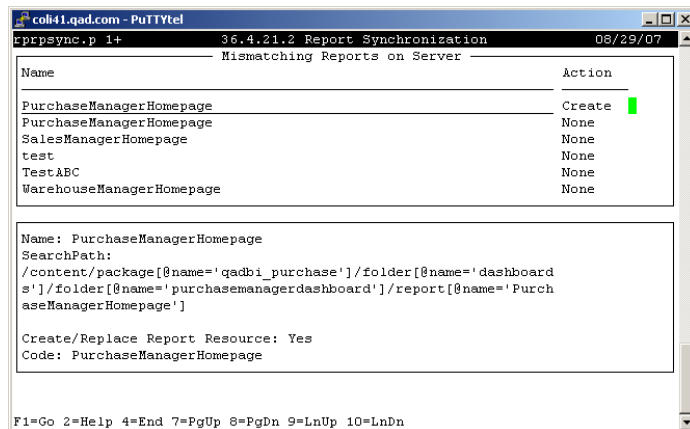

- 4 Enter or select from the mismatching report list the name of the dashboard home page that you want to take action on.
- 5 Set the action on the selected dashboard home page to Create. The Create action creates a new report resource in the system from the selected report on the report server. The actions you choose will be displayed for the corresponding report in the mismatching report list.
Note The actions will not be executed until you save the changes.
- 6 Enter a unique report code identifying a report resource in the system. The code defaults from the name of the specified dashboard home page.
Press Enter.
- 7 Repeat steps 4 through 6 for all the dashboards you want to synchronize from the Cognos report server to QAD 2007.1.
- 8 Press End and choose Yes to execute the synchronization.

Create Menu Entries for the Dashboards

Create menu entries for the new dashboard home pages using Menu System Maintenance.

- 1 Log in to QAD 2007.1 and go to Menu System Maintenance (36.4.4).
- 2 On the Menu System Maintenance screen, assign a menu label and a report code to the menu number you want to set up for the dashboard home page.

The screenshot shows the '36.4.4 Menu System Maintenance' screen. The form contains the following fields:

- Language ID: **18** (highlighted with a green cursor)
- Menu:
- Selection:
- Label:
- Name:
- Exec Procedure:
- Help File:

At the bottom of the screen, a keyboard shortcut legend is displayed: F1=Go 2=Hlp 3=Ins 4=End 6=Mnu 7=Rel 8=Clr 9=Prev 10=Next 11=Buf.

Fig. 3.68
Menu System
Maintenance
(36.4.4)

Language ID. Specify a language code that uniquely identifies the language you want to use for the menu label.

Menu. Enter a number associated with the menu from which to access the dashboard home page.

Selection. Enter a menu selection number associated with the dashboard home page.

Label. Enter a label name for this menu selection.

Name. Optionally, enter a short, symbolic name associated with the dashboard.


Exec Procedure. Specify the report code of the dashboard home page in the following format:

urn:qad-report:cognos:ReportCode

The report code was specified when you synchronized the dashboard home page from the Cognos report server to QAD 2007.1. See “Perform Report Synchronization” on page 133.

Press Go to save the record.

- 3 You have set up the menu for accessing a QAD BI dashboard from the QAD .NET 2.5 user interface in QAD 2007.1. Repeat the previous step to create menu entries for all the dashboards you want to implement.

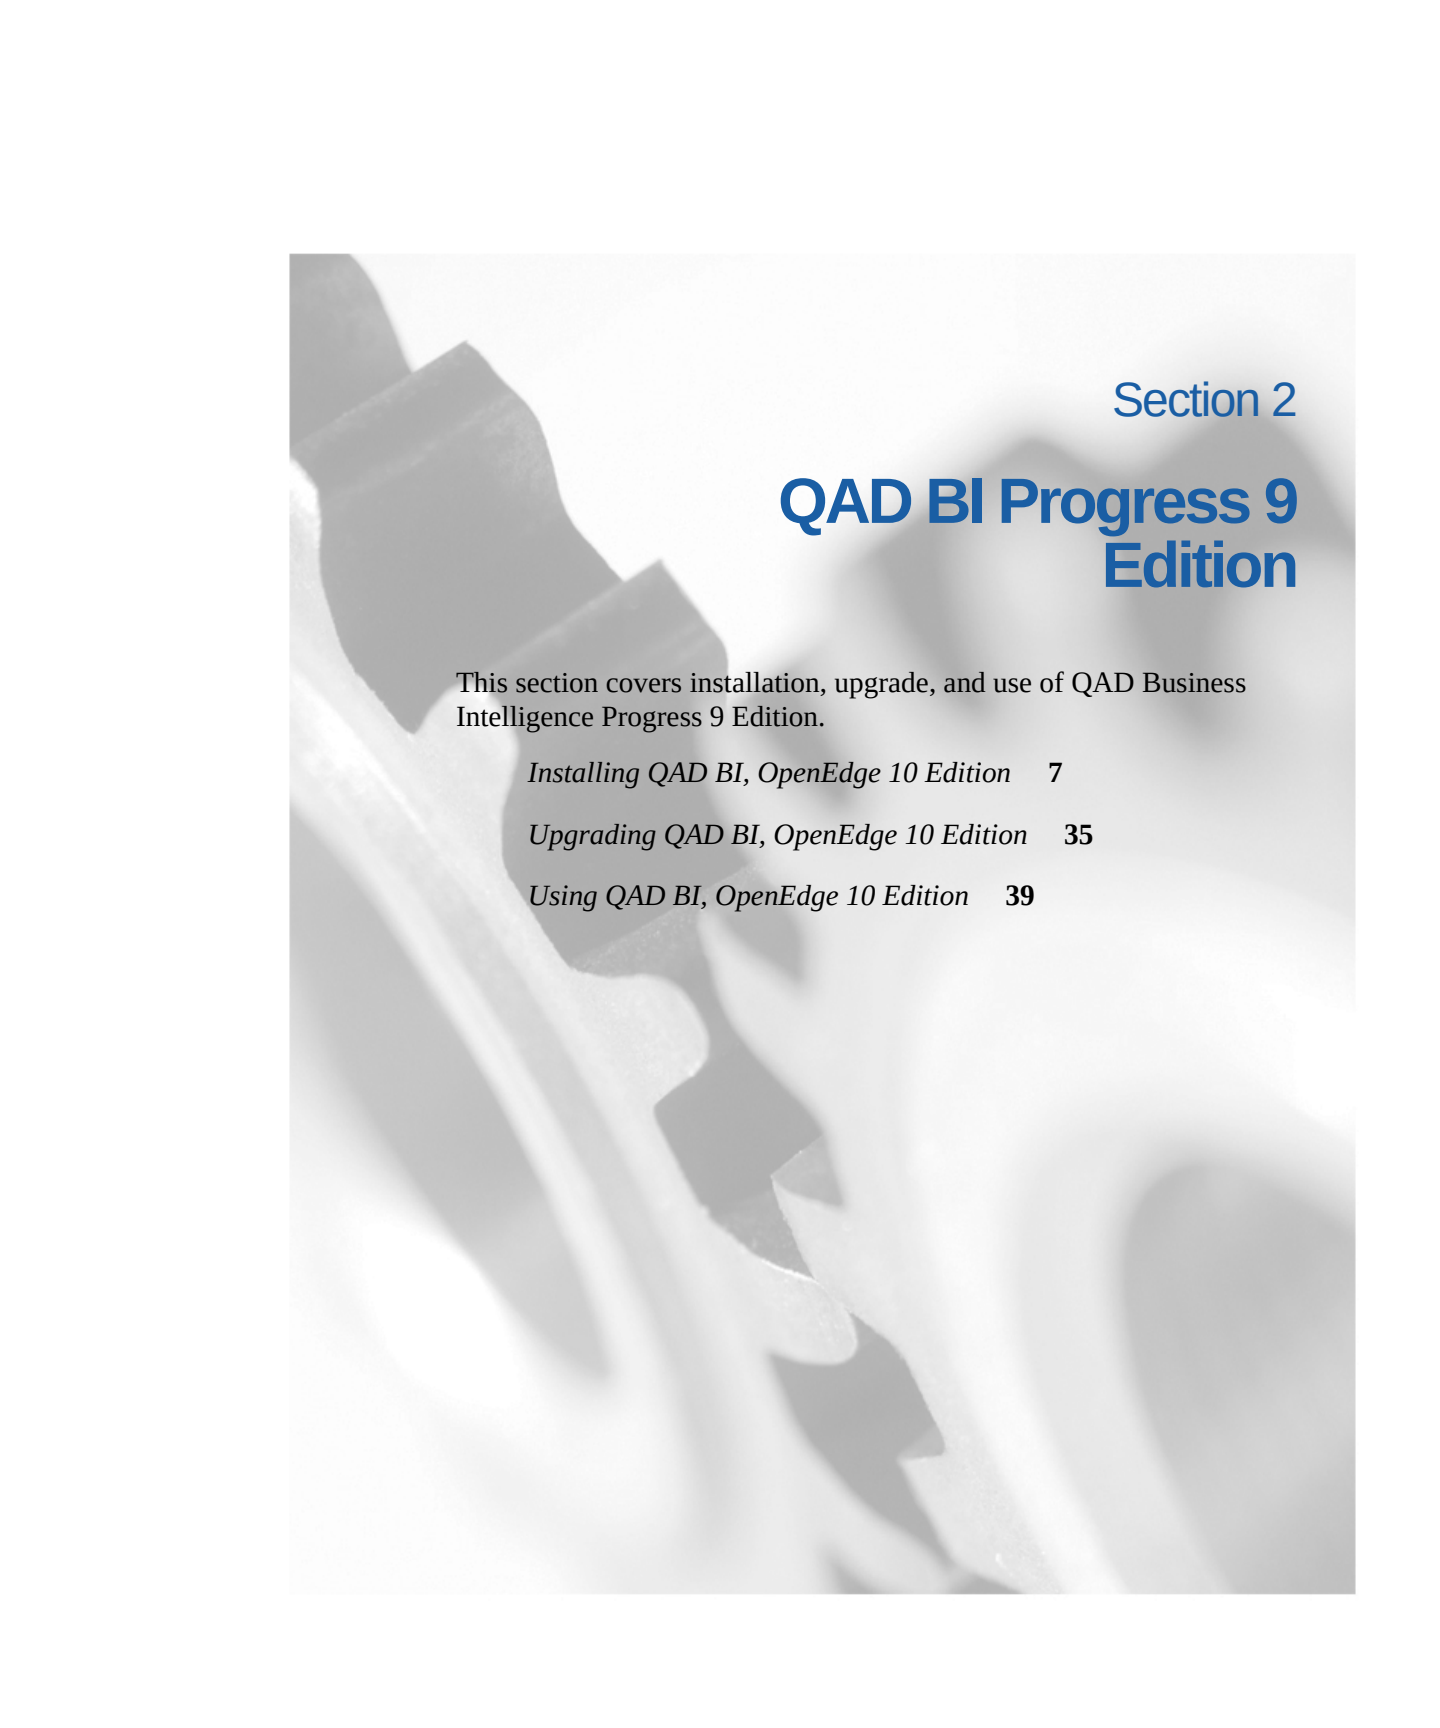The background of the page features a grayscale image of several interlocking gears. The gears are of different sizes and are positioned in a way that creates a sense of depth and mechanical complexity. The lighting is soft, highlighting the teeth of the gears and creating subtle shadows.

Section 2

QAD BI Progress 9 Edition

This section covers installation, upgrade, and use of QAD Business Intelligence Progress 9 Edition.

Installing QAD BI, OpenEdge 10 Edition **7**

Upgrading QAD BI, OpenEdge 10 Edition **35**

Using QAD BI, OpenEdge 10 Edition **39**



Chapter 4

Installing QAD BI, Progress 9 Edition

The following topics provide the information required for installing the QAD Business Intelligence (QAD BI) solution. They also provide guidelines and information for setting up or configuring required and optional third-party applications.

If you are an existing customer who is upgrading an installed version of QAD BI, you can skip the instructions in this chapter and go directly to Chapter 5, “Upgrading QAD BI, Progress 9 Edition,” on page 167.

See “Using QAD BI, Progress 9 Edition” on page 171 for information on using the features of QAD BI.

Overview **140**

System Requirements **140**


Installation Media **143**

Installation Steps **143**

Overview

QAD BI provides a complete business intelligence solution for analyzing data residing in MFG/PRO and other data sources. It extracts and transforms data from one or many data sources using flexible rules and stores this information in a data warehouse. Prebuilt MFG/PRO models support powerful multidimensional analysis against the data warehouse using Cognos 8. Figure 4.1 illustrates the overall structure of the solution.

Fig. 4.1
Component
Overview

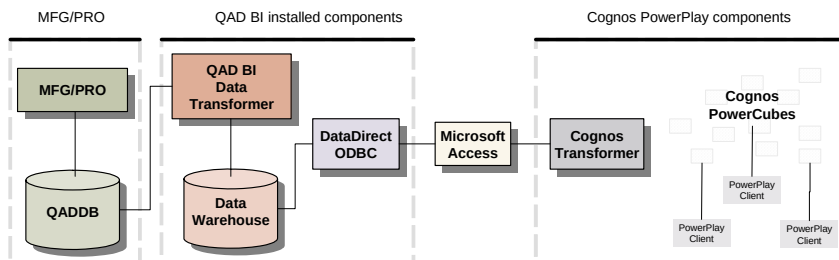

System Requirements

Supported Platforms

The Data Transformer runs on Windows 2000, XP, and 2003.

Minimum Hardware Requirements

- Pentium III, 500 MHz or higher
- Minimum 1 GB RAM
- 1 GB hard disk space or more depending on the size of the data warehouse

Note Generalizations about hardware must be evaluated with an understanding of the amount of data that will be processed through QAD BI. The server hosting the data warehouse should follow recommended practices for supporting Progress databases and (if implemented) Cognos PowerCubes.

For minimum hardware requirements to install and run Cognos 8 components, see Chapter 5, “Installing Cognos 8,” in the *Cognos 8 Business Intelligence Installation and Configuration Guide*.

Supported MFG/PRO Versions

The Data Transformer works with any service pack of MFG/PRO 9.0, eB, eB2, and eB2.1 running on Progress 9.

Note For MFG/PRO 9.0 running on Progress 8.3, you need QAD BI 2.0.

QAD BI is available in the following languages: English, French, Spanish, German, Dutch, Simplified Chinese, Traditional Chinese, Japanese, Korean.

Your source MFG/PRO database can use any Western European language based on code page ISO8859-1. Or it can use any of the following supported double-byte languages: Simplified Chinese, Traditional Chinese, Japanese, Korean. If you want to use QAD BI with multiple data sources and multiple languages, only the following combinations are supported:

- Any combination of ISO8859-1 languages
- English and any one of the supported double-byte languages

Third-Party Software Components

The following components are required for the installation of QAD BI Data Transformer:

- Progress 9.1D or 9.1E with the following components:
 - Provision Plus
 - Enterprise DB
 - 4GL Development System
- DataDirect SequeLink Server and ODBC Edition Client 4.5

The following component is required for all installations of QAD BI.

- Microsoft Access 2000, 2002, or 2003

Note Microsoft Access is only used to maintain data relationships. It is not used to store MFG/PRO data.

The following component is required when creating PowerCubes for use with Cognos 8:

- Cognos PowerPlay Transformer Edition

The following component is required when creating and managing business-related metadata for use in Cognos 8 analysis and reporting:

- Cognos Framework Manager

The following components are required when implementing Web-based Cognos 8 interfaces:

- Cognos 8 Server
- HTTP Server
 - On Windows 2000 or Windows XP: Microsoft Internet Information Services
 - On Windows 2003: Application Server

The following components are required when extracting data from non-Progress data sources:

- Progress Oracle DataServer
- Progress MS SQL Server DataServer
- Progress ODBC DataServer

The following component is required to process data warehouse tasks in parallel:

- Progress AppServer

Performance

The following suggestions are general recommendations that should boost performance in most implementations:

- The data warehouse database should be located on the same server as QAD BI Data Transformer.
- The Cognos PowerCubes should be generated on the same server as QAD BI Data Transformer.
- The network connections between the server hosting the Data Transformer and the MFG/PRO servers should be capable of supporting large data transfers efficiently.

Installation Media

The QAD BI software suite is packaged on multiple CDs. Depending on your purchase order, you may have received a CD to install QAD BI Data Transformer, a CD to install the common business model architecture components, as well as CDs to install each of the QAD BI business models.

The complete QAD BI suite includes the following media:

- QAD BI Data Transformer
- QAD BI Common Model components
- QAD BI Sales Analysis Model
- QAD BI Financial Controlling Model
- QAD BI Service Performance Model
- QAD BI Manufacturing Performance Model
- QAD BI Inventory Monitoring Model
- QAD BI Forecasting Model
- QAD BI Purchasing Model

Installation Steps

Installing QAD BI is a multi-step process. Each step is detailed in the following sections. Complete each step before moving on to the next. Each task is discussed in its own section:

- Verify the Prerequisite Components
- Set Up Language Support
- Prepare the DataDirect SequeLink Components
- Install the Cognos Components
- Install QAD BI Data Transformer Files
- Update the ODBC Account
- Install the Common Components and Business Models

Note QAD recommends you install QAD BI in a test environment first.

Verify the Prerequisite Components

Progress

QAD BI requires the Enterprise database components of Progress 9.1D or 9.1E. Use the Progress installation instructions to install the necessary components. Once they have been installed, verify that they are functioning properly by stopping and starting the Progress AdminService and connecting to the service using the Progress Explorer tool.

To stop and start the Progress AdminService:

- 1 Launch the Windows Services Manager (Start|Control Panel|Administrative Tools|Services).
- 2 Right-click AdminService for Progress and choose Stop.
- 3 Right-click AdminService for Progress and choose Start.

To connect to the service using the Progress Explorer tool:

- 1 Launch the Progress Explorer (All Programs|Progress|Progress Explorer).
- 2 Right-click the Progress Explorer node and choose Add Progress Server.
- 3 Choose OK to configure a local server.
- 4 Right-click the localhost node and choose Connect.

Important QAD recommends setting the Progress AdminService startup type to Manual. On some systems, Progress errors occur periodically when the service is set to Automatic. Anytime the server is rebooted, the service must be manually started.

Progress System Variables

Before you proceed with the QAD BI installation, you should:

- Verify that the DLC and PROMSGS system variables are set.
- Verify that the *ProgressInstallDir\bin* directory is in the system path variable.

Use these steps to verify the system variable and path information:

- 1 On your Windows Desktop, right-click My Computer and choose System Properties.
- 2 Click the Advanced tab and choose Environment Variables.
- 3 Verify that DLC and PROMSGS are set. If they are not, click New and enter the variable name and value to set the missing variables:
`DLC=ProgressInstallDir`
`PROMSGS=ProgressInstallDir\promsgs`
- 4 Double-click the Path system variable. Review the value to make sure the *ProgressInstallDir\bin* directory is included. If it is not included, add it to the end of the path, delimited by a semicolon (;).

Microsoft Access

QAD BI has been tested to ensure that it interacts seamlessly with Microsoft Access 2000 and newer releases. It has not been tested with previous releases. Before you proceed with the QAD BI installation, perform the following system checks:

- Verify the Access version compatibility.
- Set the Macro/Security option to low when using Access 2003.

To verify the version compatibility:

- 1 Launch Access.
- 2 Choose Help|About Access.
- 3 Verify that you have Microsoft Access 2000 or above.
- 4 Click OK to return to the application.

To set the Macro/Security level to low when using Microsoft Access 2003:

- 1 From the Tools menu, choose Macros|Security.
- 2 Set Security to Low.

SMTP Mail Server Account

A valid SMTP (outgoing) mail server account is required when configuring Cognos 8 Server. The account will be used to send reports by e-mail.

Make sure you know the following information:


- Host name and port of your SMTP mail server
- Account and password for the SMTP mail server

Set Up Language Support

To support different languages, you must set special language encoding and fonts in the Windows operating system:

- 1 To set language encoding, choose Start|Control Panel|Regional and Language Options|Advanced.

Fig. 4.2
Regional and
Language Options

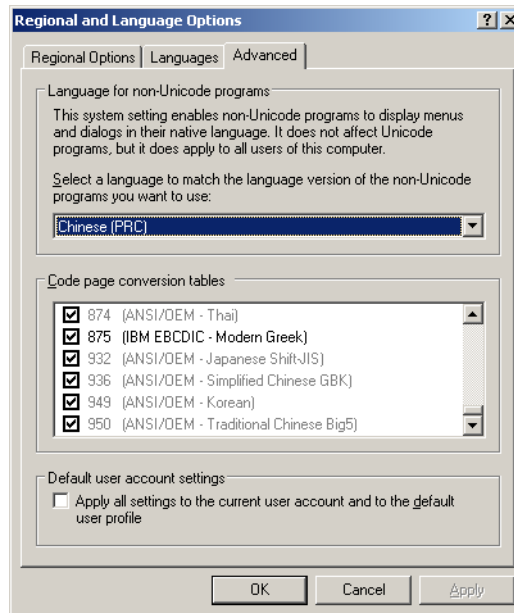

- 2 From the Language for non-Unicode programs frame, choose the language you require.

- 3 From the Code page conversion tables frame, select the code page conversion tables you require.


Prepare the DataDirect SequeLink Components

Use the following steps to install and configure the DataDirect SequeLink components. These components are provided on QAD BI Data Transformer installation CD in the \et l-progress9\sequelink subdirectory.


Note The DataDirect ODBC Edition Client and the DataDirect SequeLink Server software are licensed for use with QAD BI only.

Install the DataDirect ODBC Edition Client


- 1 Start the DataDirect ODBC client installation by running the \et l-progress9\sequelink\client\setup.exe installation program.
- 2 Review the client information, and enter your product registration information.

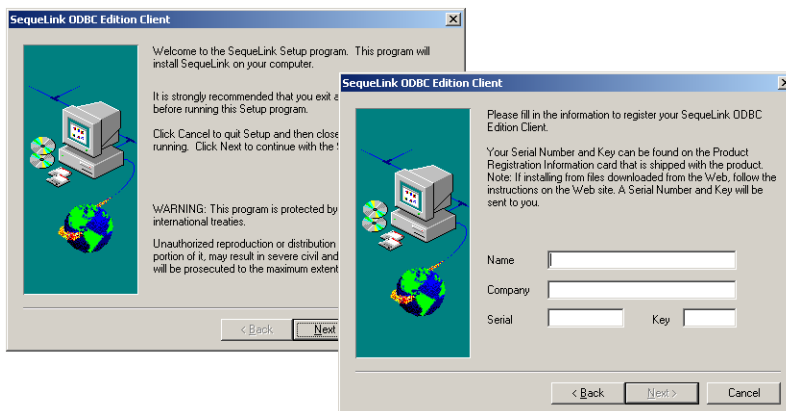

- 3 Review your registration information and license agreement, and then choose the Default installation.

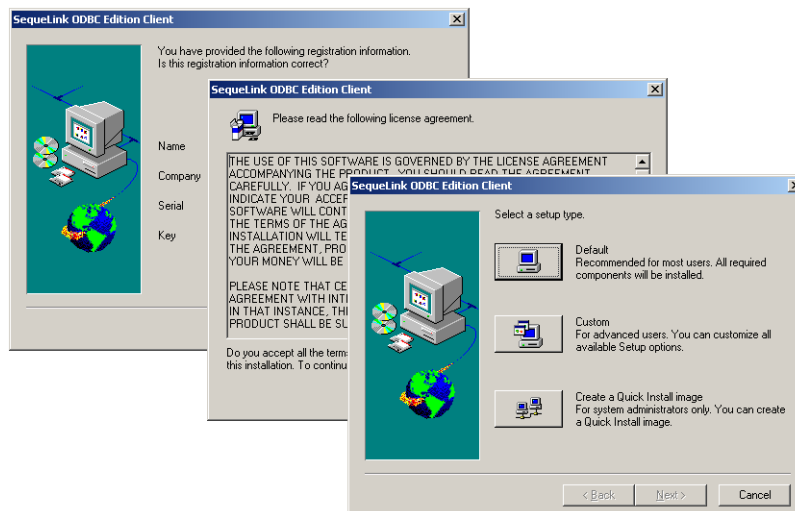


- 4 Choose a folder where to place the program icons, review the installation configuration, and begin the installation process.

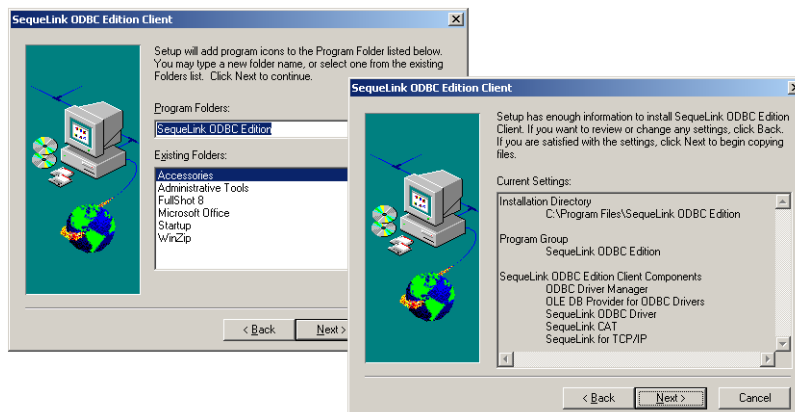


Install the DataDirect SequeLink Server

Use these steps to install the DataDirect SequeLink Server:


- 1 Start the SequeLink Server installation by running the `setup.exe` installation program found in:
`\etl-progress9\sequelink\server\`
- 2 Review the product information and verify the installation directory.
 If a previous installation of the product is detected, you should install into the same directory as the previous installation.

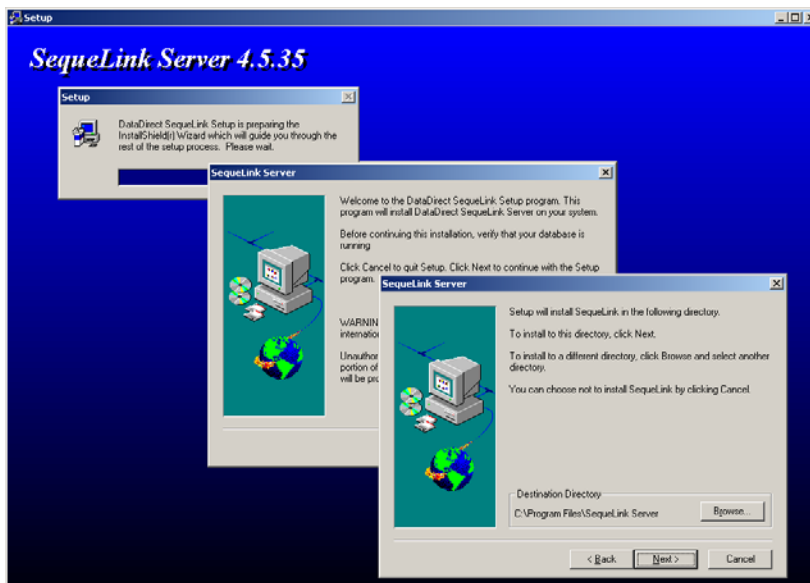


- 3 Choose the program group to create, enter and verify your registration information, and review the license agreement.

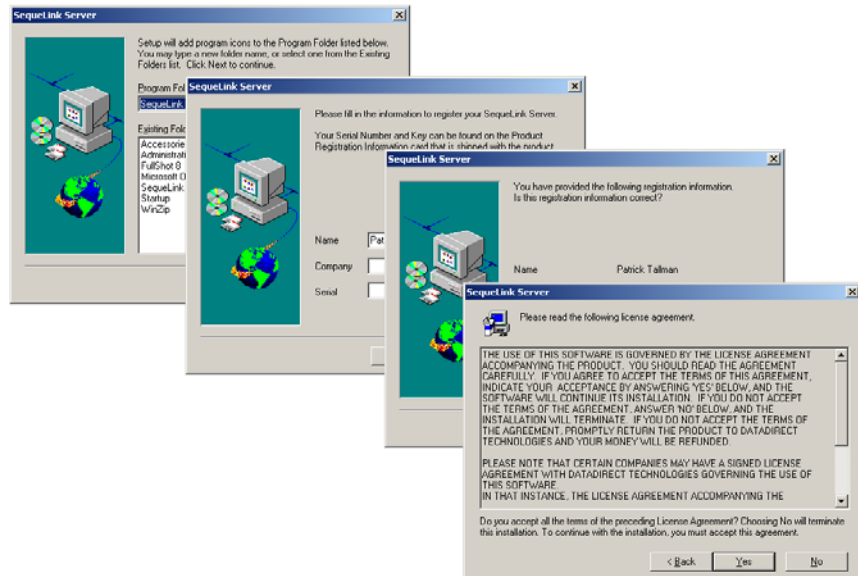


4 When prompted, enter the Progress directory information as required.

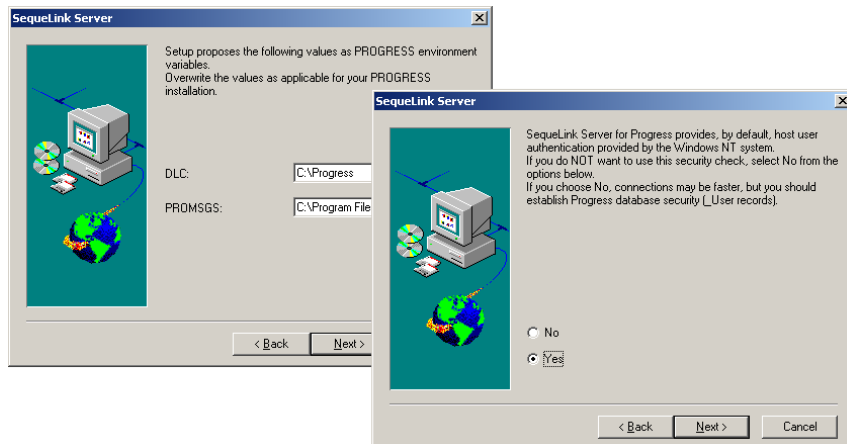

- 5 Review the components to be installed, and proceed with the installation. Once the files are installed successfully, you are notified that the SequeLink Server Administrator will be launched to add a SequeLink service.

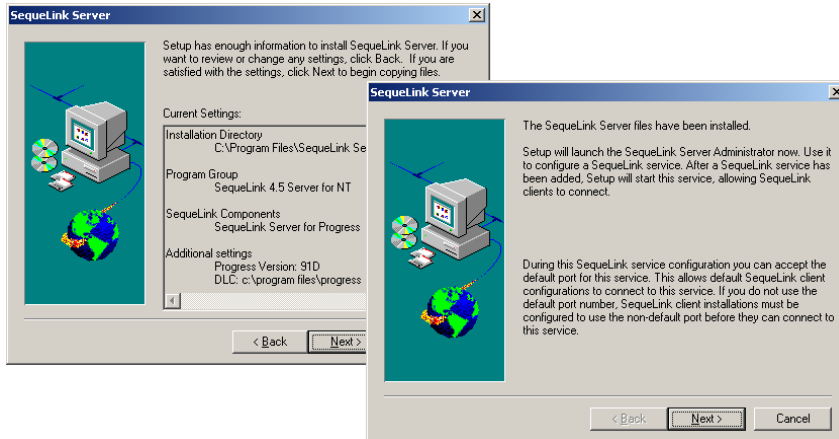

- 6 When the SequeLink Server Administrator displays, accept the default configuration. Once the service is added, the SequeLink Server installation is complete.

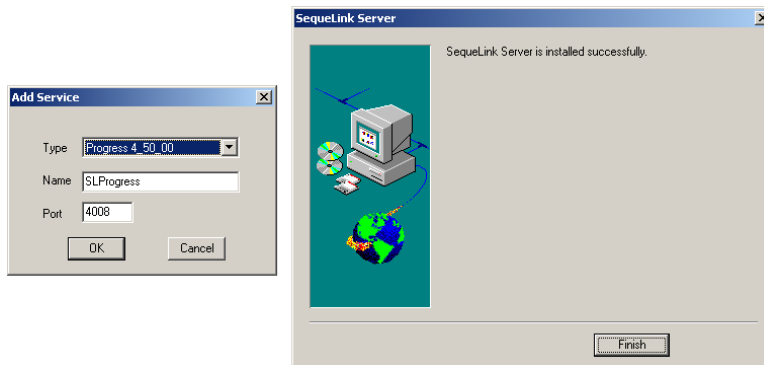

- 7 Configure the SequeLink OCBC Driver to support Progress 9.1D or Progress 9.1E.
 - a From SequeLink Server Administrator, choose the Load Config button to open the configuration. For further details, read `version.txt` under the following directory:
`SequeLinkServerInstallDir\4_50_00\bin`

- b Depending on which Progress version you are using, enter the relevant configuration details as shown in Figure 1.3 and Figure 1.4.

Fig. 4.3
Configuration for
Progress 9.1D


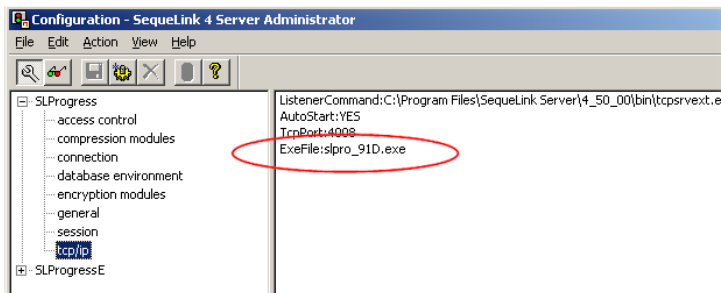


Fig. 4.4
Configuration for
Progress 9.1E

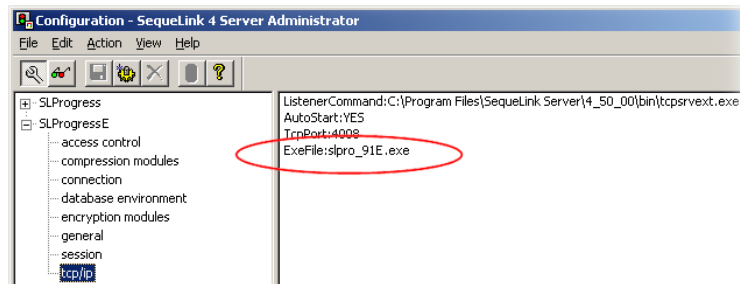

Install the Cognos Components

The installation steps described here assume that you are installing all Cognos 8 components on one computer. For other Cognos 8 installation options, see Chapter 7, “Installation Options,” in the *Cognos 8 Architecture and Planning Guide*.

Use the steps in this section to install and configure:

- Cognos PowerPlay Transformer
- Cognos 8 Server
- Cognos Framework Manager

Install and Configure Cognos PowerPlay Transformer

Installing Cognos PowerPlay Transformer

- 1 Insert the Cognos 8 Business Intelligence OLAP Modelling 8.2 Windows CD.
- 2 In the Cognos 8 Business Intelligence OLAP Modelling 8.2 Windows screen, select Install Cognos 8 Business Intelligence OLAP Modelling 8.2 Windows.
- 3 Select all default options unless using a double-byte language.
If you need to use a double-byte language in BI, at the Character Set Selection screen, select Locales for other languages.
- 4 On the Component Configuration screen, select the following option button:

Exit the Installation Wizard without configuring components. You must later configure the components to complete the installation.
- 5 Click Next.
- 6 On the Finish screen, click Finish.
- 7 In the Cognos 8 Business Intelligence OLAP Modelling 8.2 Windows screen, click Exit.

Applying the Current Configuration

- 1 From the Windows Start menu, choose All Programs\Cognos 8\Tools\ Configuration Manager.
- 2 On the Cognos Configuration Manager Welcome screen, choose the Open the current configuration option under the Start tab.
- 3 In the Configuration Manager Explorer panel, right-click the top-level node that has your computer name and choose Apply Selection.
- 4 Click Yes at the prompt for confirmation.
- 5 The Configuration Manager application progress bar displays. When the application process is complete, click OK and exit Configuration Manager.

Note When the following warning message displays, ignore it and choose OK:

Warning: Could not complete Apply for
YourComputerName.

Install and Configure Cognos 8 Server

Installing Cognos 8 Server

- 1 Launch the Cognos 8 Server installation program from the Cognos 8 Server installation CD.
- 2 Select all default options unless using a double-byte language.
If you need to use a double-byte language in BI, at the Character Set Selection screen, select Locales for other languages.
- 3 Select Cognos Content Database in the installation wizard.
- 4 On the Finish screen, click Finish.

Creating the Content Store

The content store is a database that Cognos Content Manager uses to store global configuration data, global settings (such as the language and currency formats shown in the user interface), connections to data sources, and product-specific content. Design models and log files are not stored in the content store.

By default, Cognos 8 products share the content store database.

Use Cognos content database as the content store database. For details on how to configure the content store in Cognos Configuration, see *Cognos 8 Installation and Configuration Guide*.

Installing HTTP Server

To access Cognos 8 interfaces through the Cognos 8 Web portal, you must install and configure an HTTP server to host Cognos 8 Server files and components.


Use Microsoft Internet Information Services on Windows 2000 or Windows XP; use Application Server on Windows 2003.

- 1 From the Windows Start menu, choose Control Panel|Add or Remove Programs.
- 2 In the left pane, click Add/Remove Windows Components.
- 3 On the Windows Components Wizard screen, check one of the following:
 - Internet Information Services (IIS) box when the target machine is running Windows 2000 or Windows XP
 - Application Server when the target machine is running Windows 2003
- 4 Click Next.
- 5 Accept the default options to complete the installation unless you are using IIS 6.0.

If you use IIS 6.0, ensure that the CGI extension can be executed by doing this:

- a Go to your IIS 6.0 control panel.
- b Select Web Service Extensions from the left tree.
- c Select All Unknown CGI Extensions and click Allow.
- d When prompted to confirm, click Yes.

Fig. 4.5
Internet
Information
Services Manager

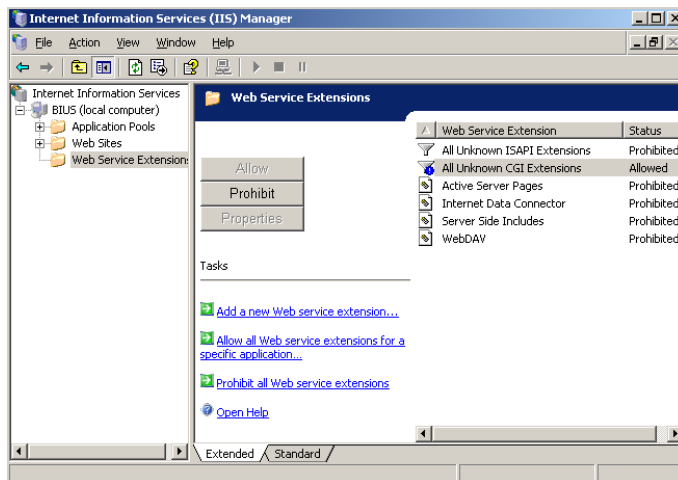

Configuring HTTP Server

Before you use Web pages generated by Cognos 8, you must configure your Web server. You must set up virtual directories, also known as Web aliases, for the directories that contain the HTML and Web files for Cognos 8.

Alias	Location	Permission
cognos8	<i>CognosSvrInstalldir</i> \webcontent	Read, Run-scripts
cognos8/cgi-bin	<i>CognosSvrInstalldir</i> \cgi-bin	Read, Run-scripts, Execute
cognos8/help	<i>CognosSvrInstalldir</i> \webcontent\documentation	Read, Run-scripts


Note *CognosSvrInstalldir* is the directory where you installed Cognos 8 Server.

Use these steps to configure Internet Information Server:

- 1 In the left pane of the Internet Information Services Manager window, expand the folder that has your computer name and then expand the Web Site folder.
- 2 Right-click the folder that contains the Web site where you will run your Cognos product and choose New|Virtual Directory. If you have only one Web site, its default name is Default Web Site.

- 3 In the Virtual Directory Creation Wizard dialog box, click Next.
- 4 In the Alias text box, enter `cognos8`, and then click Next.
- 5 Click Browse, select the *CognosSvrInstallDir\webcontent* folder, and then click Next.
- 6 Ensure that the Read and Run-scripts check boxes are selected, and then click Next.
- 7 Click Finish.
- 8 In the left pane of Internet Information Services Manager, right-click the Cognos8 folder you just created and choose New|Virtual Directory.
- 9 In the Virtual Directory Creation Wizard dialog box, click Next.
- 10 In the Alias text box, enter `cgi-bin`, and then click Next.
- 11 Click Browse, select the *CognosSvrInstallDir\cgi-bin* folder, and then click Next.
- 12 Ensure that the Read, Run-scripts, and Execute check boxes are selected, and then click Next.
- 13 Click Finish.
- 14 In the left pane of Internet Information Services Manager, right-click the Cognos8 folder and choose New|Virtual Directory.
- 15 In the Virtual Directory Creation Wizard dialog box, click Next.
- 16 In the Alias text box, enter `help`, and then click Next.
- 17 Click Browse, select the following folder, and then click Next:
CognosSvrInstallDir\webcontent\documentation
- 18 Ensure that the Read and Run-scripts check boxes are selected, and then click Next.
- 19 Click Finish.
- 20 The HTTP server is configured. Exit IIS Manager.

Fig. 4.6
Configure Internet
Information
Services

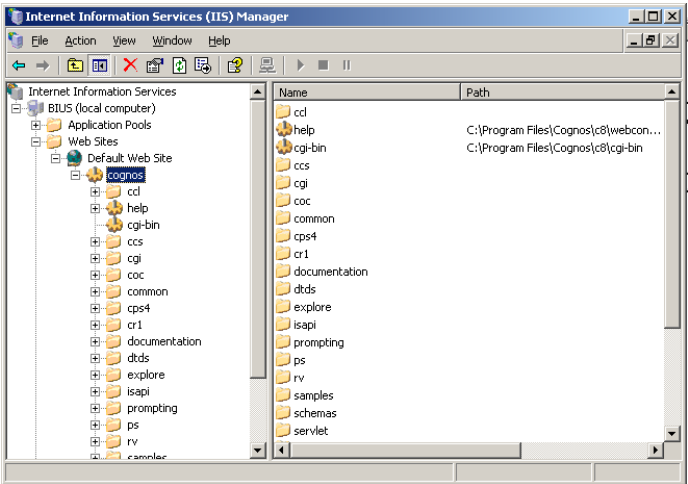

Configuring Web Browsers

Cognos 8 uses the default browser configurations provided by Microsoft, Netscape, and Firefox. For all browsers, you must ensure that settings are enabled for cookies and Java scripts. Additional required settings are specific to the browser.

Table 4.1
Web Browser
Settings

Browser	Setting	Cognos Component
Internet Explorer	Run ActiveX controls and plug-ins Script ActiveX controls marked safe for scripting	Analysis Studio
Netscape	Allow Cookies JavaScript	Cognos Connection
Firefox	Allow Cookies Enable Java Enable JavaScript Load Images	Cognos Connection

Configuring Cognos Server Components

After you install the Cognos 8 Server components, the following configuration tasks are required.

Specifying a Mail Server Account

If you want to send reports by e-mail, you must configure a mail server account.

- 1 In the Cognos Configuration Explorer window, under Data Access, click Notification.
- 2 In the Properties window, for the SMTP mail server property, enter the host name and port of your SMTP (outgoing) mail server.
- 3 Click the Value box next to the Account and password property and then click the edit button when it appears.
- 4 Enter the appropriate values in the Value – Account and password dialog box and then click OK.

Note If log-on credentials are not required for the SMTP server, remove the default information for the Account and password property. When you are prompted for confirmation to leave this property blank, click Yes. Ensure that the default user name has been removed. Otherwise, the default account is used and notifications will not work properly.

- 5 In the Properties window, enter the appropriate value for the default sender account.
- 6 Right-click Notification in the Explorer window and choose Test to test the mail server connection.
- 7 On the File menu, click Save.

Testing the Server Components

You can test your configuration settings by running the test feature before you start the Cognos 8 service. Then you can test the installation by starting the Cognos 8 service and then opening Cognos Connection. On Windows, the Cognos 8 service is configured to start automatically by default.

- 1 Start Cognos Configuration.
- 2 Ensure that you save your configuration; otherwise, you will not be able to start the Cognos 8 service.

- 3 In the Explorer window, click Local Configuration.
- 4 On the Actions menu, click Test.
Cognos Configuration checks the CSK availability; tests the namespace configuration; and tests the connections to the content store, logging database, notification database, and mail server.
- 5 If any test fails, reconfigure the affected properties and then test again. Do not start the service until all tests pass.
- 6 On the Actions menu, click Start.
It may take a few minutes for the Cognos 8 service to start. This action starts all installed services that are not running. If you want to start a particular service, select the service node in the Explorer window and then click Start on the Actions menu.
- 7 Open a Web browser.
- 8 Enter the following in the address bar and press Enter, where cognos8 is the virtual directory you created when you configured the Web server:
`http://host_name:port/cognos8`
- 9 It may take a few minutes for the Web page to open. If you see the Welcome page of Cognos Connection, your Cognos 8 installation is working.

Install and Configure Cognos Framework Manager

You must install and configure Framework Manager before you can use Cognos 8 for analysis.

Use these steps to install Cognos Framework Manager:

- 1 Launch the Cognos Framework Manager installation program from the Cognos 8 Business Intelligence Modelling Windows CD.
- 2 Select all default options.

3 Click Yes at the following prompts:

Warning: You are installing to the same location as a previous installation. Do you want to continue?

This installation will replace existing files.
Select Yes to automatically create a backup of all files that are replaced.

4 On the Finish screen, click Finish.

Install QAD BI Data Transformer Files

This section includes the information you need to install QAD BI Data Transformer program and data files using QAD BI Data Transformer installation CD.

To begin the installation of the Data Transformer, launch `install.bat` from the `etl-progress9` directory on the installation CD. You are then prompted to provide several installation parameters. Use the following descriptions as a guide.

Note The values you provide are saved in the system registry and are used as defaults on subsequent QAD BI installations.

Important If you specify a Program Files directory where QAD BI Data Transformer was previously installed, you are prompted either to upgrade or to replace the existing installation.

- Choosing to upgrade the existing installation updates the QAD BI program files to the installed version while retaining the existing data warehouse configuration and data.
- Choosing to replace the existing installation completely replaces all program and data files.

Support Multiple Code Page Data Sources. Indicate whether the product needs to connect to double-byte language source databases and English source databases at same time. Enter either Y for yes or N for no.

Default Encoding. Specify the default encoding used by the Data Transformer. ISO8859-1 is the code page for Western languages. The code pages for supported double-byte languages are:

GB2312: Simplified Chinese

CP936: Extended Simplified Chinese GBK

CP950: Traditional Chinese Big-5

CP949: Korean

SHIFT-JIS: Japanese

Program Files Directory. Specify the directory where program files will be installed. The directory name should not contain spaces.

Data Directory. Specify the directory where the data warehouse and administration databases will be installed. The directory name should not contain spaces.

Progress Directory. Specify the directory where Progress was installed.

Data Warehouse Database Name. Specify the name assigned to the data warehouse database in the Progress Explorer tool.


Data Warehouse Database Port. Specify the TCP-IP port to use for the data warehouse database server in the Progress Explorer tool.

Administration Database Name. Specify the name assigned to the Administration database in the Progress Explorer tool.

Administration Database Port. Specify the TCP-IP port to use for the Administration database server in the Progress Explorer tool.

Program Group. Specify the name of a program group where application shortcuts will be installed.

After you enter the required installation parameters, several automated tasks execute and a status screen displays.

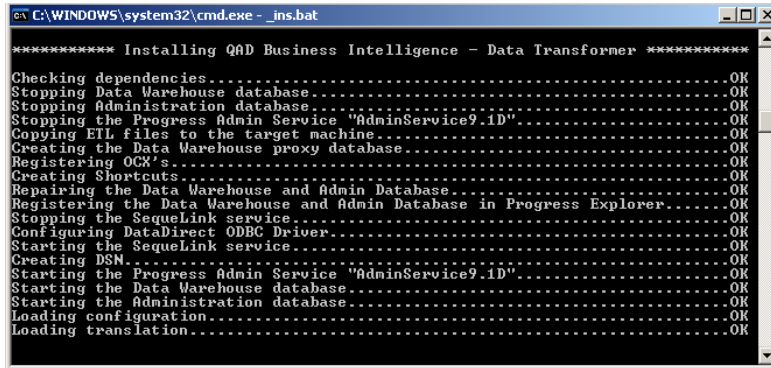

```

C:\WINDOWS\system32\cmd.exe - _ins.bat

***** Installing QAD Business Intelligence - Data Transformer *****

Checking dependencies.....OK
Stopping Data Warehouse database.....OK
Stopping Administration database.....OK
Stopping the Progress Admin Service "AdminService9.ID".....OK
Copying ELL files to the target machine.....OK
Creating the Data Warehouse proxy database.....OK
Registering ODBC's.....OK
Creating Shortcuts.....OK
Repairing the Data Warehouse and Admin Database.....OK
Registering the Data Warehouse and Admin Database in Progress Explorer.....OK
Stopping the Sequelink service.....OK
Configuring DataDirect ODBC Driver.....OK
Starting the Sequelink service.....OK
Creating DSN.....OK
Starting the Progress Admin Service "AdminService9.ID".....OK
Starting the Data Warehouse database.....OK
Starting the Administration database.....OK
Loading configuration.....OK
Loading translation.....OK

```

Fig. 4.7
QAD BI Data
Transformer
Installation Status
Screen


After the installation script completes, exit the DOS screen.

Update the ODBC Account

An ODBC Data Source Name (DSN) was created by the installation using the Data Warehouse Database Name installation parameter. The DSN must be configured to use a Windows account with Administrative rights.


To set the account, follow these steps, which assume that you are using Windows XP Professional; other operating systems may require slightly different steps.

- 1 Access the ODBC Administrator by selecting Start|Control Panel|Administrative Tools|Data Sources (ODBC).

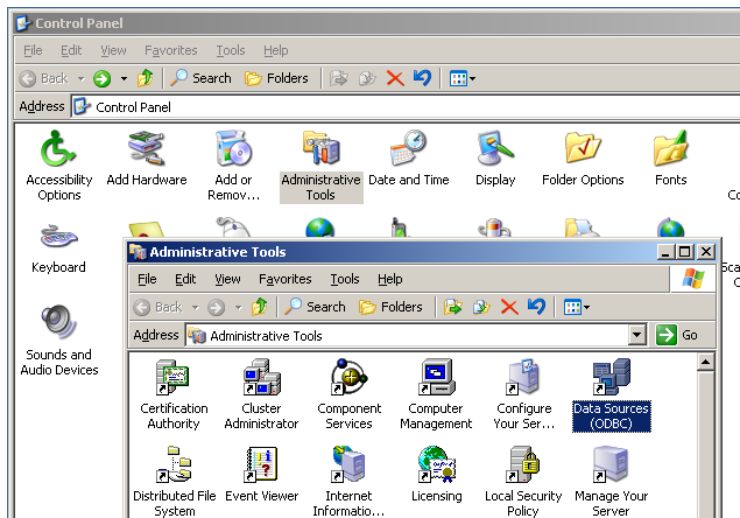

- 2 The ODBC Data Source Administrator displays. Choose the System DSN tab; then select the appropriate DSN and click Configure.

Fig. 4.8
ODBC SequeLink
Driver Setup

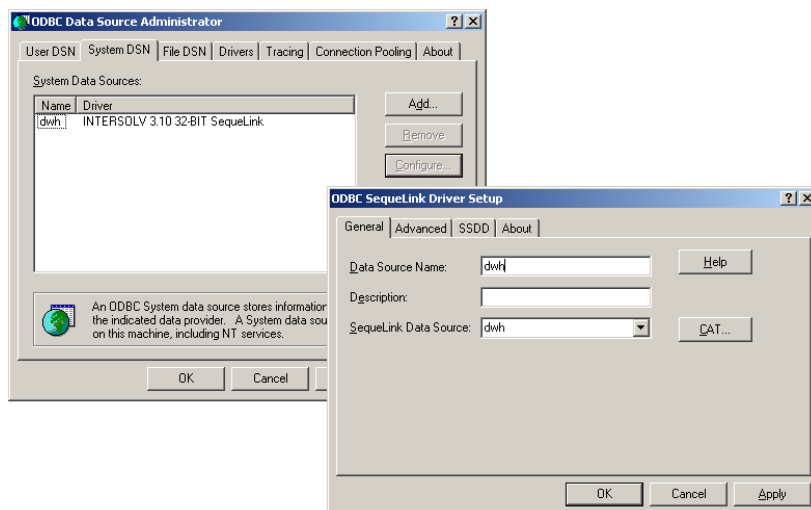

- 3 Click CAT on the ODBC SequeLink Driver Setup screen. The Edit SequeLink Data Source screen displays. In the Host panel, enter authentication information for a Windows account with Administrative privileges, and clear the Prompt for Password check box.

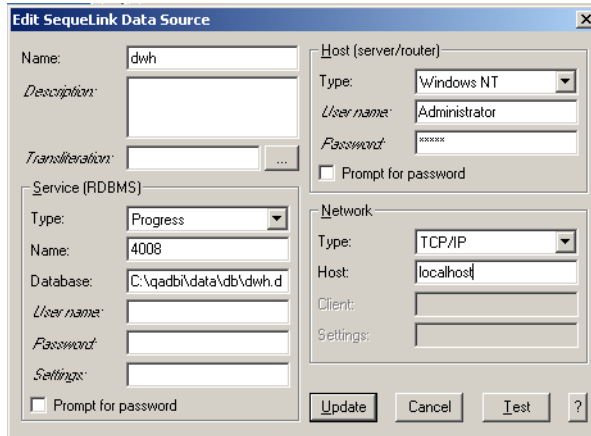


Fig. 4.9
Edit SequeLink
Data Source

- 4 Click Test to make sure the account and password information is valid.
- 5 Click Update to save your changes and return to the previous screen. Exit each screen, confirming your changes, until you are returned to your desktop.

Note You must do this task before you run the BI Data Transformer.

Install the Common Components and Business Models

Your QAD BI package may include several business model CDs. This section includes information to help you install the common model components and the business models. The same steps are used to install each of these components. You can install the business model CDs in any order once the common model components have been installed.

To begin the installation, launch `install.bat` from the selected CD.


You are then prompted to provide several installation parameters. Use the following descriptions as a guide.

Note The values you provide are saved in the system registry and are used as defaults on subsequent QAD BI installations.

Program Files Directory. Specify the directory where program files will be installed. The directory name should not contain spaces.

Data Directory. Specify the directory where the business models will be installed. The directory name should not contain spaces.

See “Using QAD-Provided Model Data” on page 224 for information on how to load the business model data.

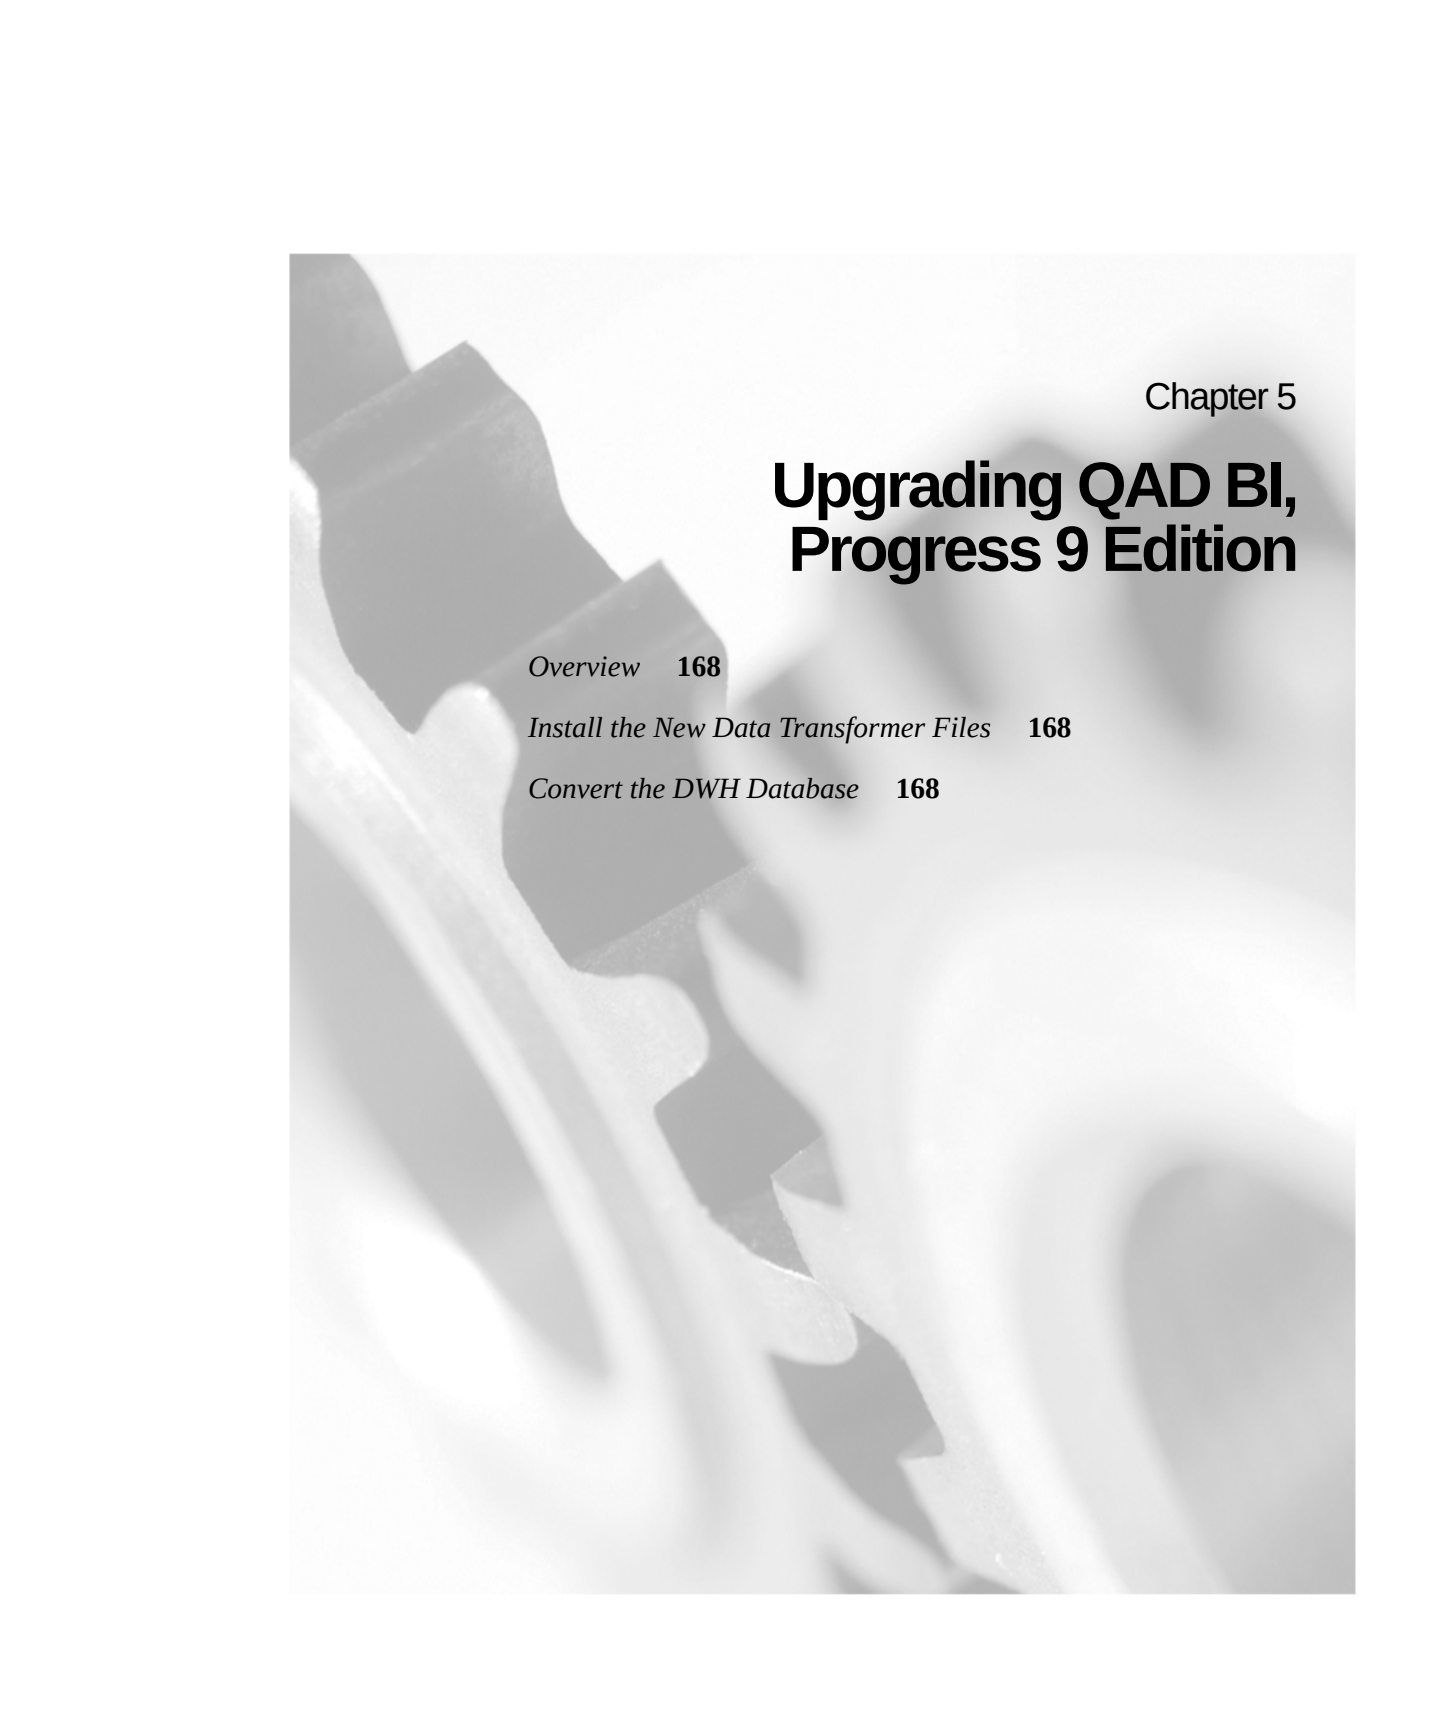The background of the page is a grayscale image of several interlocking gears. The gears are of different sizes and are positioned in a way that creates a sense of depth and mechanical complexity. The lighting is soft, highlighting the teeth of the gears and creating subtle shadows.

Chapter 5

Upgrading QAD BI, Progress 9 Edition

Overview **168**

Install the New Data Transformer Files **168**

Convert the DWH Database **168**

Overview

If you are upgrading QAD BI to release 2.5 from a release prior to 2.3.2, you must upgrade to QAD BI 2.3.2 first. For details on upgrading to QAD BI 2.3.2, see *QAD Business Intelligence 2.3.2 Technical Reference Guide*.

Upgrade Summary

For all previous releases, you must

To upgrade QAD Business Intelligence from version 2.3.2 to 2.5, you must complete the following steps:

- Install the new QAD BI Data Transformer files
- Convert the DWH database

Prior to Upgrading

Make sure you back up your data warehouse prior to upgrading QAD BI.

Install the New Data Transformer Files

See “Installation Steps” on page 143 for detailed information on installing the new QAD BI Data Transformer program and data files.

Convert the DWH Database

Use the following steps to convert the old DWH database.

- 1 Edit the `DWH_Repl_To_BI25.pf` file located in the `qadbiinstall\dir\data\utilities\dwh_conv` directory to connect to both the old QAD BI 2.3.2 DWH database and the new QAD BI 2.5 empty DWH database.

Use the following as an example:

```
# QAD BI 2.3.2 DWH Database
-db dwh.db -H juy-sh-pc2 -S 30000 -ld sdwh -U dwh -P admin
# QAD BI 2.5 DWH Database
-db dwh.db -H localhost -S 24000 -ld tdwh -U dwh -P admin
-cpinternal UTF-8 -cpstream UTF-8
```

- 2 In the Command Prompt window, run `Start_DWH_Repl_To_BI25.p` from the *qadbiinstall\dir\data\utilities\dwh_conv* directory to replicate data from the old QAD BI 2.3.2 DWH database to the new QAD BI 2.5 DWH database:

```
prowin32 -p Start_DWH_Repl_To_BI25.p -pf DWH_Repl_To_BI25.pf
```


Chapter 6

Using QAD BI, Progress 9 Edition

Overview **172**

Data Transformer User Interface **175**

Setting Up QAD BI Data Transformer **182**

Using QAD-Provided Model Data **224**

Modifying Application Settings **228**

Performing Administration Tasks **237**

Overview


The QAD Business Intelligence (QAD BI) product lets users extract and restructure data from MFG/PRO and other data sources into a Progress-based data warehouse presenting a business-oriented view of the enterprise. Analysts can use Cognos 8 to perform powerful multidimensional analysis against the data warehouse.

The QAD BI solution includes:

- One or more existing data sources
- The Data Transformer Extract-Transform-Load (ETL) tool
- Data warehouse
- A Microsoft Access database used as a database proxy between the data warehouse and PowerPlay
- The PowerPlay application from Cognos

Figure 6.1 illustrates the overall structure of QAD BI.

Fig. 6.1
QAD BI Overview

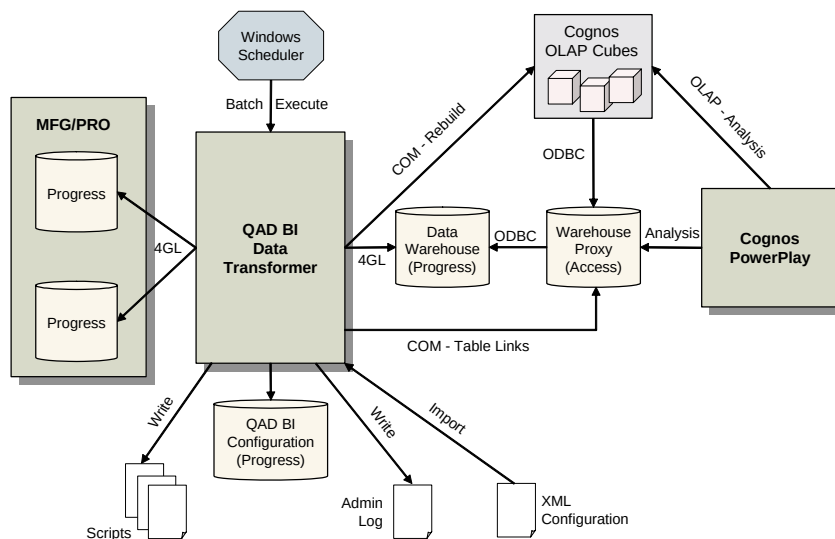

The following sections summarize the role each element plays in QAD BI. See Chapter 4, “Installing QAD BI, Progress 9 Edition,” for information on installing and configuring the individual components.

MFG/PRO

MFG/PRO databases are the primary source of the data that is made available within the data warehouse by the ETL process for analysis in Cognos PowerPlay.

In a multi-database environment, the data warehouse can be configured to populate the same table from more than one source database.

Note While you can have multiple data sources, language combinations are restricted to compatible code pages. See “Supported MFG/PRO Versions” on page 141.

See the user guides for your version of MFG/PRO for information on its features.

QAD BI Data Transformer

Data Transformer is an ETL tool for building and maintaining a data warehouse specifically designed to support analysis. You can use the Data Transformer to configure tasks to structure the data warehouse or load and then modify predefined business models from QAD.

Data Transformer generates a set of Progress scripts to synchronize the data warehouse with the source databases. Progress developers can customize the automatically generated scripts or create new scripts to extend the ETL process.

This guide includes detailed information on using the features of Data Transformer to configure your QAD BI environment.

Data Warehouse

The data warehouse is a Progress database that is populated with data from MFG/PRO and/or other data sources during the ETL process. The data warehouse is an environment separate from the source databases where data can be specially structured to support analysis.

Microsoft Access Database

Access is used as a query layer that makes data in the Progress warehouse available to Cognos PowerPlay. The Access database itself does not store any data. Instead, it serves only to maintain relationships for the data warehouse and to provide an interface for the Cognos PowerPlay Transformer.

In the QAD BI architecture, Access provides the connection to the data warehouse using ODBC and is referred to as the data warehouse proxy.

An Update Links command available in QAD BI Data Transformer is used to update the table links when changes take place in the data warehouse.

See the Microsoft user documentation for details on using Microsoft Access.

Cognos PowerPlay

An important part of the QAD BI solution is supplied by Cognos PowerPlay—an online analytical processing (OLAP) software application that lets users perform multidimensional analysis, create reports, and share them to make better decisions.

PowerPlay draws information from the data warehouse using the proxy to model and build PowerCubes, or simply cubes—the Cognos term for optimized, multidimensional data sets that enable users to perform analysis with quick response times.

See the Cognos documentation for information on configuring and using PowerPlay, as well as on how to configure PowerCubes.

QAD-Provided Models

QAD sells the following seven models to provide out-of-the-box analysis for standard MFG/PRO installations. The seven models together provide support for more than 100 key performance indicators (KPIs).

- Inventory monitoring, for insight into current and historic inventory trends

- Manufacturing performance, including statistics on work orders, production costs, productivity, and throughput
- Forecasting performance
- Sales analysis, including statistical trends in sales and revenue margins
- Financial controls, encompassing gauges for profitability, investments, and the effectiveness of financial management
- Purchasing controls, from patterns in purchase price and cost, to materials delivery
- Service performance insights, including service profitability and trends in customer calls and contract selection

For information on the models and KPIs, see *Reference Guide: QAD Business Intelligence Key Performance Indicators*. This is provided on the installation CD for each model you purchased.

A model is realized by the following components:

- Replication tasks to extract, transform, and load selected data from MFG/PRO into the data warehouse.
- Relationship definitions for the model tables in the data warehouse defined in the data warehouse proxy (Access).
- Cognos OLAP model defining the multidimensional representation of the tables in the data warehouse. Building the OLAP model creates an OLAP cube that can be analyzed using the Cognos reporting tools.

See “Using QAD-Provided Model Data” on page 224 for information on how to implement models.

Data Transformer User Interface

Important This guide is limited mainly to descriptions of the features of QAD BI Data Transformer. For information on user interfaces for associated tools such as Cognos PowerPlay and Microsoft Access, see the user documentation for those products.


QAD BI Data Transformer features a Windows-based graphical user interface. Windows conventions are used throughout the product; for example, drop-down menus, shortcut menus, drag-and-drop, and so on.

This section describes user interface features specific to QAD BI Data Transformer.

Starting

As part of the initialization process, the Data Transformer prompts for user credentials.

Fig. 6.2
QAD BI Data
Transformer Log-in
Screen

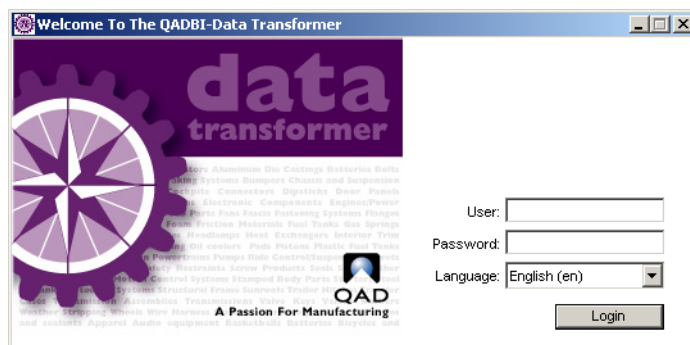

The credentials provided are authenticated against the users configured in the data warehouse database. When installed, the data warehouse database is configured with a single user:

User: dwh

Password: admin

You can add new users or change the default user with the Progress Data Dictionary tool connected to the data warehouse database. See “Update User Records” on page 237 for details.

The language selected from the drop-down list determines the language in which text labels and menus display.

Important If you chose to enable the support of multiple code page data sources during installation, a warning message displays after log-in. Ignore it and choose OK. It has no impact on your application and database. See “Update the ODBC Account” on page 163 for details.



Fig. 6.3
Log-In Warning

Navigating

Navigation within the Data Transformer provides up to three methods of accessing individual functions, depending on the type of action being performed:

- Menus on the Data Transformer main screen
- Toolbar commands
- Context-sensitive shortcut menus

The primary view of the Data Transformer is the main screen, which includes a toolbar, a menu bar, and a two-pane navigation tree.

The left pane shows the current structure of the data warehouse. When completely minimized, the top-level tree is a series of category folders. When completely maximized, it lists all the tables and custom scripts in the warehouse. Select a table to display its fields in the right pane.

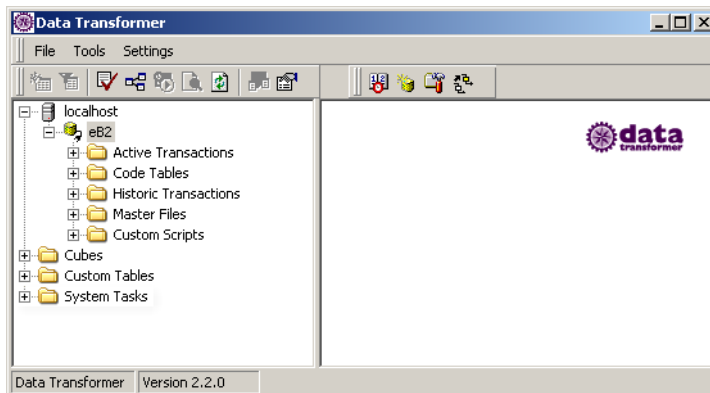


Fig. 6.4
QAD BI Data
Transformer Main
Screen

Some functions are available using any of these methods. For example, when a table is selected in the main menu, you can define subsets by clicking Subset on the Tools menu, clicking the Subset command on the toolbar, or right-clicking the table name and selecting Subset. Whichever method you use, the same Map Table screen displays.

Note Some screens include their own toolbars, typically containing two or three additional commands that apply only to the current function.

Other functions are available using only one method. For example, on the Indexes screen, you must click a command to add or delete an index, or to define a primary index.

Toolbar Commands and Menu Functions

Table 6.1 through Table 6.5 list the menu functions and related toolbar commands.

Table 6.1
Main Screen
Toolbar Commands

Command	Menu Function
	Replication Setup
	Subset
	Check Scripts
	Update Links
	Execute Now
	Preview Data (data warehouse)
	Refresh
	Field Mapping

Command	Menu Function
	Properties
	Task List
	Add Database
	Application Settings
	Rebuild Links

Table 6.2
Field Selection
Toolbar Commands

Command	Menu Function
	Field Properties
	Add Field
	Delete Field (custom tables only)

Table 6.3
Indexes Toolbar
Commands

Command	Menu Function
	Add Index
	Delete Index
	Designate as Primary Index
	Designate as Business Key Index

Command	Menu Function
	Delete Business Key Index
	Designate as Complete Business Key Index
	Designate as Incomplete Business Key Index

Table 6.4
Import Metadata
Toolbar Commands


Command	Menu Function
	Open and load metadata file
	Exit screen without loading metadata

Table 6.5
Tasklist Toolbar
Commands

Command	Menu Function
	Select All
	Select None

Note Toolbar commands are context sensitive; they are enabled only when the function they represent is appropriate to the current task or selection. Unavailable commands display in gray.

Other situations require you to right-click to display and choose available functions. For example, to assign tables to the data warehouse structure, you must right-click the appropriate database and choose the Select Tables command. There is no other access point for this function.

Source System Icons

The Data Transformer distinguishes items in the left pane of the main screen (the tree) using icons. Table 6.6 lists the icons and their descriptions.

Icon	Description	Icon	Description
	Server		Table with script error
	Schema holder		Subset
	Connected domain database		Validated code table
	Disconnected domain database		Non-validated code table
	Connected database or domain		Code table with script error
	Disconnected database or domain		Validated custom script
	Logical grouping		Non-validated custom script
	Source table prior to replication setup		Custom script with script error
	Validated table		Cube
	Non-validated table		Custom table
			Merged table

Table 6.6
Source System
Icons

Setting Up QAD BI Data Transformer

This section describes the steps necessary to connect to an MFG/PRO database that provides source data to the QAD BI analysis tools, as well as define the tables and fields that are included in the analysis models. Additionally, you control how and when data is replicated between this database and the data warehouse, which serves as the actual source of data used in analysis.

You can use one of the following methods to set up the Data Transformer:

- Perform a manual setup by defining tables and fields based on the MFG/PRO database schema.
- If you purchased one or more of the QAD-developed business models, load table definitions and scripts; then use the Data Transformer tools to fine-tune your environment as needed.

See “Using QAD-Provided Model Data” on page 224 for information.

Figure 6.5 summarizes the work flow used in the setup tasks. Subsequent paragraphs describe each task.

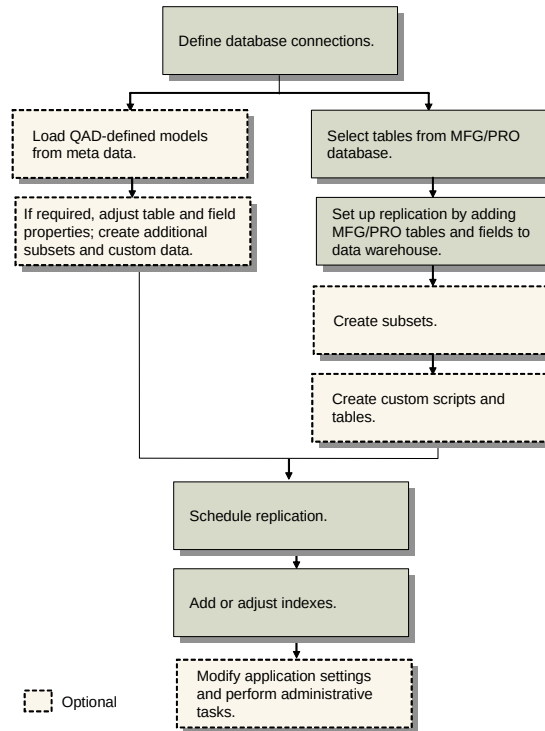


Fig. 6.5
QAD BI Setup
Work Flow

Define Database Connections

Note Many required connection settings are specified during QAD BI installation. See “Modifying Application Settings” on page 228 if you need to modify any of this information.

Before you begin mapping fields from the source MFG/PRO database to the data warehouse, you must define the connection parameters for the MFG/PRO database. The Data Transformer reads the source schema, which are used to define the tables and fields that make up the data warehouse structure.

To add a new source database connection, select File|Add Database or click the Add Database command. To edit an existing source database connection, right-click the database on the main Data Transformer screen and select Properties.

If you did not enable support for multiple data sources during installation, the code page of the source database must match the value specified for default encoding during installation. If you did enable this support, the code page of the source database must be either ISO8859-1 or the same code page that you selected during installation. See “Install QAD BI Data Transformer Files” on page 161 for details.

If you update existing properties, you must disconnect and reconnect to the database to use the new settings.

Fig. 6.6
Database Properties

Database Properties (705)

Database Properties

-Database

Physical Name: C:\qadbi\databases\leB2\qadddb.db Browse

Logical Name: eB2

☒ Active ☒ QADDB Version: eB2

-Connection Details

☒ Remote ☐ Single-User

Host: localhost Service: 26000

Other Parameters:

-Connection String

CONNECT -db 'C:\qadbi\databases\leB2\qadddb.db' -ld eB2 -H localhost -S 26000 -N TCP

OK Cancel

Physical Name. Specify the name of the database to connect.

Logical Name. Specify a logical database name that will be used to uniquely identify the database and its data within the data warehouse. This field can only be updated when a connection is first defined.

Active. Indicate whether this is an active connection. Databases marked as active are automatically connected when the Data Transformer is started. Tasks associated with databases marked as inactive are not executed during batch (non-interactive) replication.

QADDB. Indicate if this is an MFG/PRO database (Yes) or not (No). See “Domain Database Data Sources” on page 185.

Version. Select the MFG/PRO version associated with this database.

Remote. Indicate whether the database server is local or remote.

Host. When Remote is Yes, enter the host where the database server is running.

Service. When Remote is Yes, specify the service name or TCP-IP Port on which the remote database server is listening for database connections.

Single-user. Indicate if this is a single-user or a multi-user connection.

Other Parameters. Specify any additional Progress connection parameters to apply to this connection.

Connection String. The system displays the connection string based on the settings entered on the screen after the connection configuration has been accepted.

Domain Database Data Sources


The introduction of the domain concept in the MFG/PRO database provides flexible implementation options for supporting multiple business operations within a single database and eliminates the need for a single database-wide base currency or database-wide control settings. The domain is essentially a logical partition within a single database. Any number of domains can be set up in one physical database—each domain with its own base currency, chart of accounts, and operating controls.

You add the domain database just as any other database, indicating the version as eB2.1. The Data Transformer retrieves a list of all domains defined in the database; each domain is displayed as a subnode of the domain database. From that point forward, a domain is treated exactly as any other database in the system and represented with the Database Connected and Database Disconnected icons.

Important Only the domain database itself can be connected or disconnected. Individual domains cannot be connected or disconnected because they are physically realized in a single database. All domains are connected based on their domain database's status.

Text is appended to the logical names of the domain database and each domain in the tree, to indicate the type of source system—domain database or domain blade, which represents the individual domains within the database. Additionally, the Database Properties screen for an individual domain blade allows only the Active field to be modified. All other fields are read-only and based on the information entered for the domain database.

Fig. 6.7
Domain Database
in the Tree

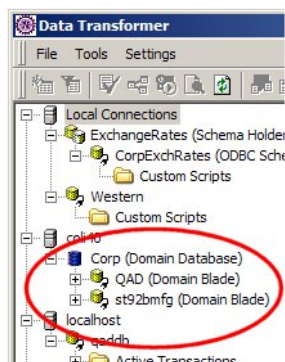

Non-Progress Data Sources

You can connect to non-Progress relational databases using the Progress DataServer technology. See the *Progress DataServer for Oracle Guide*, the *Progress DataServer for Microsoft SQL Server Guide*, or the *Progress DataServer for ODBC Guide* to learn about setting up and configuring DataServers in Progress.

Once the DataServer has been set up, you configure the connection to the schema holder database in the Data Transformer as described previously, leaving the QADDB check box cleared. The Data Transformer lists all of the schema images associated with the schema holder as child connections after the schema holder has been connected. You can right-click each of the child connections and choose Properties to configure connection information specific to the targeted schema image.

For example, if the schema image references an Oracle database, you will need to provide the following information in the Other Parameters field on the Connection Properties screen to use Oracle SQL*Net networking:

```
-U [ORACLE-USERNAME]@[ORACLE-SID]
-P [ORACLE-PASSWORD]
```

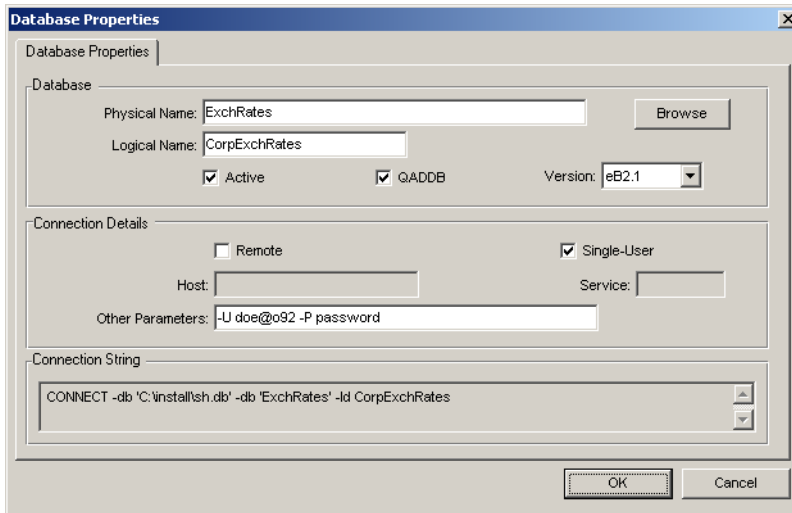


Fig. 6.8
Schema Image
Database Properties

When a schema holder is first added, the Data Transformer retrieves all defined schema images and creates additional connection records for each one. You can limit the selection of schema images to include using either the standard Delete function or the Select Schema Images screen.


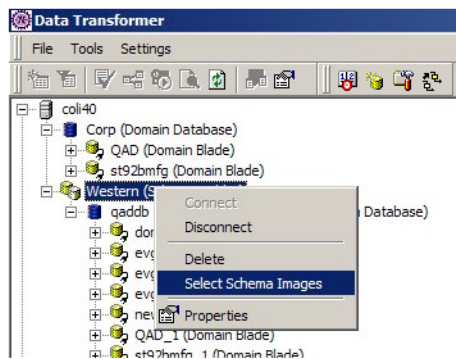


Fig. 6.9
Select Schema
Images Menu Item

Use the Select Schema Images screen to choose which schema images you want to work with and remove those you do not need to replicate. Move schema images from the Available Schema Images list to the Selected Schema Images list to have them show up in the tree.

Fig. 6.10
Select Schema
Images

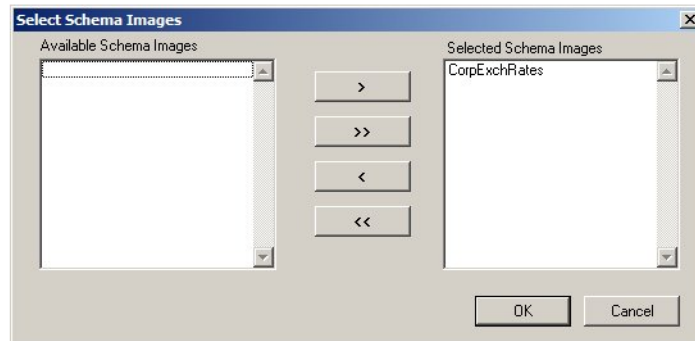


Manage Domains

When a domain database is first added, the Data Transformer retrieves all defined domains and creates additional connection records for each one.

These domains are created with the Active field set to false. You must set this field to true for any domains you want to replicate before they can be scheduled for the batch process.

Fig. 6.11
Database Properties
for an Individual
Domain

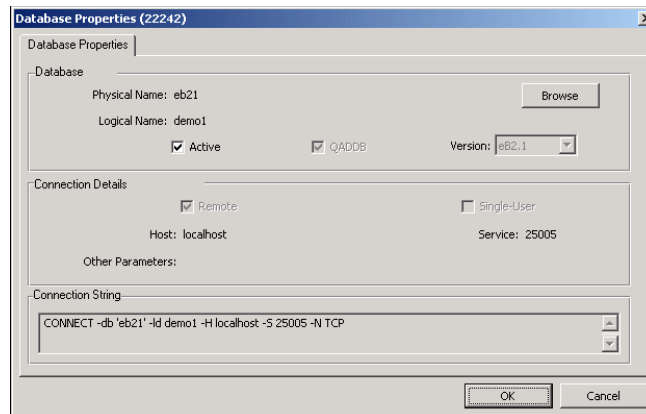

Select domains to include using either the standard Delete function or the Select Domains screen.

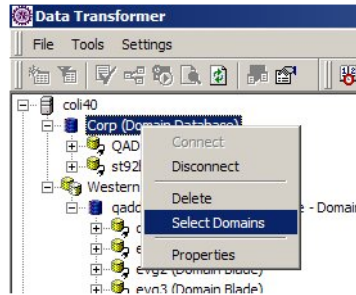


Fig. 6.12
Select Domains
Menu Item

Use the Select Domains screen to choose which domains you want to work with and remove those you do not need to replicate. Move domains from the Available Domains list to the Selected Domains list to have them show up in the tree.

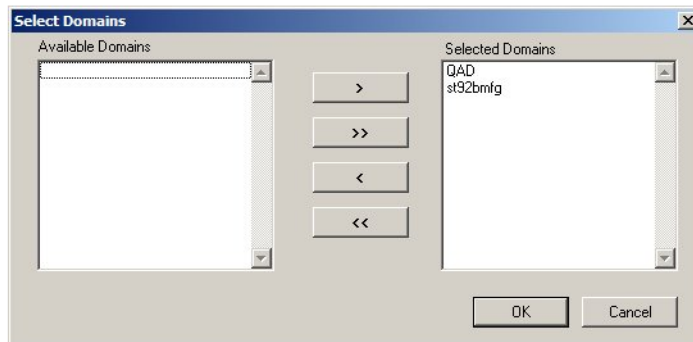


Fig. 6.13
Select Domains

Select Tables


To begin constructing the data warehouse, you first select the tables you want to add to the data warehouse from those in the connected data source.

Note If you loaded the table mapping structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default table selections.

To view the available tables, right-click the database icon in the left pane of the main Data Transformer screen. Then choose Select Tables.

The system scans the schema definitions of the connected database and displays the Select Source Tables screen illustrated in Figure 6.14.

Fig. 6.14
Select Source
Tables

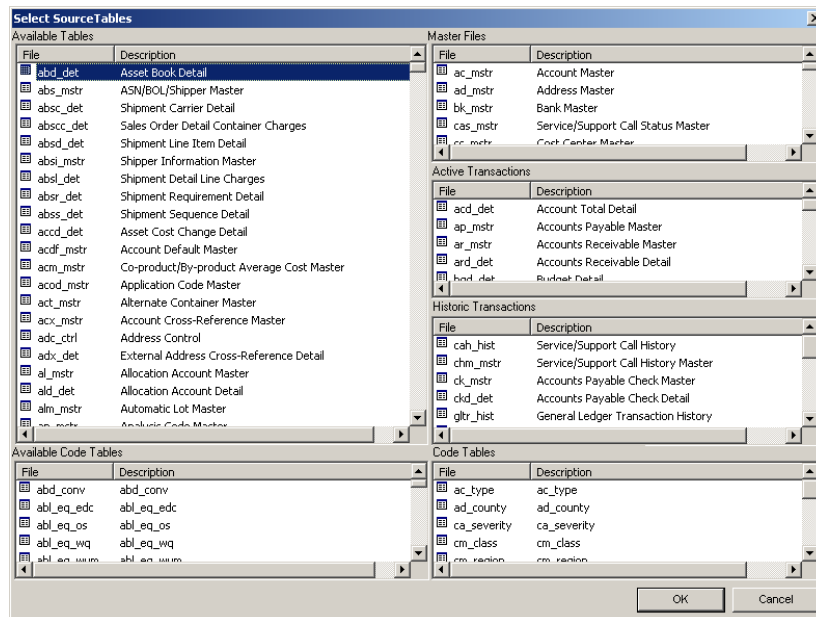

The selection screen consists of six frames:

- The two on the left side represent source tables from the source database. The system separates standard table listings from fields controlled through generalized codes when connecting to a QADDB database.
- The four frames on the right side represent destinations in the QAD BI data warehouse. These are shown in three groups—Master Files, Active Transactions, and Historic Transactions—as well as a fourth division for fields using generalized codes.

Move tables from the left to the right side using drag-and-drop. You can move tables from either frame on the left into any frame on the right.

If this is the first time you have selected tables from the database—unless you added tables by loading QAD-provided metadata—the frames on the right will be blank. Otherwise, tables you moved in earlier sessions display in the frames where they were placed. Once a table has been moved, it no longer displays in the source frame.

Note Drag-and-drop works in both directions. If you decide you do not want a table to be replicated to the data warehouse, you can move it back to the left side of the screen. If you save your changes and then decide you want to remove a table that has not yet been set up for replication, reopen the Select Tables screen and drag the table to its source location.

Important Removing a table from the right to the left once replication setup has been completed has no effect on the structure of the data warehouse. To remove a replicated table from the data warehouse, select it on the main screen and choose Tools|Delete.

When you finish selecting tables, close the screen. The system prompts you to save your changes.

The directory tree on the main screen updates to display a folder for each of the destination frames that have had tables added.

Set Up Replication

After selecting the tables to be included in the data warehouse, you must define how data should be extracted from the source table into the data warehouse. Activities include:


- Map the source table to a new data warehouse table and apply filters.
- Select fields to be replicated and create calculated fields.
- Define replication and scheduling modes.

Map Tables to Warehouse Tables

To start the replication setup, select a table from the main screen and choose Tools|Replication Setup. The Map Table screen displays (Figure 6.16).

Important You cannot choose this option for a table that has already been set up. Instead, select a table and choose individual options from the Tools menu for the function you want to perform. For example, choose Properties to modify the table mapping structure. If the table type is code table, you can use the WHERE clause to define a filter (Figure 6.15).

Fig. 6.15
Table Properties
Mapping Filter

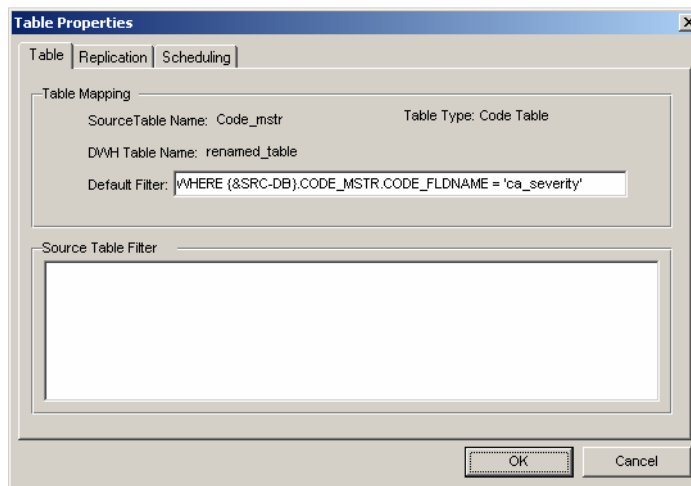

You can configure replication for all of the records in the table or for a subset of the records in the table by applying a filter. Filters can also be used to split a table into multiple table-like entities known as subsets, each of which can be a replication target. See “Create Subsets” on page 202 for details.

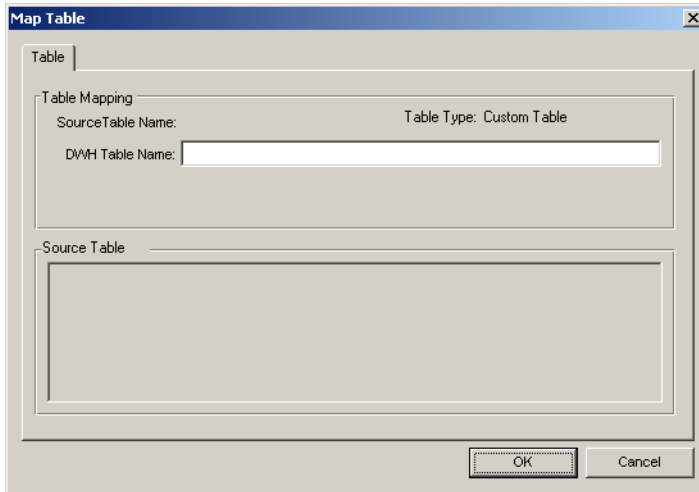


Fig. 6.16
Map Table

Source Table Name. The system displays the source table name.

Table Type. Read-only field that displays the table type—active, historic, master, or code. The system categorizes the tables based on this value.

DWH Table Name. Enter the name of a new data warehouse table that will be created to hold data from the source table.

Source Table Filter. Enter Progress code to filter records that are replicated to the data warehouse. Syntax for the filter always has the same format:

```
WHERE {&SRC-DB}.tablename.fieldname [operator] <value>
AND/OR {&SRC-DB}. tablename.fieldname [operator] <value>
[Operator] can have the following values: = , >= , <= , <> , matches ,
begins.
```

When this is blank, all records are replicated. When you save your changes, the system validates the syntax.

Click OK to save your changes and display the field mapping screen.

Map Fields to Warehouse Fields

Use the Field Selection frame to select the fields from the source table that will be replicated to the data warehouse table.


Note After initial replication setup, access this function by selecting a table and choosing Tools|Field Mapping.

Note If you loaded the database structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default field mapping structure.

The first column indicates whether a field is included in the replication process. When a field is selected on this screen, values are copied from the source database to the data warehouse during replication.

Important When you first set up table replication, the DB-NAME (and REC-ID for Progress data sources) fields are automatically configured. These system-defined fields are used to maintain links between the data source and the data warehouse. You cannot deselect them.

Fig. 6.17
Field Selection

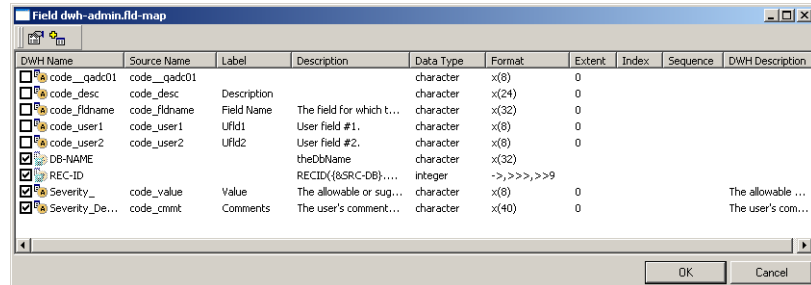

Specifying Field Properties

To define the properties associated with each field, select it and click the Properties command.

Note You can also define custom calculated fields by clicking the Add Field command. The system displays a Field Properties screen with all data fields blank and input enabled.

Fig. 6.18
Field Properties

DWH Field Name. Enter the name used to represent this field in the data warehouse. The default is the MFG/PRO schema field name.

Note You also can rename a field directly on the field selection screen by selecting its name and overtyping it.

Field Type. The system displays the field data type from the MFG/PRO schema. You cannot change it.

Convert String to Upper Case. If the field type is Character, set this to Yes to convert the field values to upper-case in the ETL script. This can be used to rationalize data that is entered in mixed cases in the data source for use in Cognos PowerPlay (a case-sensitive tool).

Description. Enter a text description of the field.

Expression. The system displays the field name or formula associated with the field.

Click OK to save the properties of an individual field. When you finish specifying field properties for the table, click OK to save your configuration.

The system validates each field record for syntax.

- Valid: A green triangle on the table icon on the main screen indicates that replication setup is complete for the table.

- Invalid: A yellow exclamation point displays on the table icon and a message indicates the nature of the error.


Important To modify field properties for tables that have already completed replication setup, you cannot access the Field Mapping function through the Replication Setup screen. You must first select the table on the main screen, and then choose Tools|Field Mapping. Select the field you want to edit and click the Field Properties command.

Define Replication Method

To specify how the system replicates data between the data source and the data warehouse, select a table on the main screen and choose Tools|Properties. Then click the Replication tab.

Important The Properties tool is available only for tables that have completed the replication.

Fig. 6.19
Table Properties,
Replication Tab

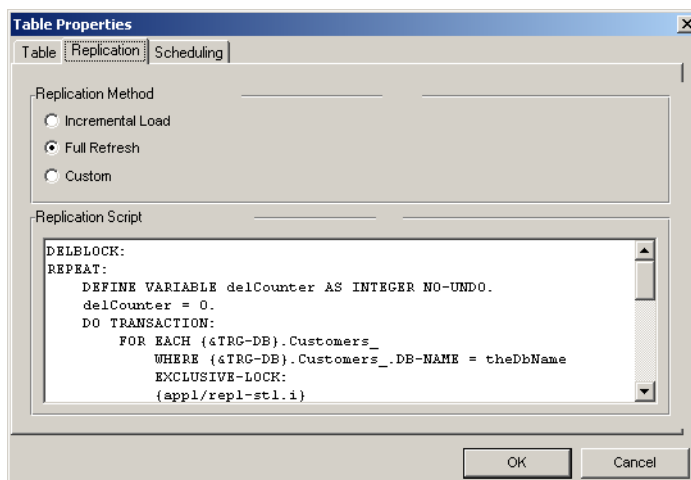

Note If you loaded the table warehouse structure from QAD-provided metadata, you do not have to use this procedure unless you want to modify the default setup.

Choose one of three replication methods:

- Incremental Load. Only records that have never been replicated to the data warehouse are selected for replication. This method is typically used for tables that contain historical records such as tr_hist and

ih_hist, or a combination of historical and active transaction records such as wod_det or pod_det. Incremental load generally is not as time consuming as a full refresh.

Important The replication process for incremental load does not determine whether a record has been modified since the last replication—only that it has been created. Be aware that using this method for records that are commonly updated—master records, for example—can create data synchronization problems between MFG/PRO and the data warehouse.

- **Full Refresh.** The system clears all existing fields in the data warehouse for the data source and completely replaces the contents. This is typically used to replicate master data—often including tables that do not contain more than 10,000 records. It is the default for newly defined tables.
- **Custom.** Whether a table is replicated depends on some user-defined condition; for example, replication only takes place when an item is associated with a product line.

The system displays a default Progress replication script based on the selected method. If you modify the code, Replication Mode is automatically set to Custom. When you click OK, the system validates the syntax. If there are errors, the table icon on the main screen displays a yellow warning indicator to indicate that a problem exists.

Replicate Data

You can synchronize data between a data warehouse table and the associated MFG/PRO table using two methods:

- Automatically, by setting up scheduling for each table
- Manually, by selecting the table on the main screen, then clicking Execute Now on the Tools menu

The following sections describe these methods.

Scheduling Automatic Replication

Automatic replication takes place using either a serial or parallel strategy. In serial replication, each task is processed sequentially based on its defined sequence—that is, its priority. With parallel replication, a pool of

processors is created and each processor is assigned a task to process. As a processor finishes a task, it is assigned another task to be processed until all tasks have been performed with respect to sequence order.

Note The processor pool size is set to one less than the value of the Minimum and Maximum Servers settings on the AppServer properties screen. See “AppServer Pool Size” on page 237 for details.


In order to use parallel replication, the Progress AppServer must be installed and configured on the same machine as QAD BI Data Transformer. For information on setting up and using parallel replication and configuring the AppServer, see “QAD BI Parallel Replication Setup” on page 244.

Use the Scheduling tab to define when replication takes place for each table in the data warehouse. You can set up different scheduling methods for individual tables based on the frequency of changes to the source table.

Important Automatic scheduling uses the Windows Task Scheduler to start a QAD BI process to review the scheduled replication tasks on a periodic basis.

See “Set Up Windows Task Scheduler” on page 239 for information.

Fig. 6.20
Table Properties,
Scheduling Tab

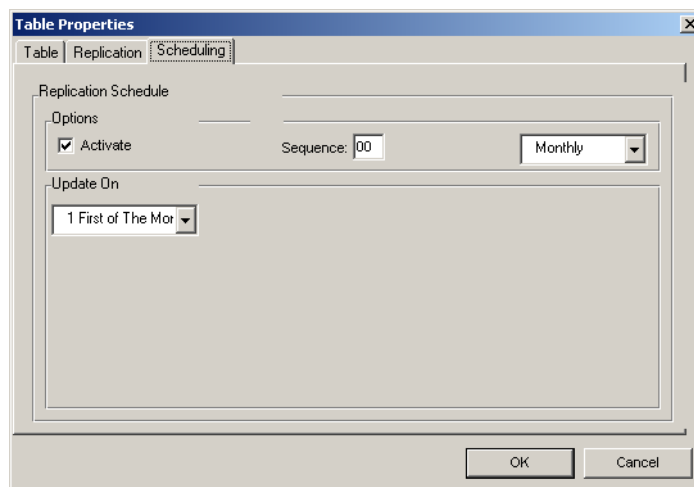

Activate. Select this field to have automatic replication take place on the specified schedule. When Activate is not selected, you must replicate this table manually using Tools|Execute Now.

When a database is marked as Inactive, you cannot change the Activate check box. To set the database's Active/Inactive status, use the Database Properties screen.

Sequence. Specify the relative order in which the task associated with this table should be replicated. Tasks are executed from low sequences to higher sequences. Tasks that share the same sequence may be executed in any order among themselves. In general:

- Tasks that pull data from sources into the data warehouse should be scheduled to precede tasks that operate on data within the data warehouse.
- Tasks that generate Cognos PowerCubes should be scheduled to run after all other tasks.

For a more detailed discussion of setting the sequence for a replication task, see “Setting the Replication Task Sequence” on page 255.

Frequency. Specify how often the replication task for this table should be run. Options are:

- Daily (the default). The table is replicated each day when the Windows scheduler starts up.
- Weekly. The system displays a list of weekdays; select the days you want this table to be replicated. Use Ctrl+Click to select more than one list entry.
- Monthly. The system displays available dates, as well as First of the Month and Last of the Month options.

Note The Windows Task Scheduler should be configured to run the QAD BI process at least as frequently as the most frequent replication task. For example, if the Windows Task Scheduler is set to run every week, even if a table replication task is scheduled to run every day, it will only be run every week.


Running Manual Replication

In addition to setting up scheduled replication processes, you can refresh a data warehouse table with updated values from the source database at any time.

Select the table on the main screen and choose Tools|Execute Now. Click Start on the Record Processing Status screen. The system runs the replication task, listing status messages to indicate its progress.

Note The moving status bar at the top of the screen will not necessarily fill completely to the right when the replication task completes. Since each new status message is added to the top of the list, you can determine that replication is finished when the Total Update Time message displays.

Fig. 6.21
Record Processing
Status

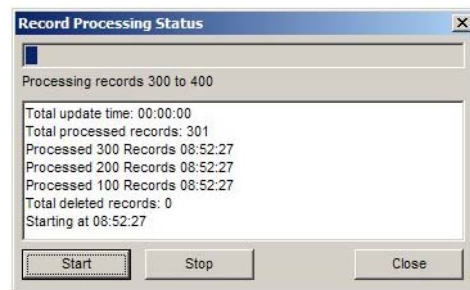

The buttons at the bottom of the screen control this function:

- Click Start to begin replication.
- Click Stop to end replication.

Note Replication may not stop immediately when you click the button depending on the nature of the script being executed.

- Click Close to exit the screen.

Rename Table

When you perform Replication Setup, tables are created in the data warehouse. If necessary, you can change a table name by using the Rename Table function on the Data Transformer|Tools menu. This function opens the Rename Table screen.

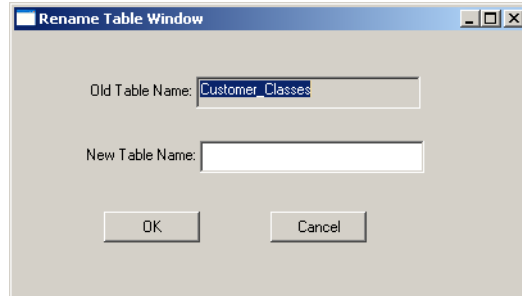


Fig. 6.22
Rename Table

If the old table name cannot be found in the data warehouse, an error message is displayed. An error message also displays if a user enters:


- A blank table name
- Reserved words
- A table name that is already in use

When you click OK and Automatically Check ETL-Scripts and Automatically Refresh Linked Tables is selected in Data Transformer|Settings|Applications Settings, the validation and linking of scripts and tables is automatically performed. See “Modifying Application Settings” on page 228 for details.

When the validation is successful and the linked table refreshed, the new table name is displayed on the main directory tree and a green triangle placed on the table icon. If there is an error, a yellow exclamation point appears on the table icon.

After successfully renaming a table, the field mapping screen is displayed.

Fig. 6.23
Field Mapping

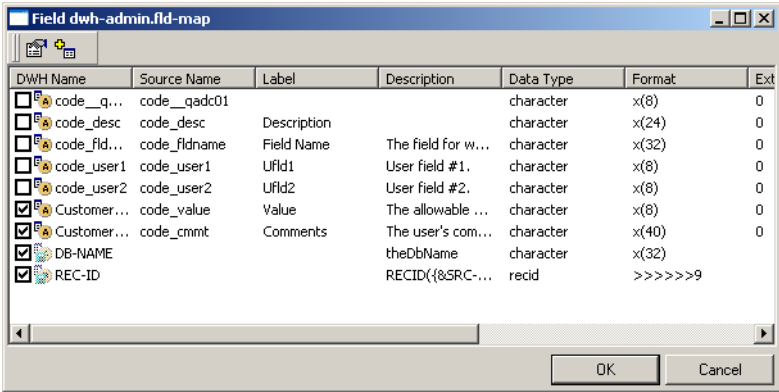

From the field mapping screen, select the fields in the source table that you want to replicate to the data warehouse table. Then click OK.

The system validates each field record for syntax and, when successful, places a green triangle on the table icon on the main screen to indicate that replication setup is completed for that table. If validation fails, a message is displayed to indicate the nature of the error, and the table icon is set to a yellow exclamation point.

Create Subsets

Within the data source, data from different functional areas is sometimes stored in the same table. For example, the MFG/PRO transaction history table (tr_hist) stores data related to sales orders—but it also contains many other types of business documents as well. You can define subsets to isolate the data of interest in a data warehouse table.

In QAD BI Data Transformer, defining a subset is similar to setting up a table for replication. The main difference is that the subset definition includes a filter specification to select the area of interest in the source table.

Instead of Tools|Replication Setup, choose Tools|Subset.

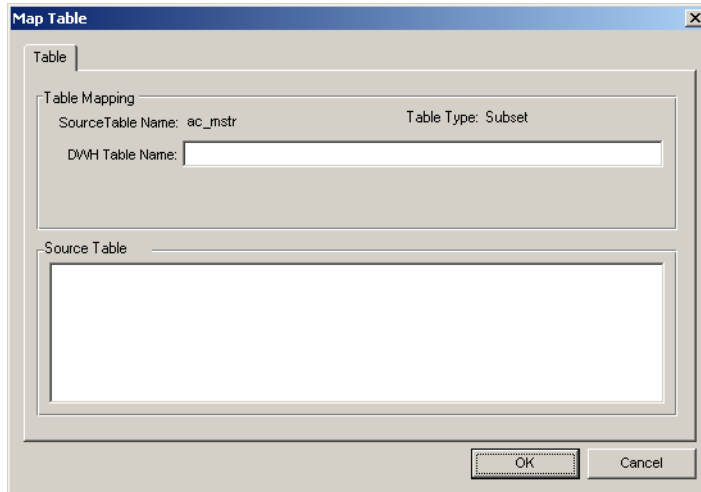


Fig. 6.24
Subset Definition

Table Type defaults to Subset; you cannot change it. Specify the data warehouse table name. Then enter Progress code to filter the records that should be replicated in the data warehouse.

Syntax for the filter always has the same format:

```
WHERE {&SRC-DB}.tablename.fieldname [operator] <value>
AND/OR {&SRC-DB}. tablename.fieldname [operator] <value>
```

[Operator] can have the following values: = , >= , <= , <> , matches , begins.

After defining the subset, you can continue to define fields and replication settings just as in the standard replication setup.

Add Indexes


When you select tables for the data warehouse, the system disregards any indexes defined in the data source. Instead, you can custom-design indexes for each table after adding it to the warehouse. This lets you test the performance of your data models first, then add indexes that are appropriate to your specific needs.

Note You can view a list of indexes defined in the data source by selecting the table on the main screen and choosing Tools|Source indexes.

To add an index to a table, select the table on the main screen and choose Tools|Indexes. The Indexes screen displays any existing indexes.

Note By default, the system creates a primary index for each table called DB-NAME. It includes the system-maintained DB-NAME field (and REC-ID for Progress data sources). You cannot modify or delete this index, unless you create a new index and set it as the primary index.

Fig. 6.25
Indexes

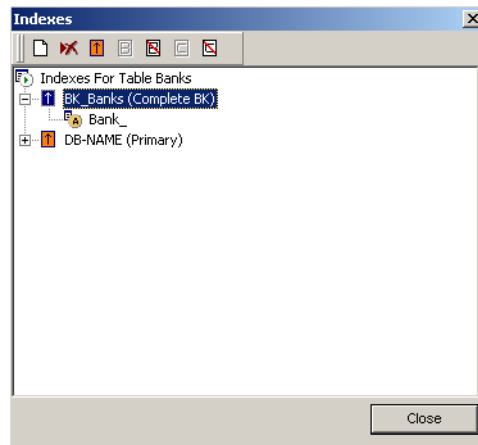

Use the commands at the top left to add or delete an index, or designate it as primary.

When you click the Add Index command, the screen illustrated in Figure 6.26 displays.

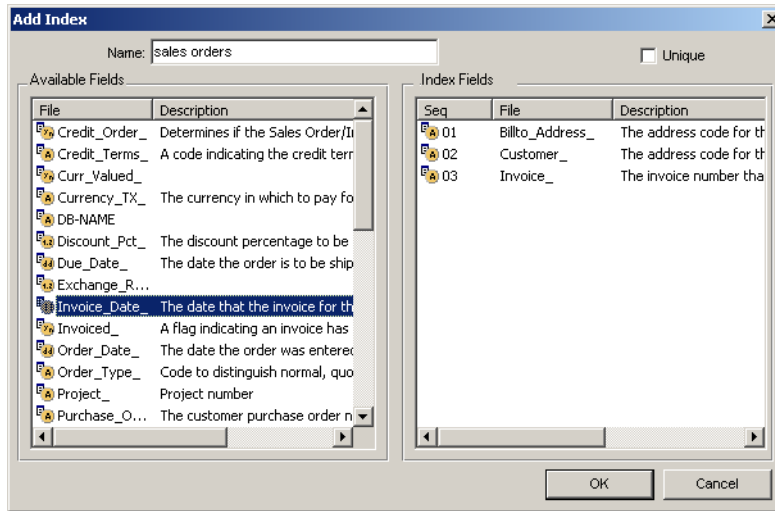


Fig. 6.26
Add Index

Enter a name for the new index. The left pane displays all the fields in the data warehouse table or subset that are available for indexing. Drag-and-drop fields to the right pane to include them in the index.

Important After adding or deleting an index, you should validate the synchronization script using these steps:

- 1 Select the updated table on the main screen.
- 2 Choose Tools|Generate ETL-script.
- 3 Choose Check Script.

If the new index validates properly, a green triangle displays on the table icon. Otherwise, a yellow warning icon displays.

Add Business Key Indexes

For Progress data sources, QAD BI Data Transformer uses the DB-NAME and REC-ID fields to maintain links between the data source and the data warehouse. However, this approach is not always reliable in some circumstances:

- When the user dumps and loads tables in the source database, the REC-ID values of the records in these tables are changed.
- Data is archived and no longer exists in the source database.

In both cases, the links between the data source and the data warehouse are broken and can no longer be used for replication purposes. Continuing to perform data replication without first rebuilding the links may cause data corruption in the data warehouse.

This is where business key index comes into play. You can designate indexes that can represent unique identifiers of records as business key indexes to construct more reliable links between the data source and the data warehouse. You can then use the business key indexes to synchronize the REC-ID values between the source and target databases to re-establish the links based on the REC-ID field for replication purposes.

Note REC-ID cannot be designated as business key index due to the reason stated previously.

You can only define one business key index for a table. If you are certain the business key index you define can uniquely identify each record, designate it as a complete business key index; otherwise, designate it as an incomplete business key index to have the system validate uniqueness and maximize accuracy when rebuilding data links.

Note When processing incomplete business key indexes, the system maximizes accuracy by performing additional operations during data link update, which may require longer execution time.

To designate an index as a business key index in a table, select the table on the main screen and choose Tools|Indexes. The Indexes screen displays any existing indexes.

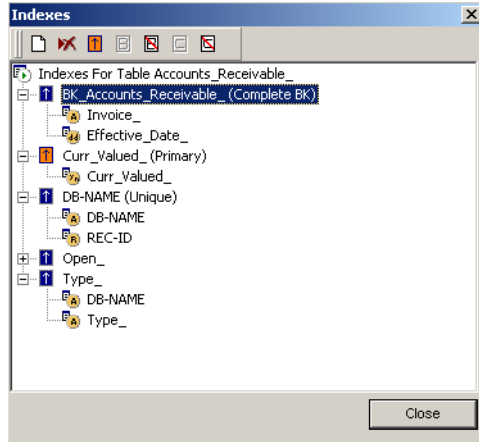


Fig. 6.27
Business Key
Indexes

Use the commands at the top left to designate an index as a complete business key index or incomplete business key index.

- To designate an index as a complete business key index, select the index and click the Set to BK icon.
- Use the Complete BK and Incomplete BK icons to switch the business key index between complete and incomplete.
- To remove the business key index, select the index and click the Cancel BK icon.

Note Custom tables do not support business key indexes. Business key index command icons are always grayed-out in the Indexes window of a custom table.

Preview Data

You can view data both after it has been replicated to the data warehouse and in its original form, in the data source.

First, select a table on the main screen. Then:

- To view the data records in the data warehouse, choose Tools|Preview Target Data.
- To view the source database records, choose Tools|Preview Source Data.

Figure 6.28 shows the contents of the address master (ad_mstr) table in MFG/PRO, as well as the corresponding Address table in the data warehouse. Note that the MFG/PRO table shows all fields in the schema, identified by the schema field names; the data warehouse displays only the mapped fields.

To sort the records based on values in a specific column, click the column heading.

Fig. 6.28
Table Preview

Account	Cost_Center	Curr_Valued	DB-NAME	Entity	Fiscal_Period	Fiscal_Year	Fiscal_Year_Percent
1040		yes	eB2	1000	5	1992	199205
1040		yes	eB2	1000	6	1992	199206
1040		yes	eB2	1000	5	2001	200105
1040		yes	eB2	1000	6	2001	200106

acd_acc	acd_amt	acd_cc	acd_cr_amt	acd_cr_curr_amt	acd_curr_amt	acd_dr_amt	acd_dr_curr_amt
1040	5000000		0	0	0	5000000	0
1040	12308.3		0	0	0	12308.3	0
1040	22259		-22000	0	0	44259	0
1040	700000		0	0	0	700000	0
1040	233333		0	0	0	233333	0
1040	90000		-104373.8	0	0	194373.8	0
1040	5000000		0	0	0	5000000	0
1040	150000		-153198.9	0	0	303198.9	0
1040	5158900		0	0	0	5158900	0
1040	10000000		0	0	0	10000000	0
1040	25000		-27217.81	0	0	52217.81	0
1040	125000		0	0	0	125000	0
1040	10000		-11123	0	0	21123	0
1040	5000000		0	0	0	5000000	0
1040	39.94		0	0	0	39.94	0
1040	54272.5		-52149	0	0	106421.5	0
1040	5969775.1		-6000	0	0	5975775.1	0
1040	10000000		0	0	0	10000000	0
1040	5000000		0	0	0	5000000	0
1040	5000000		0	0	0	5000000	0
1040	5000000		0	0	0	5000000	0
1060	-2449.93		-2449.93	0	0	0	0
1060	500000		0	0	0	500000	0
1060	-2449.99		-2449.99	0	0	0	0
1060	500000		0	0	0	500000	0
1060	500000		0	0	0	500000	0
1060	1000000		0	0	0	1000000	0
1060	500000		0	0	0	500000	0
1060	500000		0	0	0	500000	0
1060	1000000		0	0	0	1000000	0
1060	500000		0	0	0	500000	0
1060	500000		0	0	0	500000	0
1060	500000		0	0	0	500000	0
1060	-3336.3		-3336.3	0	0	0	0

Delete Target Data

You can delete data records after they have been replicated to the data warehouse. You can delete all data records from a table while preserving its table mapping information.

Choose Delete Target Data from the Data Transformer|Tools menu to open the Record Deletion Status screen.

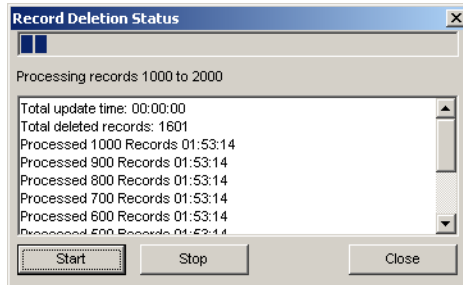


Fig. 6.29
Delete Data
Records from Data
Warehouse

To start the deletion process, click Start. If it is necessary to stop the deletion before completion, click Stop.

Validate Tables

The Validate Table function on the Data Transformer|Tools menu lets you validate table and field mappings between source tables and data warehouse tables.

Validation takes place in two phases. The system first checks for valid tables; then it checks each field mapping between source table and data warehouse table.

When checking for valid tables, the system determines whether a table has changed, is unchanged, or is missing. This information displays in the Source Table Status and DWH Table Status columns of the Table Mapping frame shown in Figure 6.30.

When checking field mappings, the system determines the field mapping status and displays this information in the Field Mapping frame. If any field mapping status is Mismatching or Invalid, the status Corrupted displays in the Status column of the Table Mapping frame. You should fix the field mapping problems before attempting to recreate a table.

Using this status information, you can detect and recover any corrupted mapping that may have occurred after activities such as database replication.

Fig. 6.30
DWH Table
Mapping Validation

Status	Description	Source DB Logical Name	Source DB	Source Table	DWH Table	Source Table Status	DWH Table Status
CORRUPTED		qsddb	C:\projects\qsdb\build\trunk\d...	cm_mstr	Customers_	CHANGED	UNCHANGED

Status	Description	Source Field	DWH Field	DWH Expression	Function
☒ OK			DB-NAME	theDbName	
☒ OK			REC-ID	RECID((&SRC-DB) cm_mstr)	
☒ MISMATCH...	format mismatching x(8) to x(12);	cm_addr	Customer_		CAPS
☒ MISMATCH...	DWH field 'Bilto_Address_' is missing;	cm_bill	Bilto_Address_		
☒ OK		cm_class	Customer_Class_		CAPS
☒ OK		cm_cr_hold	Credit_Hold_		
☒ OK		cm_region	Customer_Region_		
☒ OK		cm_slapen(1)	Salesperson_1_		CAPS
☒ OK		cm_slapen(2)	Salesperson_2_		CAPS
☒ OK		cm_slapen(3)	Salesperson_3_		CAPS
☒ OK		cm_slapen(4)	Salesperson_4_		CAPS
☒ OK		cm_sort	Sort_Name_		
☒ INVALID	Source field 'cm_type' is missing!;	cm_type	Customer_Type_		CAPS

Table Mapping Display and Functions

The following fields display in the Table Mapping frame:

- Status.** Displays the status of the table, based on the status of associated fields:
 - OK: No invalid or mismatched field mappings exist.
 - Corrupted: At least one invalid or mismatched field mapping exists.
- Description.** This field displays detailed table error information, such as a table is missing.
- Source DB Logical Name.** The alias for the source database.
- Source DB.** The physical path to the source database.
- Source Table.** The name of the table from the source database.
- Source Table Status and DWH Table Status.** These status fields indicate if mappings between the source and data warehouse are new, unchanged, or missing:
 - Unchanged: Field mappings are unchanged.
 - Changed: Field mappings have changed. Either source table fields or data warehouse fields have changed.

Missing: Either the source table or the data warehouse table is missing.

Use the two buttons in the Table Mapping frame to delete tables or recreate them.

Deleting Table Mapping

Clicking the Delete Table Mapping button lets you delete both table and field mapping information. The data warehouse table is also deleted.

Recreating Data Warehouse Table

You can use the Recreate DWH Table button to resolve any mismatching between source and data warehouse tables. You can also use it to delete data from the data warehouse table.

When you click the Recreate DWH Table button, the system:

- 1 Deletes all mapped data from the data warehouse table and deletes the data warehouse table
- 2 Creates a data warehouse table based on the original table mapping stored in data warehouse-admin

Before recreating a data warehouse table, ensure that you have deleted any field mappings with the status of Invalid shown in the Field Mapping frame.

Field Mapping Display and Functions

The following fields display in the Field Mapping frame:

Status. Status information is displayed as follows:

OK: Both source and data warehouse fields exist and are consistent.

Invalid: The source table field cannot be found and the field mapping must be deleted.

Mismatch: The source table field or the data warehouse field has changed and are inconsistent. This field mapping can be rebuilt by overriding the target field with the source field.

Description. For mismatched or invalid fields, a brief description of the error.

Source Field. The name of the field in the source table.

DWH Field. The name of the field in the data warehouse table.

DWH Expression. The expression used to calculate the value that populates the data warehouse field.

Function. Currently not used.

When you click Delete Field Mapping after selecting the relevant check boxes, the selected field mapping information stored in data warehouse-admin is deleted but the field data in the data warehouse tables is retained.

When you click Close after performing Delete Field Mapping, the system performs the Recreate DWH Table function.

Create Custom Tables

Not all tables in the data warehouse have to be based on table definitions from the connected data sources. You can create custom tables that exist only in the data warehouse.

Custom tables are populated with data using custom scripts. They can contain virtually any data the designer wants to put in them.

To create a new table, right-click the Custom Tables folder on the main screen and select Create Table. The Map Table screen displays.

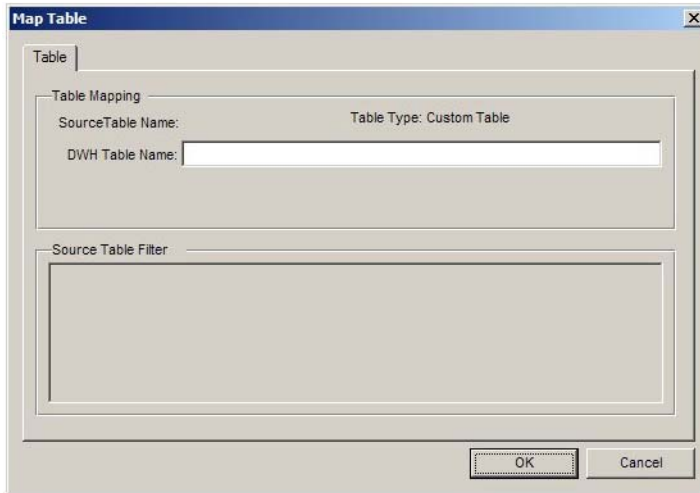


Fig. 6.31
Custom Table
Setup

While the overall process is similar to mapping an MFG/PRO table to the data warehouse, you can only access one field—DWH Table Name. Table Type is automatically set to Custom Table, and you cannot define code to filter records because a custom table is not directly based on any source table.

Click OK to display the field mapping screen. Again, navigation is similar to standard table setup. Use the Field Properties and Add Field commands in the upper left corner of the screen to update an existing field or add a new one.

You can define a field to be any data type supported by Progress. However, once you have initially specified a data type, you cannot change it. Instead, delete the field and add a new one with the correct data type.

Once you have created the custom table and defined its fields, you can define indexes for the table using the Indexes right-click option while the custom table is selected in the tree.

Create Custom ETL Scripts

Because of the way some types of data are stored in data sources, data is not always directly usable as management information. In such cases, Data Transformer lets you reference custom ETL scripts that you have

written to convert MFG/PRO data into warehouse data more appropriate for use in analysis. Custom scripts are associated with custom tables, which were described in the previous section.

Important You must be familiar with writing Progress queries to create custom scripts. See the Progress documentation for information.

Note Custom ETL scripts are used to restructure data in the data warehouse. A related type of script—a custom replication script—is used when the Replication Method of a table replication task is set to Custom. It moves data into the data warehouse using custom extraction logic.

Script Guidelines

For a custom script to be usable by QAD BI, it should follow several guidelines:

- Field references must include the full namespace reference to the field, from the database level down; for example, `datasasename.tablename.fieldname`.
- The database name must be the logical database name for the data warehouse, followed by the letter q; for example, `dwhq`. The following shows an example of a correct field reference:
`dwhq.Balance_Sheet_totals_.Cost_Center_`
- For scripts that reference the data warehouse, include the following alias as the first line to be used in the script implementation:
`&SCOPED-DEFINE TRG-DB DWHQ`
- Similarly, for scripts that reference the source database, include the following alias:
`&SCOPED-DEFINE SRC-DB SRCDB`
- Check the syntax of the saved script using the Progress tools or use the Check Scripts function after adding it.

Figure 6.32 shows an example of a completed script.

```

&SCOPED-DEFINE TRG-DB DWHQ

define variable tooearly like dwhq.Sales_Performance_.Too_early no-undo.
define variable ontime like dwhq.Sales_Performance_.On_time no-undo.
define variable toolate like dwhq.Sales_Performance_.Too_late no-undo.

for each dwhq.Sales_Performance_ exclusive-lock:
  delete dwhq.Sales_Performance_.
end.

for each dwhq.Transaction_History_ NO-LOCK
  where dwhq.Transaction_History_.tr_type = "ISS-SO",
  each dwhq.Invoice_Lines_ NO-LOCK
    where dwhq.Invoice_Lines_.Invoice = dwhq.Transaction_History_.tr_rnks
    and dwhq.Invoice_Lines_.idh_line = dwhq.Transaction_History_.tr_line
    and dwhq.Invoice_Lines_.idh_due_date < ?
  break by dwhq.Transaction_History_.Order_number by dwhq.Transaction_History_.tr_line:

  if first-of(dwhq.Transaction_History_.tr_line) then
  do:
    ASSIGN
      tooearly = 0
      ontime = 0
      toolate = 0.
  end.

  if dwhq.Transaction_History_.tr_effdate < dwhq.Invoice_Lines_.idh_due_date then
    tooearly = tooearly +
      ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).
  else if dwhq.Transaction_History_.tr_effdate = dwhq.Factuur_Regels_.idh_due_date then
    ontime = ontime +
      ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).
  else
    toolate = toolate +
      ((-1 * dwhq.Transaction_History_.tr_qty_chg) / dwhq.Invoice_Lines_.idh_qty_ord).

```

Fig. 6.32
Sample Custom
ETL Script

Adding Scripts to Data Transformer

To add a custom script, right-click the Custom Scripts folder on the main screen and select Add ETL-Script.

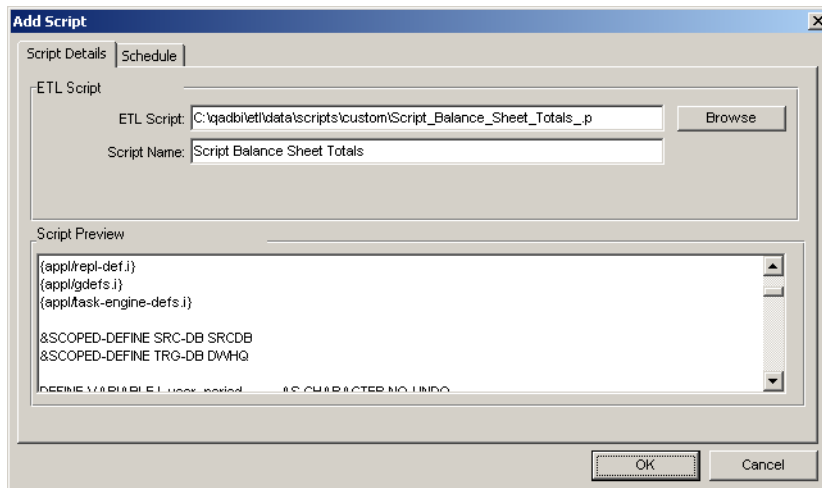


Fig. 6.33
Add Custom Script

Click Browse to navigate to the directory containing the Progress script. The system displays the contents of the script. You can update the default script name as needed. However, you cannot update the content of the script itself on the preview screen.

On the Schedule tab, specify when this script is run. This is the same as scheduling replication for standard tables.

For a more detailed discussion of setting the sequence for a replication task, see “Setting the Replication Task Sequence” on page 255.

Merge Data from Multiple Databases

You can use the merge feature in the Data Transformer to consolidate data from multiple data sources that share the same underlying table definitions. After defining replication for one database, use the Merge command to configure additional databases to reuse the replication configuration of the configured database.

To merge in data from a data source, right-click the data source and select Merge Tables. The system displays the data warehouse structure associated with all other data sources.

Fig. 6.34
Merge Tables



To use the same replication configuration as another data source, select the check box associated with the replication tasks you want to reuse.

When you choose Settings|Task List, the system displays a separate ETL script for each database.

Use the Task List

The Task List provides a consolidated view of all scheduled tasks (whether activated or not) on a single screen. It is an alternative to selecting each element in the application tree and scheduling it using the Properties function. Use it to select and deselect elements scheduled for automated replication.

To view the task list, click the Task List command on the toolbar.

You can select or deselect tasks individually. To select or deselect the entire list at once, use the Select All and Select None commands.

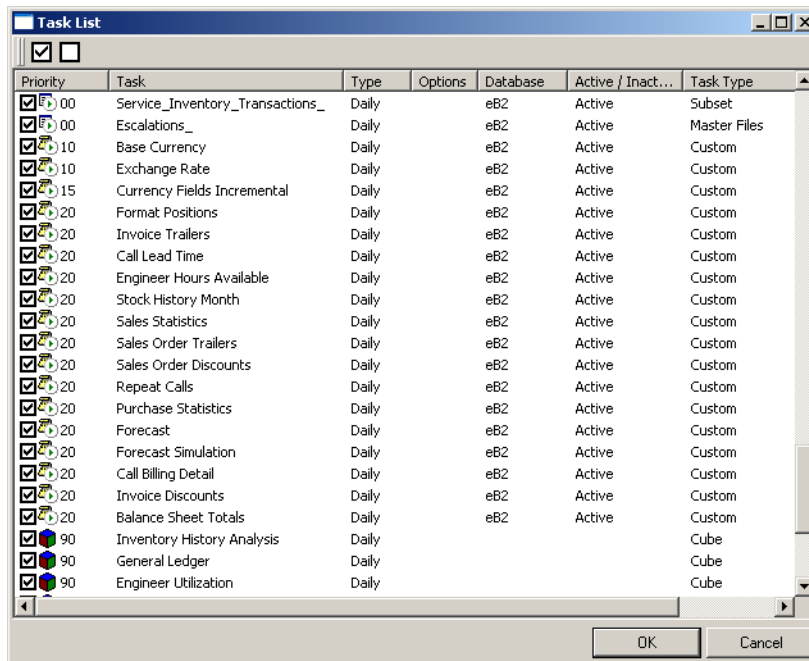


Fig. 6.35
Task List


Database Status

A source system (database) can be either active or inactive, as defined on the Database Properties screen. When a source system is marked as inactive, none of its tasks will execute under the batch replication process.

You can determine if a task is from an inactive database by viewing the Active/Inactive column in the Task List or by observing the icon for the task. Inactive tasks display a grayed-out icon. See page 184 for details.

When a database is marked as Inactive you cannot change the Activate check box. To set the database's Active/Inactive status, use the Database Properties screen.

Fig. 6.36
Database Status in
the Task List

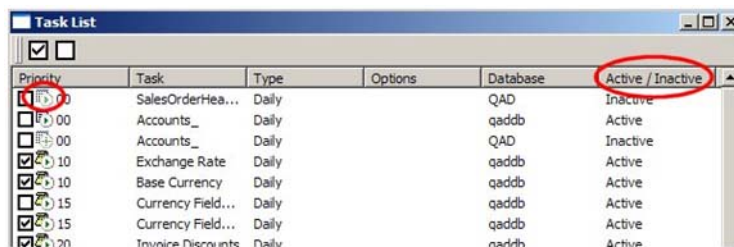

Priority	Task	Type	Options	Database	Active / Inactive
100	SalesOrderHea...	Daily		QAD	Inactive
100	Accounts_	Daily		qadddb	Active
100	Accounts_	Daily		QAD	Inactive
10	Exchange Rate	Daily		qadddb	Active
10	Base Currency	Daily		qadddb	Active
15	Currency Field...	Daily		qadddb	Active
15	Currency Field...	Daily		qadddb	Active
20	Inventory Discrepancies	Daily		qadddb	Active

Update Links

In QAD BI, Microsoft Access serves as the query layer between Cognos PowerPlay and the data warehouse. Use the Data Transformer Update Links command to synchronize table references in Access with the tables and fields available in the data warehouse.

Important You should update links anytime you add or update a table in the warehouse.

You can run the command either for an individual table or for the entire data warehouse by choosing the appropriate icon from the main screen directory tree and clicking the Update Links command:

- For an individual table, select its icon.
- For the entire warehouse, select the database icon.

After a metadata import, scripts can be validated and links updated automatically based on settings defined in Settings|Application Settings. See “Automatically Refresh Linked Tables” on page 231 for details.

Export Tables

You can export table information in XML format on any level of the main screen directory tree by selecting the icon on the appropriate level and choosing an export command from the Tools menu. For example, to export the entire directory structure, select the database icon and choose Tools|Export Tables. For an individual table, select the table and choose Tools|Export Table Meta Data.

The system prompts you to enter a directory path and file name for the exported data.

The resulting XML file includes the table structure of the selected items in the data warehouse, as well as the contents of the replication scripts.

If your company has multiple instances of QAD BI installed, you can use this feature to synchronize the setup data. Additionally, you can use the XML file as a backup.

To reload data from exported files, use the Load Meta Data function, described on page 225.

Rebuild Links

For Progress data sources, QAD BI Data Transformer uses the DB-NAME and REC-ID fields to maintain links between the data source and the data warehouse. However, this approach is not always reliable in some circumstances:

- When the user dumps and loads tables in the source database, the REC-ID values of the records in these tables are changed.
- Data is archived and no longer exists in the source database.


In both cases, the links between the data source and the data warehouse are broken and can no longer be used for replication purposes. Continuing to perform data replication without first rebuilding the links may cause data corruption in the data warehouse.

QAD BI Data Transformer lets you rebuild links by synchronizing the REC-ID values between the source and target databases based on the REC-ID field so that you can continue to perform replication without data loss or corruption. See “Add Business Key Indexes” on page 206 for details on business key index.

Note The rebuild links function does not update custom tables. You need to write Progress scripts in the `updateCustomTables.p` file under the `DWHWorkDir\appl` directory to customize custom tables. `DWHWorkDir` is the data warehouse work directory that you set during installation or in Application Settings. See “Modifying Application Settings” on page 228 for details.

To rebuild links, click the Rebuild Link icon on the Data Transformer main screen. Click Start on the status screen to start. The system runs the rebuilding task, listing status messages to indicate its progress.

Fig. 6.37
Rebuild Links

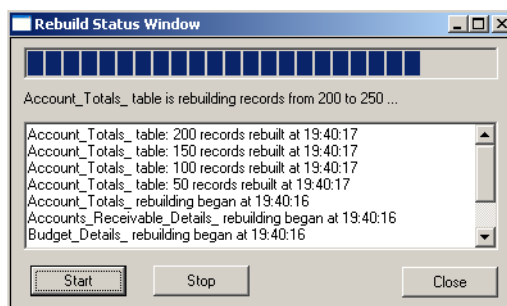

The buttons at the bottom of the screen control these functions:

- Click Start to begin update.
- Click Stop to end update.
- Click Close to exit the screen.

After rebuilding links is complete, you can review the `rebuild.log` file generated in the `DWHWorkDir\log` directory for more detailed processing and error information.

Important Every time you want to dump/load table or archive data in the source database, make sure you perform these operations in the following order:

- 1 Perform replication to refresh the data warehouse tables with updated values from the source database. See “Replicate Data” on page 197 for details.
- 2 Perform table dump/load or data archiving.
- 3 Rebuild links.

If you do not exactly follow this order or if you perform other operations that affect either the source database or the data warehouse in-between these steps, data integrity may be compromised and data corruption may occur in future replications.

Working with the Model

Cognos models supporting multidimensional analysis of business process areas can be purchased from QAD. The models map the contents of the data warehouse to concepts supported by the PowerPlay product such as dimensions, levels, categories, and measures. The product of executing a model against the data warehouse is a Cognos PowerCube.

The location of the models is referenced in the Cognos Transformer tab on the Application Settings screen. See Figure 6.48 on page 232 for details.

Note Cubes can only be built after data has been replicated to the data warehouse database.

You can:

- Create the cube.
- Check the model.
- Check the model relations.
- View the model properties to specify the replication schedule and select the languages in which cubes are generated.

Create the Cube

You can create the cube by using the Create Cube function of the Data Transformer, or by using a batch task. Cubes can only be built after data has been replicated to the data warehouse database.


Check the Model

The Cognos PowerPlay Transformer includes a function that verifies the correctness of the model file. Select a cube in the Cubes folder on the main QAD BI screen and choose File|Check Model. The system uses the Cognos function to verify the model and displays an appropriate message.

Check the Model Relations

The Check Model Relations function provides detail information about the data structure of a cube. You can see the relationship between data warehouse and source tables and fields.

Fig. 6.38
Check Model
Relations

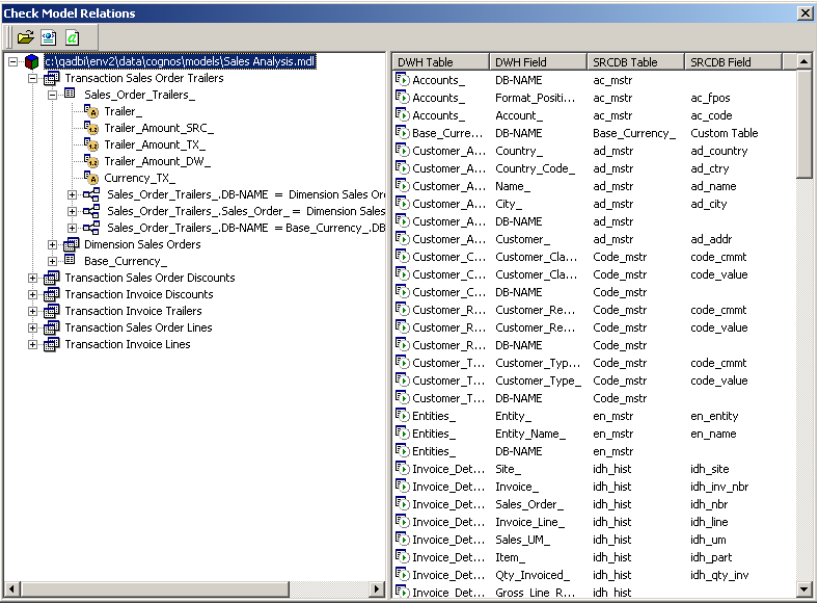

The screenshot shows the 'Check Model Relations' window. On the left is a tree view of the data model components, including 'Transaction Sales Order Trailers', 'Trailer', 'Trailer_Amount_SRC_', 'Trailer_Amount_TX_', 'Trailer_Amount_DW_', 'Currency_TX_', 'Sales_Order_Trailers_Dimension Sales On', 'Sales_Order_Trailers_Sales_Order_Dimension Sales', 'Sales_Order_Trailers_Dimension Sales', 'Base_Currency_', 'Transaction Sales Order Discounts', 'Transaction Invoice Discounts', 'Transaction Invoice Trailers', 'Transaction Sales Order Lines', and 'Transaction Invoice Lines'. On the right is a table with four columns: 'DWH Table', 'DWH Field', 'SRCDB Table', and 'SRCDB Field'. The table lists various mappings between data warehouse fields and source database tables and fields.

DWH Table	DWH Field	SRCDB Table	SRCDB Field
Accounts_	DB-NAME	ac_mstr	
Accounts_	Format_Positi...	ac_mstr	ac_fpos
Accounts_	Account_	ac_mstr	ac_code
Base_Curre...	DB-NAME	Base_Currency_	Custom Table
Customer_A...	Country_	ad_mstr	ad_country
Customer_A...	Country_Code_	ad_mstr	ad_ctry
Customer_A...	Name_	ad_mstr	ad_name
Customer_A...	City_	ad_mstr	ad_city
Customer_A...	DB-NAME	ad_mstr	
Customer_A...	Customer_	ad_mstr	ad_addr
Customer_C...	Customer_Cla...	Code_mstr	code_cmmt
Customer_C...	Customer_Cla...	Code_mstr	code_value
Customer_C...	DB-NAME	Code_mstr	
Customer_R...	Customer_Re...	Code_mstr	code_cmmt
Customer_R...	Customer_Re...	Code_mstr	code_value
Customer_R...	DB-NAME	Code_mstr	
Customer_T...	Customer_Typ...	Code_mstr	code_cmmt
Customer_T...	Customer_Type_	Code_mstr	code_value
Customer_T...	DB-NAME	Code_mstr	
Entities_	Entity_	en_mstr	en_entity
Entities_	Entity_Name_	en_mstr	en_name
Entities_	DB-NAME	en_mstr	
Invoice_Det...	Site_	idh_hist	idh_site
Invoice_Det...	Invoice_	idh_hist	idh_inv_nbr
Invoice_Det...	Sales_Order_	idh_hist	idh_nbr
Invoice_Det...	Invoice_Line_	idh_hist	idh_line
Invoice_Det...	Sales_UM_	idh_hist	idh_um
Invoice_Det...	Item_	idh_hist	idh_part
Invoice_Det...	Qty_Invoiced_	idh_hist	idh_qty_inv
Invoice Det...	Gross Line R...	idh_hist	

Specify Model Properties

To display the Model Properties screen, select a model and choose Tools|Properties. The screen contains three tabs.

Cube Details

The Cube Details tab contains read-only displays of the Cognos Transformer model name and path.

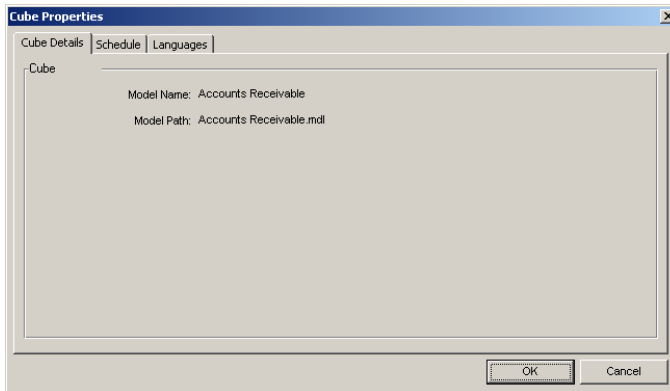


Fig. 6.39
Cube Properties,
Cube Details Tab

Schedule

The Schedule tab is the same as the Table and Custom Script Schedule tabs. Select Active and enter a sequence number to enable cube generation within the automated replication.

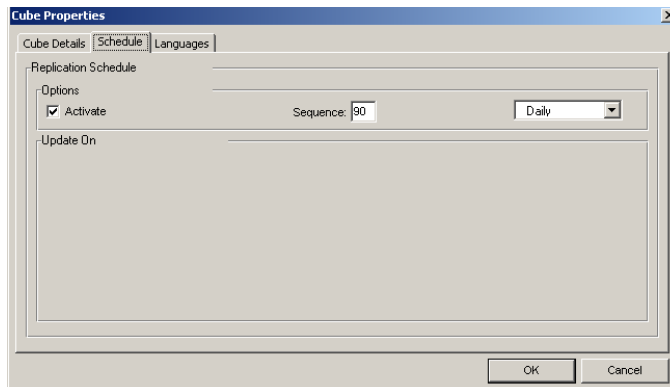


Fig. 6.40
Cube Properties,
Schedule Tab


Languages

The Languages tab allows for the selection of the language or languages in which multilingual cubes should be created.

Note Single-language cubes ignore these settings.

Cubes are created in subfolders of the Cube directory (as specified in the Application Settings Cognos Transformer tab). Subfolders are named using the two-character language identifier for the selected languages. If no language is selected, the cube is built directly within the Cube directory.

Fig. 6.41
Cube Properties,
Languages Tab

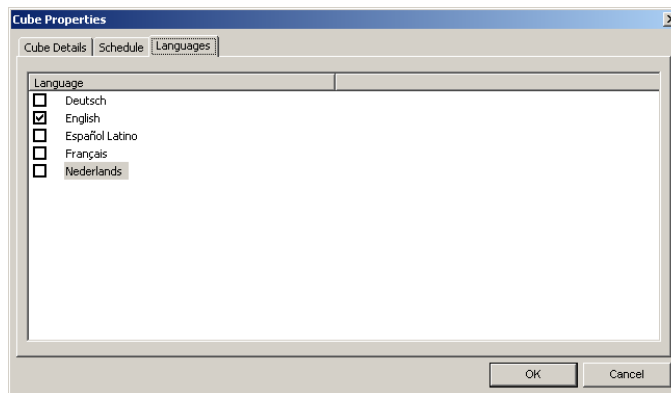

For information on creating or modifying language tokens for translated Cognos Transformer model files, see “Creating Translatable Cognos Transformer Models” on page 257.

Using QAD-Provided Model Data

If your QAD BI configuration includes one or more of the seven predefined models purchased from QAD, load the schema using the Data Transformer’s Load Meta Data function instead of building the data warehouse tables manually from MFG/PRO schema. You can then use the table and field tools to customize the schema for the predefined models as needed.

Note In MFG/PRO eB2.1, you must load metadata and scripts for each domain that you want to analyze.

Perform the following tasks to load the model data and make it ready for use:

- 1 Load metadata.
- 2 Load custom scripts.
- 3 Bulk validate custom scripts.
- 4 Complete model setup.

Load Metadata

To load the metadata that describes the data warehouse structure used in the models, right-click a database or a domain name—if you are using an MFG/PRO eB2.1 database—on the main screen and select Import Meta Data. The Choose Import File screen displays.

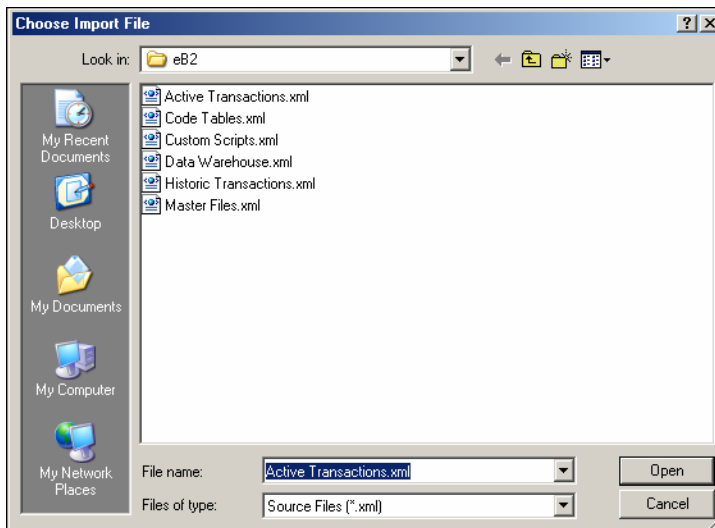


Fig. 6.42
Chose Import File

Navigate to the directory where the model source files were placed during installation. Typically, this is:

qadbiInstallDir\data\meta\version


Where version is the MFG/PRO database version; for example:

c:\qadbi\data\meta\eb2.1

Select a file and click Open to load the metadata and create the data warehouse structure. The Meta Filter Window displays.

Fig. 6.43
Meta Filter
Window

Use the check box to
Indicate that you want
to import the object.

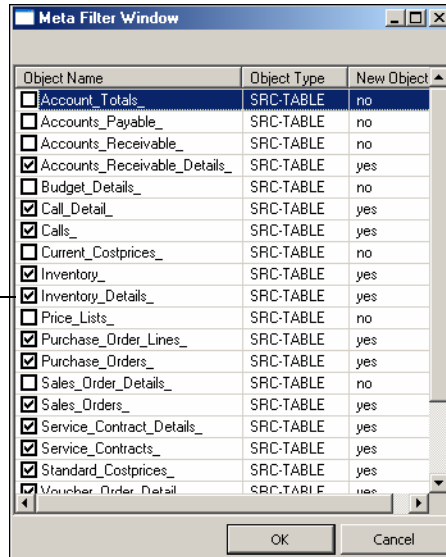

The Meta Filter Window presents a list of objects and the following information for each object:

Object Name. Displays the name of an object.

Object Type. Displays the type of the database object: SRC-TABLE, DWH-TABLE, MERGE-TABLE, SCRIPT, or CUBE.

New Object. Indicates whether the object already exists in the database or domain.

Yes: This is a new object that has not been imported before.

No: The object has already been imported.

Use the check box to the left of the object name to indicate whether to import the object. The check box is selected by default when the object is new. If the object is not new, you can select the check box to reimport the object.

Review the list to verify that the selected objects are those you want to import. Then click OK to activate the import. The created data structure then displays on the main screen directory tree. The display includes a green triangle beside a valid object or a yellow exclamation point beside an invalid object.

Note In MFG/PRO eB2.1, metadata must be loaded for each active domain in the database.

Important If this is first time you have loaded the standard XML metafiles, ensure that you load `Custom Scripts.xml` last. After the custom scripts are loaded, they are automatically compiled. Since the scripts refer to several tables in the data warehouse, the table schemas must have already been loaded for successful compilation to take place. If these schemas have not been created in the data warehouse, compilation will fail.

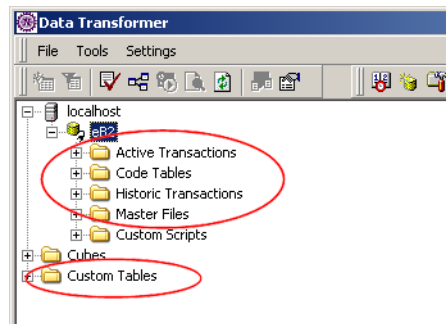


Fig. 6.44
Metadata Loaded

Bulk Generate and Validate Scripts


After loading model data and custom scripts, you can have the system regenerate and check all the scripts at the same time based on the completed data warehouse structure.

Select the database on the main screen directory tree, and then choose Tools|Check Scripts.

The system updates the table icons in the directory tree to show whether they passed validation. A green triangle indicates a validated script; a yellow exclamation point indicates a problem. For example, scripts

shown in Figure 6.45 were validated before all the custom scripts were loaded. A secondary custom script, Script Call Lead Time2, failed validation.

Fig. 6.45
Validation Icons



Note You can check the script for an individual table by right-clicking the table on the main screen, then selecting Check Script.

Complete Model Setup

After loading model data and checking scripts, complete setup tasks by:

- Updating the table links for all replication and custom tables; see page 39.
- Scheduling automatic replication for each table, custom script, and cube as shown in the relevant sections above.
- Optionally, fine-tuning the data warehouse structure and replication setup. Use the following sections for reference:
 - “Manage Domains” on page 188
 - “Select Tables” on page 189
 - “Set Up Replication” on page 191

Modifying Application Settings

Based on information entered during the installation, most settings required to connect the components of QAD BI are in place when you begin using the application.

Note An important exception to this is the currency setting, which defaults from the MFG/PRO base currency unless:

- You are connecting to a domain database and the base currencies in the domains are different.

- You are connecting to multiple databases and the base currencies in the databases are different.

In both of these cases, the currency setting is blank and you must manually set the currency for the data warehouse database. See “Currency” on page 230.

If for any reason you need to update any of those settings, choose Settings|Application Settings from the main menu. The system displays a screen with the following tabs:

- Data Warehouse
- Table Linking
- Cognos Transformer
- Batch Process
- Notification
- AppServer

The following sections describe the functions of each tab.

Data Warehouse

The Data Warehouse tab includes parameters applicable to the data warehouse database.

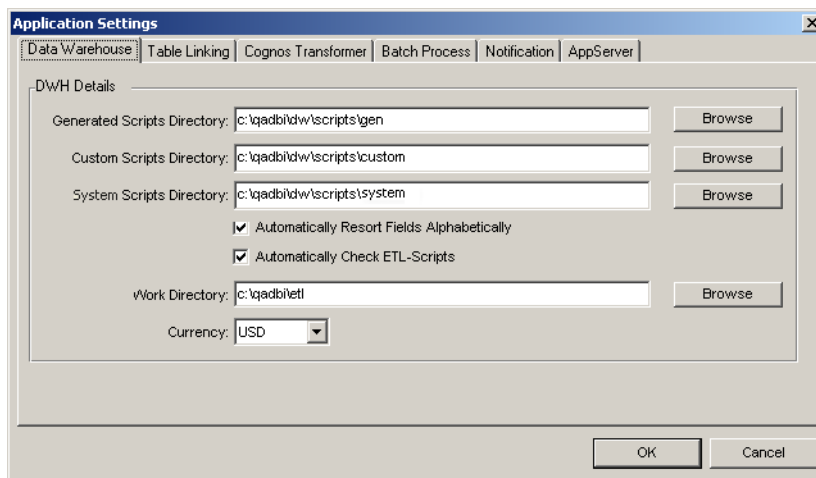


Fig. 6.46
Application
Settings, Data
Warehouse Tab

Generated Scripts Directory. Enter or browse to the location where the automatically generated table-replication scripts are to be written.

Custom Scripts Directory. Enter or browse to the location where the custom scripts are located.

Automatically Resort Fields Alphabetically. Select to have the fields (columns) of the mapped table automatically sorted on the field mapping screen.

Automatically Check ETL-Scripts. Select to automatically generate the mapped table scripts and to compile the generated and custom scripts. This process also applies after a metadata import.

Work Directory. Enter or browse to the location of the ETL tool. This directory contains the encrypted source code, log files, and temporary files and should not be changed unless recommended by QAD Support.

Currency. Select a currency from the list of currency codes in which to express all currency values defined in the standard business models. The default currency is the MFG/PRO base currency.

Table Linking

The Table Linking tab includes parameters used to connect to the Access data warehouse proxy.

Fig. 6.47
Application
Settings, Table
Linking Tab

The screenshot shows the 'Application Settings' dialog box with the 'Table Linking' tab selected. The dialog has several tabs: 'Data Warehouse', 'Table Linking', 'Cognos Transformer', 'Batch Process', 'Notification', and 'AppServer'. The 'Table Linking' tab is active and contains the following fields and controls:

- Database Details:**
 - Database:** A text field containing 'C:\qadb\dw\ldb\dw\dw.mdb' and a 'Browse' button to its right.
 - Automatically Refresh Linked Tables:** A checked checkbox.
- ODBC Connection:**
 - DAO Version:** A text field containing 'DAO.DBEngine.36'.
 - DSN:** A text field containing 'dw\h'.
 - User:** An empty text field.
 - Password:** An empty text field.
 - Schema:** A text field containing 'dw\h'.

At the bottom right of the dialog are 'OK' and 'Cancel' buttons.

Database. Enter or browse to the location of the data warehouse proxy Access .mdb file.

Automatically Refresh Linked Tables. Select this option to automatically update data warehouse proxy link data when mapping tables or after importing metadata.

DAO version. Enter the Database Access Objects database engine version.

Note In general, this field should not be changed.

DSN. Enter the Data Source Name created for the data warehouse proxy ODBC connection. This is initially set during installation. See “Update the ODBC Account” on page 163 for details.

User. Enter the user name for the data warehouse proxy.

Note By default, no user name is required.

Password. Enter the password for the specified user.


Note By default, no password is required.

Schema. Enter the data warehouse Progress schema name. The default set during installation is dwh.

Cognos Transformer

The Cognos Transformer tab includes path preferences used by the Cognos PowerPlay Transformer. The ETL tool uses these settings to set the values in the Cognos Transformer.

Fig. 6.48
Application
Settings, Cognos
Transformer Tab

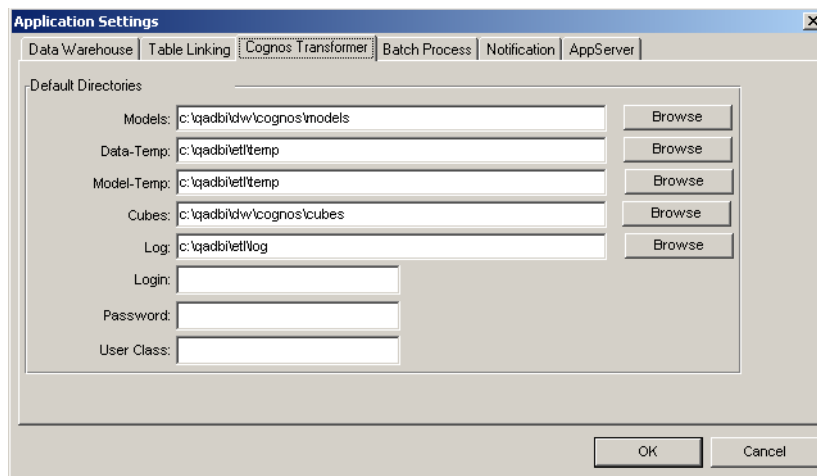

Models. Enter or browse to the location where the Cognos model files were installed or copied.

Data-Temp. Enter or browse to the location that the Cognos Transformer should use to store temporary data files created during cube generation.

Model-Temp. Enter or browse to the location that the Cognos Transformer should use to store temporary files created during model operations.

Cubes. Enter or browse to the location where the Cognos Transformer should create the cubes.

Log. Enter or browse to the location where the Cognos Transformer and the Data Transformer should write the log files.

The following optional properties are used when building Cognos models in which Cognos security has been enabled. Cognos security is set up using the Cognos Access Manager and stored in a local authentication export (.lae) file or LDAP-compliant namespace.

Login. Specify the log-in for a Cognos user whose authority will be used to regenerate the models.

Password. Specify the password for a Cognos user whose authority will be used to regenerate the models.

User Class. Specify a Cognos User Class to which the specified log-in user belongs and which will be used to regenerate the models.

For additional information regarding the use of the Cognos cube security and Transformer, see the Cognos Transformer online help and user documentation.

Batch Process

Use settings on the Batch Process tab to customize QAD BI in the following areas:

- Improve performance.
- Allow concurrent access to the data warehouse while the batch is run.
- Use the Progress-supplied database server administration.
- Use custom scripts (batch files) to start and stop the data warehouse.

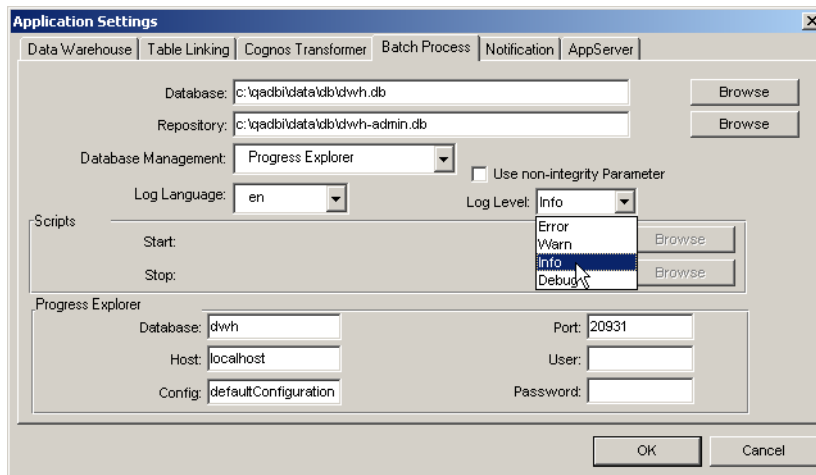


Fig. 6.49
Application
Settings, Batch
Process Tab

Database. Enter or browse to the location of the data warehouse file. By default, this is the dwh.db file in the directory where QAD BI is installed.

Repository. Enter or Browse to the location of the data warehouse repository. By default, this is the `dwh-admin.db` file in the directory where QAD BI is installed.

Database Management. Select the method to use to start and stop the data warehouse—Progress Explorer or Scripts. Depending on this setting, you can update the fields in the appropriate frame.

Single User Batch Process. Specify whether the data warehouse database is started in single-user mode when running the batch process. If selected, no other connections to the data warehouse are accepted until the batch process completes. This field is not available when parallel replication is selected on the AppServer tab—that is, the Use AppServer check box is selected.

Use non-integrity parameter. Specify whether the data warehouse is started in non-integrity mode. When this option is selected, Progress runs without using the database integrity or database recovery features.

Important Selecting this option can improve system performance. However, if Progress fails for any reason, you cannot recover the database. Use this feature with caution and make sure you have an adequate database backup strategy.

Log Language. Select the language in which the log information is written.

Log Level. Select the level of log information to be captured.

Error: Displays functional errors

Warn: Displays activities that may cause errors, as well as errors

Info: Displays trace of user activities, as well as errors and warnings

Debug: Displays debug information for developers, as well as errors and warnings

Start. If Database Management is Scripts, enter or browse to the appropriate script files that are used to start the data warehouse.

Stop. If Database Management is Scripts, enter or browse to the appropriate script files that are used to stop the data warehouse.

Database. Enter the data warehouse database name as defined in the Progress Explorer.

Host. Enter the Progress server defined in the Progress Explorer and assigned to manage the data warehouse.

Config. Enter the Progress Explorer Configuration to use to start and stop the data warehouse.


Port. Enter the port or service the data warehouse runs under. This is defined in the Progress Explorer Configuration.

User. Enter a user authorized to start and stop the data warehouse.

Password. Enter the password of the user authorized to start and stop the data warehouse.

Notification

The Notification tab includes information the system uses to send e-mail messages when an error occurs during batch processing.

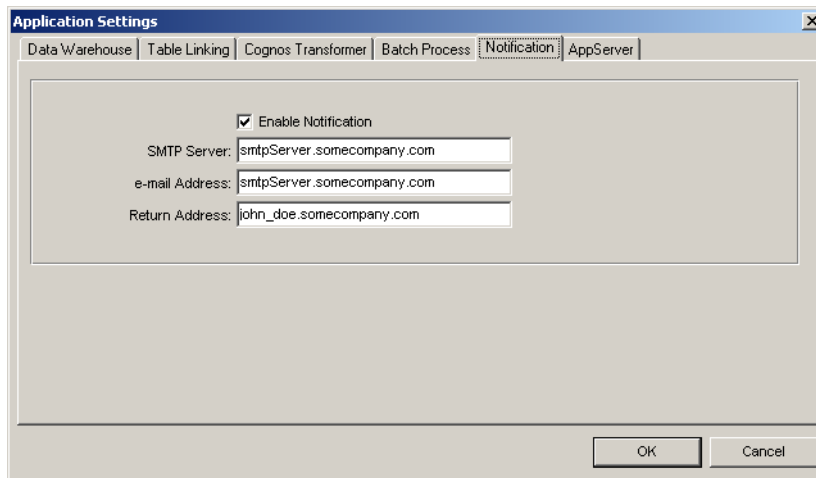

The screenshot shows the 'Application Settings' dialog box with the 'Notification' tab selected. The dialog has a title bar with a close button. Below the title bar are several tabs: 'Data Warehouse', 'Table Linking', 'Cognos Transformer', 'Batch Process', 'Notification' (which is active), and 'AppServer'. The 'Notification' tab contains a checkbox labeled 'Enable Notification' which is checked. Below this are three text input fields: 'SMTP Server' with the value 'smtpServer.somecompany.com', 'e-mail Address' with the value 'smtpServer.somecompany.com', and 'Return Address' with the value 'john_doe.somecompany.com'. At the bottom right of the dialog are 'OK' and 'Cancel' buttons.

Fig. 6.50
Application
Settings,
Notification Tab

Enable Notification. When this is selected, e-mail is sent when errors occur during batch processing.

SMTP Server. Enter the name of the Simple Mail Transfer Protocol server to use to send the e-mail

e-mail Address. Enter the e-mail address of the person you want to receive the e-mail notifications.

Return Address. Enter the e-mail address of the person you want to be used for the return address on the e-mail.

AppServer

The AppServer tab includes information the system uses to determine the replication strategy (that is, serial or parallel via the Use AppServer check box) and, when parallel replication is used, the AppServer configuration information. For more details on parallel replication, see “QAD BI Parallel Replication Setup” on page 244.

Fig. 6.51
Application
Settings,
AppServer Tab

Use AppServer. When this is selected, parallel replication is used for the batch replication. When not selected, serial replication is used.

AppService. Enter the name of the AppServer broker. This is the same value that appears in the Progress Explorer tree under the AppServer folder. Also referred to as the AppServer name.

AppServer Host. Enter the name of the server where the AppServer has been installed.

NameServer Port. Specify the port to which the NameServer has been configured to listen. The default is 5162.

AppServer Pool Size. Specify the number of AppServer processes that will be available to process replication tasks. Four is a good starting value for testing. The value entered here must be one less than the value of the Minimum and Maximum Servers settings on the AppServer properties screen. See “QAD BI Parallel Replication Setup” on page 244 for details.

Note Do not set this value too high. Entering a value that is too large can reduce performance on hardware that is insufficient to handle the processing load.

DWH-ADMIN Host. Specify the name of the server where the administration database is running.

DWH-ADMIN Service. Specify the port to which the administration database is configured to listen. The default is 24001.

DWH-ADMIN Network. Specify the protocol that the administration database is configured to use for communication. Default is TCP.

AppServer Log Directory. Specify the directory to which all log files will be written.

AppServer Error Log. Specify the name of the AppServer error log.

AppServer Replication Log. Specify the name of the AppServer replication log.

For additional information on using parallel replication with the Data Transformer, see “QAD BI Parallel Replication Setup” on page 244.

Performing Administration Tasks

Update User Records

During installation, a single default user is defined with database administrator rights in the Progress Administration database:

Default user ID: dwh

Default password: admin

You can modify this default information, as well as create additional users or delete existing ones, with the following procedure:

- 1 Start Progress Data Administration.
- 2 Select Database|Connect and enter connection information on the Connect Database screen. If the default installation was performed, the connection parameters are:
 - Physical Name: dwh
 - Logical Name: dwh
 - Network: TCP
 - Multiple Users: checked
 - Host Name: localhost
 - User ID: dwh
 - Password: admin

Fig. 6.52
Updating User Data

- 3 Select Admin|Security|Edit User List.
- 4 On the Edit User List screen, click Add, Modify, or Delete to manage users.

For additional information on managing users in a Progress database, see the *Progress System Administration Guide*.

Set Up Windows Task Scheduler

You can use Data Transformer to define the replication schedule for each individual task. See “Scheduling Automatic Replication” on page 197 for information on defining task schedules in Data Transformer.

However, you also must set up an operating-system-level scheduling task to look at the individual task schedules and run the processes accordingly.


Note This procedure is based on Windows XP Professional. It may vary for other versions of Windows.

- 1 To run the Windows Task Scheduler Wizard, select Start|Control Panel|Scheduled Tasks|Add Scheduled Tasks.
- 2 Click Next to continue.
- 3 Click Browse and select the Run Tasks shortcut located in the directory where program files were installed.
- 4 Choose the task schedule:
 - Daily
 - Weekly
 - Monthly
 - One time only
 - When my computer starts
 - When I log on

Depending on your choice, you may be prompted for further scheduling information.

Important The schedule you define here describes when Windows launches its own scheduling task, which in turn looks at the Data Transformer scheduling tasks. You should be sure to define the Windows task so that it is appropriate to the schedule granularity defined for Data Transformer. For example, it would not make sense to define a monthly Windows task if you want to replicate tables every day.

- 5 Enter the name of a Windows account with sufficient access privileges to execute the Data Transformer on the target machine.
- 6 Select the date and time for the task to begin.
- 7 Click Finish to save the task.

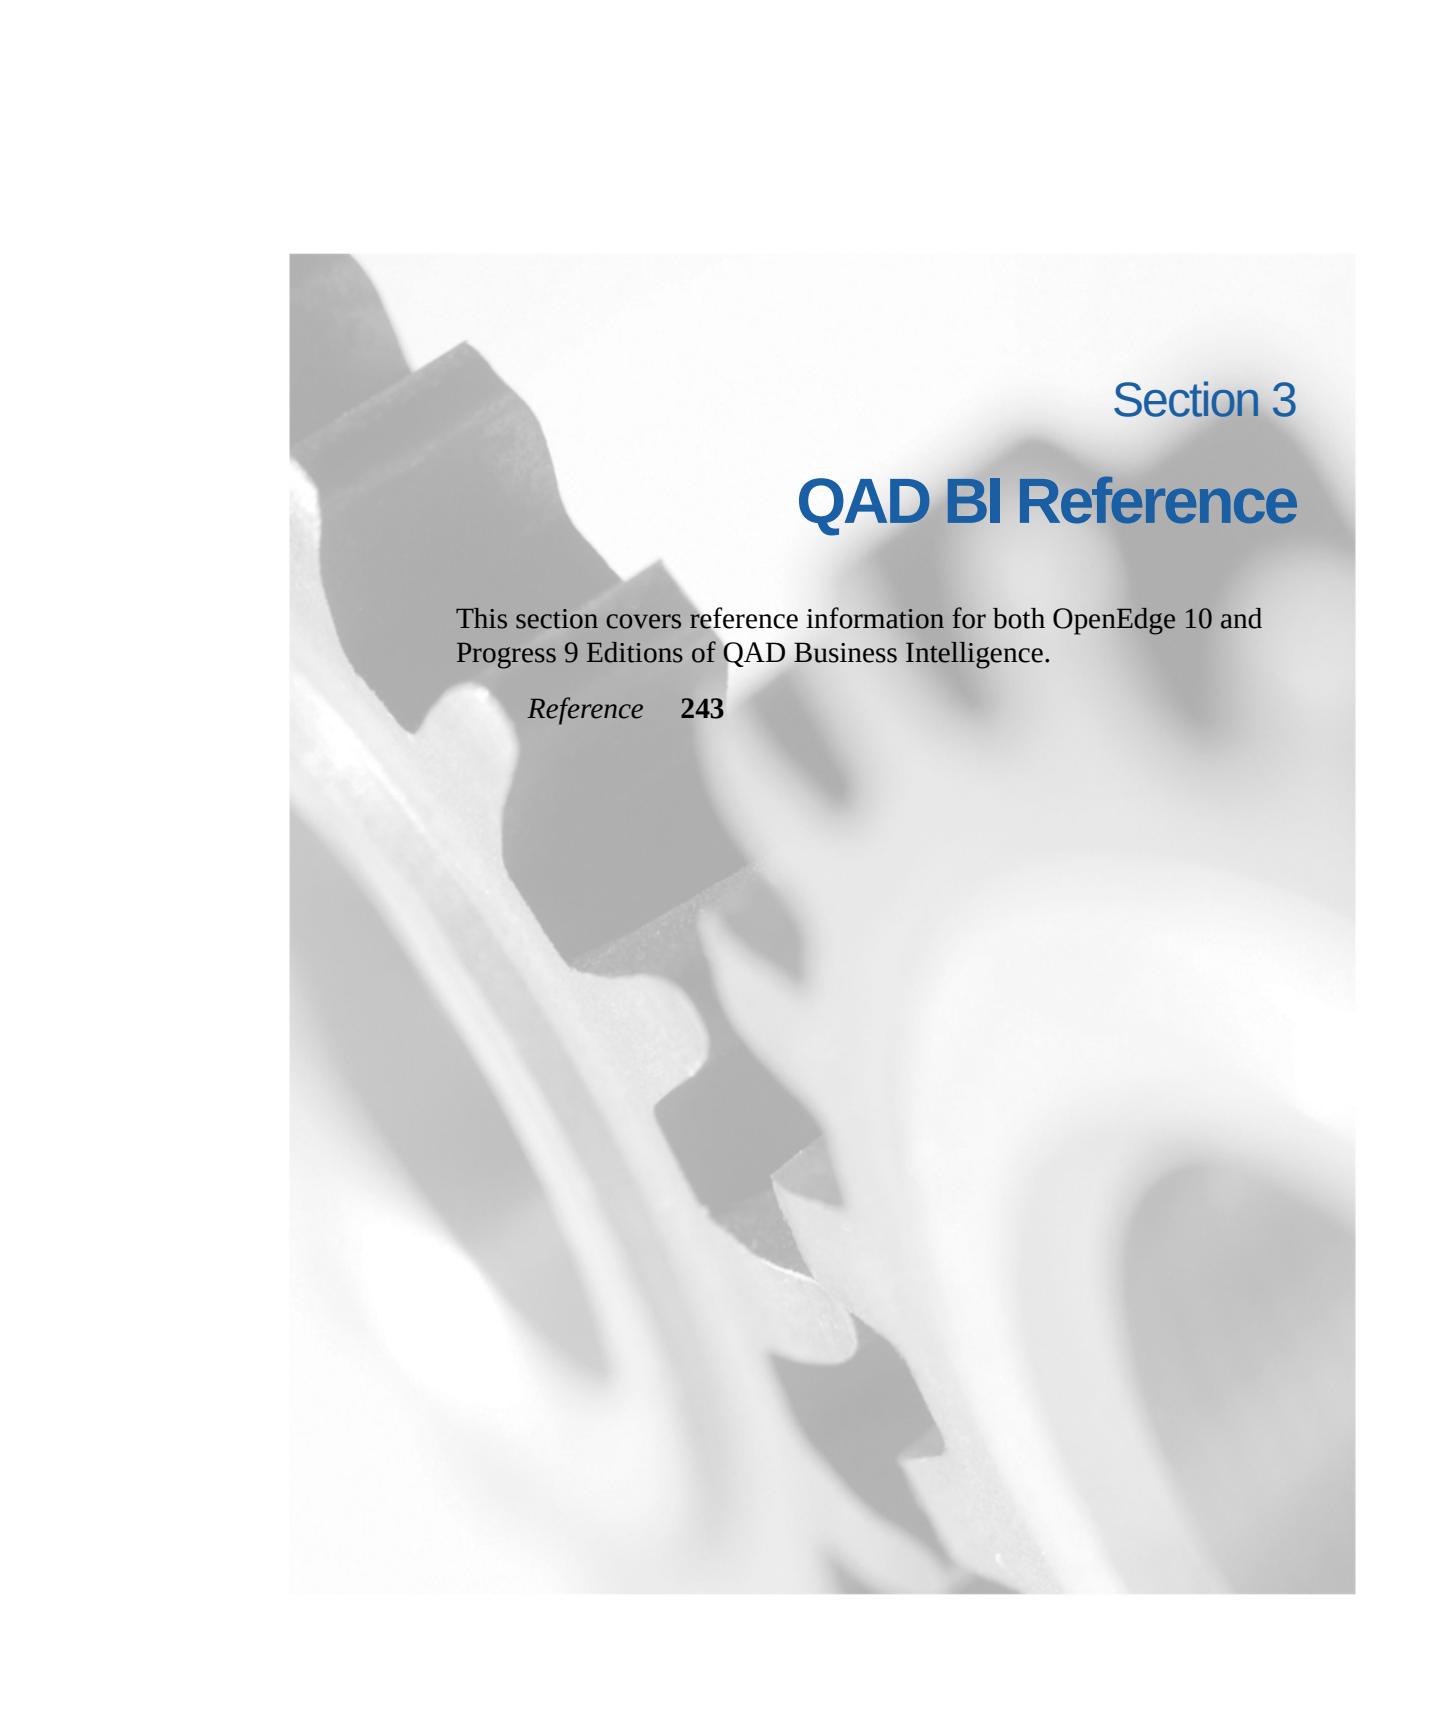The background of the page is a grayscale image of several interlocking gears. The gears are of different sizes and are positioned in a way that creates a sense of depth and mechanical complexity. The lighting is soft, highlighting the metallic texture of the gears.

Section 3

QAD BI Reference

This section covers reference information for both OpenEdge 10 and Progress 9 Editions of QAD Business Intelligence.

Reference **243**



Chapter 7

Reference

QAD BI Parallel Replication Setup **244**

Multicurrency Configuration **250**

Setting the Replication Task Sequence **255**

Creating Translatable Cognos Transformer Models **257**

Manually Loading Custom Scripts **260**

QAD BI Parallel Replication Setup

This section provides the information required for configuring QAD BI for parallel replication. It also provides QAD BI specific guidelines and information for configuring the Progress AppServer, which is required to replicate tasks in parallel.

See the Progress document *Building Distributed Applications Using the Progress AppServer* for documentation describing the general setup and configuration of the AppServer.

Overview

In order to improve replication performance during batch processing, parallel or multi-threaded processing of the replication tasks is supported using the Progress AppServer. Parallel replication allows for more than one replication task to be processed concurrently by separate Progress processes. In order to use the parallel replication strategy, both Data Transformer and AppServer must be configured.

This section assumes the AppServer has been installed and configured using the default settings on the same server as Data Transformer.

Configure the AppServer

The AppServer can be configured using the Progress Explorer application (recommended) or by directly modifying the `ubroker.properties` file located in `ProgressInstallDir\properties`.

This section describes only the process of configuring the AppServer using the Progress Explorer application.

- 1 Open the Progress Explorer application.
- 2 Connect to the localhost Progress Server.
- 3 Expand the AppServer folder in the tree in the left pane.
- 4 Right-click the `asbroker1` item in the expanded AppServer folder and select Properties.

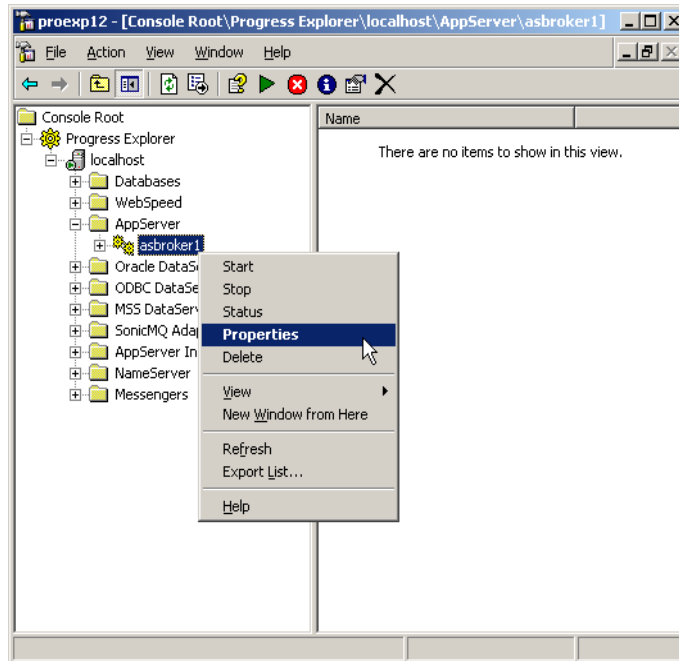


Fig. 7.1
Selecting the
Properties for the
AppServer

- 5 Expand the Broker item in the tree and select the General item.
- 6 Set Operating Mode to State-reset.


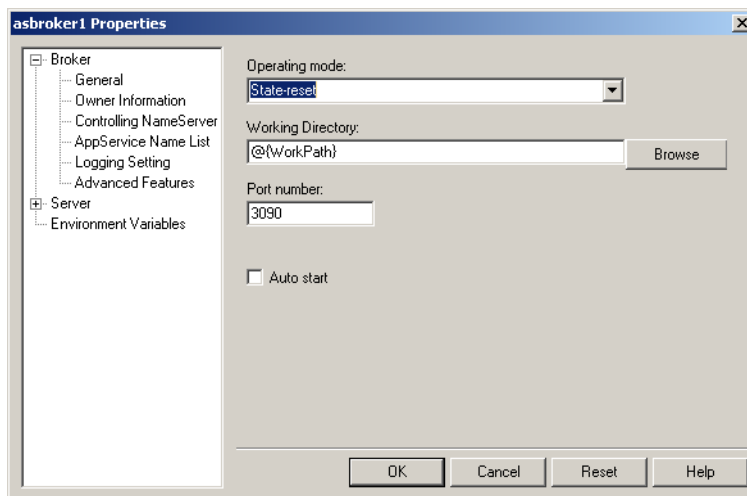


Fig. 7.2
Configuring the
Broker's General
Parameters

- 7 Select Logging Setting under the Broker.
- 8 Modify the Broker log filename setting to the following:
`ETLInstallDir\log\asbroker1.broker.log`
 where *ETLInstallDir* is the value supplied for the program files during the installation.

Fig. 7.3
Configuring the
Broker's Logging
Parameters

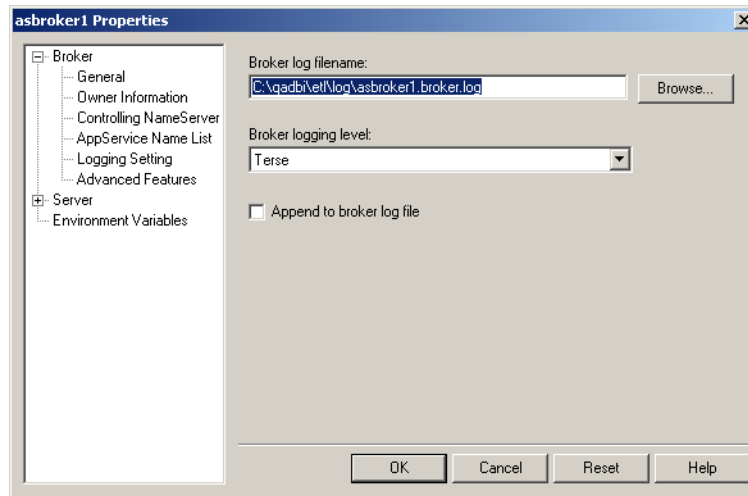

- 9 Expand the Server item in the tree and select the General item.
- 10 Modify the Server startup parameters setting to the following:
`-pf ETLInstallDir\appserver.pf`
 Where *ETLInstallDir* is the value supplied for the program files during the installation.

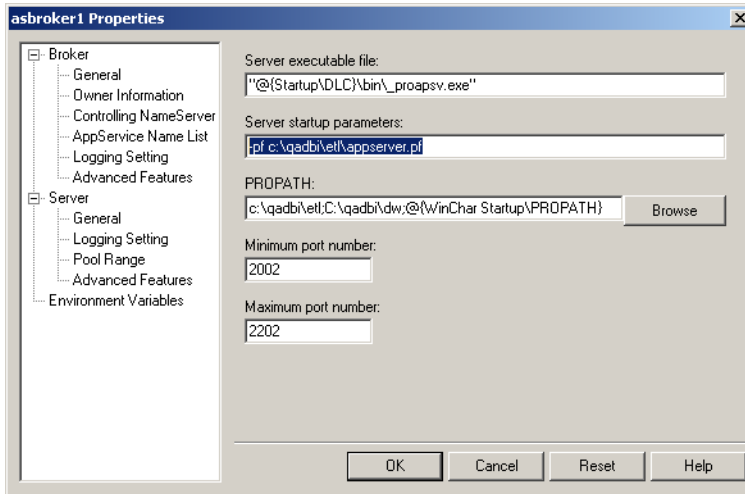


Fig. 7.4
Configuring the
Server's General
Server Startup
Parameter

- 11 Modify the PROPATH setting to include the following at the beginning:

ETLInstallDir;DataInstallDir;

Where *ETLInstallDir* is the value supplied for the program files and *DataInstallDir* is the value supplied for the data files during the installation.

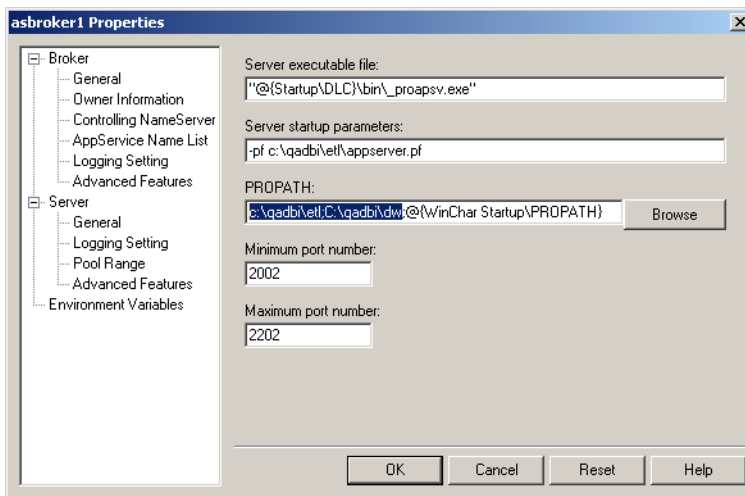


Fig. 7.5
Configuring the
Server's General
PROPATH
Parameter


- 12 Select Logging Setting under the Server.

- 13** Modify the Server log filename setting to the following:

ETLInstallDir\log\asbroker1.server.log

Where *ETLInstallDir* is the value supplied for the program files during the installation.

Fig. 7.6
Configuring the
Server's Logging
Parameters

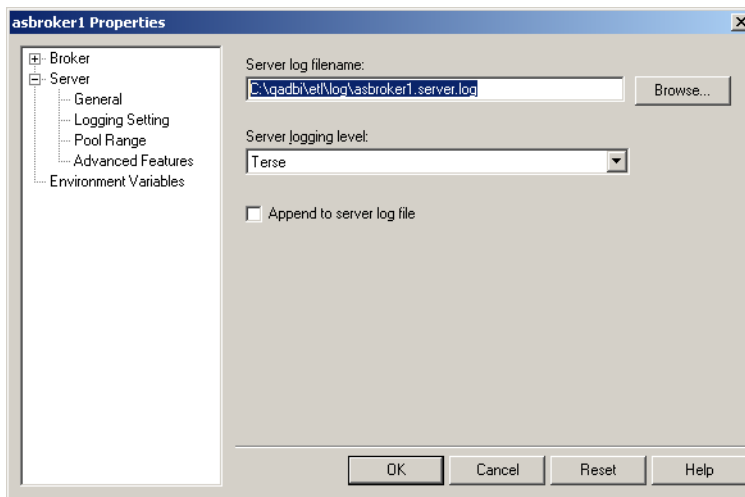

- 14** Select Pool Range under the Server.
- 15** Modify the initial number of servers to start, maximum servers, and minimum servers settings to the integer value equal to your AppServer Pool Size setting + 1. For example, this document indicates that the value 4 should be used. So, use 5 for the Initial number of servers to start setting. See "Pool Size of Script" on page 116 and for details.

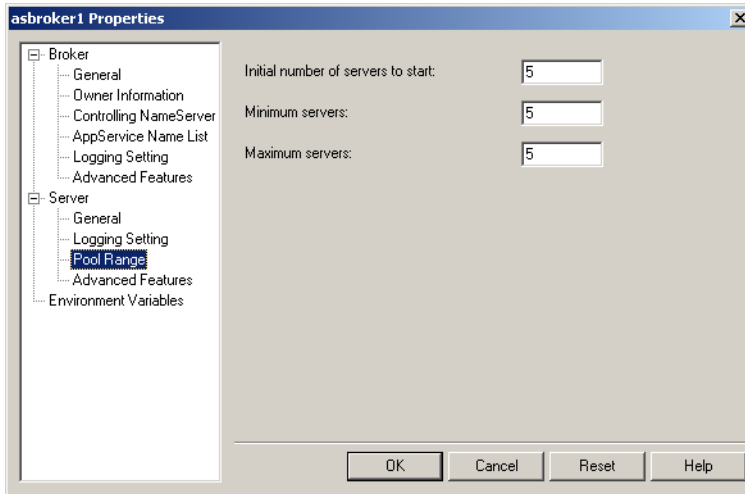


Fig. 7.7
Configuring the
Server's Pool
Range Parameters

Important If changes were made to the AppServer's configuration, the server must be shut down and restarted for the modifications to take effect.

Configure Data Transformer

- 1 Start the Application Settings dialog for Data Transformer.
- 2 Switch to the AppServer tab.
- 3 Select the Use AppServer check box to enable processing of tasks in parallel. When this check box is not selected, the default serial processing will be used.
- 4 Enter information for your setup for every field on the tab. The following graphic depicts the AppServer default settings. See "AppServer" on page 116 for details.

Fig. 7.8
Configuring
AppServer
Parameters

The screenshot shows the 'Application Settings' dialog box with the 'AppServer' tab selected. The 'Use AppServer' checkbox is checked. The following fields are visible:

Field	Value
AppService:	asbroker
AppServer Host:	localhost
NameServer Port:	5162
DWH-ADMIN Host:	localhost
DWH-ADMIN Service:	24001
DWH-ADMIN Network:	TCP
AppServer Pool Size:	4
AppServer Log Directory:	c:\qadbi\et\log
AppServer Error Log:	appserver-error.log
AppServer Replication Log:	appserver-replication.log

Buttons: OK, Cancel

See detailed field descriptions for the AppServer tab in “AppServer” on page 116.

Multicurrency Configuration

This section provides the information required to enable QAD BI to extract data from MFG/PRO sources that have differing base or system currencies and to convert the currencies to a single user-defined data warehouse currency for the standard business models.

Overview

Multicurrency support in QAD BI allows amounts valued in different currencies to be revalued in a common currency within the standard business models. This provides a foundation for analytic operations that compare and aggregate amounts that were originally valued in different currencies.

Important The Sequence dependencies for multicurrency scripts must be observed to get the correct results. See “Setting the Replication Task Sequence” on page 255 for information.

Configure the Data Warehouse Currency

A single currency can be defined as the data warehouse currency in Data Transformer. When a data warehouse currency is defined, all source system currencies are revalued using the Exchange Rate table (see next section) in this currency. If no data warehouse currency is defined, the data warehouse is considered a single-currency implementation and no conversions occur.

To set the Data Warehouse currency, follow these steps:

- 1 Choose Settings|Application Settings from the menu.
- 2 Select the data warehouse tab and select the desired currency from the Currency drop-down list.
- 3 Click OK to save the selected currency as the data warehouse currency.

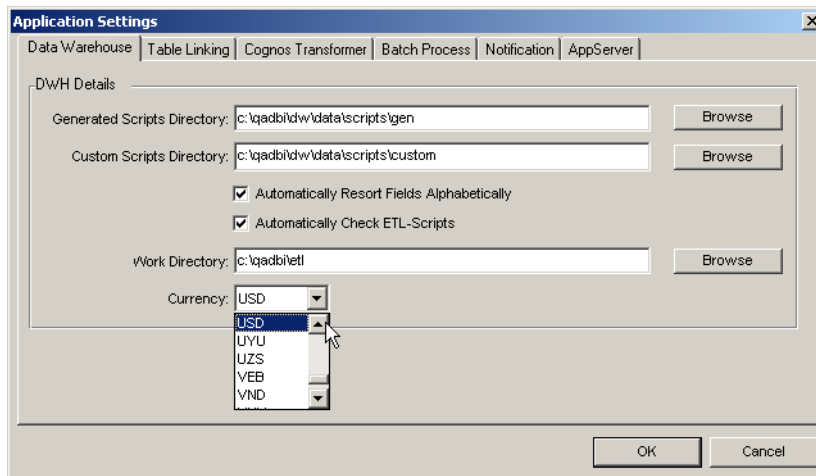


Fig. 7.9
Setting the Data
Warehouse
Currency

Configure Multicurrency Custom Scripts


For source systems with differing base currencies defined, Data Transformer supports conversion of currency values into a single currency for analysis—that is, the data warehouse currency. To value multiple currencies in a single currency, additional custom scripts must be added to the source metadata and configured for replication.

In addition to setting the data warehouse currency in the Application Settings, you must perform the following steps to enable multicurrency support in QAD BI.

Note These steps assume the table tasks have all been configured with a Sequence value less than 10 (by default they will have the value 00) and that the Custom Scripts Sequence values are greater than 15.

- 1 Start Data Transformer and navigate to the Custom Scripts folder in the tree.
- 2 Right-click the Custom Scripts folder and select Add Script.
- 3 Click Browse on the Add Script screen and navigate to the *QADBIDataDir\scripts\custom* directory; select the *Script_Currency_Fields_Incremental_.p* custom script, and click Open.
- 4 Select the Schedule tab and set the fields as follows:
 - Activate: selected
 - Sequence: 15
 - Frequency: any item in the list

Fig. 7.10
Setting the
Schedule Fields for
Script_Currency_
Fields_
Incremental_.p

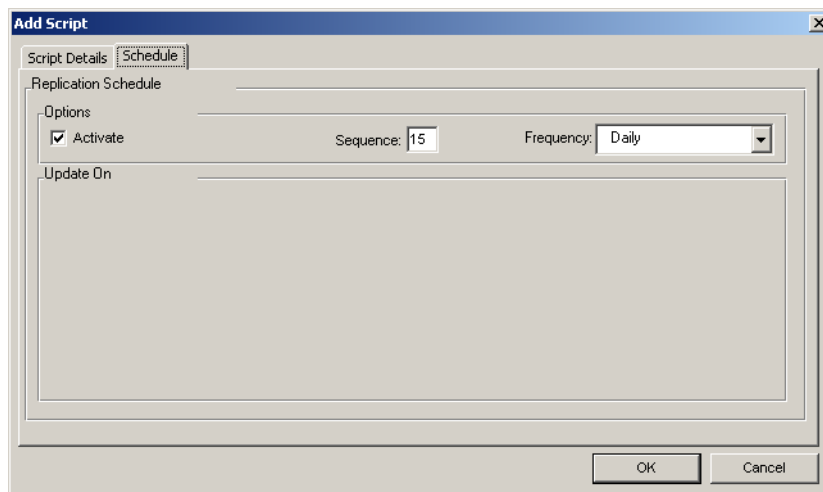

- 5 Again choose to add a custom script (see steps 2 and 3 above).

- 6 Click Browse on the Add Script screen and navigate to the *QADBIDataDir\scripts\custom* directory; select the *Script_Base_Currency_.p* custom script, and click Open.
- 7 Select the Schedule tab and set the fields as follows:
 - Activate: selected
 - Sequence: 10
 - Frequency: any item in the list

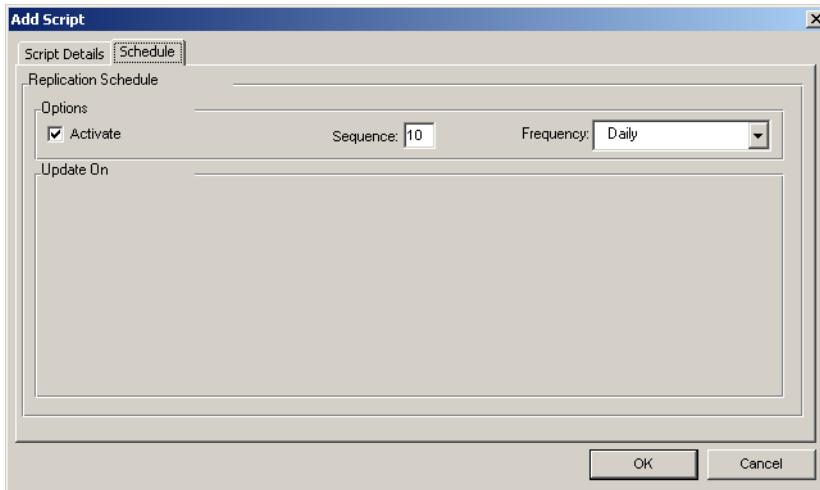


Fig. 7.11
Setting the
Schedule Fields for
*Script_Base_*
Currency_.p

- 8 Repeat steps 5 through 7 for *Script_Exchange_Rate_.p*.

Modifying Currency

After the first batch replication has run in a multicurrency-enabled configuration, the base currency may change in either the source system or the data warehouse. To accommodate this change, a custom script must be executed.

Note This procedure assumes that multicurrency replication has been set up as described in this section.

- 1 Start Data Transformer and navigate to and expand the Custom Scripts folder in the tree.
- 2 Right-click the `Script_Currency_Fields_Incremental_.p` custom script and select Properties.
- 3 Select the Schedule tab and clear the Activate check box.
- 4 Click OK to save the changes.
- 5 Right-click the Custom Scripts folder and select Add Script.
- 6 Click Browse on the Add Script screen and navigate to the `QADBIDataDir\scripts\custom` directory; select the `Script_Currency_Fields_Full_.p` custom script, and click Open.
- 7 Select the Schedule tab and set the fields as follows:
 - Activate: selected
 - Sequence: 15
 - Frequency: any item in the list
- 8 Exit Data Transformer and execute the batch replication.
- 9 Start Data Transformer and navigate to and expand the Custom Scripts folder in the tree.
- 10 Right-click the `Script_Currency_Fields_Incremental_.p` custom script and select Properties.
- 11 Select the Schedule tab and select the Activate check box.
- 12 Click OK to save the changes.
- 13 Right-click the `Script_Currency_Fields_Full_.p` custom script and select Properties.
- 14 Select the Schedule tab and clear the Activate check box.
- 15 Click OK to save the changes.

QAD BI has now been configured to use the new source base currency or data warehouse currency. Batch replication can continue in the normal manner.

Setting the Replication Task Sequence

This section provides detailed information for configuring replication task sequences in Data Transformer.

Overview

In order to configure replication tasks to run automatically in batch mode, the Schedule tab for Tables, Custom Scripts, and Cubes must be properly set up. This section discusses the setting of the Sequence field on these screens so that the dependencies for each task type—Tables, Custom Scripts, and Cubes—are met.

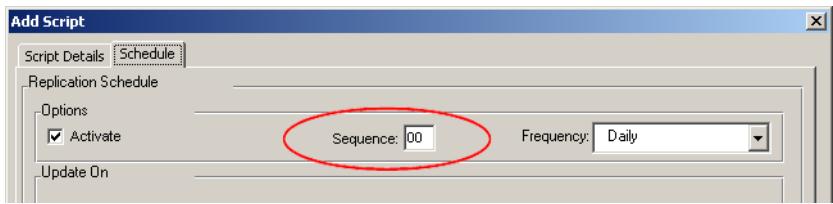


Fig. 7.12
Setting the
Sequence for a
Replication Task

Dependencies exist between the Table, Custom Script, and Cube tasks. In general, all Table tasks must run before the Custom Script tasks and all Custom Script tasks must run before the Cube tasks.

Single-Currency Sequence Dependencies

Table 7.1 lists the dependencies between the task types and the recommended values that should be used in a standard single-currency installation.

Note All dependencies require that prior dependencies have also been met.

Table 7.1
Single-Currency
Dependencies

Script or Task Type	Dependencies	Recommended Sequence Setting
Table	None	00
Script_Currency_Fields_Incremental_.p	Table	15
Custom Script	Script_Currency_Fields_Incremental_.p	20
Cube	Custom Script	90

Multicurrency Sequence Dependencies

Some special considerations must be observed if Data Transformer is being used in multicurrency mode. Table 7.2 lists the dependencies between the task types and the recommended values that should be used in a standard multicurrency installation.

Note All dependencies require that prior dependencies have also been met.

Table 7.2
Multicurrency
Sequence
Dependencies

Script or Task Type	Dependencies	Recommended Sequence Setting
Table	None	00
Script_Base_Currency_.p Script_Exchange_Rate_.p	Table	10
Script_Currency_Fields_Incremental_.p	Script_Base_Currency_.p and Script_Exchange_Rate_.p	15
Custom Script	Script_Currency_Fields_Incremental_.p	20
Cube	Custom Script	90

Creating Translatable Cognos Transformer Models

This section provides information for creating translatable Cognos Transformer models.

Overview

The QAD BI Data Transformer supports creating Cognos Transformer models using tokens to define text for dimensions, levels, categories, and measures. These tokens are translated during replication using user-defined replacement text specified using Data Transformer Label function.

Cognos Transformer Model

The model is created using tokens of the form `${token}` for any text that requires translation; for example, dimension names, level names, and so on. Keep in mind that when a language is not defined in the Languages tab of Cube Properties, the value of `token` is used for the text; the `${` and `}` is stripped from the `${token}`.

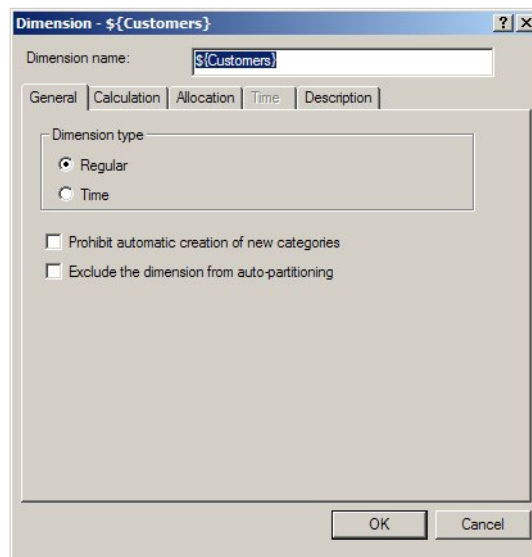


Fig. 7.13
Defining Cognos
Transformer Model
Text Using a Token


The token is replaced by the value defined, using Data Transformer Label function described in the next section, for the language being processed.

Data Transformer User-Defined Labels

In addition to defining your Cognos Transformer model using tokens, Data Transformer's configuration database must be updated with the token and its language-dependent translations. This is accomplished using the following steps:

- 1 In Data Transformer, choose Settings|Labels from the menu. This displays the Labels screen.
- 2 On the Labels screen, click the New button on the toolbar.

Fig. 7.14
Labels

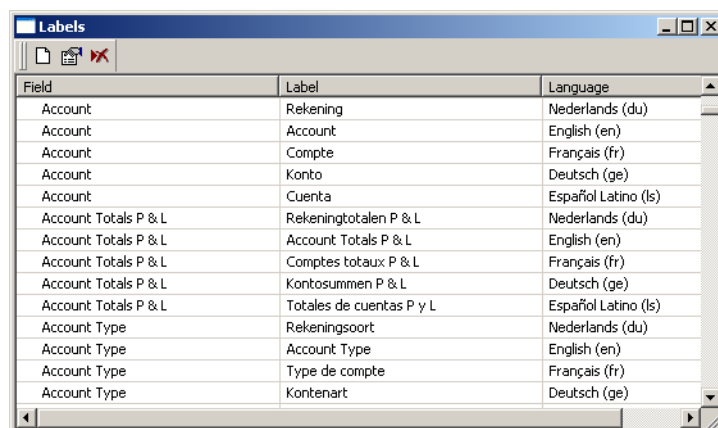

Field	Label	Language
Account	Rekening	Nederlands (du)
Account	Account	English (en)
Account	Compte	Français (fr)
Account	Konto	Deutsch (ge)
Account	Cuenta	Español Latino (ls)
Account Totals P & L	Rekeningtotalen P & L	Nederlands (du)
Account Totals P & L	Account Totals P & L	English (en)
Account Totals P & L	Comptes totaux P & L	Français (fr)
Account Totals P & L	Kontosummen P & L	Deutsch (ge)
Account Totals P & L	Totales de cuentas P y L	Español Latino (ls)
Account Type	Rekeningsoort	Nederlands (du)
Account Type	Account Type	English (en)
Account Type	Type de compte	Français (fr)
Account Type	Kontenart	Deutsch (ge)

- 3 Enter the information to define your translatable token on the Add Label screen as follows:
 - Field: Enter the token used in the Cognos Transformer model.

Example If the token entered in the Cognos Transformer model is `${Customer}`, enter Customer in this field.

 - Languages: Select the language you are defining for the token from the drop-down list.
 - Label: Enter the text that should be used to replace the token.

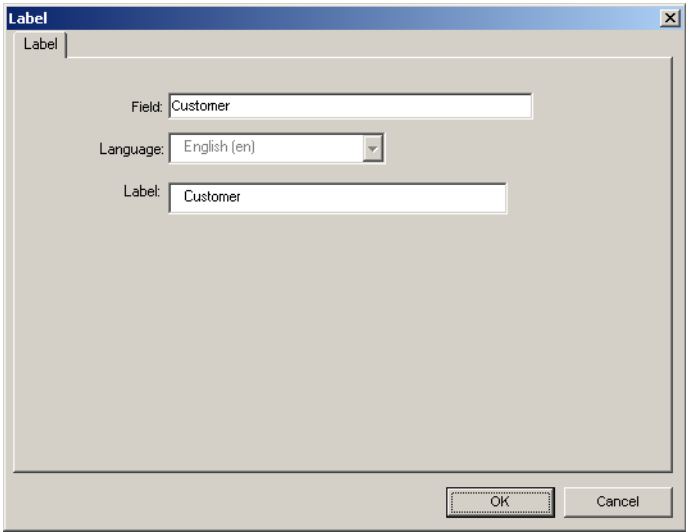


Fig. 7.15
Add Label

- 4 Repeat Steps 2 and 3 for all languages you want to define. When finished, the Labels screen should contain multiple records for the token—one for each language defined.

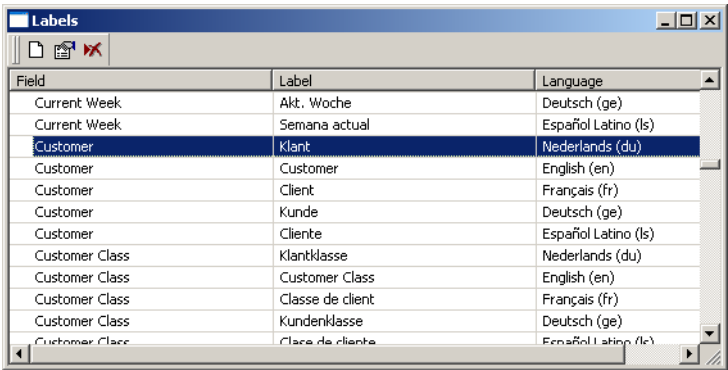


Fig. 7.16
Multiple Languages
Defined for
Customers Token

Manually Loading Custom Scripts

Overview


You can manually load custom scripts. This section provides information on the interdependencies between custom scripts as well as instructions for loading them.

Alternately, the predefined business models offered for sale by QAD include prebuilt custom scripts and tables to transform data in the data warehouse into the data required by the Cognos cubes. To load custom scripts in this fashion, see the sections under “Using QAD-Provided Model Data” on page 103.

Load Custom Scripts

To manually load custom scripts, right-click the Custom Scripts folder on the main screen directory tree and select Add Script.

Fig. 7.17
Add a Customer
Script



The Add Script screen displays. Click Browse to navigate to the directory where the custom script files were placed during installation. Typically, this is:

```
qadbiInstallDir\data\scripts\custom
```

For example:

```
c:\qadbi\data\scripts\custom
```

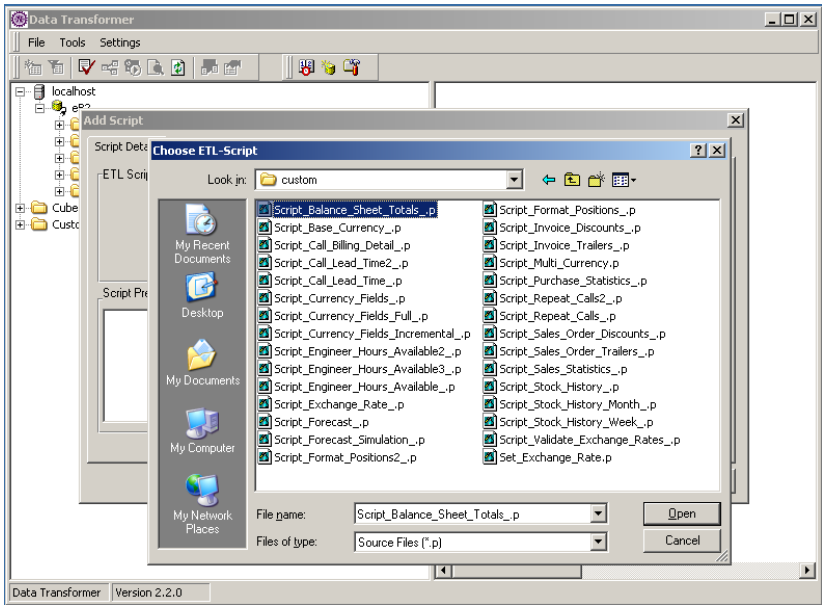


Fig. 7.18
Selecting Custom Scripts

Select the first script on the list and click Open. The system populates the Script Details frame with the path, the default script name—which you can update as needed—and a preview of the script contents.

Important Not all scripts in the custom folder are to be loaded into Data Transformer. Table 7.3 lists the custom scripts distributed for the current version. Only primary scripts should be loaded. Loaded secondary scripts will fail validation.

Primary Scripts	Secondary Scripts
Script_Balance_Sheet_Totals.p	None
Script_Call_Billing_Detail.p	None
Script_Call_Lead_Time.p	Script_Call_Lead_Time2.p
Script_Engineer_Hours_Available.p	Script_Engineer_Hours_Available2.p Script_Engineer_Hours_Available3.p
Script_Forecast.p	None
Script_Forecast_Simulation.p	None
Script_Format_Positions.p	Script_Format_Positions2.p
Script_Invoice_Discounts.p	None

Table 7.3
Custom Primary and Secondary Scripts

Primary Scripts	Secondary Scripts
Script_Invoice_Trailers_.p	None
Script_Purchase_Statistics_.p	None
Script_Repeat_Calls_.p	Script_Repeat_Calls2_.p
Script_Sales_Order_Discounts_.p	None
Script_Sales_Order_Trailers_.p	None
Script_Sales_Statistics_.p	None
Script_Stock_History_Week_.p	Script_Stock_History_.p
Script_Stock_History_Month_.p	Script_Stock_History_.p
Script_Currency_Fields_Incremental_.p	Script_Currency_Fields_.p
Additional scripts should be loaded if multiple MFG/PRO base currencies will be used. To support multiple MFG/PRO base currencies:	
Script_Base_Currency_.p	None
Script_Exchange_Rate_.p	None

The additional scripts shown in Table 7.4 are required for multiple MFG/PRO base currencies.

Table 7.4
Multiple-Currency
Scripts

Primary Scripts	Secondary Scripts
Script_Base_Currency_.p	None
Script_Exchange_Rate_.p	None

Important The custom script `Script_Multi_Currency.p` is a utility script—that is, not a primary or secondary script—and should *not* be scheduled by users.

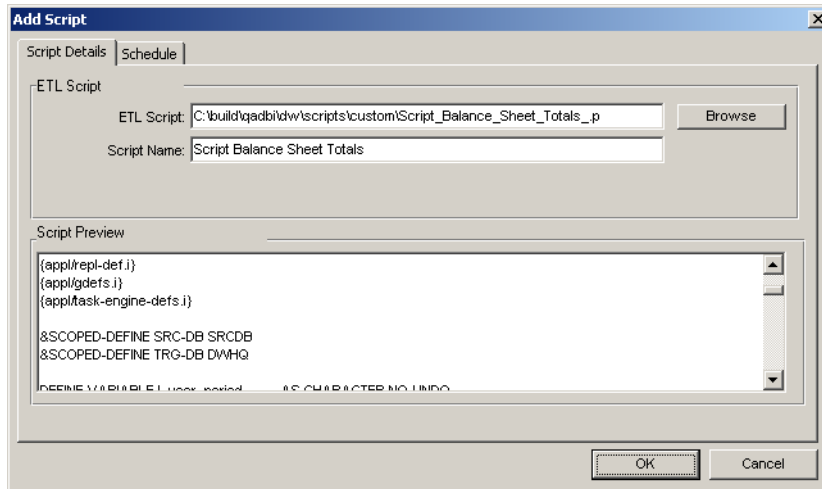


Fig. 7.19
Add Script

Click the Schedule tab to specify when this script will run to replicate data. For information on scheduling, see “Scheduling Automatic Replication” on page 69.

Note To ensure that custom scripts are run after any standard (that is, generated) scripts, set Sequence to a value that is greater than the highest standard script’s sequence. For additional information regarding the use of multicurrencies, see “Multicurrency Configuration” on page 250.

Repeat this task for each primary script in the directory.

Index

A

application settings 107, 228, 252

B

batch process 113, 233, 244, 253, 255

business key indexes 76, 206

business models 17, 43, 51, 99, 165, 174, 182, 221

C

code pages 14, 147, 161, 184

code table filter 63, 192

Cognos 8 8, 40, 140, 172

Cognos 8 Server 23, 154

Cognos Configuration Manager 19, 153

Cognos Framework Manager 29, 160

Cognos PowerPlay Transformer 18, 111, 153, 174, 232

Cognos Transformer models 257

content store 23, 154

currency 251

custom

compiled scripts 106, 227

fields 66, 194

indexes 75, 76, 203, 206

scripts 89, 106, 213, 227, 260

tables 69, 88, 197, 213

D

Dashboard 44

Install 125

data

merge 91, 216

replication 83, 207

subsets 74, 202

target 84, 208

Data Transformer 41, 173

configuring 249

installation 14, 161

menu 47, 178

navigation 46, 177

setting up 51, 182

source system icons 50, 181

toolbar 47, 178

translatable Cognos models 257

user interface 45, 175

data warehouse 40, 41, 108, 172, 173, 229

currency 251

fields 65, 194

tables 61, 63, 86, 189, 191, 211

databases

connections 52, 183

merge data 91, 216

replication 63, 191

status 96, 217

DataDirect SequeLink 147

domains 57, 60, 185, 188

E

error messages 118, 235

F

fields

custom 66, 194

mapping 65, 73, 85, 194, 201, 209

properties 66, 194

filter, code table 63, 192

H

hardware requirements 8, 140

HTTP server

configuration 25, 156

installation 23, 154

I

icons, Data Transformer source system 50, 181

IIS 6.0 24, 155

Impromptu Query Definition 42

indexes 75, 76, 203, 206

installation 7–33, 139–166

 Data Transformer 14, 161

 media 11, 143

 Progress components 144

 steps 12, 143

IQD Editor 101

K

key performance indicators 43, 174

L

language support 9, 14, 141, 146

links

 rebuilding 97, 219

 updating 218

log-in, user 45, 176

M

mapping

 fields 65, 73, 85, 194, 201, 209

 tables 63, 87, 191, 212

menu, Data Transformer 47, 178

merge data 91, 216

metadata 62, 103, 191, 225

MFG/PRO database 41, 173

 connecting to 51, 182

 domain 57, 185

Microsoft Access 175, 230

 database 174

 server 96, 218

 settings required 145

Microsoft Internet Information Services 23, 155

multicurrency configuration 250

N

navigation, Data Transformer 46, 177

notification 118, 235

O

ODBC Administrator 164

Oracle database 58, 187

overview 8, 36, 40, 140, 172

P

parallel replication 244

performance requirements 11, 142

Progress

 components 144

 DataServer 58, 186

Q

QAD ReportNet Bundle 30

R

rebuild links 97, 219

recreating tables 86, 211

reference information 244–263

replication

 automatic 69, 197

 data 69, 83, 197, 207

 fields 65, 73, 194, 201

 manual 71, 200

 method 67, 196

 multicurrency 253

 parallel 244

 setup 63, 191

 table validation 85, 209

 tables 63, 71, 191, 200

 task sequence 255

S

script validation 106, 227

setting up BI 51, 182

SMTP mail server account 13, 27, 146, 159

software requirements 9, 141

source system

 icons, Data Transformer 50, 181

supported platforms 8, 140

system registry 15, 17, 161, 166

system tasks 92

T

tables

 custom 69, 197

 export 96, 219

 linking 110, 230

 mapping 63, 87, 191, 212

 re-creation 86, 211

 removal 63, 191

 rename 72, 200

 selection 61, 189

 status 87, 212

 subsets 47, 178

 validation 85, 209

toolbar, Data Transformer 47, 178

U

upgrading 36, 168

user

 log-in 45, 176

 records 118, 237

using QAD BI 40–121, 172–239

V

validation
 scripts 106, 227
 tables 85, 209

W

Web browsers 27, 158
Windows Task Scheduler 120, 239

