



Installation Guide

QAD Customer Relationship

Management

Overview
Installation
Post-Installation Configuration
Upgrade

78-0927-6.8
QAD CRM 6.8
September 2018

This document contains proprietary information that is protected by copyright and other intellectual property laws. No part of this document may be reproduced, translated, or modified without the prior written consent of QAD Inc. The information contained in this document is subject to change without notice.

QAD Inc. provides this material as is and makes no warranty of any kind, expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. QAD Inc. shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance, or use of this material whether based on warranty, contract, or other legal theory.

This document contains trademarks owned by QAD Inc. and other companies.

CRM_IG_v068.pdf

Copyright ©2018 by QAD Inc.

QAD Inc.

100 Innovation Place
Santa Barbara, California 93108
Phone (805) 566-6000
<https://www.qad.com>

Contents

CRM Installation Guide Change Summary	ix
Chapter 1 Overview	1
Overview	2
Installation	4
Installing QAD CRM on a Network	4
Installing QAD Remote Sales	5
Configuration	5
Integration	5
Integration with QAD Enterprise Applications	5
Integration with Microsoft Exchange Server	6
Chapter 2 Installation	7
Planning an Installation	8
Security Plan	8
Deployment	9
Database Server	9
Application Server	10
Deployment Server	10
Delivery Server	10
QAD CRM Clients	10
QAD Enterprise Applications Integration	10
Exchange Server Integration	11
Network, Disk, and Client Layout	11
System Requirements	11
General Requirements	11
Database Server	11
Deployment Server	12
Delivery Server	13
QAD CRM WebClient	13
QAD Enterprise Applications Integration	15
Microsoft Exchange Integration	15
QAD Remote Sales	16
Network	17
Deploying QAD CRM	17

Installing Progress on the Database Server	18
Installing Progress on the Deployment Server	18
Installing QAD CRM on the Deployment Server	18
Setting Up the Database Server	21
Configuring QAD CRM on Deployment Server	29
Configuring the Delivery Server	30
Splitting and Compiling UI and Backend QAD CRM Programs	33
Copying QAD Backend Programs on the Application Server	34
Configuring Application Server	37
Generating and Copying QAD CRM WebClient Files	41
Integrating QAD CRM with QAD SE	45
Integrating QAD CRM with QAD EE	48
Configuring QXtend for Integration	50
Configuring the Environment for Sales Order Integration	67
Installing QAD CRM on End-User PC	69
Creating Separate QAD CRM Environment	72
Implementing QAD Remote Sales (Optional)	73
Deploying QAD CRM in a YAB Environment	76
Installing Appropriate CRM YAB Recipe	77
Installing Progress on the Deployment Server	77
Installing QAD CRM on the Deployment Server	77
Configuring QAD CRM on Deployment Server	80
Splitting and Compiling UI and Backend QAD CRM Programs	84
Generating and Copying QAD CRM WebClient Files	85
Configuring integration with QAD ERP	89
Installing QAD CRM on End-user PC	89
Creating Separate QAD CRM YAB Environment	89
Implementing Remotes Sales (Optional)	90
Chapter 3 Post-Installation Configuration	91
Overview	92
Mandatory Configuration Tasks	92
Function Settings	92
Configuring Mandatory Information	93
Loading Language Files into QAD CRM	97
Setting Up a New Language Record	97
Loading Language File	98
Configuring Function Information	101
Chapter 4 Upgrade	103
Upgrading QAD CRM 6.1.1 to 6.3B1	104
Installing QAD CRM 6.3B1	104

Converting 6.1.1 Databases to the Supported Progress Version	105
Converting 6.1.1 Databases to 6.3B1 (Non-Unicode)	105
Converting 6.3B1 Databases From Non-Unicode to Unicode	108
Performing Post-Upgrade Tasks	110
Upgrading QAD CRM 6.3 to 6.3B1	111
Upgrading QAD CRM 6.3 B1 / 6.4 B2 to QAD CRM 6.4 B6	111
Pre-Upgrade Tasks	111
Converting 6.3 B1 / 6.4 B2 Databases to 6.4 B6 Format	114
Post-Upgrade Tasks	117
Upgrading QAD CRM 6.4 B2/6.4 B6 to QAD CRM 6.4 B8	117
Pre-Upgrade Tasks	118
Converting QAD CRM 6.4 B2 / 6.4 B6 Databases to QAD CRM 6.4 B8	120
Post-Upgrade Tasks	121
Upgrading QAD CRM 6.4B8 to CRM 6.4.4 Patch Bundle 1	122
Upgrading QAD CRM 6.4.4 Patch Bundle1 to QAD CRM 6.5.1	122
Pre-Upgrade Tasks	122
Converting QAD CRM 6.4.4 Patch Bundle1 Databases to QAD CRM 6.5.1	122
Post-Upgrade Tasks	123
Upgrading QAD CRM 6.5.1 to QAD CRM 6.6.1	123
Pre-Upgrade Tasks	123
Installing QAD CRM 6.6 B7 on the Deployment Server	124
Converting 6.5.1 Databases to 6.6.1 Format	124
Configuring QAD CRM 6.6.1 on Deployment Server	129
Configuring the Delivery Server	130
Splitting UI and Backend Programs on the Deployment Server	130
Copying QAD Backend Programs on the Application Server	130
Configuring Application Server	131
Generating and Copying QAD CRM WebClient Files	131
Integrating with QAD SE	131
Integrating with QAD EE	133
Installing QAD CRM on End-User PC	133
Post-Upgrade Tasks	133
Upgrading QAD CRM 6.6.1 to CRM 6.6.2	133
Installing QAD CRM 6.6.2 on the Deployment Server	133
Install QAD CRM 6.6.2 Upgrade Patch Bundle on Deployment Server	134
Converting 6.6.1 Databases to 6.6.2 Format	134
Configuring QAD CRM 6.6.2 on Deployment Server	138
Configuring the Delivery Server	138
Splitting UI and Backend Programs on the Deployment Server	139
Copying QAD Backend Programs on the Application Server	139
Configuring Application Server	139
Generating and Copying QAD CRM WebClient Files	140
Integrating with QAD SE	140

Integrating with QAD EE	140
Updating the AppServer Name Defined in QAD CRM	141
Installing QAD CRM on End-User PC	141
Post-Upgrade Tasks	141
Upgrading QAD CRM 6.6.2 to CRM 6.6.3	142
Installing QAD CRM 6.6.3 on the Deployment Server	142
Converting 6.6.2 Databases to 6.6.3 Format	142
Configuring QAD CRM 6.6.3 on Deployment Server	145
Configuring the Delivery Server	145
Splitting UI and Backend Programs on the Deployment Server	145
Copying QAD Backend Programs on the Application Server	146
Configuring Application Server	146
Generating and Copying QAD CRM WebClient Files	147
Integrating with QAD SE	147
Integrating with QAD EE	147
Updating the AppServer Name Defined in QAD CRM	148
Installing QAD CRM on End-User PC	148
Post-Upgrade Tasks	148
Upgrading QAD CRM 6.6.3 to CRM 6.7	149
Installing QAD CRM 6.7 on the Deployment Server	149
Converting 6.6.3 Databases to 6.7 Format	149
Configuring QAD CRM 6.7 on Deployment Server	152
Configuring the Delivery Server	152
Splitting UI and Backend Programs on the Deployment Server	152
Copying QAD Backend Programs on the Application Server	152
Configuring Application Server	153
Generating and Copying QAD CRM WebClient Files	153
Integrating with QAD SE	154
Integrating with QAD EE	154
Updating the AppServer Name Defined in QAD CRM	155
Installing QAD CRM on End-User PC	155
Post-Upgrade Tasks	155
Upgrading QAD CRM 6.7 to CRM 6.7.1	156
Installing QAD CRM 6.7.1 on the Deployment Server	156
Converting 6.7 Databases to 6.7.1 Format	156
Configuring QAD CRM 6.7.1 on Deployment Server	159
Configuring the Delivery Server	160
Splitting UI and Backend Programs on the Deployment Server	160
Copying QAD Backend Programs on the Application Server	160
Configuring Application Server	160
Generating and Copying QAD CRM WebClient Files	161
Integrating with QAD SE	161
Integrating with QAD EE	161

Updating the AppServer Name Defined in QAD CRM	162
Installing QAD CRM on End-User PC	162
Post-Upgrade Tasks	162
Upgrading QAD CRM 6.7.1 to CRM 6.7.2	163
Installing QAD CRM 6.7.2 on the Deployment Server	163
Converting 6.7.1 Databases to 6.7.2 Format	164
Configuring QAD CRM 6.7.2 on Deployment Server	166
Configuring the Delivery Server	167
Splitting UI and Backend Programs on the Deployment Server	167
Copying QAD Backend Programs on the Application Server	167
Configuring Application Server	167
Generating and Copying QAD CRM WebClient Files	168
Integrating with QAD SE	168
Integrating with QAD EE	168
Updating the AppServer Name Defined in QAD CRM	169
Installing QAD CRM on End-User PC	169
Post-Upgrade Tasks	169
Upgrading QAD CRM 6.7.2 to CRM 6.7.3	170
Installing QAD CRM 6.7.3 on the Deployment Server	170
Installing Using YAB	170
Normal Installation	171
Installing QAD CRM on End-User PC	173
Post-Upgrade Tasks	173
Upgrading QAD CRM 6.7.3 to CRM 6.8	174
Installing QAD CRM 6.8 on the Deployment Server	174
Installing Using YAB	174
Normal Installation	175
Installing QAD CRM on End-User PC	177
Post-Upgrade Tasks	177
Appendix A Signing Tools for OE11.3.1	179
Overview	180
Preparing Signing Tools	180
Setting Environment Variables	181
Product Information Resources	183
Index	185

CRM Installation Guide Change Summary

The following table summarizes significant differences between this document and the last published version.

Date/Version	Description	Reference
September 2018/6.8	Updated the system requirements	--
	Updated instructions for deploying CRM	--
	Added instructions for upgrading CRM 6.7.3 to 6.8	page 174
September 2017/6.7.3	Updated the system requirements	--
	Updated instructions for deploying CRM	--
	Added instructions for upgrading CRM 6.7.2 to 6.7.3	page 170
April 2016/6.7.2	Updated instructions for deploying CRM	--
	Added instructions for deploying CRM in YAB environment	page 76
	Added instructions for upgrading CRM 6.7.1 to 6.7.2	page 163
September 2015/6.7.1	Updated instructions for deploying CRM	--
	Added instructions for upgrading CRM 6.7 to 6.7.1	page 156
March 2015/6.7	Updated the system requirements	--
	Added instructions for updating CRM 6.6.3 to 6.7	page 149
September 2014/6.6.3	Updated the system requirements	--
	Added reference for updating CRM 6.4B8 to 6.4.4 Patch Bundle 1	page 122
	Added instructions for updating CRM 6.6.2 to 6.6.3	page 142
August 2014/6.6.2 (Rev 1)	Removed references to OE10.1C from System Requirements in Chapter 2 Installation	--
	Added procedures for updating CRM 6.6.1 to 6.6.2	page 133
March 2014/6.6.2	Updated Progress versions for the database servers	--
	Updated the code information about setting databases on a Windows server	page 28
	Added a section about signing tools for OE11.3.1	page 179
April 2013/6.6.1 Rev1	Updated some steps in Installing QAD CRM on the Deployment Server	page 19
	Updated the steps of Performing Additional Configurations for Integration with QAD Enterprise Applications	page 38
	Updated the steps of Generating and Copying QAD CRM WebClient Files	page 41
	Added supplementary information to Installing QAD CRM on End User PC	page 71
	Added information about the dump and load utility	page 101
March 2013/6.6.1	Updated information about upgrading CRM 6.4.4 to CRM 6.5.1	page 122

Date/Version	Description	Reference
	Updated information about upgrading CRM 6.5.1 to CRM 6.6.1	page 123
	Updated information about integrating CRM with QAD SE	page 131
November 2012/6.6	Updated information about upgrading CRM 6.5.1 to CRM 6.6	page 123
September 2012/6.6	Rebranded for version 6.6	--
September 2012/6.6	Updated information about support for Exchange Server 2010	--
April 2012/6.5.1-Rev1	Updated information about QAD CRM WebClient configuration	--
March 2012/6.5.1	Revamped the whole book for QAD CRM WebClient in numerous places	--
September 2011/6.4.4	Added a reminder for completing further configuration steps required for sales order integration documented in the QAD CRM Administration Guide	--

Overview

This chapter provides an overview of QAD Customer Relationship Management (QAD CRM) and its enterprise-wide deployment. It discusses the following topics:

Overview 2

Installation 4

Configuration 5


Integration 5

Overview

QAD CRM is a comprehensive business-generating system that consists of several applications:

- QAD Sales Force Automation (QAD SFA). This is the core of the system that is designed to help you streamline sales efforts by managing your contacts, activities, business opportunities, product details, and so on.
- QAD Remote Sales. This is an optional stand-alone version of QAD CRM that lets remote sales personnel synchronize their data with the host database.
- QAD Marketing Automation. This optional application provides comprehensive campaign management features designed to streamline marketing efforts. All modules available in QAD Sales Force Automation are included in QAD Marketing Automation.

Fig. 1.1
QAD CRM Functional Areas

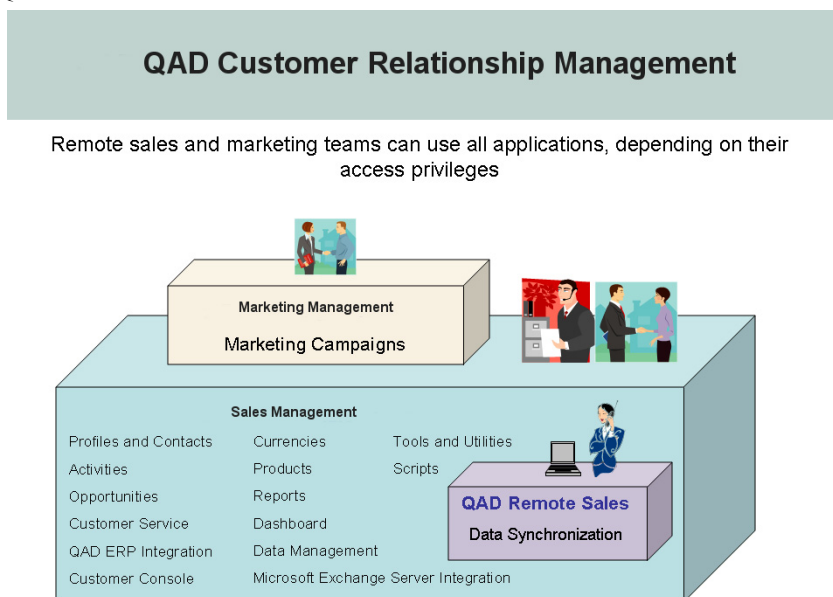


QAD CRM applications can communicate with each other to share information. For example, sales and marketing departments can share details of customers, prospects, partners, and suppliers through the application they use. The system ensures organizational and departmental data security by selectively restricting user access to data.

The system can integrate and synchronize data with different versions of QAD EE and QAD SE, as well as Microsoft Exchange Server 2010, 2013, and 2016.

When remote users synchronize data in their personal database with the host databases, they indirectly synchronize data with the integrated system.

You can install QAD CRM as a thin client application. QAD Remote Sales is installed on remote computers as a stand-alone application.


Fig. 1.2
Installation Overview

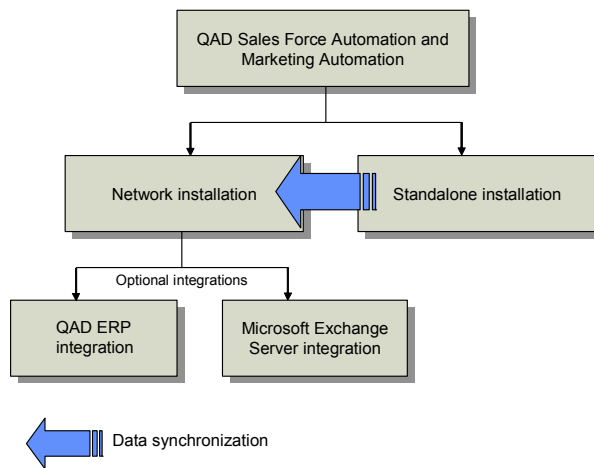

The system also integrates with other third-party applications—Microsoft Word 2007/2010/2013/2016, Microsoft Excel 2007/2010/2013/2016, Crystal Report XI, and Phone Dialer—to support various functions. For example, you can create business letters using Microsoft Word templates registered in the system.

Microsoft Word is required if you want to use the mail merge feature to create letters to contacts, send marketing literature to your targeted audience, or print quotes. One specific report—installed base report—requires Microsoft Excel integration. Both Word and Excel are required for integration with Crystal reports, which lets you export reports to a number of standard Microsoft Office document formats supported by QAD CRM.

Fig. 1.3
Crystal Report Export

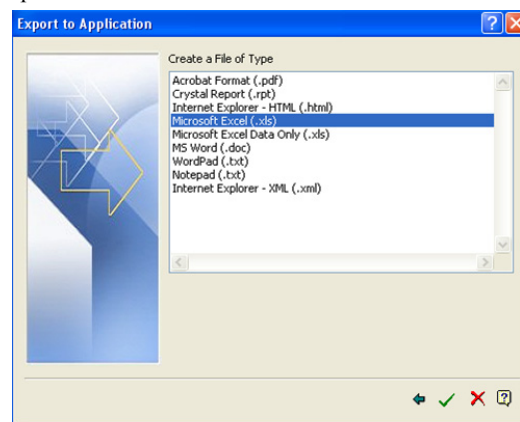

The architecture, features, and functionality of the system meet enterprise requirements of reliability, scalability, flexibility, and maintainability.

Installation

You can install QAD CRM across the enterprise network as a thin client using the Progress WebClient technology. QAD Remote Sales is installed on remote computers as a stand-alone application.

To install the system you should be familiar with the following technologies and products:

- Progress
- TCP/IP networking
- QAD CRM
- QAD EE/SE
- Microsoft Exchange Server 2010, 2013, or 2016
- UNIX or Linux
- Text editors

Installing QAD CRM on a Network

- 1 Ensure that your hardware and software infrastructure meets the minimum requirement criteria for installation.
- 2 Plan the network installation.
- 3 Ensure that all required Progress components are installed.
- 4 Set up the system on the deployment and database servers:
 - a Install and configure program components on the deployment server.
 - b Set up the database server.
 - c Set up the delivery server (a Tomcat Web server) to host the QAD CRM Webapps.
 - d Configure the servers to communicate with CRM WebClient.
 - e Set up the system installation environment to integrate with QAD Enterprise Applications.
 - f Prepare the AppServer environment to support Microsoft Exchange Server 2010, 2013, or 2016 integration, QAD Enterprise Applications (Enterprise Edition) integration, and Remote Sales data synchronization.
- 5 Set up the clients.

The CRM client can be easily configured on a computer by just clicking on a URL once the system has been configured by the administrator for use in WebClient mode.
- 6 Make sure that the database application server and delivery servers are up and running. The CRM client can be launched by just clicking the icon created by the CRM WebClient installation.

Installing QAD Remote Sales

- 1 From QAD CRM:
 - a Create remote or regional nodes.
 - b Enable data synchronization.
 - c Create host database subset.
- 2 On the remote computer(s):
 - a Ensure that the hardware and software configuration of remote computers meet the minimum requirement criteria for installation.
 - b Install Progress Personal Database.
 - c Install QAD Remote Sales.
 - d Load the host node subset onto the Progress Personal Database.
 - e Enable data synchronization.

Configuration

You must configure QAD CRM according to the requirements of your company. Configuration tasks can be categorized as mandatory or functional.

- Mandatory tasks include setting up the system for enterprise-wide use by configuring business unit details, administrator profile, base currency, and so on. When you start the system after installation, you can configure it with mandatory information by using the Configuration Wizard.
- Functional tasks include configuring user profiles, teams, menus, reports, templates, system settings, and so on by using the system setup modules.

Integration

You can integrate the system with your QAD Enterprise Applications and Microsoft Exchange Server 2010, 2013, or 2016 to enhance its scope.

Integration with QAD Enterprise Applications

Various modules of your QAD Enterprise Applications can be integrated with QAD CRM through CIM, QXtend, database, and session triggers to provide efficient and fast online integration. QAD CRM supports integration with multiple domains of QAD Enterprise Applications.

For integration purposes the databases must run in multi-user mode and must always be available. The file server that holds QAD Enterprise Applications programs must include certain QAD CRM programs. Similarly, the file server that holds QAD CRM programs must contain certain QAD Enterprise Applications programs.

After configuring the applications you can enable and configure the integration as required. You can then perform the initial data transfer between the integrated systems.

Integration with Microsoft Exchange Server

By integrating the system with Microsoft Exchange Server 2010, 2013, or 2016 you can:

- Send e-mail messages from the system using the Microsoft Outlook client.
- Maintain references to e-mail messages stored in Microsoft Outlook in the system.
- Synchronize activity and contact details between the system and Microsoft Exchange Server.
- Synchronize data sent using e-mail messages between the stand-alone version and network version of the system.

For the integration you must install QAD AdminService, which communicates with Microsoft Exchange Server and its components for the integration. You must also install various components on the QAD CRM deployment server and the QAD CRM client and register custom forms in the Exchange organization library to enable integration with Exchange Server.

Installation

This chapter describes how to install QAD Customer Relationship Management (QAD CRM). It discusses the following topics:

Planning an Installation **8**

System Requirements **11**

Deploying QAD CRM **17**

Deploying QAD CRM in a YAB Environment **76**

Planning an Installation

This section describes topics you should understand before installing QAD CRM.

If you have experience installing QAD CRM from previous versions, numerous changes have occurred to the installation process.

A QAD CRM installation can be one of three types:

- A new installation.
- A Service Pack installation.
- An installation to support a conversion from an earlier QAD CRM version to the current release (upgrade).

This section only describes how to perform a new installation. To perform a new install, you must plan for the following:

- 1 An installation addressing:
 - Test and production databases
 - QAD Enterprise Applications integration (optional)
 - Exchange Server integration (optional)
 - QAD Remote Sales (optional)
- 2 QAD CRM database configuration, including any custom and other side databases.
- 3 The resulting network, disk, and client layouts.

Security Plan

A successful QAD CRM installation requires a complete security plan. During installation, full permissions are required for system and application tools that are used to load, edit or delete data. In addition, to install the system on a network, you require administrator privileges as installation programs create registry entries and may update some system files that require administrator rights.

In addition, to integrate Exchange Server, you need to create one user; for example, a user with userid `qadsfama` (it could be any user-defined userid), in Active directories with full administrative access.

A security plan typically consists of:

- 1 Operating-system-level security for tools such as:
 - Progress Editor
 - Progress Data Administrator
 - Progress Application Compiler
- 2 Operating-system login security.
- 3 Operating-system permissions and ownership set appropriately for:
 - Database files
 - Log files


- Application source and compiled source files
- Application startup and shutdown scripts
- Registry

Deployment

You can install QAD CRM on UNIX/Linux and Windows servers. QAD CRM has five components:

- Database server
- Application server
- Deployment server (file server)
- Delivery server (Web server)
- QAD CRM clients (a WebClient/Remote Sales)

Fig. 2.1
QAD CRM Deployment with QAD Enterprise Applications

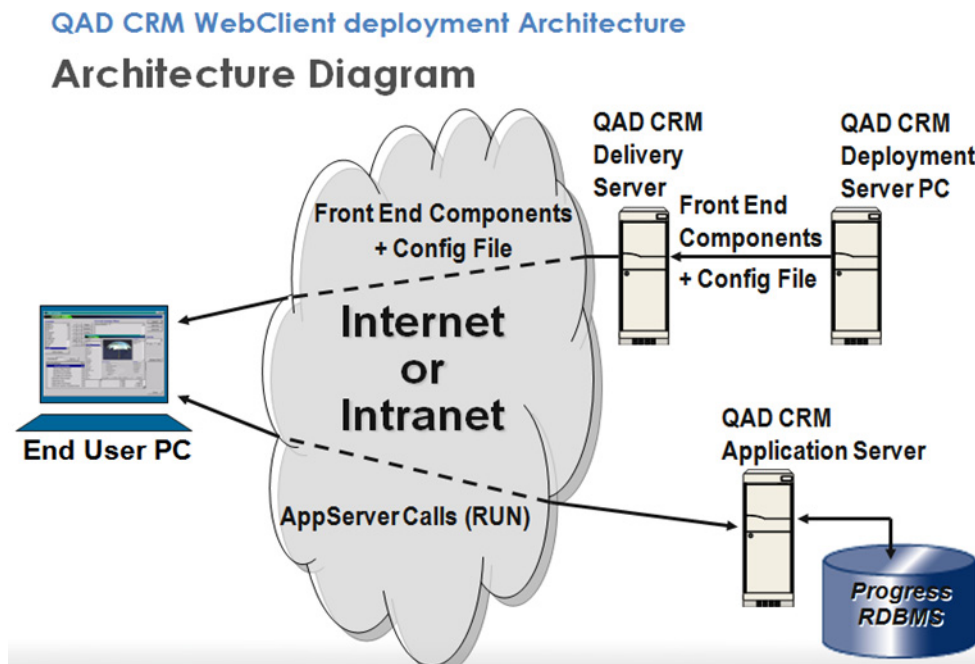

Database Server

The database server consists of the QAD CRM databases. You build these databases as part of the installation. You first create empty databases, then use the empty databases as a template to build test, production, training, development and other databases. CRM WebClient accesses these databases through an AppServer directly or through a deployment server. QAD CRM stores information in the `bisgen`, `bisgmenu`, and `dataexch` databases.

Application Server

The application server contains Progress AppServer and compiled QAD CRM application code. Application server components can reside on the same machine as the database server.

Deployment Server

The deployment server is the location of the QAD CRM encrypted code, compiled specifically for this machine type. The `.r` code is used to generate cab files that are hosted on the delivery server.

Delivery Server

The delivery server hosts:

- Codebase: QAD CRM files (`.r`, `.ocx`, `.pl`, and so on) that go onto the end-user machine; the files may have been installed and updated.
- QAD CRM configuration file.
- Progress WebClient software.

Note Application/Database deployment servers can all reside on same machine.

QAD CRM Clients

QAD CRM has two types of clients:

- WebClient: A CRM WebClient can be configured by clicking on a hyperlink provided by a administrator or a person doing the configuration of CRM at a given site. This link will vary from configuration to configuration but in essence it points to a `qadcrm.prowcapc/qadcrm_all.prowcapc` file on a Webserver that can be invoked by the client machine, and QAD CRM installation is done automatically. No separate files need to be configured on the client.
- QAD Remote Sales: This is an optional stand-alone version of QAD CRM that lets remote sales personnel use the system in an offline mode and synchronize data with the host database. A client setup is required to install QAD Remote Sales and perform data synchronization.

QAD Enterprise Applications Integration

You can integrate various modules of QAD Enterprise Applications with QAD CRM through QAD QXtend (in the case of QAD EE), CIM through Progress AppServer (sales order transfer), database and session triggers.

For the integration, QAD Enterprise Applications and QAD CRM databases must run in multi-user mode and always be available. The deployment server that holds QAD Enterprise Applications programs must include certain QAD CRM programs. Similarly, the deployment server that holds QAD CRM programs must contain certain QAD Enterprise Applications programs.

QAD recommends that you deploy:

- QAD CRM and QAD Enterprise Applications databases on the same database server.
- The Progress AppServer on the database server.

Exchange Server Integration

You can integrate various modules of Microsoft Exchange Server 2010, 2013, or 2016 (e-mails, appointments, tasks, and contacts) with QAD CRM. For integration you must install QAD AdminService. The QAD AdminService is a Windows service that communicates with Microsoft Exchange Server and QAD CRM using Progress AppServer. QAD CRM runs QAD AdminService on the deployment server machine.

QAD recommends deployment of Progress AppServer on the database server.

Network, Disk, and Client Layout

The databases and program files can reside on the same Windows server. Using the same server enhances system performance. However, if there are many clients, you should use separate servers for resource sharing.

The servers must be easily accessible by clients running on workstations across the network. They must have sufficient free hard disk space to accommodate operations performed by system users.

At a machine level, QAD recommends deployment of QAD CRM databases on a database server and software on a file server separate from the database server.

System Requirements

This section describes hardware and software requirements for deploying QAD CRM.

See the [Product Compatibility Guide](#) in the QAD Store for the up-to-date requirements and compatibility information.

General Requirements

The system administrator must be an experienced Progress database administrator with experience managing Progress client processes. Before installing QAD CRM, Progress must be installed following the instructions in the Progress installation guide. The Progress install for each platform may include UNIX kernel changes and patches.

Database Server

The database server contains QAD CRM and Progress server software, as well as your production data. You should estimate the final size of your production database and the demands placed on different components of the database before starting an installation so that you can lay out your disks appropriately.

Table 2.1
Hardware Requirements for Database Server

Hardware Component	Minimum Requirement
Processor	Pentium 4 2.80 GHz, dual processor or above
RAM	4 GB For better performance, use 8 GB or more of RAM .

Hardware Component	Minimum Requirement
Hard disk	8 GB The hard disk requirement may be more, depending on the number of: • Environments you want to create. The environments are compilation, test, and production. • Users that will connect to the server.
Others	SVGA color monitor High-speed 100 MB Ethernet card CD-ROM drive

Table 2.2
Software Requirements for Database Server

Software Component	License Type	Version
Progress	Enterprise Database Server	10.2A02, 10.2B01, 10.2B02, 10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3
Progress	AppServer Enterprise	10.2A02, 10.2B01, 10.2B02, 10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3
Progress	4GL (1 user)	10.2A02, 10.2B01, 10.2B02, 10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3
Operating System		UNIX/Linux/Windows 2012/Windows 2008 /Windows 2003

Deployment Server

Table 2.3
Hardware Requirements for Deployment Server

Hardware Component	Minimum Requirement
Processor	Pentium 4 2.80 GHz, dual processor or above
RAM	4 GB For better performance, use 8 GB or more of RAM .
Hard disk	8 GB The hard disk requirement may be more, depending on the number of: • Environments you want to create. The environments are compilation, test, and production. • Users that will connect to the server.
Others	SVGA color monitor High-speed 100 MB Ethernet card CD-ROM drive

Table 2.4
Software Requirements for Deployment Server

Software Component	License Type	Version
Progress	OE Studio (1 user)	10.2A02, 10.2B01, 10.2B02, 10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3 Important CRM requires the 32-bit version of OE Studio. Ensure that you install the Progress for 32-bit system on the Windows Deployment Server.
Operating System		Windows 2012/Windows 2008/Windows 2003

Delivery Server

Table 2.5
Hardware Requirements for Delivery Server

Hardware Component	Minimum Requirement
Processor	Pentium 4 2.80 GHz, dual processor or above
RAM	4 GB For better performance, use 8 GB or more of RAM .
Hard disk	8 GB The hard disk requirement may be more, depending on the number of: • Environments you want to create. The environments are compilation, test, and production. • Users that will connect to the server.
Others	SVGA color monitor High-speed 100 MB Ethernet card CD-ROM drive

Table 2.6
Software Requirements for Delivery Server

Technology Component	Server
Web Server	Apache Tomcat 6.0
Operating System	UNIX/Linux/Windows 2012/Windows 2008/Windows 2003

QAD CRM WebClient

Table 2.7
Hardware Requirements for Client

Hardware Component	Minimum Requirement
Processor	Pentium 4 3.00 GHz processor
RAM	1 GB at minimum For optimal performance, it is recommended to have 2 GB RAM or more.

Hardware Component	Minimum Requirement
Hard disk	2 GB
Others	SVGA color monitor Network card Ethernet connection running TCP/IP protocol In case of QAD CRM configuration over a WAN, following additional requirements must be met: • Minimum latency between end-user PC and Application Server should be less than 200 ms

Table 2.8
Software Requirements for Client

Software Component	License Type	Version
Operating System		Windows 2003/XP/Vista/2008/7/8/8.1/10
Progress WebClient		10.2A02/ 10.2B01/ 10.2B02/10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3
Internet Explorer		IE7/IE8/IE9/IE10

Important

- Windows 8 is only supported for CRM deployed with OE10.2B07, OE10.2B08, OE11.3.1, and later versions.
- Windows 8.1 is only supported for CRM deployed with OE10.2B08, OE11.3.2, and later versions.

QAD Enterprise Applications Integration

Table 2.9

Requirements for QAD Enterprise Applications Integration

Technology Component	Server	Client
QAD Enterprise Applications	QAD 2007.1 SE, QAD 2008 SE, QAD 2008.1 SE, QAD 2009 SE, QAD 2009 EE, QAD 2009.1 EE, QAD 2010 SE, QAD 2014 SE, QAD 2010 EE, QAD 2010.1 EE, QAD 2011 EE, QAD 2011.1 EE, QAD 2012 EE, QAD 2013 EE, QAD 2014 EE, QAD 2015 EE, QAD 2016 EE, QAD 2016.1 EE, QAD 2017 EE, QAD 2018 EE	QAD 2007.1 SE, QAD 2008 SE, QAD 2008.1 SE, QAD 2009 SE, QAD 2009 EE, QAD 2009.1 EE, QAD 2010 SE, QAD 2014 SE, QAD 2010 EE, QAD 2010.1 EE, QAD 2011 EE, QAD 2011.1 EE, QAD 2012 EE, QAD 2013 EE, QAD 2014 EE, QAD 2015 EE, QAD 2016 EE, QAD 2016.1 EE, QAD 2017 EE, QAD 2018 EE

Technology Component	License Type	Version
QXtend		1.8.6, 1.8, 1.7.1, 1.7.0.15, 1.6.3, 1.8.7, 1.9.0 NOTE: QXtend is required only if QAD CRM is to be integrated with QAD EE. It is NOT required for integration with QAD SE.

Microsoft Exchange Integration

Table 2.10

Requirements for Microsoft Exchange Server 2010/2013/2016 Integration

Technology Component	Server	Client
Microsoft	Microsoft Exchange 2010/2013/2016	Microsoft Outlook 2010 Microsoft Outlook 2013 Microsoft Outlook 2016 Microsoft Outlook WebApp Microsoft Outlook Web Access ActiveSync (from SmartPhone)

QAD Remote Sales

Table 2.11
Hardware Requirements for QAD Remote Sales

Hardware Component	Minimum Requirement
Processor	Pentium 4 3.00 GHz processor
RAM	1 GB at minimum For better performance, it is recommended to have 2 GB RAM or more.
Hard disk	4 GB
Others	SVGA color monitor Network card Ethernet connection running TCP/IP protocol CD-ROM drive

Table 2.12
Software Requirements for QAD Remote Sales

Technology Component	License Type	Version
Progress	Personal database	10.2A02, 10.2B01, 10.2B02, 10.2B05, 10.2B06, 10.2B07, 10.2B08, 11.2.1, 11.3.1, 11.3.2, 11.4, 11.6, 11.7, 11.7.2, 11.7.3
Operating System		Windows Vista/XP/7/8/8.1/10

Important

- Windows 8 is only supported for CRM deployed with OE10.2B07, OE10.2B08, OE11.3.1, and later versions.
- Windows 8.1 is only supported for CRM deployed with OE10.2B08, OE11.3.2, and later versions.

Users can synchronize data in QAD Remote Sales with data in the host database using Progress AppServer. VPN access to office network is required.

Table 2.13
Progress AppServer Synchronization Requirements

Method	Technology	Server	QAD Remote Sales Client
Progress AppServer	Progress	QAD CRM	VPN Client

Table 2.14
Microsoft Office Integration

Technology Component	License Type	Version
Microsoft Office		2007/2010/2013/2016

MS Office needs to be installed on CRM remote nodes and connected CRM clients. If you want to run CRM directly from the file server using Citrix or RDP, you need to install MS Office on the CRM file server as well. MS Word is used in CRM for sending letters, printing opportunity quotes, and so on; MS Excel is used to display CRM browser data in various modules and as an output channel for reporting purposes. MS Excel is also used by one specific report—Installed Base Report.

Network

Set up your network to support the Progress specifications. The minimum requirement is a 10 Megabit (Mb) Ethernet or faster network. For better maintenance and performance, QAD recommends the following:

- Install Progress Database and AppServer components on the database server.
- Install all Progress client components (OpenEdge Studio) on the deployment server.
- If you are integrating or planning to integrate with QAD Enterprise Applications, use the same database server and Progress database and AppServer components used by QAD Enterprise Applications.
- 100 Megabit (Mb) Ethernet or faster network.

Deploying QAD CRM

With QAD Enterprise Edition 2016/2017/2018, QAD CRM back-end server components are installed using the QAD YAB installer and are managed using the QAD YAB console. YAB is a deployment and management toolset that covers all products installed into an Enterprise Edition environment. It is automatically installed with the QAD YAB installer. You do not need to take any steps to install YAB separately.

If you plan to install QAD CRM with Enterprise Edition 2016/2017/2018, see “Deploying QAD CRM in a YAB Environment” on page 76.

Here are the general steps for deploying QAD CRM:

- 1 Installing Progress on the Database Server
- 2 Installing Progress on the Deployment Server
- 3 Installing QAD CRM on the Deployment Server
- 4 Setting Up the Database Server
- 5 Configuring QAD CRM on Deployment Server
- 6 Configuring the Delivery Server
- 7 Splitting and Compiling UI and Backend QAD CRM Programs
- 8 Copying QAD Backend Programs on the Application Server
- 9 Configuring Application Server
- 10 A file called `appsrvtt.d` has now been updated to record the AppServer information you have set up. Copy this newly updated `appsrvtt.d` file from the folder `QADCRMInstallDir\` to the folder `QADCRMInstallDir\webclient\frontend\` before proceeding to the generation of the CRM cab files in the next section.
- 11 Integrating QAD CRM with QAD SE or Integrating QAD CRM with QAD EE
- 12 Configuring QXtend for Integration
- 13 Configuring the Environment for Sales Order Integration

14 Installing QAD CRM on End-User PC

15 Creating Separate QAD CRM Environment

16 Implementing QAD Remote Sales (Optional)

Installing Progress on the Database Server

Make sure the following Progress components are installed on the database server:

- Progress Enterprise database server
- Progress AppServer
- Progress 4GL

QAD recommends deployment of Progress AppServer on the database server.

For information about installing Progress components, refer to the Progress software installation guides.

Installing Progress on the Deployment Server

You must have local administrator access to perform the required Progress and QAD CRM installation on the deployment server.

For information about installing Progress components, refer to the Progress software installation guides.

Installing QAD CRM on the Deployment Server

After planning the deployment and installing all Progress components, you can install the system from the installation CD. You can also download QAD CRM from QAD web site.

The first step is to set up the deployment server. The deployment server:

- Contains all program files
- Manages file sharing
- Manages system security
- Coordinates communication between workstations

To load the installation media, you must have Administrator privileges on the deployment server machine. Close all other applications before beginning the installation process.

Other applications or tasks might interfere with the installation or use files that CRM needs to complete the installation. Shut down any processes where the executable itself, or a file used by the executable, is located in the directory where you intend to install CRM.

Use the following steps to install QAD CRM components on the deployment server:

- 1 Launch the installation program from the installation medium you plan to use as described in the following table:


For this Installation medium...	Do the following...
CD	Insert the CD into the drive. If it does not run automatically, double-click <code>setup.exe</code> in the root directory of the CD to start the installation.
DVD	Double-click the <code>setup.exe</code> in the root directory to start the installation.
Software Distribution download	Download all the files to a folder (for example, <code>c:\qadcrmmmedia</code>), then double-click <code>setup.exe</code> to start the installation.

- 2 On the QAD CRM Setup Wizard Welcome screen, click Next.

If a previous CRM version is found on the system, a warning prompts you to continue with the installation. Click Yes to proceed or No to abort the setup.


Note QAD recommends that you uninstall any previous versions of QAD CRM prior to installing the latest release. However, this warning message only appears when CRM 6.1, CRM 6.2, CRM 6.3, CRM 6.4b2, CRM 6.4b6, CRM 6.4b8, CRM 6.5, CRM 6.6, CRM 6.7, CRM 6.7.1, CRM 6.7.2, or CRM 6.7.3 is installed on your computer.

- 3 Setup checks for supported versions of Progress on the computer.
 - If no compatible Progress version is found, Setup displays an error message and aborts the installation.
 - If more than one Progress version is installed on the computer, Setup locates the highest version of Progress supported by CRM that is available for use.
- 4 Setup checks for Microsoft .NET Framework 4.0 on the system.
 - If Microsoft .NET Framework 4.0 is already installed, skip to the next step.
 - If Microsoft .NET Framework 4.0 is not installed, Setup prompts you to install the component. Click Yes to install .NET Framework 4.0. Setup Wizard installs the component.
- 5 The Destination Location screen appears. Accept the default installation directory and click Next. If you specify another directory other than the default location, you will see the following message:

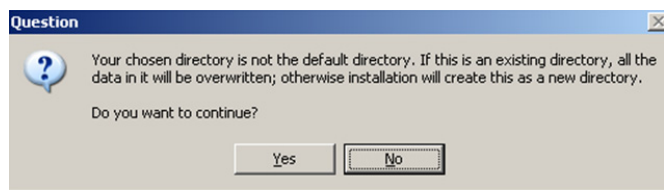

- 6 In the Program Folder Name screen, specify the program folder name for QAD CRM and click Next.
- 7 In the QAD CRM Setup Confirmation screen, review the selected setup options. To change the options, click Back; click Install to start the installation process.

- 8 If the Crystal Distribution package is not installed on the computer, the Crystal Distribution Setup Wizard screen appears. Follow the on-screen instructions to complete the installation of this component.
 - a On the Crystal Distribution Setup Wizard Welcome screen, click Next.
 - b On the Select Installation Folder screen, click Next.
 - c On the Confirm Installation screen, click Next.
 - d When installation is complete, click Close.
- 9 If QAD AdminService is not installed, the AdminService Setup Wizard screen appears. Follow the on-screen instructions to complete the installation of this component.
 - a On the QAD AdminService Setup Wizard Welcome screen, click Next.
 - b On the Select Installation Folder screen, check the installation folder and change if required. Select “Everyone” from the installation option and click Next.

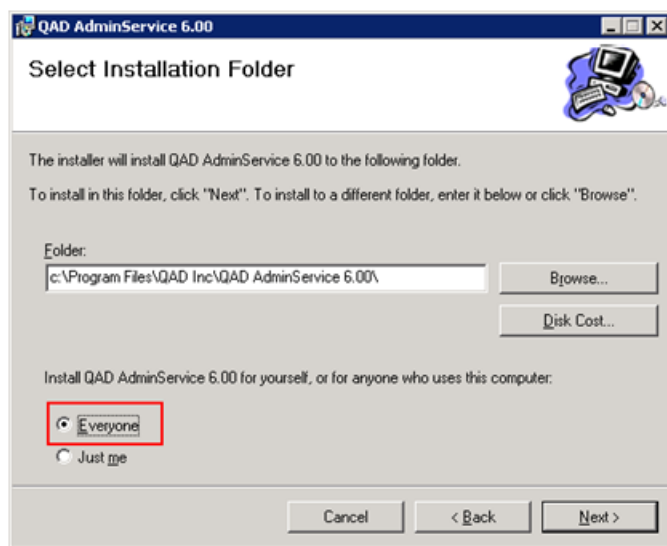

- c On the Confirm Installation screen, click Next.
 - d Select English (United States) from the language list and then click OK.
 - e When Installation is complete, click Close. The Installation Log screen appears.
 - f Select the “I would like to view the Installation Log file” check box and then click Finish. The log file is opened in Microsoft Windows Notepad.
 - g Check the log file for errors. Errors begin with two asterisks (**) in the log file. Contact QAD Support if errors are found.
- 10 When QAD CRM installation is complete, Setup creates the following QAD CRM shortcut icons in the QAD CRM program folder.
 - QAD CRM Help: Launches QAD CRM online help.
 - QAD CRM Demo: Launches the QAD CRM demo environment. To log in to the demo environment, use the username demo and leave the password blank.

- QAD CRM Deployment Utility: A control center for configuring, compiling upgrading or setting up CRM for WebClient mode or setting up the QAD CRM Remote Sales environment.

Note It is useful to understand how files are organized in the installation directory for administration tasks, such as the system to integrate with QAD Enterprise Applications.

Testing the System

To test the installation on the deployment server:

- 1 Choose Start|All Programs|QAD CRM 6.8.0|QAD CRM Demo.
- 2 In the User ID field, type `demo`. Leave the Password field blank.
- 3 Test the system functionality.

If you encounter any errors, contact QAD Support.

Setting Up the Database Server

QAD CRM is a multi-database application that requires a minimum of three databases connected concurrently to a single session. Each QAD CRM session connects to, at minimum, a main database (`bisgen`), an administration database (`bisgmenu`) and a data synchronization database (`dataexch`). If you plan to integrate with QAD Enterprise Applications, you need to connect to other databases.

Working QAD CRM databases are created in two stages. You first create empty databases, then use them as a template to build test, production, training, development and other databases.

To set up databases in a UNIX/Linux server, you must have experience creating databases and loading data definition files in Progress. You must also know how to modify system files such as service and startup scripts for databases, and have the appropriate write permission to make the required file and folder updates.

QAD CRM supports the following code pages:

- Unicode (UTF-8)
- ISO (ISO8859-1)

For non-iso languages, CRM databases should be configured to run in Unicode.

Important Languages requiring Unicode character sets must be able to access Unicode components in the `DLC/prolang/utf` directory on the server.

Before creating the database, determine the following:

- 1 The directory where you want to create the QAD CRM databases, referred to as `QADCRMInstallDirDatabaseServer/db`
- 2 The Progress directory
- 3 The host name of the database server

QAD recommends that you deploy QAD CRM and QAD Enterprise Applications databases on the same database server.

Set the Progress `DLC` variable correctly and ensure that the `$DLC\bin` directory is included in the `PATH` environment variable. `DLC` is the directory where Progress is installed, and `bin` is a subdirectory of `DLC` where the most often used Progress executables reside.

Setting Up Databases in a UNIX/Linux Server

Creating Non-Unicode Databases

To create empty databases in a UNIX/Linux server:

- 1 Go to `QADCRMInstallDirDatabaseServer/db`.
- 2 Transfer all the data definition (.df) and structure (.st) files from `QADCRMInstallDir/db/df` on CRM Deployment server to `QADCRMInstallDirDatabaseServer/db` using an FTP or WinSCP program.
- 3 Enter the following:

```
prostrct create bisgen bisgen.st -blocksize 8192
prostrct create bisgmenu bisgmenu.st -blocksize 8192
prostrct create dataexch dataexch.st -blocksize 8192
procoppy $DLC/empty8 bisgen
procoppy $DLC/empty8 bisgmenu
procoppy $DLC/empty8 dataexch
```
- 4 Start the Progress data dictionary using the command:

```
_progres -p _admin.p
```
- 5 Connect `bisgen`, `bisgmenu`, and `dataexch` databases and load data definitions into it that define each table, field, and index in the database.
- 6 The database schema (.df file) consists of the sequences, tables, fields and indexes in the database. In this task, you load the schema into the empty `bisgen`, `bisgmenu`, and `dataexch` databases using data definition files `bisgen.df`, `bisgmenu.df` and `dataexch.df`. Load the data definition files using the Progress data dictionary tool.
- 7 The resulting empty databases are used to build all your main and support databases such as `bisgenprod`, `bisgentest`, and `bisgentrain`. Create copies of the databases for backup and testing purposes.

Creating Unicode Databases

- 1 Go to `QADCRMInstallDirDatabaseServer/db`.
- 2 Transfer all the data definition (.df) and structure (.st) files from `QADCRMInstallDir/db/df` on CRM Deployment server to `QADCRMInstallDirDatabaseServer/db` using an FTP or WinSCP program.

3 Type the following:

```
prostrct create bisgen bisgen.st -blocksize 8192
prostrct create bisgmenu bisgmenu.st -blocksize 8192
prostrct create dataexch dataexch.st -blocksize 8192
procopy $DLC/prolang/utf/empty8 bisgen
procopy $DLC/prolang/utf/empty8 bisgmenu
procopy $DLC/prolang/utf/empty8 dataexch
```

4 Load the ICU-UCA collation table.

- a** Start the Progress data dictionary using the following command:

```
_progres -p _admin.p
```


- b** Connect to the database you want to load the ICU-UCA collation table into by choosing Database|Connect from the menu.

- c** Choose Admin|Load Data and Definitions|Data Definitions (.df file). Locate the file ICU-UCA.df in \$DLC/prolang/utf/ and load it into the database.

Ignore the following error and warning messages:

```
Error: Collation tables for database DBName have been changed. You must
rebuild all the indexes in order to reconnect to this database. (2609)
```

Fig. 2.2
Warning Message

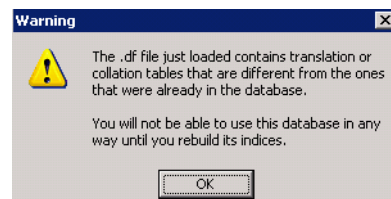

- d** Disconnect from the database by choosing Database|Disconnect from the menu.

Note Repeat steps b through d for each of the three CRM databases—bisgen, bisgmenu, and dataexch.

Note Whenever you use Progress tools such as Data Dictionary or Data Administration for setting up Unicode databases, make sure that the parameter file used by the Progress session specifies the following parameters:

```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

5 Rebuild indexes. Execute the following command to rebuild index for the new ICU-UCA collation:

```
proutil DBPath/bisgen -C idxbuild all -cpinternal UTF-8
proutil DBPath/bisgmenu -C idxbuild all -cpinternal UTF-8
proutil DBPath/dataexch -C idxbuild all -cpinternal UTF-8
```

6 Load your .df files.

Start the Progress data dictionary using the following command:

```
_progres -p _admin.p
```

Connect to the `bisgen`, `bisgmenu`, and `dataexch` databases and load into them data definitions that define tables, fields, and indexes in the databases.

Note For the `bisgen` Unicode database, you should skip loading `bisgen.df` and load `bisgen_utf.df` instead.

- 7 Use the empty databases to build your main and support databases such as `bisgenprod`, `bisgentest`, and `bisgentrain`. Create copies of the databases for backup and testing purposes.

Setting Up Databases on a Windows Server

The QAD CRM installation uses or creates several directories. If you use the default directories and they do not exist at the time of installation, they are created automatically. This applies the ownership and appropriate permissions. However if you create or use the other directories outside installation, make sure that permissions are set properly.

The QAD CRM Installation environment has a `db` folder. QAD recommends that you keep the databases in this folder. For example, you can keep test databases by creating a new `QADCRMInstallDir\db\test` folder.

Before creating the database, determine the following:


- 1 The directory where you want to create the QAD CRM databases
- 2 The Progress directory
- 3 The host name of the database server

Set the Progress `DLC` variable correctly and ensure that the `%DLC%\bin` directory is included in the `PATH` environment variable. `DLC` is the directory where Progress is installed, and `bin` is a subdirectory of `DLC` where the most often used Progress executables reside.

To add `DLC` and `PATH` to user environment variables:

- 1 From the Desktop, choose Start|Settings|Control Panel.
- 2 Double-click the System icon and select the Advanced tab.
- 3 Click the Environment Variable button.
- 4 Click New under the User variables for <user name> listbox. The New User Variable dialog box appears.
- 5 In the Variable name field, type `DLC`.
- 6 In the Variable value field, type the Progress installation path. Then click OK.
- 7 Repeat Step 4 to create a `PATH` environment variable. In the Variable value field, type the following:

```
%PATH%;%DLC%;%DLC%\bin
```

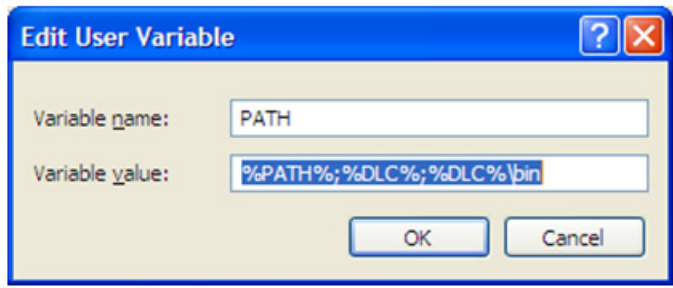

When you have added the `DLC` and `PATH` environment variables, use the DOS command prompt to run all the Progress commands.

Creating Non-Unicode Databases

- 1 Create two folders `test` and `prod` to hold the test and production databases under `QADCRMinstallDir\db` respectively.
- 2 Using Windows Explorer, copy all the database structure (`.st`) and data definition (`.df`) files from `QADCRMinstallDir\db\df` to `QADCRMinstallDir\db\test`—assuming that you want to place your newly created databases in the `QADCRMinstallDir\db\test` folder.
- 3 From the desktop, choose `Start|Run`. The Run dialog box appears. Enter `cmd` in the Open field. Then click OK.
- 4 Change to the `QADCRMinstallDir\db\test` directory.

- 5 Enter the following:

```
prostrct create bisgen bisgen.st -blocksize 8192
prostrct create bisgmenu bisgmenu.st -blocksize 8192
prostrct create dataexch dataexch.st -blocksize 8192
procopy %DLC%/empty8 bisgen
procopy %DLC%/empty8 bisgmenu
procopy %DLC%/empty8 dataexch
```

- 6 Start the Progress data dictionary using the command:

```
_progres -p _admin.p
```

- 7 Connect the `bisgen`, `bisgmenu`, and `dataexch` databases and load data definitions that define each table, field, and index in the database.
- 8 The database schema (`.df` file) consists of the sequences, tables, fields, and indexes in the database. You load the schema into the empty `bisgen`, `bisgmenu`, and `dataexch` databases using the data definition files `bisgen.df`, `bisgmenu.df` and `dataexch.df`. Load the data definition files using Progress data dictionary tool.

The resulting empty databases are used to build all your main and support databases such as `bisgenprod` and `bisgentrain`. Create copies of the databases for backup and testing purposes.

Creating Unicode Databases

To create Unicode databases on the Windows Server:

- 1 Create two directories—test and prod—for the test and production databases under *QADCRMInstallDir\db* respectively.
- 2 Copy all the database structure (.st) and data definition (.df) files from *QADCRMInstallDir\db\df* to *QADCRMInstallDir\db\test*.
- 3 From the Windows Start menu, choose Run; then enter `cmd` and click OK to open the command window.
- 4 Change to the *QADCRMInstallDir\db\test* directory.
- 5 Enter the following:



```
prostrct create bisgen bisgen.st -blocksize 8192
prostrct create bisgmenu bisgmenu.st -blocksize 8192
prostrct create dataexch dataexch.st -blocksize 8192
procoppy %DLC%\prolang\utf\empty8 bisgen
procoppy %DLC%\prolang\utf\empty8 bisgmenu
procoppy %DLC%\prolang\utf\empty8 dataexch
```
- 6 Load the ICU-UCA collation table.
 - a Start the Progress data dictionary using the following command:


```
_progres -p _admin.p
```
 - b Connect to the database you want to load ICU-UCA collation table into by choosing Database|Connect from the menu.
 - c Choose Admin|Load Data and Definitions|Data Definitions (.df file). Locate the file ICU-UCA.df in %DLC%\prolang\utf\ and load it into the selected database.

Ignore the following error and warning messages:

```
Error: Collation tables for database DBName have been changed. You must
rebuild all the indexes in order to reconnect to this database. (2609)
```

Fig. 2.3
Warning Message

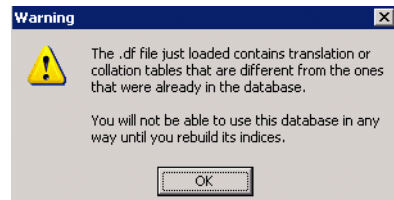

- d Disconnect from the database by choosing Database|Disconnect from the menu.

Note Repeat steps b through d for each of the three CRM databases—bisgen, bisgmenu, and dataexch. Whenever you use Progress tools such as Data Dictionary or Data Administration for setting up Unicode databases, make sure that the parameter file used by the Progress session specifies the following parameters:

```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

- 7 Rebuild indexes. Execute the following command to rebuild indexes for the new ICU-UCA collation:

```
proutil DBPath/bisgen -C idxbuild all -cpinternal UTF-8
proutil DBPath/bisgmenu -C idxbuild all -cpinternal UTF-8
proutil DBPath/dataexch -C idxbuild all -cpinternal UTF-8
```

- 8 Load your .df files.

Connect to the bisgen, bisgmenu, and dataexch databases and load into them data definitions that define tables, fields, and indexes in the databases.

Note For the bisgen Unicode database, you should load `bisgen_utf.df` instead of `bisgen.df`.

- 9 Use the Progress Data Dictionary tool to load the data definition files `bisgen.df`, `bisgmenu.df`, and `dataexch.df` into the empty bisgen, bisgmenu, and dataexch databases.
- 10 Use the empty databases to build your main and support databases such as bisgenprod, bisgentest, and bisgentrain. Create copies of the databases for backup and testing purposes.

Starting Databases in Multi-User Mode

To enable clients to communicate with the databases, you need to start databases in multi-user mode.

- 1 On the database server machine, tailor your services file. All services names, host names, and port numbers must match in the services files of each client and each database server on the network. The location of the UNIX/Linux services file on the server is typically the `/etc` directory. On Windows, it is located in `C:\windows\system32\drivers\etc`.

Note The more users you expect to have, the more numbers you should leave open between port numbers.

- 2 If your Database server and AppServer process reside on different machines, you must start the Database in client server mode with the following instructions.

Add the names of your database services to your services file. Add one for each main database and any other databases you plan to connect to. Limit the service name to 16 characters. You can use any unused port numbers.

The database service names and suggested port numbers are described below. If these port numbers conflict with your existing setup, you must specify appropriate numbers.

Service Name	Port #/Protocol	Comment
bisgentest	2030/tcp	# test bisgen
bisgmenutest	2040/tcp	# test bisgmenu
dataexchtest	2050/tcp	# test dataexch
bisgenprod	2060/tcp	# Production bisgen
bisgmenuprod	2070/tcp	# Production bisgmenu
dataexchprod	2080/tcp	# Production dataexch

3 Start the databases in multi-user mode using one of the following:

- Progress Explorer (Windows only)
- Batch files

The installation technician is responsible for supplying and customizing the batch files.

If you plan to integrate with QAD Enterprise Applications, QAD recommends that you use QAD Enterprise Applications startup and shutdown scripts.

QAD CRM supports the following code pages:

- Unicode (UTF-8)
- ISO (ISO8859-1)

For non-ISO languages, configure CRM databases to run in Unicode.

For UTF-8 configuration, use the following parameters:

- Database start-up script

Start all the databases with the following parameters:

```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

- Sample database start-up script

```
# Start CRM databases

$DLC/bin/proserve $DBDIR/bisgen -S bisgen -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic

$DLC/bin/proserve $DBDIR/bisgmenu -S bisgmenu -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic

$DLC/bin/proserve $DBDIR/dataexch -S dataexch -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic
```

- Integration with QAD Enterprise Application (Standard Edition)

If QAD Enterprise Application (SE) is configured with non-ISO code page, for example, 1250, to integrate with CRM, start CRM databases in UTF-8.

- Sample database start-up script

```
#

$DLC/bin/proserve $DBDIR/mfg -S mfg -cpstream 1250 -cpinternal 1250 -cpcoll polish
$DLC/bin/proserve $DBDIR/adm -S adm -cpstream 1250 -cpinternal 1250 -cpcoll polish
$DLC/bin/proserve $DBDIR/bisgen -S bisgen -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic
$DLC/bin/proserve $DBDIR/bisgmenu -S bisgmenu -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic
$DLC/bin/proserve $DBDIR/dataexch -S dataexch -cpinternal UTF-8 -cpstream UTF-8 -cpcoll ICU-UCA -cpcase Basic
```

4 Make sure that the databases are running properly. In case of errors, check Progress help and database startup parameters.

Configuring QAD CRM on Deployment Server

Compiling Encrypted Files

QAD CRM supports the following three scenarios:

- QAD CRM Without Integration with QAD Enterprise Applications
- QAD CRM Integrated with QAD Enterprise Applications (Standard Edition)
- QAD CRM Integrated with QAD Enterprise Applications (Enterprise Edition)

QAD CRM Without Integration with QAD Enterprise Applications

Compiled programs with ISO databases (.r code) are shipped with the product. If you are using QAD CRM with OE11.6 and an ISO database in a stand-alone configuration, then you can skip directly to the section “Configuring the Delivery Server”. Otherwise, go to the section “Compilation Procedure” and implement the steps.

QAD CRM Integrated with QAD Enterprise Applications (Standard Edition)

- 1 Rename the file `QADCRMInstallDir\system\psys0101.i`; for example, you can rename the file to `psys0101.i.org`.
- 2 Copy `psys0101.i` from `QADCRMInstallDir\integration\eb21` to the folder `QADCRMInstallDir\system`.
- 3 Go to the section “Compilation Procedure”.

QAD CRM Integrated with QAD Enterprise Applications (Enterprise Edition)

- 1 Rename the file `QADCRMInstallDir\system\psys0101.i`; for example, you can rename the file to `psys0101.i.org`.
- 2 Copy `psys0101.i` from `QADCRMInstallDir\integration\eb3` to the folder `QADCRMInstallDir\system`.
- 3 Copy `proxy.pl` provided with QAD Enterprise Applications to `QADCRMInstallDir\mfgsrv`.

Note If you are using QAD Enterprise Applications on Progress Open Edge 10.x, copy the 32-bit version of `proxy.pl` from `QADERPInstallDir\fin` to `QADCRMInstallDir\mfgsrv`. The Progress 32-bit version of the `proxy.pl` file can be acquired from the QAD Enterprise Applications Enterprise Edition installation media. From the installation media, extract the `mfgproap32/mfgproap32.zip` file, which contains 32-bit `proxy.pl`, to `QADCRMInstallDir\mfgsrv`.

- 4 Open `cbserver.xml` under `QADCRMInstallDir\integration\mfgpro` in Notepad and modify `appServiceURL` with QAD Enterprise Applications Financials AppServer details. In the following example, `col45` is the AppServer host name, `42398` is the NameServer port number, and `QADFdevsfm93app` is the QAD EE Financial AppServer broker name.

```

<?xml version="1.0" encoding="UTF-8" ?>
<!-- This file contains the configuration of the business layer of the application -->
- <serverConfiguration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="serverConfiguration.xsd">
  <!-- sessionInfoGetterProcedure can be used to override the default value of
  clnsrvcenv.p -->
  <sessionInfoGetterProcedure>clnsrvcbenv.p</sessionInfoGetterProcedure>
  <!-- disable authentication for time being -->
  <!-- <DisableAuthentication/> -->
  <!-- A valid appserver needs to be specified -->
- <appServerConnection>
- <appService name="QADFdevsfm93app">
  <appServiceURL>appserver://coli45:42398/QADFdevsfm93app</appServiceURL>
  </appService>
  <DebugLevel>0</DebugLevel>
</appServerConnection>
</serverConfiguration>

```

5 Go to the section “Compilation Procedure”.

Compilation Procedure

1 Create a word break rule file for the CRM Unicode databases (Unicode Environment only).

- a Start a command window (cmd.exe) and set the DLC and PATH variables.

```

set DLC=ProgressInstallDir
set PATH=%PATH%;%DLC%;%DLC%\bin

```

- b Change the current directory to the Progress installation directory.

```
cd %DLC%
```

- c Compile the new word break rule file using the following command.

```
proutil -C wbreak-compiler %DLC%\prolang\convmap\utf8-bas.wbt 1
```

- d Double check that the file created in the previous step named `proword.1` now exists in the `%DLC%` folder.

2 Modify the parameter file.

For a Unicode environment, you must perform the following additional steps:

- a Update or add the following parameter values in `QADCRMInstallDir\qadsfamaupgrade.pf`:

```

-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic

```

- b For Unicode compilation, modify `qadsfamaupgrade.pf` to connect to the Unicode databases in the `QADCRMInstallDir\db\demo\unicode` folder; for example:

```

-db db\demo\unicode\bisgmenu -1
-db db\demo\unicode\bisgen -1
-db db\demo\unicode\dataexch -1

```

Configuring the Delivery Server

QAD CRM ships with a Web archive file named `qadcrmwebclient.war`, which resides in the folder `QADCRMInstall\Webclient\backend`. The file must be copied in the delivery server's Tomcat webapps folder; note that CRM only supports Apache Tomcat. After copied, the `.war` file

is extracted automatically by Tomcat within a few seconds. However, in case you find the file is not extracted automatically, you must restart Tomcat for QAD CRM Webapp named `qadcrwebclient` to be installed. If you cannot restart Tomcat—as it might be used by another applicaiton, you can run the following command to manually extract the `.war` file:

```
jar-xvf yourWARfileName.war.
```

Note If you have already setup a Tomcat server as part of your QAD Enterprise Applications system, then you can consider using the same Tomcat server as your CRM Delivery Server.

Once the CRM Webapp gets created on Tomcat, you will get a directory structure similar to the one shown below:

- `qadcrwebclient/qadcrm`: QAD CRM 6.8 Webapp folder

This holds the CRM WebClient application image (including subfolders and components).

Note This is user-defined and can be named as you choose. However, note that all the references to this folder in the links specified in this document must be changed accordingly once you change the name of this folder.

- `qadcrm.prowcapc/qadcrm_all.prowcapc` and other component cab files including the `main.cab` files
- `qadcrwebclient/images`: contains supporting image files
- `qadcrwebclient/WEB-INF`: contains supporting files for Webapp
- `qadcrwebclient/META-INF`
- `qadcrwebclient/web_image`: Initially empty but created to hold the Progress software WebClient image, which must be copied in this folder so that client machines can download it automatically, if required.

Contents in `qadcrwebclient/web_image` must be copied from the following CRM installation directory:

```
QADCRMInstalldir\webclient\backend\progresswebclient\<Progress WebClient Version>\web_image
```

Where `<Progress WebClient Version>` is the Progress version with which you plan to use CRM.

Once you have copied the software on the Tomcat webapp folder, two files must be modified in `web_image` folder to reflect the correct path of CRM software and Progress WebClient software as per your configuration. These two files are:

- `bootstrap.htm`
- `webclient.htm`

Modifying the `bootstrap.htm` File

To modify `bootstrap.htm` file, do the following:

1 Open the `bootstrap.htm` file and search for the string `qaddemo`.

2 Find the following line:

```
document.location.href =  
"http://qaddemo.qad.com:8080/qadcrwebclient/qadcrm/qadcrm.prowcapc"
```

- 3 Replace the string "qaddemo.qad.com:8080" in the above line with "<Tomcat Hostname>:<Tomcat Port number>" based on your own server and Tomcat setup.

Now the line is:

```
document.location.href =
"http://<Tomcat Hostname>:<Tomcat Port
number>/qadcrmwebclient/qadcrm/qadcrm.prowcapc"
```

Note The name of the .prowcapc file is case-sensitive and depends on the name of the .wcp file you selected to build the cab files. It would be qadcrm_all.prowcapc if you use qadcrm_all.wcp to build the CRM .cab files.

- The qadcrmwebclient folder refers to the Tomcat webapps folder where the QAD CRM WebClient will be deployed.
- The URL "http://<Tomcat hostname>:<Tomcat Port Number>/qadcrmwebclient/qadcrm" is an example of a configuration file URL, that is, the Tomcat location where the WebClient configuration files for this particular CRM system are stored. This configuration URL information will be required later when you generate the QAD CRM WebClient cab files using the QAD CRM Deployment Utility.
- The file qadcrm.prowcapc/qadcrm_all.prowcapc is a Progress WebClient file that you must copy from the CRM deployment server to the delivery server (where Tomcat is installed) in later steps.

- 4 Find the following line:

```
window.location =
"http://qaddemo.qad.com:8080/qadcrmwebclient/web_image/webclient.htm"
```

- 5 Modify the URL in the above line to reflect the path of the webclient.htm file as per your configuration.

Modifying the webclient.htm File

In the webclient.htm file, search for the string qaddemo. You will find the following reference that must be changed:

```
ether.SetProperty("ProwcapURL",
"http://qaddemo.qad.com:8080/qadcrmwebclient/qadcrm/qadcrm.prowcapc");
```

Modify the URL in the above line to reflect the correct path of the qadcrm.prowcapc or qadcrm_all.prowcapc file in your configuration.

In some specific versions of webclient.htm file for OE V11.x, you might instead find a string ProwcapURL =
"http://qaddemo.qad.com:8080/qadcrmwebclient/qadcrm/qadcrm.prowcapc".

Modifying the web.xml file

This step is required to associate the Progress WebClient application with the .prowcapc file extension, so that the CRM WebClient installation will launch correctly on the client PC:

- 1 Locate the <Tomcat_install_dir>/conf/web.xml file.
- 2 Locate <mime-mapping> in the <web-app> section.

- 3 As the last mime mapping, add the following:


```
<mime-mapping>
  <extension>prowcab</extension>
  <mime-type>application/progress-wcappcab</mime-type>
</mime-mapping>
```

- 4 Save web.xml.


Splitting and Compiling UI and Backend QAD CRM Programs

Perform the following steps on the CRM deployment server:

- 1 If you are using a Unicode database, update the file named `QADCRMInstallDir/qadcrmparam_wc.pf` with the following parameters:
 - cpinternal UTF-8
 - cpstream UTF-8
 - cpcoll ICU-UCA
 - cpcase Basic
- 2 Choose Start|All Programs|QAD CRM 6.8.0|QAD CRM Deployment Utility. The following screen appears.

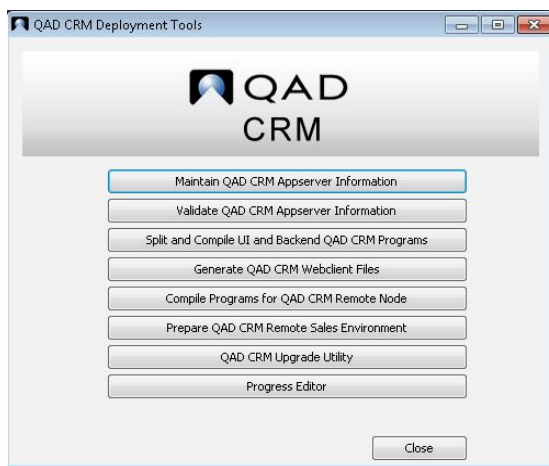

- 3 From the QAD CRM deployment utility screen, select the button Split and Compile UI and Backend QAD CRM Programs. A screen similar to the one shown below appears.

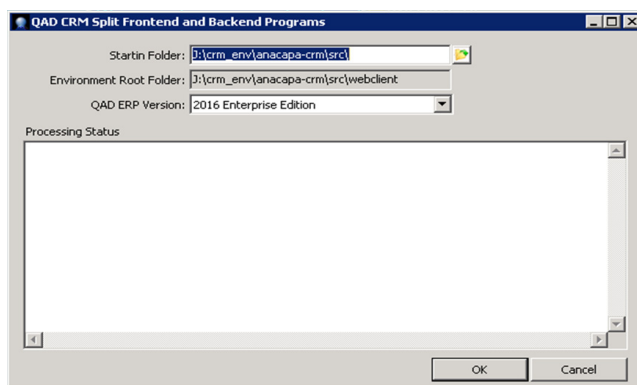

- 4 Select the `Startin` folder as `QADCRMInstallDir`; for example: `c:\qadcrm680\`. This is selected by default.

All CRM programs that require recompilation on the backend are copied under `QADCRMInstallDir\webclient\backend` folder; for example:

`c:\qadcrm680\webclient\backend`

By default, the environment root folder is set to `QADCRMInstallDir\webclient`; for example: `c:\qadcrm680\webclient`

QAD ERP Version. Select the QAD Enterprise Edition version with which you are trying to integrate CRM.

- 5 Click OK to start processing

At this point, you might encounter the following warning messages:

Remote Appserver connection could not be established. Validate QAD CRM Appserver Information using QAD CRM Deployment tool.

You must only generate .cab file for CRM Webclient only when AppServer connection is established successfully. Do you still wish to proceed?

Answer Yes to continue with the file splitting. The AppServer setup will be carried out in later steps before the generation of the CRM Webclient .cab files.

- Two log files will be generated in the `QADCRMInstallDir\log` folder that contains error information. After you have run the above utility, it will create various subfolders under `QADCRMInstallDir\webclient\frontend` (in this example, `c:\qadcrm680\webclient\frontend`): contains CRM code and other files required to make the CRM cab file.

After you have run the above utility, it automatically compiles all the CRM UI programs required for CRM WebClient against your existing CRM databases and generates the .r files.

- `QADCRMInstallDir\webclient\backend` (in this example, `c:\qadcrm680\webclient\backend`): contains all the code that is required on the backend server. It will contain the source code of programs that need to be copied to the AppServer machine and compiled there.

Copying QAD Backend Programs on the Application Server

- 1 On the QAD CRM AppServer machine, create the folder
`<QADERPInstallDir>/qadcrm/<environment name>`; for example:
`/qadea/qadcrm/prod`
- 2 Create the following subdirectories under `qadcrm/<environment name>`:
 - system
 - dataexch
 - progs
 - report
 - triggers
 - integration\mfgpro

- 3 Copy programs to respective folders on your CRM AppServer environment that you have just created:

Copy the source code files, which are copied in `QADCRMInstallDir\Webclient\backend` folder as a result of splitting the CRM frontend and backend code in the previous section, to respective folders on your CRM AppServer environment. For example:

Copy source code files from the directory...	... to this directory
<code>QADCRMInstallDir\Webclient\backend\dataexch</code>	<code>qadcrm/prod/dataexch</code>
<code>QADCRMInstallDir\Webclient\backend\integration\mfgpro</code>	<code>qadcrm/prod/integration/mfgpro</code>
<code>QADCRMInstallDir\Webclient\backend\progs</code>	<code>qadcrm/prod/progs</code>
<code>QADCRMInstallDir\Webclient\backend\report</code>	<code>qadcrm/prod/report</code>
<code>QADCRMInstallDir\Webclient\backend\system</code>	<code>qadcrm/prod/system</code>
<code>QADCRMInstallDir\Webclient\backend\si</code>	<code>qadcrm/prod/si</code>
<code>QADCRMInstallDir\Webclient\backend\triggers</code>	<code>qadcrm/prod/triggers</code>

Copy `QADCRMInstallDir\Webclient\backend\si` to your QAD CRM `si` folder in your AppServer environment. You do not need to compile the files in this QAD CRM `si` folder; these files are only required to support compilation of some other CRM backend programs.

Note If the AppServer is installed on UNIX/Linux, use FTP or WinSCP to copy the programs.

After you copy the source program files, compile them in your AppServer environment; see “Compiling QAD CRM Backend Programs on the Application Server”.

Compiling QAD CRM Backend Programs on the Application Server

- 1 Create a copy of your QAD CRM AppServer parameter file (.pf) file `qadcrmparam_as.pf`; for example, name it `qadcrmcompile.pf`.

Note If you are integrating QAD Enterprise Applications with QAD CRM, you need to modify the `qadcrmcompile.pf` file to include connections to all the QAD Enterprise Applications databases.

- 2 Specify the following additional parameters in this file:

```
-p _comp.p -inp 32000
```

- 3 Create a compile script to start the CRM application compiler with the above parameter file and the parameters below:

- a Set following environmental variables:

```
DLC=ProgressInstallDir;export DLC
PATH=$DLC/bin:$PATH;export PATH
PROMSGS=$DLC/promsgs;export PROMSGS
PROTERMCAP=$DLC/protermcap;export PROTERMCAP
PS1='$$ ';export PS1
```

- b Include the following in the PROPATH, and make sure you include the command `Export PROPATH` in your script:

```
QADERPInstallDir/xrc
QADERPInstallDir/qadcrm/prod/si/xrc
QADERPInstallDir/qadcrm/prod
```

```

QADERPInstallDir/qadcrm/prod/system
QADERPInstallDir/qadcrm/prod/dataexch
QADERPInstallDir/qadcrm/prod/progs
QADERPInstallDir/qadcrm/prod/report
QADERPInstallDir/qadcrm/prod/triggers
QADERPInstallDir/qadcrm/prod/integration/mfgpro

```

Note The suggested PROPATH assumes that you are integrating QAD Enterprise Applications with QAD CRM. If you are installing QAD CRM as a stand-alone system that runs on a Linux AppServer backend, you can omit the following two PROPATH values:

```

QADERPInstallDir/xrc
QADERPInstallDir/qadcrm/prod/integration/mfgpro

```

- c** If you are using QAD 2011 EE above, add the following directories to the PROPATH:

```

QADERPInstallDir/xrc/us/bbi
QADERPInstallDir/xrc/us/so
QADERPInstallDir/xrc/us/px
QADERPInstallDir/xrc/validation
QADERPInstallDir/xrc/us/mf
QADERPInstallDir/xrc/us/fs
QADERPInstallDir/xrc/us/pp
QADERPInstallDir/xrc/us/gp

```

- d** Set Terminal type as per your environment.

- e** Start Progress client with parameter file:

```

<progress path>/bin/_progres -s 128 -pf <compile>.pf -cpinternal <codepage> -
cpstream <codepage stream>

```

Example:

```

/dr01/progress/dlc/bin/_progres -s 128 -pf
QADERPInstallDir/qadcrm/qadcrmcompile.pf -cpinternal ISO8859-1 -cpstream ISO8859-1

```

- 4** Select the following directories to compile with program types *.p, *.cls,*.w:

- QADERPInstallDir/qadcrm/prod/system
- QADERPInstallDir/qadcrm/prod/dataexch
- QADERPInstallDir/qadcrm/prod/progs
- QADERPInstallDir/qadcrm/prod/report
- QADERPInstallDir/qadcrm/prod/triggers
- QADERPInstallDir/qadcrm/prod/integration/mfgpro

Files/Directories to Compile	Types
>/apps/qadcrm65/test/dataexch	*.p *.w *.cls
/apps/qadcrm65/test/integration/mfgpro	*.p *.w *.cls
/apps/qadcrm65/test/progs	*.p *.w *.cls
/apps/qadcrm65/test/report	*.p *.w *.cls
/apps/qadcrm65/test/system	*.p *.w *.cls
/apps/qadcrm65/test/triggers	*.p *.w *.cls

Note You do not need to compile the files in this QAD CRM `si` folder. You can also leave out the directories `QADERPInstallDir/qadcrm/prod/integration/mfgpro` if you are not about to integrate QAD CRM with QAD Enterprise Applications.

- 5** Choose the Start Compile option. When compilation is complete, check the compilation log to make sure all the programs are compiled correctly.

Configuring Application Server

Configuring the AppServer environment is a must.

To prepare the AppServer environment:

- 1 Define the QAD CRM AppServer broker in the `ubroker.properties` file. Use the Progress `$DLC/bin/genuuid` utility to generate a new unique UUID for the new Progress AppServer definition.

For your reference, here is a sample of QAD CRM AppServer broker definition. Your actual broker definition can vary depending on your environment.

```
[UBroker.AS.QADCRM_AS]
appserviceNameList=QADCRM_AS
autoStart=0
brkrLoggingLevel=2
brkrLogThreshold=500000
brkrNumLogFiles=2
brokerLogFile=/qad/local/sandbox/team/crm2012ee/build/work/logs/QADCRM_AS.broker.log
collectStatsData=0
controllingNameServer=NS1
defaultService=0
infoVersion=9010
initialSrvrInstance=2
maxSrvrInstance=5
minSrvrInstance=2
noSessionCache=0
operatingMode=Stateless
portNumber=18683
PROPATH=
/qad/local/sandbox/team/crm2012ee/crm/src/integration/mfgpro,/qad/local/sandbox/team/crm2012ee/build/work/pro/com/mfgpro,/qad/local/sandbox/team/crm2012ee/build/work/pro,/qad/local/sandbox/team/crm2012ee/build/work/qxtend/qxtadapter,/qad/local/sandbox/team/crm2012ee/build/work/config,/qad/local/sandbox/team/crm2012ee/build/work/dist,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/bbi,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/bbi,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/sq,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/bbi,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/tx,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/bbi,/qad/local/sandbox/team/crm2012ee/build/work/dist/us/bbi,/qad/local/sandbox/team/crm2012ee/build/work/qra/qra.pl,/qad/mfgpro/93/qadf in_cache/2012.0.80.13/proxyobj/proxy.pl,/qad/local/sandbox/team/crm2012ee/crm/src/si/xrc,/qad/local/sandbox/team/crm2012ee/crm/src,/qad/local/sandbox/team/crm2012ee/crm/src/dataexch,/qad/local/sandbox/team/crm2012ee/crm/src/progs,/qad/local/sandbox/team/crm2012ee/crm/src/system,/qad/local/sandbox/team/crm2012ee/crm/src/triggers,/qad/local/sandbox/team/crm2012ee/crm/src/report
registerNameServer=1
registrationMode=Register-IP
srvrActivateProc=
srvrConnectProc=
srvrDeactivateProc=
srvrDisconnProc=
srvrLogFile=/qad/local/sandbox/team/crm2012ee/build/work/logs/QADCRM_AS.server.log
srvrLoggingLevel=2
srvrLogThreshold=500000
srvrNumLogFiles=2
srvrShutdownProc=
srvrStartupParam=-pf /qad/local/sandbox/team/crm2012ee/crm/src/qadsfamaprod_as.pf
srvrStartupProc=/qad/local/sandbox/team/crm2012ee/crm/src/progs/pappsistart.p
sslEnable=0
uuid=-1cfaa137:137db7e54a9:-8000
workDir=/qad/local/sandbox/team/crm2012ee/build/work
```

- 2 Create the AppServer broker parameter file using `QADCRMInstalldir/qadcrmparam_as.pf` as a template to connect to the QAD CRM databases.

Note Do not remove any predefined parameters in your .pf file. If the Progress database server and AppServer are installed on same machine, do not connect the databases using the client-server mode (-H -S parameters) in your parameter file and start the databases as self-service clients.

3 Specify following startup parameters for the AppServer broker:

a Specify the `srvrStartupParam` parameter:

```
srvrStartupParam=-pf <AppServer broker .pf file with full path>
```

Note If you are using a Unicode database, make sure that the Appserver Broker parameter file contains the following Unicode parameters:

```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

b Specify the `srvrStartupProc` parameter:

```
srvrStartupProc=QADERPInstallDir/qadcrm/prod/progs/pappsistart.p
```

4 Modify the `PROPATH` parameters of the AppServer brokers. Put QAD CRM directories in the `PROPATH`; for example, put the following folders in the `PROPATH`:

```
qadcrm\prod
qadcrm\prod\system
qadcrm\prod\integration\mfgpro
qadcrm\prod\dataexch
qadcrm\prod\progs
qadcrm\prod\report
qadcrm\prod\triggers
```

5 Start the AppServer broker using the following command:

```
ProgressInstallDir/bin/asbman -name <broker name> -start
```

6 To start the AppServer automatically, modify the QAD-supplied startup batch files.

Performing Additional Configurations for Integration with QAD Enterprise Applications

If QAD CRM is integrated with QAD Enterprise Applications (SE or EE), you must perform additional configurations for the application server.

QAD CRM Integrated with QAD SE

1 Modify the AppServer broker parameter file to connect to the QAD SE databases and `qxevents` databases in addition to the QAD CRM databases. The `qadddb` should be the first database in the parameter file.

2 Use the trigger option and specify the trigger location for QAD Enterprise Applications databases and `qxevents` database:

```
-trig triggers
```

3 Modify the `PROPATH` to add QAD SE directories before QAD CRM directories.

QAD CRM Integrated with QAD EE

- 1 Modify the AppServer broker parameter file to connect to the QAD EE databases and qxevents databases in addition to the QAD CRM databases. The qaddb should be the first database in the parameter file.
- 2 Use the trigger option and specify the trigger location for QAD Enterprise Applications databases and qxevents database:

```
-trig triggers
```

- 3 Modify the PROPATH of the CRM AppServer brokers:
 - Add *QADERPInstallDir/prod/integration/mfgpro* as the first line
 - Add QAD EE directories before QAD CRM directories

For example, the modified PROPATH looks something like this:

```
QADERPInstallDir/qadcrm/prod/integration/mfgpro
SSMPatchInstallDir/
QXtendInstallDir/
QXOInstallDir/
QADERPDesktopInstallDir/com/mfgpro
QADERPDesktopInstallDir/
QADERPInstallDir/
QADERPInstallDir/us/bbi
QADERPInstallDir/us
QADERPInstallDir/us/sq
QADERPInstallDir/us/tx
QADERPInstallDir/config
QADERPInstallDir/qra/qra.pl
QADERPInstallDir/fin/proxy.pl
QADERPInstallDir/fin/proxy
QADERPInstallDir/qadcrm/prod
QADERPInstallDir/qadcrm/prod/dataexch
QADERPInstallDir/qadcrm/prod/progs
QADERPInstallDir/qadcrm/prod/system
QADERPInstallDir/qadcrm/prod/triggers
QADERPInstallDir/qadcrm/prod/report
```

Note Include *SSMPatchInstallDir* if the SSM patch is installed.

It is also important to include the following ERP folders in the CRM AppServer Propath:


- QADERPInstallDir/us/bbi
 - QADERPInstallDir/us
 - QADERPInstallDir/us/sq
 - QADERPInstallDir/us/tx
- 4 Start the CRM AppServer broker using the following command:


```
ProgressInstallDir/bin/asbman -name <broker name> -start
```

Maintaining and Validating QAD CRM AppServer Information

Perform the following steps on the CRM Deployment Server:

- 1 From the QAD CRM Deployment Utility screen, click the Maintain QAD CRM AppServer Information button.
- 2 In the Service Parameter Maintenance window, configure appropriate parameter values.

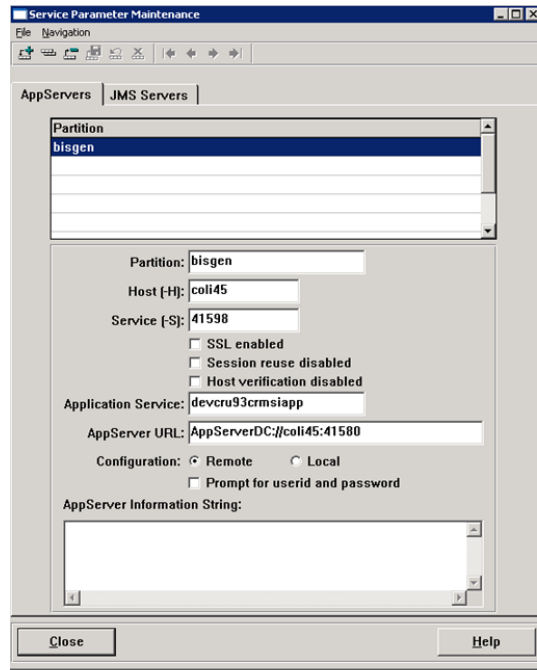

Partition. Do not modify the default partition value of `bisgen`, even if you intend to set up multiple CRM systems on the same deployment server.

Host (-H). Enter the host name or IP address of the NameServer that provides the AppServer connection.

Service (-S). Enter the service name or port number of the NameServer that provides the AppServer connection. The port number of the NameServer being used by your AppServer is referenced in its corresponding NameServer log file, whose location is specified in the Progress `ubroker.properties` file.

Application Service. Enter the name of a valid AppServer application service supported by the NameServer. The NameServer chooses an AppServer that supports this application service for the partition connection.

Use different Application Service names to distinguish between various CRM environments such as Test and Prod environments. For example, it could say `TestCRM_AS` for test CRM system and `ProdCRM_AS` for Production CRM system.

AppServer URL. Specify the URL for connecting to the AppServer; for example, `coli45` is the name of the host and `41580` is the broker port number through which to connect to the AppServer. Your CRM AppServer port number is defined in the Progress `ubroker.properties` file.


Note You are advised to use the DirectConnect method to connect to the AppServer through a URL similar to the AppServer URL, as shown in the screenshot.

Configuration. Choose Remote to connect to an AppServer using the connection information specified for this partition.

- 3 Save your changes and exit the Progress session completely.

- 4 Run the QAD CRM Deployment Utility and click the Validate QAD CRM AppServer Information button.
- 5 In the AppServer Session Information window, click Get Info and make sure that the AppServer connection information such as PROPATH and databases information is correct as per your CRM environment configuration.

If the connection is successful, you will see a connection string in the connection Id fill-in beginning with the Host IP address that hosts the appserver.

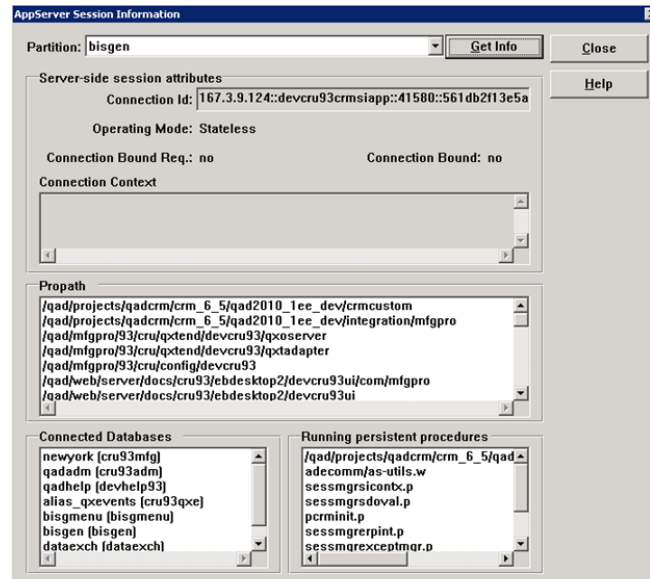

- 6 A file called `appsrvtt.d` has now been updated to record the AppServer information you have set up.
Copy this newly updated `appsrvtt.d` file from the folder `QADCRMInstallDir\` to the folder `QADCRMInstallDir\webclient\frontend\` before proceeding to the generation of the CRM cab files in the next section.

Generating and Copying QAD CRM WebClient Files

After you install QAD CRM, you can find the QAD CRM WebClient project files `qadcrm.wcp` and `qadcrm_all.wcp` in `QADCRMInstallDir\webclient\frontend`. You can tailor some settings in either of these two files. You can either use `qadcrm.wcp` or `qadcrm_all.wcp` to build the CRM WebClient .cab files.


Note The difference between `qadcrm_all.wcp` and `qadcrm.wcp` files is that `qadcrm_all.wcp` contains all the crm programs in a single component that is downloaded when the user installs the CRM WebClient application for the first time.

If you use `qadcrm.wcp` to generate .cab files, CRM generates multiple .cab file components that are downloaded when the CRM WebClient application needs those components.

There is a performance trade-off between approaches with these two .wcp files.

- With `qadcrm.wcp`, download each CRM component as needed. There will be less delay the first time the user tries to install and access CRM.

- With `qadcrm_all.wcp`, all files required for CRM WebClient are downloaded at the same time. There could be a one-time performance hit during the initial install of the application.
- 1 Run the QAD CRM Deployment Utility and click the Generate QAD CRM WebClient Files button.
 - 2 From the File menu, select Open to locate and open the file `qadcrm.wcp` or `qadcrm_all.wcp` in the `QADCRMInstallDir\webclient\frontend` directory.
Note The following example assumes that you have built the `.cab` files using `qadcrm.wcp` file. If you use `qadcrm_all.wcp`, the actual process remains the same but images will differ.
 - 3 In the WebClient project file window, enter values in the fields based on your deployment configurations.

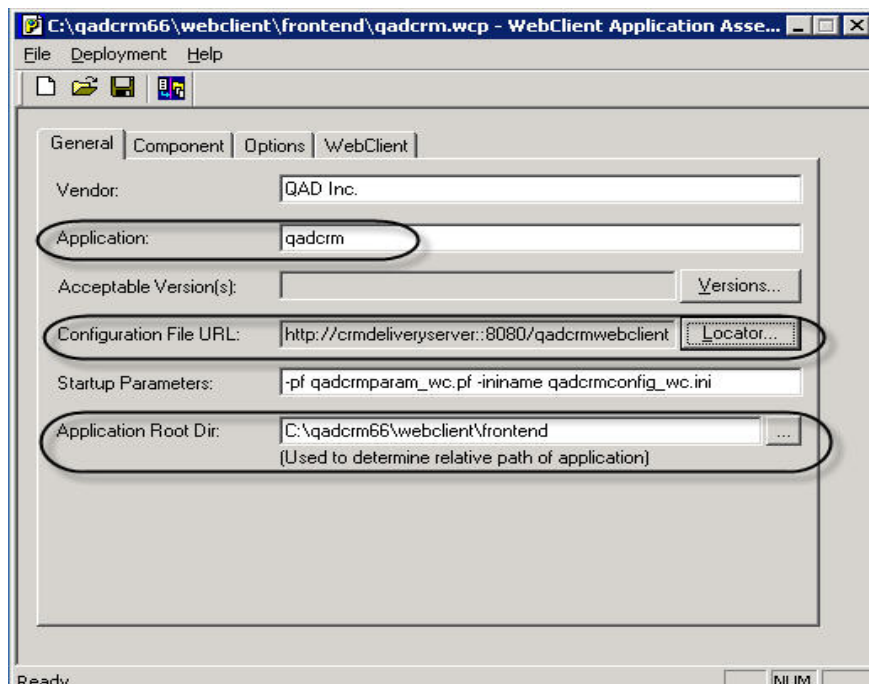

Application. Enter the application name to generate the `prowcabc` file that is referenced in the `bootstrap.htm` and `webclient.htm` file that you modified earlier. Note that the `prowcabc` file name is case sensitive.


Configuration File URL. Enter the configuration file URL according to your CRM setup on the (Tomcat) delivery server. See the configuration file URL information in “Modifying the `bootstrap.htm` File” on page 31.

Application Root Dir. Enter `QADCRMInstallDir\webclient\frontend`.


Acceptable Version(s). Click the Versions button and, in the window that appears, clear the Acceptable to run option for all previous versions. Then, select each entry one by one and select the Remove button to clear all the entries. Click OK to return to the General tab; you should now have no value for the Acceptable Version(s) field.

Platform. For Progress OpenEdge 11.4/11.6, this option is available under the General tab. Make sure that you select the 32-bit option and keep the 64-bit option unselected.

- 4 Under the Component tab, click the Locator button and modify the URL of your codebase as per your configuration. Click OK to Save your changes. See the URL information in “Modifying the bootstrap.htm File” on page 31.

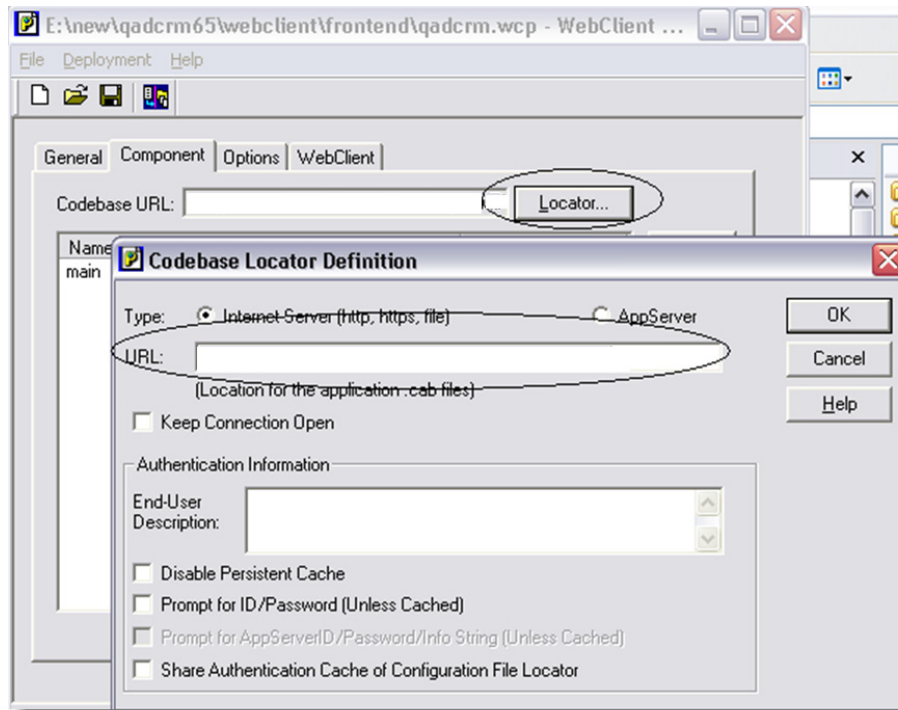


- 5 Under the Options tab, make sure that the Intellistream System Tasks field is checked, and the System Tasks Version field is set to 6.8b1.
- 6 Under the WebClient tab, modify the WebClient Install URL as per your configuration. See the window.location URL information in “Modifying the bootstrap.htm File” on page 31.

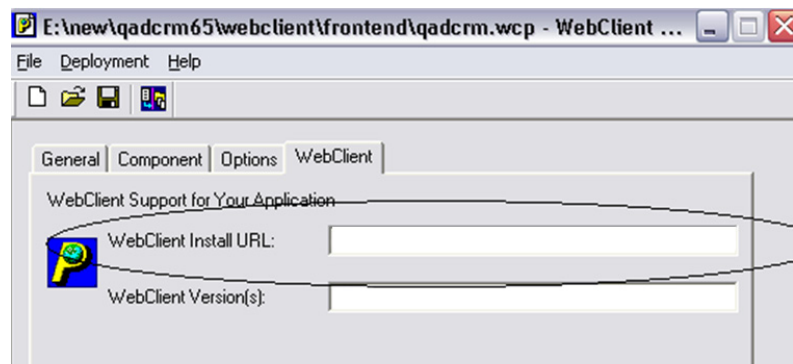

Ensure that the correct Progress WebClient version is entered in the WebClient Version(s) field; for example, 11.3.1 or 10.2B07.


- 7 Click the Save button on the toolbar to save the project.
- 8 From the Deployment menu, select Generate.

- 9 In the Generate QADCRM window, click the Security button and select the digital signature files; then click OK. Relevant files for a particular environment are available in *QADCRMInstallDir\bin*. In this folder, search for a *.spc file name for the Certificate file, and a *.pvk file name for the Private key file.

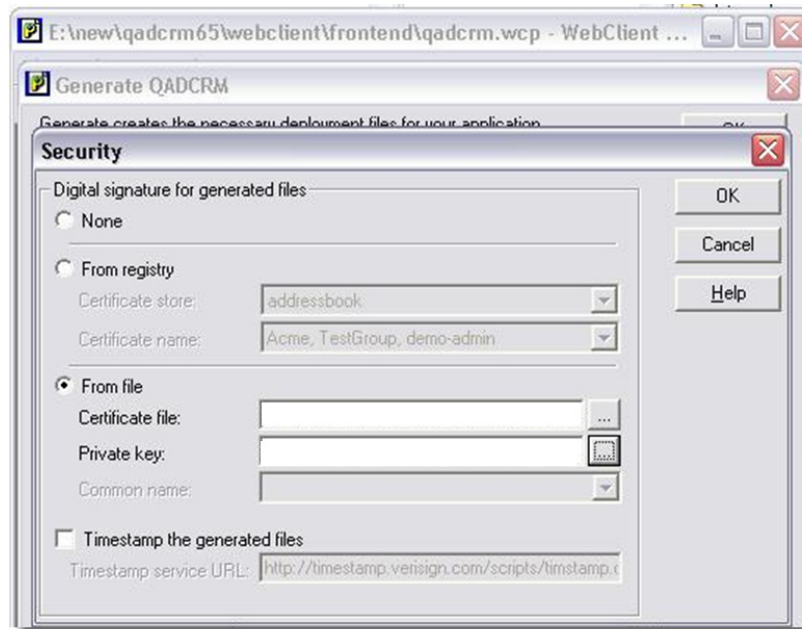

If you are using Progress 11.3.1 or a later version, there is a new field called *Path* to *Signtool.exe* for signing .cab files digitally. Follow the instruction in “Signing Tools for OE11.3.1” on page 179 to make the *signtool.exe* file available before you proceed with the next step.

- 10 Select Deployment | Generate from the menu and make sure all the settings in the Generate QADCRM window are configured correctly.

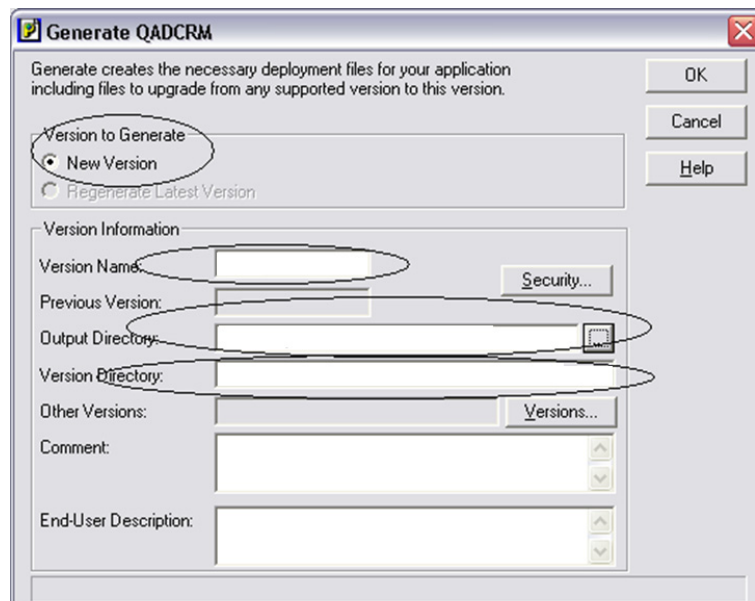

New Version. You must select this option.

Version Name. Enter the current version name 6.8b1.

Output Directory. Specify the output directory based on your CRM installation directory; that is, `QADCRMInstallDir\webclient\frontend`.

Version Directory. This field is automatically populated once you specify the output directory.

11 Click OK to generate the cab files.

In the process of cab files generation, the system prompts you to enter a password for each component cab file to be created. In the password prompt, enter `qadcrm` and click OK.

In case of errors, the cab files generation process is aborted and errors are recorded in the log file. Refer to the log file for error details, if any; then rectify any problems and generate the files again.

12 When cab files generation is complete, WebClient files are created in the `QADCRMInstallDir\webclient\frontend\CRMVersion` directory.

13 You must copy the .cab files generated for QAD CRM earlier. Refer to `QADCRMInstallDir\webclient\frontend\6.8b1\qadcrm.log` for the files that need to be copied from the CRM Deployment Server to Delivery Server (where Tomcat is installed).

Integrating QAD CRM with QAD SE

QAD CRM uses database and session triggers to connect and update the databases of both systems, eliminating the need for manual intervention when transferring data between the two systems.

For integration, the databases of both systems:

- Must always be available
- Must run in multi-user mode
- Can share the same database server

For integration you must configure the deployment servers of the QAD CRM and your QAD Enterprise Applications.

Prerequisites

Before integrating with QAD Enterprise Applications, verify that you have met the following prerequisites:

- System requirements for QAD Enterprise Applications integration. See “System Requirements” on page 11.
- Your QAD CRM databases are running in multi-user mode.
- Your QAD Enterprise Applications is functioning properly.
- Your network is operating.
- QAD Enterprise Applications databases are in multi-user mode.
- You have access to QAD Enterprise Applications compiled programs (.x) and the `xrc` folder.

Configuring QAD Enterprise Applications For Integration

- 1 Modify QAD Enterprise Applications parameter file (.pf) for connecting to the QAD CRM databases.

The following is an example of how you can modify the parameter file.

```
-db /QADERPInstallDir/db/testdb -ld qadddb -trig triggers
-db /qaderpinstallldir/db/helpptest -ld qadhelp -trig triggers
-db /qaderpinstallldir/db/admintest -ld qadadm -trig triggers
-db /qadcrm/db/bisgen -ld bisgen -trig triggers
-db /qadcrm/db/bisgmenu -ld bisgmenu -trig triggers
-db /qadcrm/db/dataexch -ld dataexch -trig triggers
-h 8
-yy 1950
```

Normally, QAD Enterprise Applications uses the same parameter file for telnet, connmgr, AppServer broker, and WebSpeed broker. If this is not the case, you must modify all parameter files.

- 2 Modify QAD Enterprise Applications configuration settings (.ini) file, telnet, connmgr, AppServer broker, and WebSpeed broker to add the following directory locations in the PROPATH:

```
QADERPInstallDir/qadcrm/prod
QADERPInstallDir/qadcrm/prod/system
QADERPInstallDir/qadcrm/prod/dataexch
QADERPInstallDir/qadcrm/prod/progs
QADERPInstallDir/qadcrm/prod/report
QADERPInstallDir/qadcrm/prod/triggers
QADERPInstallDir/qadcrm/prod/integration/mfgpro
```

Note If you are using QAD 2008 SE or earlier, specify the `svrStartupProc` parameter for the .NET UI as follows:

```
svrStartupProc=mfaistrt.p
```

- 3 Modify the script file used by QAD Enterprise Applications Character Client to connect to the bisgen, bisgmenu, and dataexch databases and startup program:

```
exec $DLC/bin/_progres -rq
$MFGDB -ld qadddb -znotrim -trig triggers
-db $ADMDB -ld qadadm
-db $HLPDB -ld qadhelp
-db $QADSAMDB -ld bisgen -trig triggers
-db $EDATADB -ld dataexch -trig triggers
-db $EBMENUDB -ld bisgmenu -trig triggers
-cpstream iso8859-1 -cpinternal iso8859-1 -cpcoll basic
-Bt 350 -c 30 -D 100 -mmax 3000 -nb 200 -s 63
-E -d dmy -yy 1970 -T /ext1/mfgeB/mfgwork -h 8
-p mf.p
```

If you are integrating CRM with QAD 2007.1 SE, you must replace “-p mf.p” with “-p mfbg.p” in the above file.

Performing Additional Steps For QAD 2007.1 SE

Additional steps are required to integrate QAD CRM with the QAD 2007.1 SE Release. Skip the following steps if you are integrating CRM with QAD 2009 SE or later releases.

- 1 Back up the following programs from the `QADERPInstallDir/xrc` directory if available:

<code>cmw.t</code>	Write trigger for QAD Enterprise Applications <code>cm_mstr</code> table
<code>ptw.t</code>	Write trigger for QAD Enterprise Applications <code>pt_mstr</code> table

adw.t Write trigger for QAD Enterprise Applications ad_mstr table
 gpapist.p Program for the integration
 sopiwitt.i Best Price routine
 sopiwids.i Best Price routine
 sopiwapi.p Best Price routine

- 2 Transfer the programs listed in the last step from *QADCRMInstallDir\integration\eb21* to *QADERPInstallDir\xrc* using an FTP or WinSCP program.
- 3 Compile the programs you copied in the previous step using MFG/UTIL.
Note If the programs are customized, contact your QAD Enterprise Applications supplier.
- 4 Copy the compiled files *cmw.r*, *ptw.r*, and *adw.r* from *QADERPInstallDir\xrc* to the directory *QADERPInstallDir/triggers*.
- 5 Copy *mfwb01a.r* from *QADERPInstallDir\xrc* to the directory *QADERPInstallDir*.
- 6 Copy *sopiwapi.r* from *QADERPInstallDir\xrc* to the directory *QADERPInstallDir/us/so* directory.

Performing Additional Steps For QAD 2008 SE

Additional steps are required to integrate QAD CRM with the QAD 2008 SE release. Skip the following steps if you are integrating CRM with QAD 2009 SE or later releases.

- 1 Back up the following programs from the *QADERPInstallDir\xrc* directory if available:
sopiwitt.i Best Price routine
sopiwids.i Best Price routine
sopiwapi.p Best Price routine
- 2 Transfer the programs listed in step 1 from *QADCRMInstallDir\integration\eb21* to *QADERPInstallDir\xrc* using an FTP or WinSCP program.
- 3 Compile the *sopiwapi.p* program you copied in step 1 using MFG/UTIL.
Note If the programs are customized, contact your QAD Enterprise Applications supplier.
- 4 Copy *sopiwapi.r* from *QADERPInstallDir\xrc* to the directory *QADERPInstallDir/us/so* directory.

AIM Configuration

Do the following if AIM is configured with QAD Enterprise Applications (SE):

- 1 Before configuring AIM, verify that you have met the following prerequisites:
 - System requirements for AIM in QAD Enterprise Applications integration section. See “System Requirements” on page 11.
- 2 Back up *cpdtrig.p* from the *AIMInstallDir\xrc* directory.
- 3 Transfer *cpdtrig.p* from *QADCRMInstallDir\integration\eb21* to *AIMInstallDir\xrc* using an FTP or WinSCP program.

4 Compile `cpdtrig.p`.

Note If the above program is customized, contact your QAD Enterprise Applications supplier.

5 Copy the compiled `cpdtrig.r` to the QAD Enterprise Applications environment, depending upon the AIM configuration.

Integrating QAD CRM with QAD EE

QAD CRM uses database and session triggers and QXtend to connect and update the databases of both systems for other modules.

For integration, the databases of both systems:

- Must always be available
- Must run in multi-user mode
- Can share the same database server

For integration you must configure the file servers of QAD CRM and your QAD Enterprise Applications.

QAD CRM uses QXtend to transfer data between QAD Enterprise Applications and QAD CRM for the following modules.

- Address
- Multiple Currency
- Users

Prerequisites

Before integrating with QAD Enterprise Applications, verify that you have met the following prerequisites:

- System requirements for QAD Enterprise Applications integration. See “System Requirements” on page 11.
- QAD CRM databases are in multi-user mode.
- Your QAD Enterprise Applications is functioning properly.
- Your network is operating.
- QAD Enterprise Applications databases are in multi-user mode.
- You have access to QAD Enterprise Applications compiled programs (.r) and the xrc folder.
- QXtend is installed and functioning properly.

Configuring QAD Enterprise Applications for Integration

1 Modify QAD Enterprise Applications parameter file (.pf) for connecting to the QAD CRM databases.

The following is an example of how you can modify the parameter file.

```
-db /QADERPInstallDir/db/testdb -ld qaddb -trig triggers
-db /QADERPInstallDir/db/helpstest -ld qadhelp -trig triggers
```

```
-db /QADERPInstallDir/db/admintest -ld qadadm -trig triggers
-db /qadcrm/db/bisgen -ld bisgen -trig triggers
-db /qadcrm/db/bisgmenu -ld bisgmenu -trig triggers
-db /qadcrm/db/dataexch -ld dataexch -trig triggers
-h 8
-yy 1950
```

Normally, QAD Enterprise Applications uses the same parameter file for telnet, connmgr, AppServer broker, and WebSpeed broker. If this is not the case, you must modify all parameter files.

- 2 Modify QAD Enterprise Applications configuration settings (.ini) file, telnet, QAD Financials AppServer broker, QAD UI AppServer, WebSpeed broker, and connmgr to append the following directory locations in the PROPATH:

```
QADERPInstallDir/qadcrm/prod
QADERPInstallDir/qadcrm/prod/system
QADERPInstallDir/qadcrm/prod/dataexch
QADERPInstallDir/qadcrm/prod/progs
QADERPInstallDir/qadcrm/prod/report
QADERPInstallDir/qadcrm/prod/triggers
QADERPInstallDir/qadcrm/prod/integration/mfgpro
```

- 3 Modify server.xml under folder <QDT_install_directory>/envs/<environment name>/configs to include QAD CRM database connection details as follows:

```
<?xml version="1.0" encoding="UTF-8" ?>
- <serverConfiguration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="serverConfiguration.xsd">
+ <components>
- <databases>
  <rdbms>Progress</rdbms>
  <database>
    <name>sfm93t_mfg</name>
    <parameters>-H coli40 -S sfm93t_mfg-server -N TCP -ld newyork -trig
      triggers</parameters>
    </database>
  - <database>
    <name>sfm93t_adm</name>
    <parameters>-H coli40 -S sfm93t_adm-server -N TCP -ld qadadm -trig
      triggers</parameters>
    </database>
  - <database>
    <name>bisgmenu</name>
    <parameters>-H coli40 -S sfm93tt_bm-server -N TCP -ld bisgmenu -trig
      triggers</parameters>
    </database>
  - <database>
    <name>bisgen</name>
    <parameters>-H coli40 -S sfm93tt_bg-server -N TCP -ld bisgen -trig
      triggers</parameters>
    </database>
  - <database>
    <name>dataexch</name>
    <parameters>-H coli40 -S sfm93tt_dx-server -N TCP -ld dataexch -trig
      triggers</parameters>
    </database>
  - <database>
```

Note Skip the following steps if you are integrating CRM with QAD 2009.1 EE or later releases.

- 4 If you are using QAD 2009 EE, back up the following program from the QADERPInstallDir/xrc directory:

```
ptw.t      Write trigger for the QAD Enterprise Applications
pt_mstr    table
```

- 5 Transfer the programs in step 4 from QADCRMInstallDir\integration\eb3 to QADERPInstallDir/xrc using an FTP or WinSCP program.

6 Compile the programs you copied using MFG/UTIL.

Note If the programs are customized, contact your QAD Enterprise Applications supplier.

7 Copy the compiled file `ptw.r` from `QADERPInstallDir/xrc` to the directory `QADERPInstallDir/triggers`.

8 Modify the script file used by QAD Enterprise Applications Character Client to connect to the `bisgen`, `bisgmenu`, and `dataexch` databases and startup program:

```
exec $DLC/bin/_progres -rq
$MFGDB -ld qaddb -znotrim -trig triggers
-db $ADMDB -ld qadadm
-db $HLPDB -ld qadhelp
-db $QADSAMDB -ld bisgen -trig triggers
-db $EDATADB -ld dataexch -trig triggers
-db $EBMENUDB -ld bisgmenu -trig triggers
-cpstream iso8859-1 -cpinternal iso8859-1 -cpcoll basic
-Bt 350 -c 30 -D 100 -mmax 3000 -nb 200 -s 63
-E -d dmy -yy 1970 -T /ext1/mfgeB/mfgwork -h 8
-p mfbg.p
```

Configuring QXtend for Integration

This section explains how to configure QXtend to enable data transfer between QAD EE and QAD CRM. It involves various settings in QAD EE, QXtend Outbound, and QXtend Inbound.

1 Configure Event Daemon settings using Event Daemon Configure in the .NET UI.

Fig. 2.4
Event Daemon Configure

Instances. Enter 5.

Log-in ID for this Daemon/Password for this Daemon. Enter the log-in ID and password for this daemon.

Daemon Log File. Specify the Daemon log file; for example,
/qad/mfgpro/93/crm/work/EventDaemon.log.

Daemon Start Directory. Specify the Daemon start directory; for example, /qad/mfgpro/93/crm/work/. Make sure that the directory has write permission.

2 Create event destination using Event Destination Create in the .NET UI.

Fig. 2.5
Event Destination

The screenshot shows a web-based form titled "Event Destination - Modify". The form contains the following fields:

- Destination Name:** A text box containing "qadcrm".
- Destination Type:** A dropdown menu with "Direct Appserver" selected.
- Appserver Connection:** A text box containing "appserver://col47.qad.com:41398/testcm93qxoSIapp".
- Appserver Procedure:** A text box containing "com/qad/qa/si/RPCRequestService.p".
- Directory:** An empty text box.

At the bottom right of the form are two buttons: "Save" and "Close".

Note The Modify function is shown here to provide an example of values to enter in the Event Destination-Create function.

Destination Name. Enter qadcrm.

Destination Type. Choose Direct AppServer.

AppServer Connection. Specify the AppServer Connection QXtend Outbound SI AppServer connection string; for example:

AppServer://coli45.qad.com:42398/testsfm93qxoSIapp

Where coli45 is the AppServer host name; 42398 is the NameServer port number; testsfm93qxoSIapp is QXtend Outbound SI AppServer broker name.

AppSever Procedure. Enter com/qad/qa/si/RPCRequestService.p

3 Create event configuration for the following components in all the entities of all the integrated components using Event Configuration Create in the .NET UI:

- Business Relation
- Supplier
- Customer
- Customer Ship-To
- End User
- Domain
- Domain Property
- Currency

- Exchange Rate
- User

Repeat the above steps for all the entities of all the domains available in QAD Enterprise Applications.

Fig. 2.6
Event Configuration Create

Component. Choose one of the above-mentioned components in the list by searching for it using the Component Label field; for example, choose Business Relation.

Publish Any Update. Select this option.

Object Status. Leave the field blank.

Destination Name. Enter qadcrm.

Active. Select this option.


- 4 Start the event daemon using the Event Daemon Start. When the event daemon is started, the system displays the message: The daemon is successfully started.
- 5 Update CRM application code using System Maintain in the .NET UI. In System Maintain, specify *QADERP* as the application ID.

Configuring QXtend for Integration (if QXtend Version is 1.6.3 or Later)

To configure QXtend for integration:

- 1 Make backups of the following .xml template files from directory *QADCRMInstallDir\integration\eb3\templates*.
 - qadcrmdefaultConfiguration.xml
 - qadcrmconfigureSourceApplication.xml
 - qadcrmconfigureProfile.xml
 - qadcrmconfigureOthers.xml

- 2 Make sure the source application type *QADEE*, source application *QADERP*, and business objects are already created and configured. To verify this:
 - a In a Web browser, enter the QXtend Outbound URL; for example, `http://qaddemo:8080/qxo/`.
 - b In the QXtend Outbound main page, click Configuration.
 - c Expand Source Applications.
 - d Make sure the source application type *QADEE* is available and source application *QADERP* is created under source application type *QADEE*.

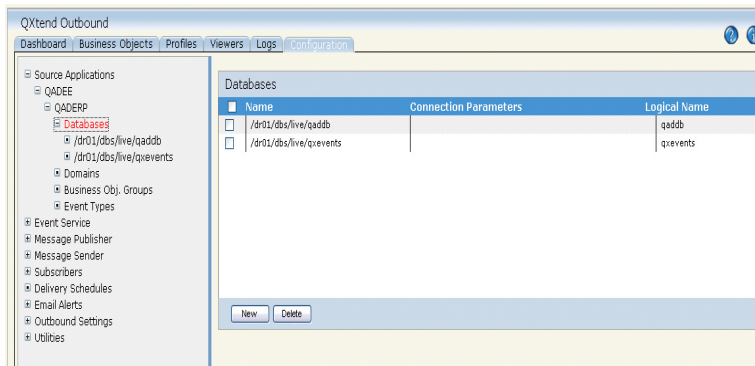

If it does not exist, go to step 3; otherwise, go to step 4.

Note Source application name may vary as per your current configuration. If you are using a different source application, then additional configuration changes need to be made. For details, contact QAD Support.

3 Load default configuration:

- a Open `qadcrmdefaultConfiguration.xml` from dir `QADCRMInstallDir\compile\integration\eb3\templates\` in Notepad and modify the entries highlighted under SourceApplicationType and licenseManager sections with the corresponding values and save the xml file.

Fig. 2.7

Source Application Type Section


```
- <qxc:qxcConfiguration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
- <qxc:sourceApplicationType>
  <qxc:name>QADEE</qxc:name>
  <qxc:active>true</qxc:active>
  <qxc:useRowids>true</qxc:useRowids>
  <qxc:directDataPublish>false</qxc:directDataPublish>
- <qxc:sourceApplication>
  <qxc:code>QADERP</qxc:code>
  <qxc:description />
  <qxc:appServerParameters />
- <qxc:databaseConnection>
  <qxc:name>/dr01/dbs/live/qaddb</qxc:name>
  <qxc:connectionParameters />
  <qxc:logicalName>qaddb</qxc:logicalName>
</qxc:databaseConnection>
- <qxc:databaseConnection>
  <qxc:name>/dr01/dbs/live/qxevents</qxc:name>
  <qxc:connectionParameters />
  <qxc:logicalName>qxevents</qxc:logicalName>
</qxc:databaseConnection>
</qxc:sourceApplication>
</qxc:sourceApplicationType>
```

Fig. 2.8

License Manager Section

```
- <qxc:licenseManager>
  <qxc:host>qaddemo</qxc:host>
  <qxc:port>8080</qxc:port>
  <qxc:webApp>qxi</qxc:webApp>
  <qxc:useSSL>false</qxc:useSSL>
</qxc:licenseManager>
```

- b Copy the modified `qadcrmdefaultConfiguration.xml` to the QXtend Inbound `configService` directory; for example, `\dr01\tomcat\8080\webapps\qxi\WEB-INF\configService`.
- c In a Web browser, enter the QXtend Inbound URL; for example, `http://qaddemo:8080/qxi`.
- d In the QXtend Inbound main page, click QXtend Manager, select Functions|Test Harness| QXtend Config Service, and enter Configuration File as `qadcrmdefaultConfiguration.xml`, User Name as `admin`, and Password as `mfgpro`, and click Submit to load the `.xml` file.

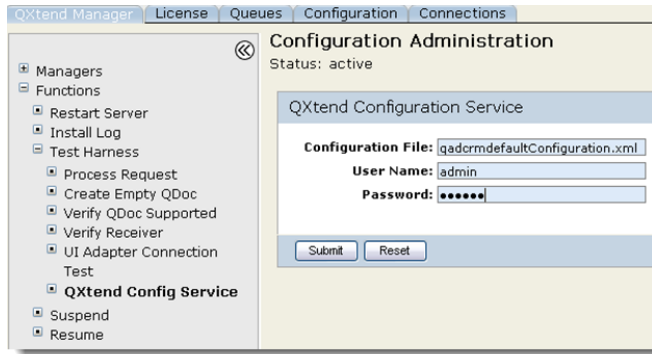

- e Refresh the QXtend Outbound URL and verify source application type *QADEE* is available and source application *QADERP* is created under source application type *QADEE*.
- 4 Configure the source application for QAD CRM.
 - a Copy `qadcrmconfigureSourceApplication.xml` from dir `QADCRMInstallDir\integration\eb3\templates\` to the QXtend Inbound `configService` directory, which is a subfolder that resides under the Tomcat Webserver as follow:


```
<TOMCATInstallDir>/webapps/qxi/WEB-INF/configService
```
 - b In a Web browser, enter the QXtend Inbound URL.
 - c In the QXtend Inbound main page, click QXtend Manager and select Functions|Test Harness|QXtend Config Service and enter Configuration File as `qadcrmconfigureSourceApplication.xml`, User Name as `admin`, and Password as `mfgpro`; click Submit to load the xml file.
 - 5 Configure profiles for QAD CRM.
 - a Copy `qadcrmconfigureProfile.xml` from directory `QADCRMInstallDir\integration\eb3\templates\` to the QXtend Inbound `configService` directory, which is a subfolder that resides under the Tomcat Webserver as follow:


```
<TOMCATInstallDir>/webapps/qxi/WEB-INF/configService
```
 - b In a Web browser, enter the QXtend Inbound URL.
 - c In the QXtend Inbound main page, click QXtend Manager and select Functions|Test Harness|QXtend Config Service, and enter `qadcrmconfigureProfile.xml` for Configuration File, User Name as `admin`, and Password as `mfgpro`; click Submit to load the .xml file.

6 Configure Others for QAD CRM.

- a Open `qadcrmconfigureOthers.xml` from directory `QADCRMInstallDir\integration\eb3\templates\` in Notepad and modify the highlighted entries for connection pool `ee-crm` with the QAD CRM AppServer details, then save the `.xml` file.

In the following example, `qaddemo` is AppServer host name, `5162` is the NameServer port number, `crm_ASlive` is the QAD CRM AppServer broker name, `demo` is the user ID for the `ee-crm` connection pool, and `12/9fVy87Uw=` is the password.

```
- <qxc:connectionPool>
  <qxc:name>ee-crm</qxc:name>
  <qxc:type>SIAP1</qxc:type>
  <qxc:host>qaddemo</qxc:host>
  <qxc:port>5162</qxc:port>
  <qxc:appserverName>crm_ASlive</qxc:appserverName>
  <qxc:clientUser>demo</qxc:clientUser>
  <qxc:clientPassword>12/9fVy87Uw=</qxc:clientPassword>
  <qxc:clientDomain />
</qxc:connectionPool>
```


- b Copy `qadcrmconfigureOthers.xml` from directory `QADCRMInstallDir\compile\integration\eb3\templates\` to the QXtend Inbound `configService` directory, which is a subfolder that resides under the Tomcat Webserver as follow:


```
<TOMCATInstallDir>/webapps/qxi/WEB-INF/configService
```
- c In a Web browser, enter the QXtend Inbound URL.
- d In the QXtend Inbound main page, click QXtend Manager and select Functions|Test Harness|QXtend Config Service and set Configuration File to `qadcrmconfigureOthers.xml`, User Name as `admin`, and Password as `mfgpro`; click Submit to load the `.xml` file.

Configuring QXtend for Integration (if QXtend Version is earlier than 1.6.3)


Configuring QXtend Outbound for integration

- 1 Create the source application for QAD CRM integration.
 - a In a Web browser, enter the QXtend Outbound URL; for example, `http://coli47.qad.com:10040/testcrm93qxo/`.
 - b In the QXtend Outbound main page, click Configuration.
 - c Expand Source Applications.
 - d Make sure that source application type QAD EE is created. If it does not exist, create one with the following details:
 - Name as QADEE
 - Description as QAD Enterprise Edition
 - Active selected
 - Use RowIDs deselected
 - Direct Data Publish (DDP) only deselected




- e Create a new source application. Specify QAD EE as the code and leave AppServer parameters blank.
- f If QXtend version is 1.6.2.6 or later, create the following databases:
 - Add one database and specify Name of qaddb database (for example, sfm93t_mfg), Connection Parameters (for example, -H coli40 -S sfm93t_mfg-server, where coli40 is the database host name and sfm93t_mfg-server is the service name created for the qaddb database) and Logical name of mfg database as qaddb.
 - Add database and specify Name of qxevents database (for example, sfm93t_qxe), Connection Parameters (for example, -H coli40 -S sfm93t_qxe-server, where coli40 is the database host name and sfm93t_mfg-server is the service name created for qaddb database) and Logical Name (for example, qxevents)

Fig. 2.9
Set Up Databases

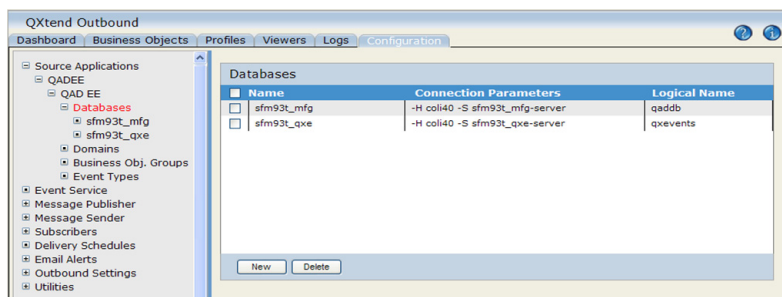

- g Make sure default event types are imported. If not, import event types by selecting the Import button.

Fig. 2.10
Import Event Type

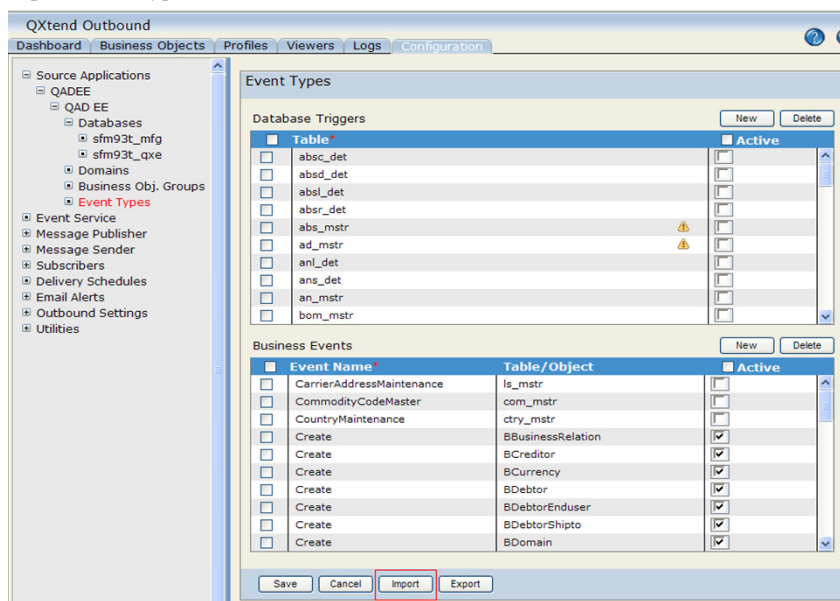


- h Create event types for CRM integration for the following objects using Events Create, Modify, and Delete.
 - BBusinessRelation
 - BCreditor
 - BCurrency
 - BDebtor
 - BDebtorEndUser
 - BDebtorShipto
 - BDomain
 - BDomainProperty
 - BExchangeRate
 - BUser
- 2 Configure schemas, business objects, and profiles.

If you are using QXtend 1.6.2.6 or later, use the following steps to load business objects and profiles:

 - a Go to the QXtend Outbound main page.
 - b Click the Configuration tab.
 - c In the left pane, choose Utilities|XML Import.
 - d In the XML Import screen, specify QADEE/*/* in the XML to Load field.
 - e Click Load to import business objects and profiles.


Fig. 2.11
XML Import

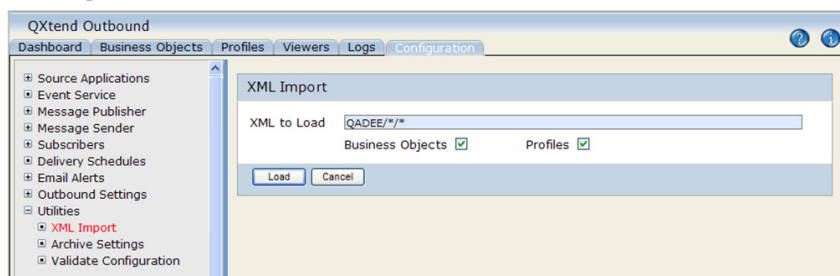

If your QXtend version is earlier than 1.6.2, use the following steps:

- a Go to the QXtend Outbound main page.
- b Click the Business Objects tab.
- c Select the App Type created earlier, such as QAD2008EE-FIN.
- d Click the New button.

Fig. 2.12
Load Schema

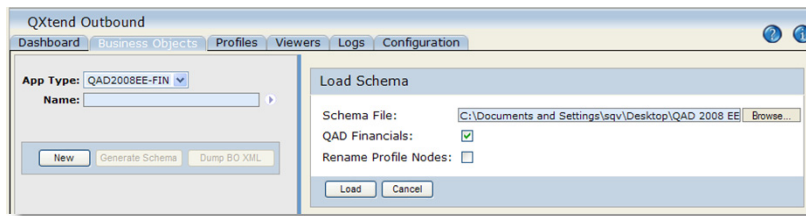

Schema File. Copy the `bbusinessrelation-ERP3_1.xsd` schema file from Qxtend Inbound webapp folder to a temp folder on your Deployment server; for example, `QADCRMinstallDir\temp`.

For example, the schema file could be copied from *Qxtend Inbound webapp folder*/WEB-INF/schemas/QADEE/bbusinessrelation-ERP3_1.xsd to the `c:\qadcrm\temp` folder, where `c:\qadcrm` is the CRM installation folder.

Now specify the above location (for example, `c:\qadcrm\temp`) as the schema file for the business relation.

QAD Financials. Select QAD Financials.

Rename Profile Nodes. Leave this option deselected.

- e** Click Load to load the schema.
- f** Repeat steps d and e to load schemas for the following components:
 - BCreditor
 - BDebtor
 - BDebtorShipto
 - BDebtorEndUser
 - BDomain
 - BDomainProperty
 - BCurrency
 - BExchangeRate
 - BUser
- g** In the left pane, select the profile radio button.
- h** Select default profile for business relation.
- i** Click Copy to create a new profile for CRM integration.

Fig. 2.13
Create Profile

Name. Enter a profile name, such as BBusinessRelationCRM.

QDoc Name. Enter a QDoc name in lower case; for example, bbusinessrelation.

QDoc Version. Enter ERP3_1.

Type. Choose Data Synchronization.

j Make sure that all the ID fields are included for the BBusinessRelation profile. To do this, select the profile and click the Edit button to select check boxes for ID fields; then click Save.

k Repeat steps h through j to create profiles for all the following components:

- BCreditor
- BDebtor
- BDebtorShipTo
- BDebtorEndUser
- BDomain
- BDomainProperty
- BCurrency
- BExchangeRate
- BUser

3 Create a new subscriber


a Go to the QXtend Outbound main page.

b Click the Configuration tab.

a In the left pane, click Subscriber.

b Click New to create a new subscriber.

Fig. 2.14
Create Profile

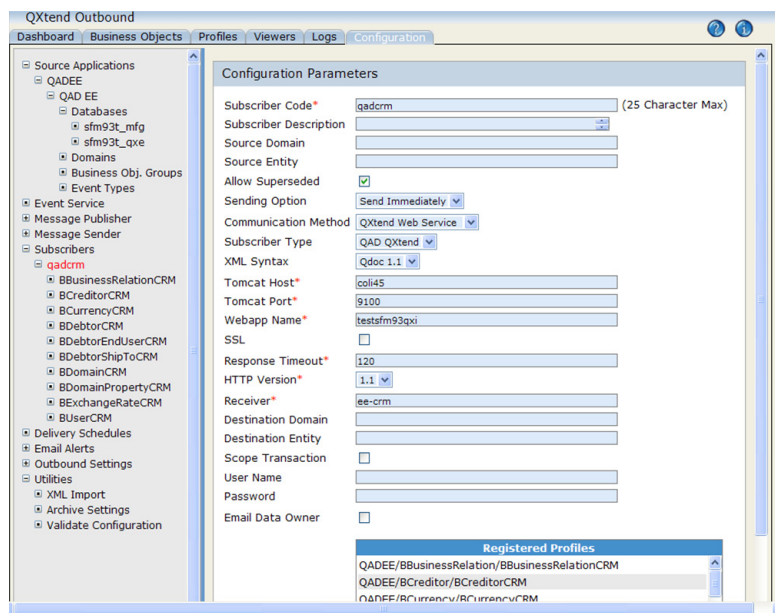

Subscriber Code. Enter qadcrm.

Allow superseded. Select this option.

Sending Option. Choose Send Immediately.

Communication Method. Choose QXtend Web Service.

XML syntax. Choose QDoc 1.1.

Tomcat Host. Enter the Tomcat host name.

Tomcat Port. Enter Tomcat host port.

Webappname. Enter the Inbound Webappname; for example, testcrm93qxi.

HTTP Version. Enter 1.1.

Receiver Name. Specify the QXtend Inbound receiver name.

Destination Domain. Leave this field blank.

Destination Entity. Leave this field blank.

Scope Transaction. Leave this option deselected.

c Click Register Profiles.

d Select all the profiles created for CRM from the list on the right and click Add the Profiles.

e Click Register Src Apps and select Source Application.

f Click Save.

4 Configure Message Sender.

- a Go to the QXtend Outbound main page.
- b Click the Configuration tab.
- c From the left pane, click Message Sender.
- d Select an available message sender under Message Sender. Create one if no default message sender exists.
- e Select the Lookup button.
- f Select newly created Subscriber and click Add.
- g Click save to save the details.

Fig. 2.15
Create Message Sender

The screenshot shows the 'QXtend Outbound' application window with the 'Configuration' tab selected. The left-hand navigation pane shows a tree structure under 'Business Objects' > 'Message Sender' > 'msgSender'. The main area is titled 'Configuration Parameters' and contains the following fields:


- Session Code***: A text input field containing 'msgSender' with a '(25 Character Max)' label.
- Session Description**: A dropdown menu.
- Polling Frequency***: A text input field containing '1'.
- Max Retry Limit***: A text input field containing '5'.
- Alert Monitor Frequency***: A text input field containing '1'.
- Number of Agents***: A text input field containing '1'.
- Alert Message Types**: Checkboxes for 'ERR' (checked), 'WRN' (checked), and 'MSG' (unchecked).

Below these fields is a section titled 'Registered Subscribers' which contains a table with one entry: 'qadcrm'. At the bottom of the configuration area are three buttons: 'Lookup', 'Save', and 'Cancel'.

5 Configure Message Publisher.

- a Go to the QXtend Outbound main page.
- b Click the Configuration tab.
- c From the left panel, click Message Publisher.
- d Select available message Publisher under Message Publisher. Create one if default one does not exist.
- e Click the Lookup button.
- f Select App Type QAD EE.
- g Select BusinessObjects created for CRM integration and click Add to include it in the Message publisher.


Fig. 2.16
Configure Message Publisher

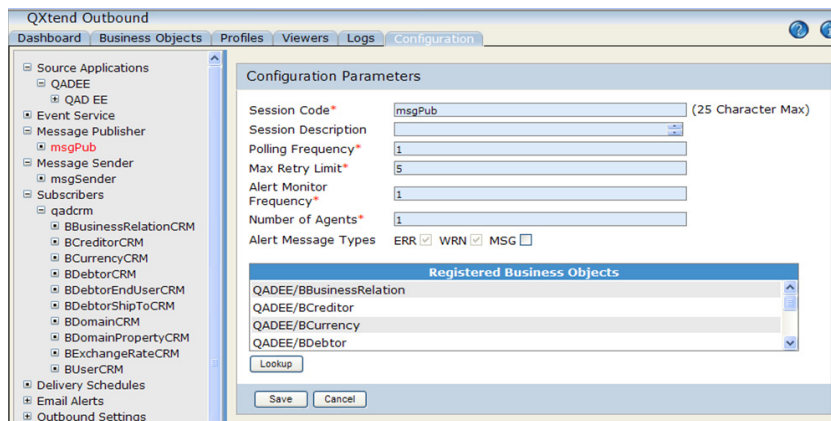

Configuring QXtend Inbound for Integration

- 1 Load Business Components schemas for CRM integration only if QXtend version is prior to 1.6.2.6.
 - a Go to the QXtend Inbound main page.
 - b Go to the Configuration tab.
 - c Select Schemas from the left pane.
 - d Select QAD2008EE under schemas
 - e Click Add.
 - f Select Continue Configuration update without suspending QXtend Inbound.

Fig. 2.17
Configure Message Publisher

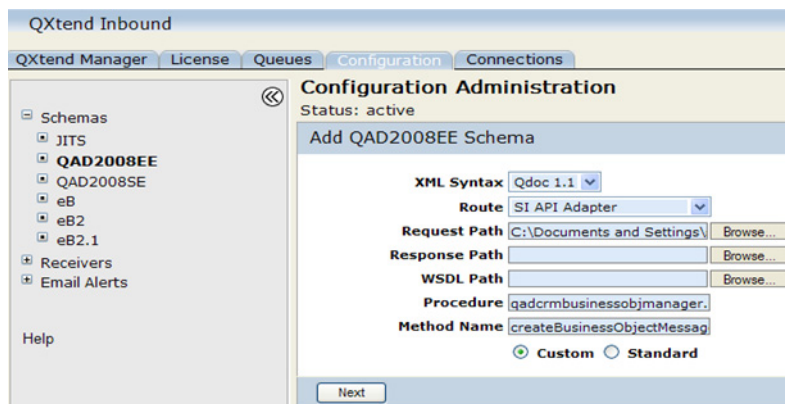

XML syntax. Select Qdoc 1.1.

Route. Select SI API Adapter.

Request Path. Enter the following:

`QADCRMinstallDir\temp\bbusinessrelation-ERP3_1.xsd`

This assumes that you have followed the instructions listed under step Load Schema in the Qxtend Outbound setup in the previous section.

Response Path. Leave this field blank.

WSDL Path. Leave this field blank.

Procedure. Enter `qadcrmbusinessobjmanager.r`.

Method Name. Enter `createBusinessObjectMessage`.

Custom/Standard. Select Custom.

g Click Next.

h Select the receiver ee-crm specified during subscriber configuration.

i Repeat the above steps to load schemas for the following components:

- BCreditor
- BDebtor
- BDebtorShipto
- BDebtorEndUser
- BDomain
- BDomainProperty
- BCurrency
- BExchangeRate
- BUser

2 Create New Receiver for data transfer from QAD EE to QAD CRM.

a Go to the QXtend Inbound main page.


b Go to the Configuration tab.

c Select Receivers from left pane.

d Select QADEE if QXtend Version is prior to 1.6.2.6; otherwise, select CRM.

e Click New.

Fig. 2.18
Add Receiver

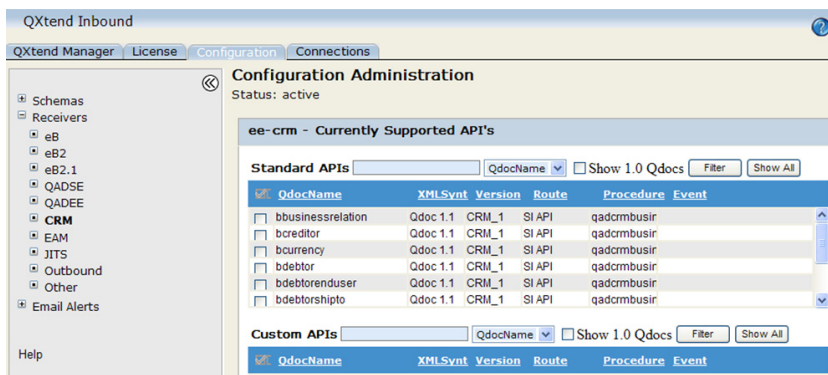

- f** Select Continue Configuration update without suspending QXtend Inbound.
 - g** Specify the receiver name as ee-crm.
 - h** Leave licensed domains blank.
 - i** Click Next.
 - j** Select the following QDocs from Standard APIs if QXtend version is 1.6.2.6 or later; otherwise select Qdocs from custom APIs.
 - BBusinessRelation
 - BCreditor
 - BDebtor
 - BDebtorShipto
 - BDebtorEndUser
 - BDomain
 - BDomainProperty
 - BCurrency
 - BExchangeRate
 - BUser
- 3** Create New Connection for data transfer from QAD EE to QAD CRM.
- a** Go to the QXtend Inbound main page.
 - b** Go to the Connection tab.
 - c** Expand Add connection pool.
 - d** Click Add SI-API pool.

Fig. 2.19
Add Receiver

The screenshot shows the 'Configuration Settings Update' dialog box in the QXtend Inbound application. The 'Configuration' tab is selected. On the left, there is a tree view with 'Functions' expanded, showing options like 'Close Connection Pool', 'Restart Connection Pool', 'Reset Failed Init Count', 'Connection Pool Manager', 'Update Configuration', 'Settings', 'Connections', and 'Users'. The main area displays various configuration parameters with input fields and dropdown menus. The parameters are: Debug (No), App Server Name (testsfm93SIapp), Host (coli45), Port (42398), User (mfg), Password (masked with dots), Domain (If Applicable) (empty), Minimum Connections (1), Maximum Connections (5), Maximum Failures (20), Connections Monitor Frequency (60000), Maximum Connection Idle Time (180000), Maximum Connection Init Time (20000), Wait time for Idle Connection (10000), Max Licensed Agent Retry (5), and Wait time for Licensed Agent (20000). At the bottom, there are 'Save' and 'Cancel' buttons.

Pool Name. Enter the same name as the receiver name, such as ee-crm.

AppServer Name. Enter the AppServer name created when you set up the AppServer environment; for example, testsfm93SIapp.

Host. Enter the AppServer host name.

Port. Enter the NameServer port number.

e Click Save.

4 Create new receiver for data transfer from QAD CRM to QAD EE.

a Go to the QXtend Inbound main page.

b Go to the Configuration tab.

c Select Receivers from the left pane.

d Select QADEE and Click New.


e Select Continue Configuration update without suspending QXtend Inbound.

f Specify crm-ee as the receiver name and leave licensed domains blank.

g Select following QDocs from Standard APIs:


- BBusinessRelation
- BCreditor
- BDebtor
- BDebtorShipto
- BDebtorEndUser
- BDomain
- BDomainProperty
- BCurrency
- BExchangeRate
- BUser

Fig. 2.20
Select QDocs

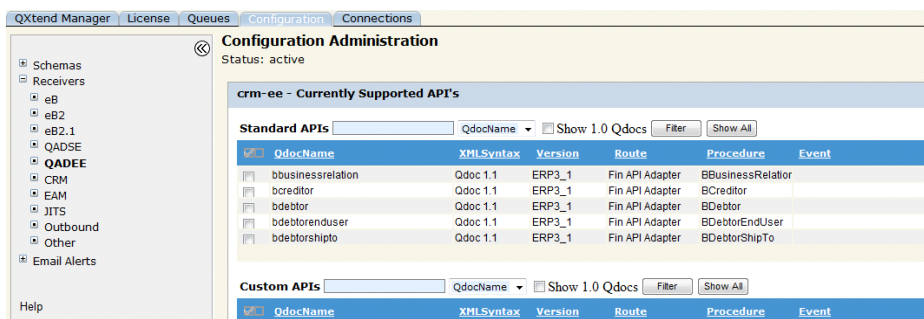

- 5 Create New Connection for data transfer from QAD CRM to QAD EE.
 - a Go to the QXtend Inbound.
 - b Go to the Connection tab.
 - c Expand Add connection pool.
 - d Click Add Fin API pool.

Fig. 2.21
Create Connection

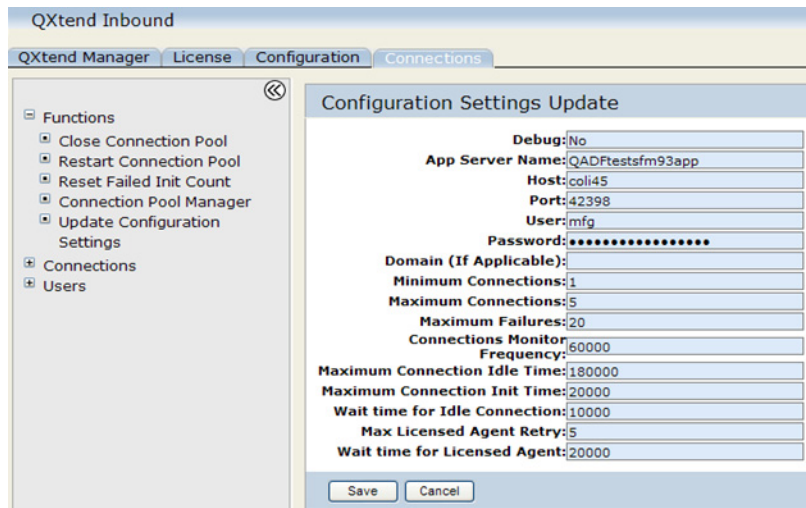

Pool Name. Specify the same name as the receiver name such as crm-ee.

AppServer Name. Specify QAD EE Financial AppServer broker name; for example, QFtestsfm93app.

Host. Enter the AppServer Host name.

Port. Enter the NameServer port number.

User/Password. Enter the user and password.

- e Click Save.

Configuring the Environment for Sales Order Integration

QAD CRM uses CIM to create sales orders in QAD Enterprise Applications. If you plan to use this feature, use the AppServer from the QAD Enterprise Applications machine.

You must also perform the following configuration in your test and production environments, and then refer to the QAD CRM *Administration Guide* to complete further configuration steps required for sales order integration.

1 Do either of the following:

- If your QAD Enterprise Applications is installed on a Linux\UNIX system, copy `QADCRMInstallDir\bin\client_cim_linux.sh` as `client_cim_prod_linux.sh` to `QADERPInstallDir/script` (where all QAD Enterprise Applications batch files are available).
- If your QAD Enterprise Applications is installed on Windows, copy `QADCRMInstallDir\bin\client_cim_win.bat` as `client_cim_prod_win.bat` to `QADERPInstallDir/script` (where all QAD Enterprise Applications batch files are available).

2 Open the copied `client_cim_prod_linux.sh/client_cim_prod_win.bat` file in an editor and make sure the `DLC` and `PROPATH` entries have valid values. For example in case of Linux/UNIX, it should look like this:

```
&DLC = /home/progress/dlc101c
&PROPATH =
QADERPInstallDir,QADERPInstallDir/us/bbi,QADERPInstallDir/qadcrm/prod,QADERPInstallDir/
qadcrm/prod/system,QADERPInstallDir/qadcrm/prod/dataexch,QADERPInstallDir/qadcrm/prod/
progs,QADERPInstallDir/qadcrm/prod/report,QADERPInstallDir/qadcrm/prod/triggers,QADERP
InstallDir/qadcrm/prod/integration/mfgpro
```

3 If QAD QXtend is installed, open the copied `client_cim_linux.sh/client_cim_win.bat` file in an editor and include the QXtend Outbound install directory in the beginning of the `PROPATH`:

```
&PROPATH =
QXtendOutboundInstallDir,QADERPInstallDir,QADERPInstallDir/us/bbi,QADERPInstallDir/qad
crm/prod,QADERPInstallDir/qadcrm/prod/system,QADERPInstallDir/qadcrm/prod/dataexch,QAD
ERPInstallDir/qadcrm/prod/progs,QADERPInstallDir/qadcrm/prod/report,QADERPInstallDir/q
adcrm/prod/triggers,QADERPInstallDir/qadcrm/prod/integration/mfgpro
```

4 Modify the paths of the following files referenced in the `client_cim_prod_linux.sh/client_cim_prod_win.bat` file:

- `Production.pf`. This parameter file should be replaced by the one that connects the QAD CRM and QAD Enterprise Applications prod databases and `qxevents` database if QXtend is installed in your environment. You must create one if you cannot use any existing parameter file.
- `pintord02.r` file located in the `QADERPInstallDir/qadcrm/prod/integration/mfgpro` directory.

5 Create a printer record for Sales Order Integration in QAD Enterprise Applications using the following steps:

- Run QAD Enterprise Applications.
- Go to Printer Setup Maintenance (36.13.2) and create a printer record with the following details:
 - Output To: `sfama.so`
 - Destination Type: Default
 - Description: `sfama`

- Lines / Page: 66
- Scroll Output: No
- Device Pathname: /tmp/sfama.so
- Spooler: No

Leave the rest of the fields blank.

Installing QAD CRM on End-User PC

Before setting up QAD CRM clients, verify that you have met the following prerequisites:

- System requirements for QAD CRM. See “System Requirements” on page 11.
- Your network is operating.
- Create the folder `C:\temp` on your client PC if it does not exist.
- You have permission level required on your PC to install new applications such as QAD CRM WebClient, which requires access to update the Windows registry file.

The installation of QAD CRM WebClient on an end-user PC consists of two steps:


- 1 Install Progress WebClient (if not already installed).
- 2 Install QAD CRM.

Once you have finished hosting your CRM WebClient application .cab files on the Delivery Server (a Tomcat server), do the following:

- 1 Start Internet Explorer as Administrator.
- 2 Go to this URL:

`http://<DeliveryServerIpAddressorHostName>:<TomcatPortNo>/<qadcrmwebclient>/web_image/bootstrap.htm`

- 3 If Progress WebClient is not installed on your machine, Internet Explorer displays the Progress WebClient and QAD CRM installation page.

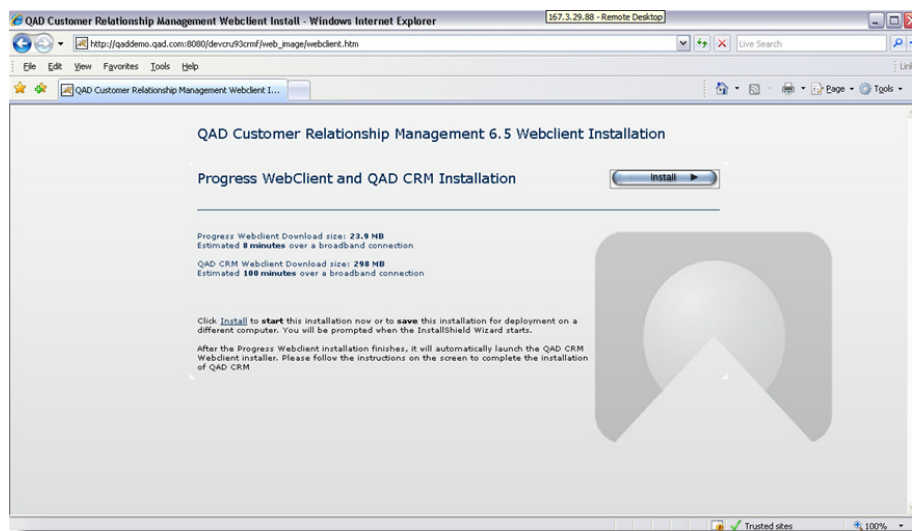


Click the Install button to launch the installation process.

- 1 It installs the required version of Progress WebClient application, then launches the CRM WebClient application download and eventually starts the CRM.

Note You might be required and prompted to restart your PC after Progress WebClient has been installed.

- 2 If you already have Progress WebClient installed on your machine, the installer displays a warning message and prompts you to exit.

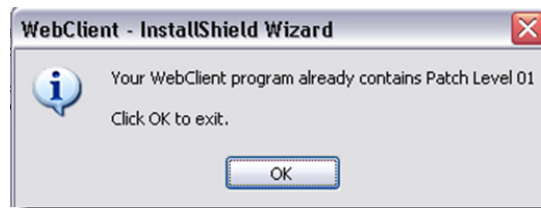

Exit the installer and go to the following URL to proceed to download the CRM WebClient application:

`http://qaddemo.qad.com:8080/qadcrmwebclient/qadcrm/qadcrm.prowcapc`

If you used `qadcrm_all.wcp` to generate the CRM `.cab` files, the URL can be different as the following:

`http://qaddemo.qad.com:8080/qadcrmwebclient/qadcrm/qadcrm_all.prowcapc`

- 3 At the Security Warning message box, click Run to launch the QAD CRM installation process.



- 4 When installation is complete, a QAD CRM WebClient icon is created on the Windows Desktop. QAD CRM WebClient shortcut menus are also created.



- QAD CRM WebClient: Launch QAD CRM in the WebClient mode.
- QAD CRM WebClient AppManager: View detailed information about QAD CRM WebClient installed on your machine, such as configuration file and application directory.
- Uninstall QAD CRM WebClient: Uninstall QAD CRM WebClient from your machine.

Note If you are installing a CRM WebClient on a test server (instead of an end-user PC) so that it can be shared with multiple users via remote desktop into that test server, then you will need to open up the Properties of the CRM WebClient Window icon, and blank out the “Start in” value before you click on this icon to launch the WebClient for the first time.

- 5 Launch CRM WebClient either by clicking the application Desktop icon or selecting the application shortcut command from the Start menu.
- 6 When you run QAD CRM WebClient for the first time on your machine, you get a message similar to one shown below.



Click OK to install required components. When installation is complete, launch QAD CRM WebClient again.

Note During the first launch of the CRM WebClient application, it could take some time depending on the connection speed between the Tomcat server where your CRM application is hosted and your own computer on which you are trying to launch CRM WebClient. However, this delay will be experienced only during first time you access CRM. Subsequent access to the CRM system is quicker.

If a user launched the QAD CRM WebClient and did not perform the initial installation on a client PC, the user will encounter an error similar to the one following even if the user belongs to a local admin group:

Unable to install/run <application name>. You must have full access to the Application Key in the windows Registry. HKEY_LOCAL_MACHINE\Software\QAD Inc.\<application name>.

Contact your System Administrator.

To resolve this issue, take the following steps:

- 1 Go to the registry and select following node:
 - Windows 32-bit clients:
HKEY_LOCAL_MACHINE\Software\<VendorName>\<ApplicationName>
 - Windows 64-bit clients:
HKEY_LOCAL_MACHINE\Software\Wow6432Node\<VendorName>\<ApplicationName>
- 2 Select the application name. Then, right-click and choose Permission.
- 3 Select Users from Group or user names section.
- 4 Select Full Control from Permissions for user group and select Allow.
- 5 Click OK and restart the QAD CRM WebClient.

Note Running the CRM WebClient application does not require the user to have admin permission. The user only needs access permission to the registry nodes.

Creating Separate QAD CRM Environment

Prerequisites

For an integration with QAD Enterprise Applications, a corresponding environment should be available for each separate QAD CRM environment you want to set up.

Duplicate Environment Creation Process


Make a copy of the *QADCRMInstallDir* on your deployment server to a new folder; for example, *QADCRMInstallDir_Env*.

For example, if you installed the original configuration of QAD CRM on a Deployment server in *c:\qadcrm661*, you could copy it to a new folder such as *c:\qadcrm661_test*.


Once you have made a copy of the environment to a new folder, the instructions for setting up your environment remain the same as your original configuration except that wherever you see a tag *QADCRMInstallDir*, you must replace it with the new folder name you created; that is, *C:\qadcrm661_test* in this case.

Preparing the QAD Remote Sales Environment on the Deployment Server

- 1 On the QAD CRM deployment server, run the QAD CRM Deployment Utility. The following window pops up.

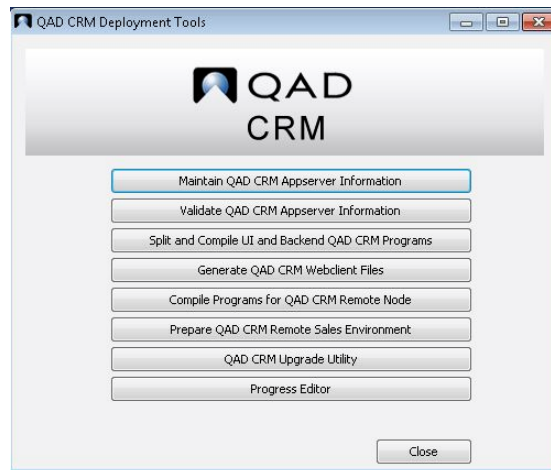


- 2 Click the Compile Programs for QAD CRM Remote Node button.
An application compiler screen pops up.

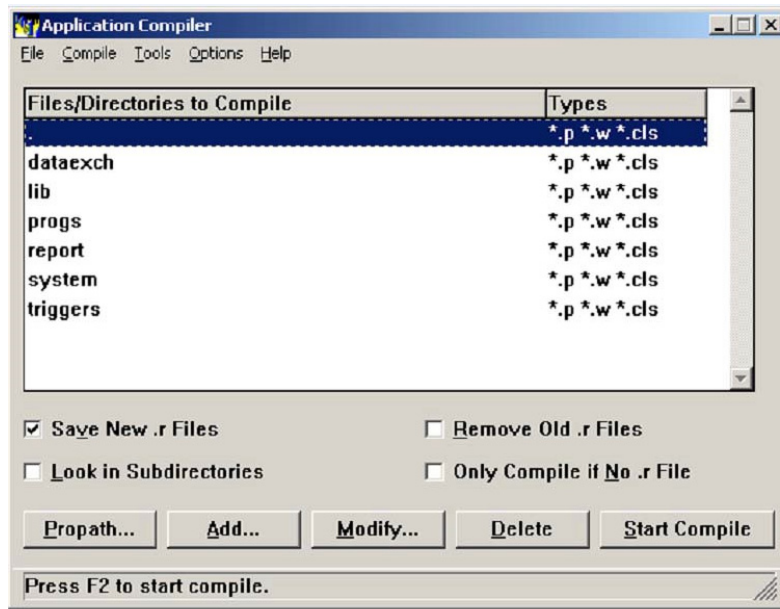

- a Select Options|Compiler and make sure that both Minimize R-Code Size and Generate MD-5 are set to Yes.
- b In the Application Compiler screen, clear the Look in Subdirectories check box and then click Start Compile to start the compilation.
- c The application compiler generates a log file during compilation. Check the log file to ensure that there are no errors. Errors recorded in the log file begin with double asterisk characters. If any error occurs, contact QAD Support.

Note If you are not sure about the location of the log file, check Options|Compiler and view the log file to check for errors.

- 3 Click the Prepare QAD CRM Remote Sales Environment button.
- 4 A message is displayed. Click Yes to copy required programs.

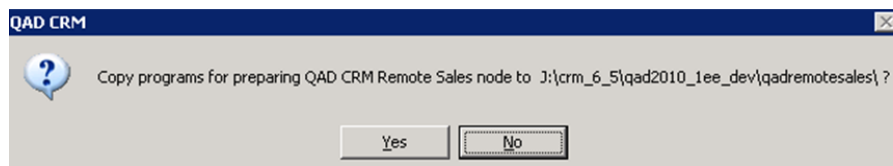

Implementing QAD Remote Sales (Optional)

Installing QAD Remote Sales

Before installing QAD Remote Sales, you must complete the previous step (Preparing the QAD Remote Sales Environment on the Deployment Server). The previous step must be performed only once and it can be used to set up any number of remote nodes, as described in the following procedure.

To install QAD Remote Sales on a remote computer:

- 1 Install the Progress Personal Database license at:

`C:\Progress\openedge`

- 2 Create a directory on the remote computer to store QAD Remote Sales program files. The assumed directory is:

`C:\QADRemoteSales`

Copy the directories and their content from the following location on your deployment server to the new directory you created; that is,

`QADCRMInstallDir\QADRemoteSales` on deployment server to `C:\QADRemoteSales`

- 3 Run the following program:

`C:\QADRemoteSales\bin\remotesetup\setup.exe`

This program starts the QAD Remote Sales installation.

- 4 Click Next.

If QAD CRM 6.4B8/6.4B6/6.4B2/6.3/6.1 is found on the system, Setup displays a warning message. Click Yes to continue with the installation or No to abort the setup.

It is highly recommended that you uninstall any previous version of QAD CRM prior to installing the latest release.

- 5 Setup checks for the Progress database version installed on the computer.
 - If the compatible Progress versions are not found, Setup displays an error message and aborts the installation.
 - It will use the highest version of Progress supported by CRM that is available on the computer.

Select the Progress version you want to use and click Next.

- 6 Setup checks for Microsoft .NET Framework 4.0 on the system.
 - If Microsoft .NET Framework 4.0 is already installed, skip to the next step.
 - If Microsoft .NET Framework 4.0 is not installed, Setup prompts you to install the component. Click Yes to install .NET Framework 4.0. Setup Wizard installs the component.

After Microsoft .NET Framework 4.0 is installed, you might get an alert that you must restart Windows so that an application using .NET Framework can work properly. If you see this prompt, choose the option Restart Later and make sure that you restart windows after the CRM Client installation has been completed.

- 7 Click OK. The Destination Location screen appears.
- 8 To change the default installation directory, click Change. Browse and select the directory. Then click OK and then click Next. The Program Folder screen appears.
- 9 To change the default program folder for storing shortcuts, specify the folder you want in the Program folder field. Click Next. The Options Selected screen appears.
- 10 Click Install. Setup starts installing the system components in the designated directory.

- 11 During install, Setup checks some Progress files. If the files cannot be found, Setup prompts you to copy Progress files. It is recommended to choose Yes to copy the Progress files required.
- 12 The installation program now initiates the Crystal Distribution package installation or repair. If this software is already installed, select the Repair option.
Note Choosing the Remove option removes the Crystal Distribution package from the client computer.
- 13 To install the Crystal Distribution package, click Next.
The Select Installation Folder screen appears.
- 14 To change the default installation directory, click Browse. Specify the installation directory.
- 15 Click Next. The Confirm Installation screen appears. Click Next to start the installation.
- 16 On the Installation Complete screen, click Close to finish the Crystal Reports Installation.
- 17 Click Finish to end the QAD CRM Remote Sales installation.

The QAD Remote Sales installer creates icons to start the system and access the help system.

After installation you can start QAD Remote Sales with demo data. You should restart the computer for your changes to take effect.

Note In case of Unicode implementation, you must have done the following:

Change some parameter values in the remote sales client parameter (.pf) file. The file name is `qadsfama.pf` and is available in the remote sales installation folder (`C:\QADRemoteSales`).

Update or add the following entries in the `qadsfama.pf` file:

```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

Preparing QAD Remote Sales

Before preparing QAD Remote Sales, you must register the QAD Remote Sales database—called the remote node—with the host system on the network. This is required for data synchronization and data subset creation.

From the database on the network—also called the host node—you must create the data subset file for the remote node. This file is loaded onto the QAD Remote Sales.

To load the host node data subset onto the personal database:

- 1 Extract the appropriate data subset from the host node and save it in the `.res` file format.
- 2 Copy the data subset file of the node in `.res` format from:
`QADCRMInstallDir\dataout`
to this directory on the computer where QAD Remote Sales is installed:
`QADRemoteSaleInstallDir\datain`
- 3 Log in as the demo in QAD Remote Sales.

Note At this point, if you run into the an error about Unable to open word-break table, take the following steps to resolve the error:

- a Start a command window (`cmd.exe`) and set the DLC and PATH variables.

```
set DLC=ProgressInstallDir
set PATH=%PATH%;%DLC%;%DLC%\bin
```
- b Change current directory to the Progress installation directory.

```
cd %DLC%
```
- c Compile the new word-break file using the following command:

```
proutil -C wbreak-compiler %DLC%\prolang\convmap\utf8-bas.wbt 1
```
- 4 Choose Main Menu|Remote Sales Data Synchronization|Receive Data to Recreate Current Node. The Node Requiring Re-creation dialog box appears.
- 5 From the Load data from list, choose File.
- 6 In the File Name field, specify the full path and name of the `.res` file.
- 7 Click OK. The system starts loading the data into the personal database.
- 8 Restart the system.

To enable data synchronization:

- 1 Choose Main Menu|Remote Sales Data Synchronization|Node Management Control|Synchronization settings.
- 2 Select the Enable Data Synchronization check box.
- 3 In the No of Days Modified Records must be kept field, type 30.
- 4 Restart QAD Remote Sales.

When needed, synchronize the data with the host node. You must ensure that the data synchronization feature is configured in QAD CRM. QAD Remote Sales users should periodically synchronize data with the host node to keep information current.

Deploying QAD CRM in a YAB Environment

Here are the general steps for deploying QAD CRM in a YAB environment for 2018 EE, 2017 EE, 2016.1 EE, or 2015 EE (cloud):

- 1 Installing Appropriate CRM YAB Recipe
- 2 Installing Progress on the Deployment Server
- 3 Installing QAD CRM on the Deployment Server
- 4 Configuring QAD CRM on Deployment Server
- 5 Splitting and Compiling UI and Backend QAD CRM Programs
- 6 Generating and Copying QAD CRM WebClient Files

- 7 Configuring integration with QAD ERP
- 8 Installing QAD CRM on End-user PC
- 9 Creating Separate QAD CRM YAB Environment
- 10 Implementing Remotes Sales (Optional)

Installing Appropriate CRM YAB Recipe

With QAD Enterprise Edition 2018/2017/2016.1/2016/2015 (cloud), QAD CRM back-end server components are installed using the YAB installer. YAB supports installing all server components on a single host. To distribute server components over several hosts, contact QAD Services.

Follow these steps to install CRM back-end components:

- 1 Download the Customer Relationship Management Server (YAB) (`crm-server-release-x.x.x.x`) zip file from the QAD Store or from QAD Release Fulfillment.
- 2 Move the file to a file system that is accessible from the UNIX host where your Enterprise Edition environment is installed.
- 3 Change to the directory where Enterprise Edition is installed.

```
cd directory
```

- 4 Unset the environment variables. Enter:

```
unset DLC
unset PROMSGS
unset PROTERMCAPI
```

- 5 Enter:

```
yab install [ZIP FILE]
```

Example

```
yab install /dr01/crm-server-release-6.8.0.0.zip
```

- 6 CRM is installed.

If BUILD is not successful, contact QAD Support.

Installing Progress on the Deployment Server

You must have local administrator access to perform the required Progress and QAD CRM installation on the deployment server.

For information about installing Progress components, refer to the Progress software installation guides.

Installing QAD CRM on the Deployment Server

After planning the deployment and installing all Progress components, you can install the system from the installation CD. You can also download QAD CRM from QAD web site.

The first step is to set up the deployment server. The deployment server:

- Contains all program files
- Manages file sharing
- Manages system security
- Coordinates communication between workstations

To load the installation media, you must have Administrator privileges on the deployment server machine. Close all other applications before beginning the installation process.

Other applications or tasks might interfere with the installation or use files that CRM needs to complete the installation. Shut down any processes where the executable itself, or a file used by the executable, is located in the directory where you intend to install CRM.

Use the following steps to install QAD CRM components on the deployment server:

- 1 Launch the installation program from the installation medium you plan to use as described in the following table:


For this Installation medium...	Do the following...
CD	Insert the CD into the drive. If it does not run automatically, double-click <code>setup.exe</code> in the root directory of the CD to start the installation.
DVD	Double-click the <code>setup.exe</code> in the root directory to start the installation.
Software Distribution download	Download all the files to a folder (for example, <code>c:\qadcrmmedia</code>), then double-click <code>setup.exe</code> to start the installation.

- 2 On the QAD CRM Setup Wizard Welcome screen, click Next.


If a previous CRM version is found on the system, a warning prompts you to continue with the installation. Click Yes to proceed or No to abort the setup.

Note QAD recommends that you uninstall any previous versions of QAD CRM before installing the latest release.

- 3 Setup checks for supported versions of Progress on the computer.
 - If no compatible Progress version is found, Setup displays an error message and aborts the installation.
 - If more than one Progress version is installed on the computer, Setup locates the highest version of Progress supported by CRM that is available for use.
- 4 Setup checks for Microsoft .NET Framework 4.0 on the system.
 - If Microsoft .NET Framework 4.0 is already installed, skip to the next step.
 - If Microsoft .NET Framework 4.0 is not installed, Setup prompts you to install the component. Click Yes to install .NET Framework 4.0. Setup Wizard installs the component.
- 5 The Destination Location screen appears. Accept the default installation directory and click Next. If you specify a directory other than the default location, you will see the following message:

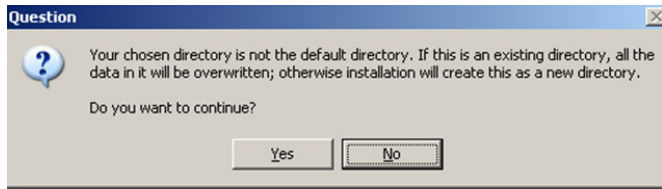

- 6 In the Program Folder Name screen, specify the program folder name for QAD CRM and click Next.
- 7 In the QAD CRM Setup Confirmation screen, review the selected setup options. To change the options, click Back; click Install to start the installation process.
- 8 If the Crystal Distribution package is not installed on the computer, the Crystal Distribution Setup Wizard screen appears. Follow the on-screen instructions to complete the installation of this component.
 - a On the Crystal Distribution Setup Wizard Welcome screen, click Next.
 - b On the Select Installation Folder screen, click Next.
 - c On the Confirm Installation screen, click Next.
 - d When installation is complete, click Close.
- 9 If QAD AdminService is not installed, the AdminService Setup Wizard screen appears. Follow the on-screen instructions to complete the installation of this component.
 - a On the QAD AdminService Setup Wizard Welcome screen, click Next.
 - b On the Select Installation Folder screen, check the installation folder and change if required. Select "Everyone" from the installation option and click Next.

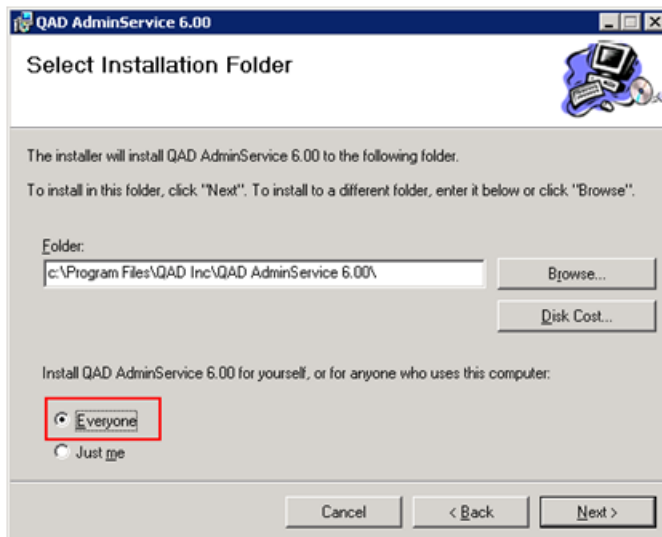

- c On the Confirm Installation screen, click Next.
- d Select English (United States) from the language list and then click OK.

- e When Installation is complete, click Close. The Installation Log screen appears.
 - f Select the “I would like to view the Installation Log file” check box and then click Finish. The log file is opened in Microsoft Windows Notepad.
 - g Check the log file for errors. Errors begin with two asterisks (**) in the log file. Contact QAD Support if errors are found.
- 10 When QAD CRM installation is complete, Setup creates the following QAD CRM shortcut icons in the QAD CRM program folder.
- QAD CRM Help: Launches QAD CRM online help.
 - QAD CRM Demo: Launches the QAD CRM demo environment. To log in to the demo environment, use the username demo and leave the password blank.
 - QAD CRM Deployment Utility: A control center for configuring, compiling, upgrading, or setting up CRM for WebClient mode or setting up the QAD CRM Remote Sales environment.

Note It is useful to understand how files are organized in the installation directory for administration tasks, such as the system to integrate with QAD Enterprise Applications.

Testing the System

To test the installation on the deployment server:

- 1 Choose Start|All Programs|QAD CRM 6.8.0|QAD CRM Demo.
- 2 In the User ID field, type demo. Leave the Password field blank.
- 3 Test the system functionality.


If you encounter any errors, contact QAD Support.

Configuring QAD CRM on Deployment Server

Maintaining and Validating QAD CRM AppServer Information

Perform the following steps on the CRM Deployment Server:

- 1 From the QAD CRM Deployment Utility screen, click the Maintain QAD CRM AppServer Information button.
- 2 In the Service Parameter Maintenance window, configure appropriate parameter values.

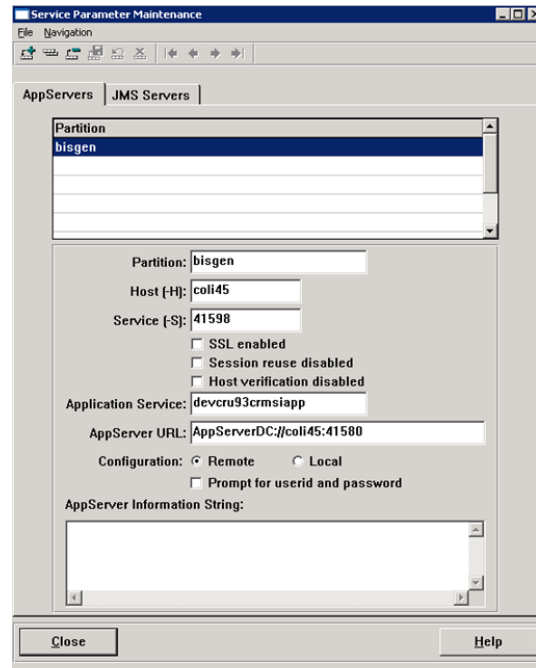

Partition. Do not modify the default partition value of `bisgen`, even if you intend to set up multiple CRM systems on the same deployment server.

Host (-H). Enter the host name or IP address of the NameServer that provides the AppServer connection.

Service (-S). Enter the service name or port number of the NameServer that provides the AppServer connection. The port number of the NameServer being used by your AppServer is referenced in its corresponding NameServer log file, whose location is specified in the `Progress ubroker.properties` file.

Application Service. Enter the name of a valid AppServer application service supported by the NameServer. The NameServer chooses an AppServer that supports this application service for the partition connection.

Use different Application Service names to distinguish between various CRM environments such as Test and Prod environments. For example, it could say `TestCRM_AS` for the Test CRM system and `ProdCRM_AS` for the Production CRM system.

AppServer URL. Specify the URL for connecting to the AppServer; for example, `coli45` is the name of the host and `41580` is the broker port number through which to connect to the AppServer. Your CRM AppServer port number is defined in the `Progress ubroker.properties` file.


Note You are advised to use the DirectConnect method to connect to the AppServer through a URL similar to the AppServer URL, as shown in the screenshot.

Configuration. Choose Remote to connect to an AppServer using the connection information specified for this partition.

- 3 Save your changes and exit the Progress session completely.

- 4 Run the QAD CRM Deployment Utility and click the Validate QAD CRM AppServer Information button.
- 5 In the AppServer Session Information window, click Get Info and make sure that the AppServer connection information such as PROPATH and databases information is correct as per your CRM environment configuration.

If the connection is successful, you will see a connection string in the connection Id fill-in beginning with the Host IP address that hosts the appserver.

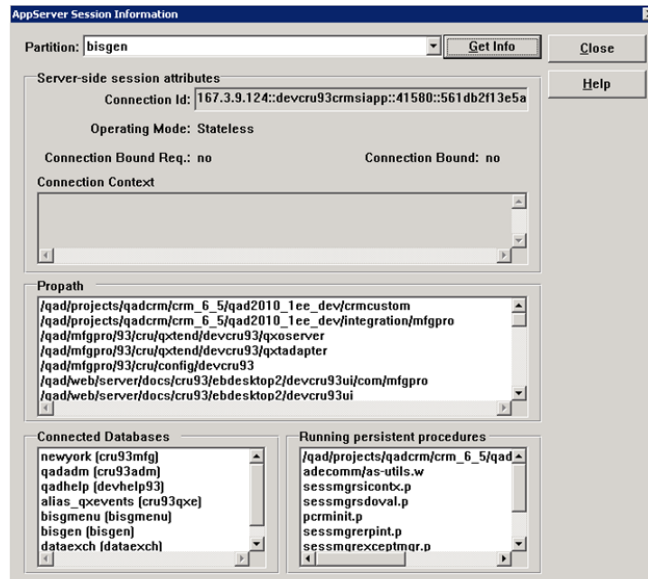

- 6 A file called `appsrvtt.d` has now been updated to record the AppServer information you have set up.

Copy this newly updated `appsrvtt.d` file from the folder `QADCRMInstallDir\` to the folder `QADCRMInstallDir\webclient\frontend\` before proceeding to the generation of the CRM cab files in the next section.

Compiling Encrypted Files

QAD CRM in a YAB environment supports only one scenario:

- QAD CRM Integrated with QAD Enterprise Applications (Enterprise Edition)

To integrate QAD CRM with QAD Enterprise Applications (Enterprise Edition):

- 1 Copy `proxy.pl` provided with QAD Enterprise Applications to `QADCRMInstallDir\mfgsrv`.

Note If you are using QAD Enterprise Applications on Progress Open Edge 10.x, copy the 32-bit version of `proxy.pl` from `QADERPInstallDir/fin` to `QADCRMInstallDir\mfgsrv`. The Progress 32-bit version of the `proxy.pl` file can be acquired from the QAD Enterprise Applications Enterprise Edition installation media. From the installation media, extract the `mfgproap32/mfgproap32.zip` file, which contains 32-bit `proxy.pl`, to `QADCRMInstallDir\mfgsrv`.

You can get the location of the `proxy.pl` file by reviewing the `ProPath` of the `as-fin` appserver in the `ubroker.properties` file.

- 2 Open `cbserver.xml` under `QADCRMInstallDir\integration\mfgpro` in Notepad and modify `appServiceURL` with QAD Enterprise Applications Financials AppServer details. In the following example, `coli45` is the AppServer host name, `42398` is the NameServer port number, and `QADFdevsfm93app` is the QAD EE Financial AppServer broker name.

```
<?xml version="1.0" encoding="UTF-8" ?>
<!-- This file contains the configuration of the business layer of the application -->
- <serverConfiguration xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="serverConfiguration.xsd">
  <!-- sessionInfoGetterProcedure can be used to override the default value of
  clnsrvcbenv.p -->
  <sessionInfoGetterProcedure>clnsrvcbenv.p</sessionInfoGetterProcedure>
  <!-- disable authentication for time being -->
  <!-- <DisableAuthentication/> -->
  <!-- A valid appserver needs to be specified -->
- <appServerConnection>
- <appService name="QADFdevsfm93app">
  <appServiceURL>appserver://coli45:42398/QADFdevsfm93app</appServiceURL>
  </appService>
  <DebugLevel>0</DebugLevel>
</appServerConnection>
</serverConfiguration>
```

- 3 Continue with “Compilation Procedure”.

Compilation Procedure

- 1 Create a word break rule file for the CRM Unicode databases.

- a Start a command window (`cmd.exe`) and set the `DLC` and `PATH` variables.

```
set DLC=ProgressInstallDir
set PATH=%PATH%;%DLC%;%DLC%\bin
```

- b Change the current directory to the Progress installation directory.

```
cd %DLC%
```

- c Compile the new word break rule file using the following command.

```
proutil -C wbreak-compiler %DLC%\prolang\convmap\utf8-bas.wbt 1
```

- d Double check that the file created in the previous step named `proword.1` now exists in the `%DLC%` folder.

- 2 Modify the parameter file.

For a Unicode environment, you must perform the following additional steps:

- a Update or add the following parameter values in `QADCRMInstallDir\qadsfamaupgrade.pf`:


```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```

- b For Unicode compilation, modify `qadsfamaupgrade.pf` to connect to the Unicode databases in the `QADCRMInstallDir\db\demo\unicode` folder; for example:

```
-db db\demo\unicode\bisgmenu -1
-db db\demo\unicode\bisgen -1
```

```
-db db\demo\unicode\dataexch -1
```

- 3 Choose Start|All Programs|QAD CRM 6.8.0|QAD CRM Deployment Utility. The following screen appears.

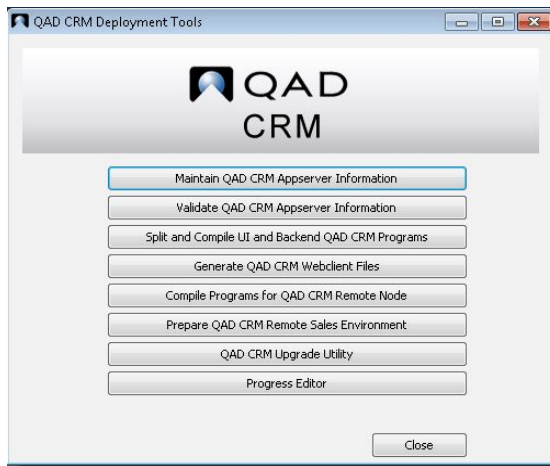


Continue with the instructions under “Splitting and Compiling UI and Backend QAD CRM Programs”.

Splitting and Compiling UI and Backend QAD CRM Programs

Perform the following steps on the CRM deployment server:

- 1 If you are using a Unicode database, update the file named *QADCRMInstallDir/qadcrmparam_wc.pf* with the following parameters:


```
-cpinternal UTF-8
-cpstream UTF-8
-cpcoll ICU-UCA
-cpcase Basic
```
- 2 From the QAD CRM deployment utility screen, select the button Split and Compile UI and Backend QAD CRM Programs. A screen similar to the one shown below appears.

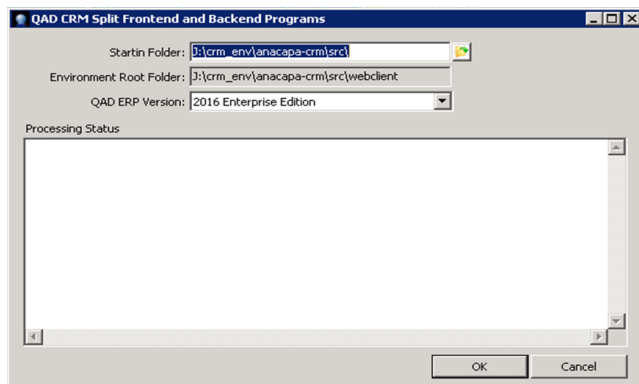

- 3 Select the Startin folder as *QADCRMInstallDir*; for example: *c:\qadcrm680*. This is selected by default.

All CRM programs that require recompilation on the backend in that case are copied under `QADCRMInstallDir\webclient\backend` folder.

By default, the environment root folder is set to `QADCRMInstallDir\webclient`.

Select QAD Enterprise Edition version with which you are trying to integrate CRM.

4 Click OK to start processing

- Two log files will be generated in the `QADCRMInstallDir\log` folder that contains error information. After you have run the utility, the system creates various subfolders under `QADCRMInstallDir\webclient\frontend` contains CRM code and other files required to make the CRM cab file.

After you have run the above utility, the system automatically compiles all the CRM UI programs required for CRM WebClient against your existing CRM databases and generates the `.r` files.

- `QADCRMInstallDir\webclient\backend`: contains all the code that is required on the backend server. It will contain the source code of programs for QAD CRM backend. In YAB environment, you can ignore the files in this folder as these are automatically configured.

Generating and Copying QAD CRM WebClient Files

After you install QAD CRM, you can find the QAD CRM WebClient project files `qadcrm.wcp` and `qadcrm_all.wcp` in `QADCRMInstallDir\webclient\frontend`. You can tailor some settings in either of these two files. You can either use `qadcrm.wcp` or `qadcrm_all.wcp` to build the CRM WebClient `.cab` files.

Note The difference between `qadcrm_all.wcp` and `qadcrm.wcp` files is that `qadcrm_all.wcp` contains all the CRM programs in a single component that is downloaded when the user installs the CRM WebClient application for the first time.

If you use `qadcrm.wcp` to generate `.cab` files, CRM generates multiple `.cab` file components that are downloaded when the CRM WebClient application needs those components.

There is a performance trade-off between approaches with these two `.wcp` files.


- With `qadcrm.wcp`, download each CRM component as needed. There will be less delay the first time the user tries to install and access CRM.
- With `qadcrm_all.wcp`, all files required for CRM WebClient are downloaded at the same time. There could be a one-time performance hit during the initial install of the application.

1 Run the QAD CRM Deployment Utility and click the Generate QAD CRM WebClient Files button.

2 From the File menu, select Open to locate and open the file `qadcrm.wcp` or `qadcrm_all.wcp` in the `QADCRMInstallDir\webclient\frontend` directory.

Note The following example assumes that you have built the `.cab` files using the `qadcrm.wcp` file. If you use `qadcrm_all.wcp`, the actual process remains the same but images will differ.

3 In the WebClient project file window, enter values in the fields based on your deployment configurations.

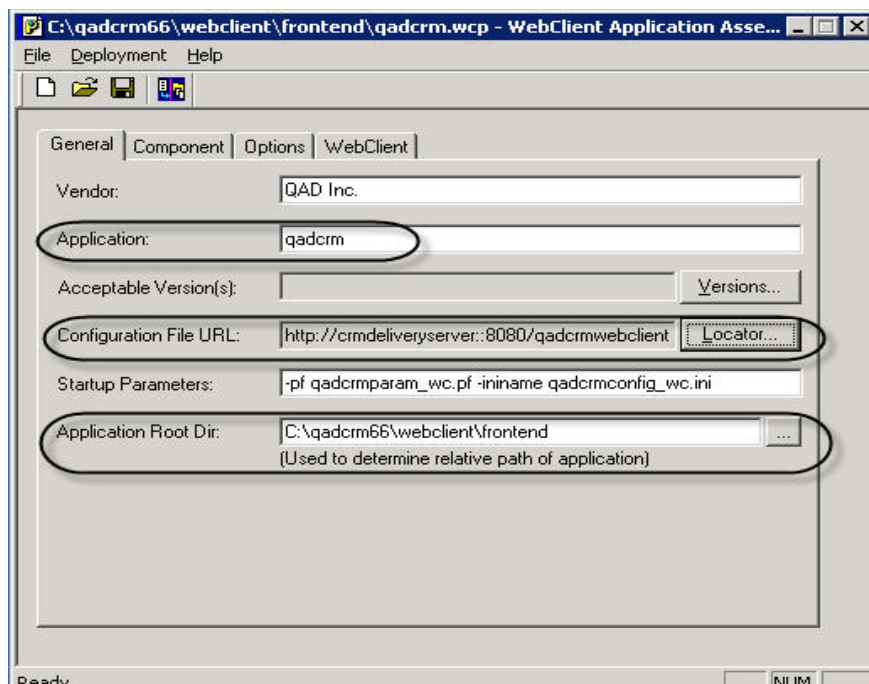

Application. Enter the application name to generate the `prowcappc` file that is referenced in the `bootstrap.htm` and `webclient.htm` files that you modified earlier. Note that the `prowcappc` file name is case sensitive.


Configuration File URL. Enter the configuration file URL according to your CRM setup on the (Tomcat) delivery server. See the configuration file URL information in “Modifying the `bootstrap.htm` File” on page 31.

Application Root Dir. Enter `QADCRMInstallDir\webclient\frontend`.

Acceptable Version(s). Click the Versions button and, in the window that appears, clear the Acceptable to run option for all previous versions. Then, select each entry one by one and select the Remove button to clear all the entries. Click OK to return to the General tab; you should now have no value for the Acceptable Version(s) field.

Platform. For Progress OpenEdge 11.4/11.6, this option is available under the General tab. Make sure that you select the 32-bit option and keep the 64-bit option unselected.

- 4 Under the Component tab, click the Locator button and modify the URL of your codebase as per your configuration. Click OK to save your changes. You can get the URL information from `bootstrap.htm` file on your Tomcat WebServer.

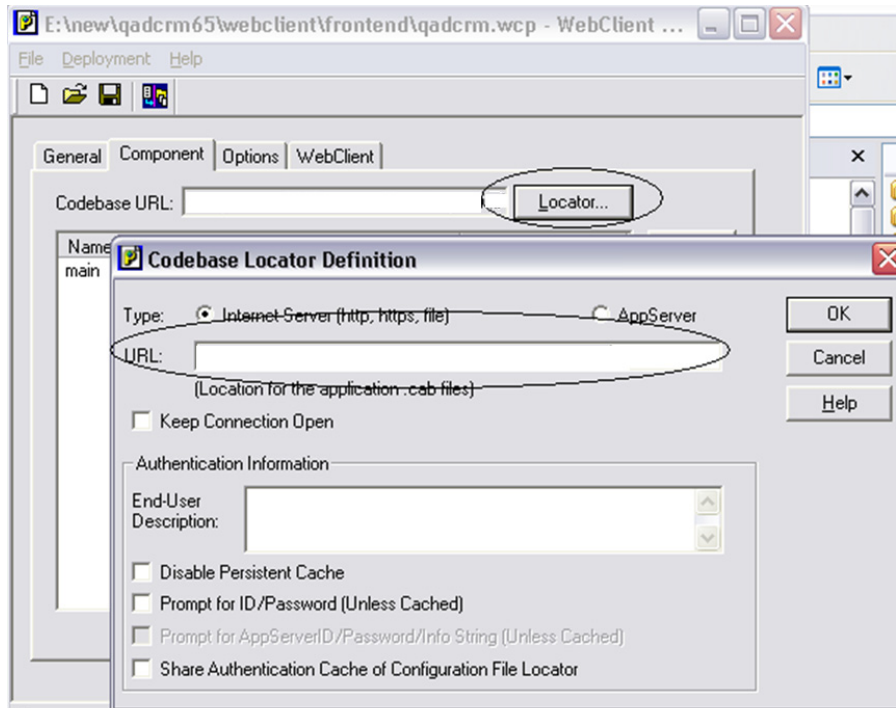


- 5 Under the Options tab, make sure that the Intellistream System Tasks field is checked, and the System Tasks Version field is set to 6.8b1.
- 6 Under the WebClient tab, modify the WebClient Install URL as per your configuration. See the window.location URL information in bootstrap.htm File under *qadcrmwclient/webapp* folder on Delivery Server (Tomcat).




Ensure that the correct Progress WebClient version is entered in the WebClient Version(s) field; for example, 11.3.1 or 10.2B07.

- 7 Click the Save button on the toolbar to save the project.
- 8 From the Deployment menu, select Generate.
- 9 In the Generate QADCRM window, click the Security button and select the digital signature files; then click OK. Relevant files for a particular environment are available in *QADCRMInstallDir\bin*. In this folder, search for a *.spc file name for the Certificate file, and a *.pvk file name for the Private key file.

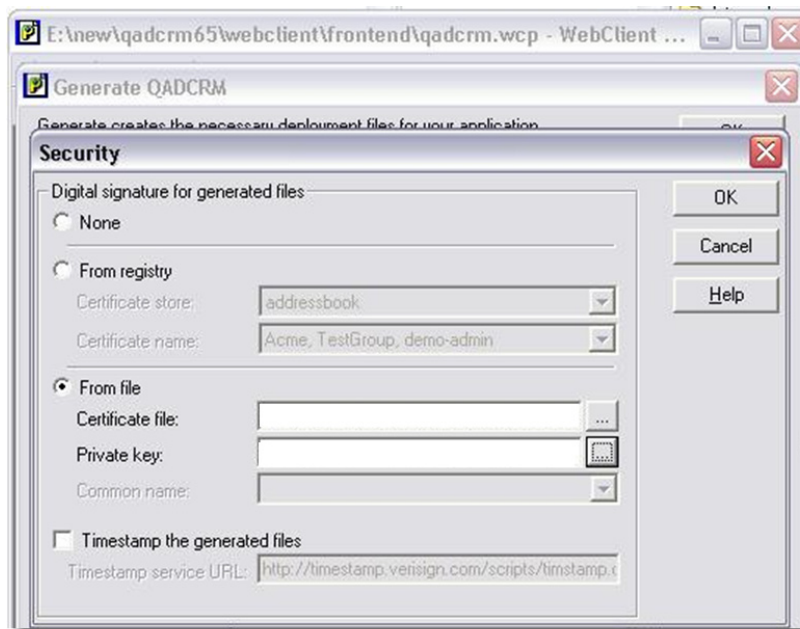

If you are using Progress 11.3.1 or a later version, there is a new field called `Path` to `Signtool.exe` for signing `.cab` files digitally. Follow the instructions in “Signing Tools for OE11.3.1” on page 179 to make the `signtool.exe` file available before you proceed with the next step.

- 10 Select Deployment | Generate from the menu and make sure all the settings in the Generate QADCRM window are configured correctly.

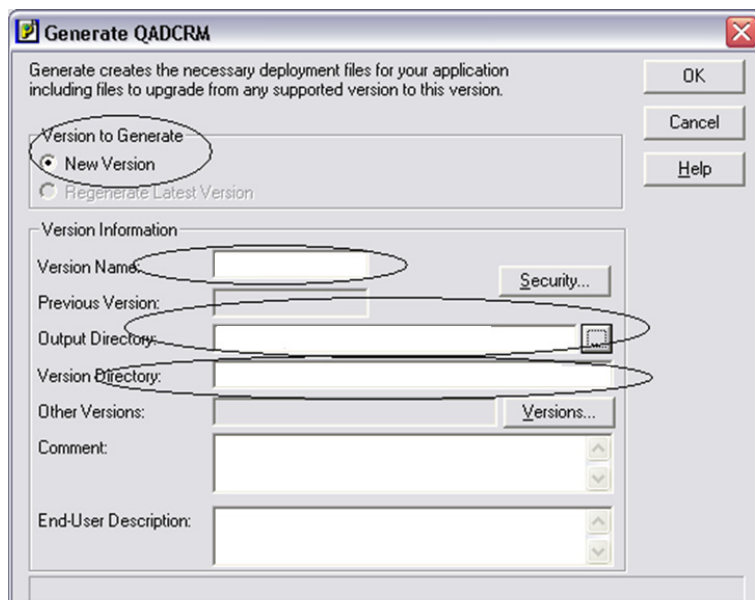

New Version. You must select this option.

Version Name. Enter the current version name 6.8b1.

Output Directory. Specify the output directory based on your CRM installation directory; that is, `QADCRMInstallDir\webclient\frontend`.

Version Directory. This field is automatically populated once you specify the output directory.

- 11 Click OK to generate the cab files.

In the process of cab files generation, the system prompts you to enter a password for each component cab file to be created. In the password prompt, enter `qadcrm` and click OK.

In case of errors, the cab files generation process is aborted and errors are recorded in the log file. Refer to the log file for error details, if any; then rectify any problems and generate the files again.

- 12 When cab files generation is complete, WebClient files are created in the `QADCRMInstallDir\webclient\frontend\CRMVersion` directory.
- 13 You must copy the .cab files generated for QAD CRM earlier. Refer to `QADCRMInstallDir\webclient\frontend\6.8b1\qadcrm.log` for the files that need to be copied from the CRM Deployment Server to Delivery Server (where Tomcat is installed).
- 14 Modify the `webclient.htm` and `bootstrap.htm` files.

Note This step is only applicable when you use `qadcrm_all.wcp` to generate CRM WebClient files. If you use `qadcrm.wcp`, skip this step.

On the Delivery server under the `qadcrmwebclient\wepapp` folder, locate the files `webclient.htm` and `bootstrap.htm`.

Search for the string `qadcrm.prowcapc`. You will find the following reference that must be changed:

```
http://<servername>:<portnumber>/qadcrmwebclient/qadcrm/qadcrm.prowcapc
```

Modify the file name from `qadcrm.prowcapc` to `qadcrm_all.prowcapc` in the above line to reflect the correct path of the `qadcrm_all.prowcapc` file in your configuration.

Configuring integration with QAD ERP

All the required components on backend are already configured for you when you install CRM in a YAB environment. Refer to *QAD CRM Administration Guide* to complete further configuration steps required for enabling QAD CRM integration with QAD ERP.

Installing QAD CRM on End-user PC

The instructions for setting up QAD CRM on an end-user PC in a YAB environment are the same as in a non-YAB environment. See “Installing QAD CRM on End-User PC” on page 69.

Creating Separate QAD CRM YAB Environment

Prerequisites

For an integration with QAD Enterprise Applications, a corresponding environment should be available for each separate QAD CRM environment you want to set up

Duplicate Environment Creation Process

Install the appropriate CRM YAB recipe for the required environment and then follow the instructions in “Deploying QAD CRM in a YAB Environment” on page 76.

Implementing Remotes Sales (Optional)

The instructions for implementing QAD Remote Sales in a YAB environment are the same as in a non-YAB environment. See “Implementing QAD Remote Sales (Optional)” on page 73.

Post-Installation Configuration

This section describes post-installation configuration of QAD Customer Relationship Management (QAD CRM). It discusses the following topics:

Overview 92

Configuring Mandatory Information 93

Loading Language Files into QAD CRM 97

Configuring Function Information 101

Overview

After installing QAD CRM, you must configure it according to the requirements of your company. Most system features are based on these configurations. For example, users access the system through their user profile and permissions as configured in the system.

You must configure the system before using it in your company's production environment.

Custom settings of the system are categorized as mandatory configurations or function settings.

Mandatory Configuration Tasks

Mandatory configuration tasks provide the minimum information required to operate QAD CRM. These are typically one-time settings and must be completed before the system is used in the production environment. The system provides a Configuration Wizard to set up mandatory information.

Mandatory information includes:

- Details of the headquarters of your business unit
- Administrator profile
- Base currency
- Business year
- Data synchronization
- Look-up data


Function Settings

Function settings are useful for customizing and operating the system. They can be set up at any time during system deployment and include:

- User profiles
- Teams
- System parameters
- Menus
- Programs
- Wizards
- System messages
- User-defined frames
- Export options
- Templates
- Currency and foreign exchange rates
- VAT details
- Product details
- Territory details

You can customize the system with mandatory and function information through the System Setup module.

Fig. 3.1
System Setup Module

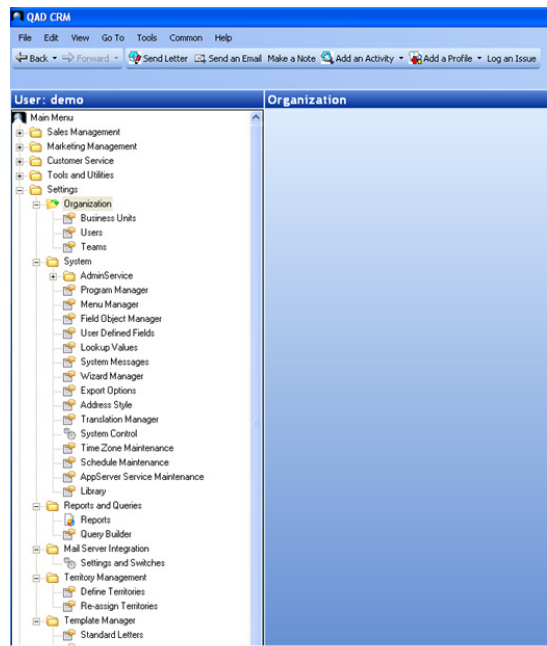

To integrate the system with your QAD Enterprise Applications, you must appropriately configure QAD CRM for integration. You must then transfer information from your QAD Enterprise Applications to the system.

Configuring Mandatory Information

You can configure the system with mandatory information using the Configuration Wizard, which is available when you first start the QAD CRM after installation. The Configuration Wizard leads you step by step through entering the mandatory data.

After configuring the system with mandatory information, log in using the admin user name and password. Then configure the system with function information.

To configure the system using the Configuration Wizard:


- 1 Start QAD CRM.

Fig. 3.2
Starting the Wizard



- 2 Click Setup. The Configuration Wizard screen appears.

Fig. 3.3
Installation Wizard - Business Unit

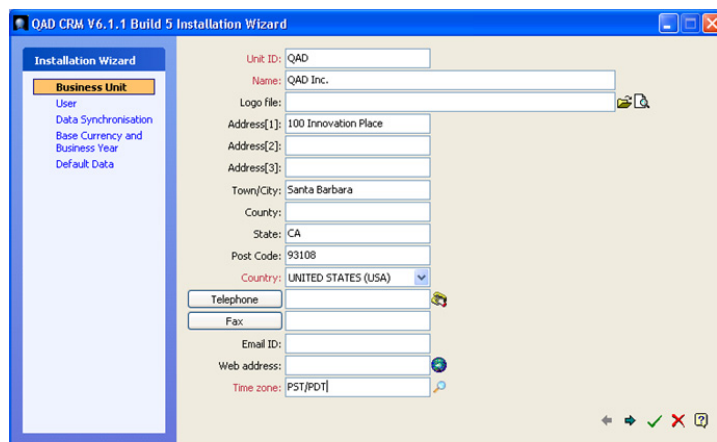

- 3 Enter your business unit details.
- 4 Click Next.
- 5 Enter details for the system administrator user profile.

Fig. 3.4
Administrator Details

The screenshot shows the 'Administrator Details' screen of the QAD CRM V6.1.1 Build 5 Installation Wizard. The left sidebar contains the following options: Business Unit, User (selected), Data Synchronisation, Base Currency and Business Year, and Default Data. The main area is titled 'Details' and contains the following fields:

- User ID: Admin
- Name & Initials: Admin A
- Position: Administrator
- Language: English
- Time zone: (dropdown menu)
- Phone numbers and Email:
 - Direct: (text box)
 - Mobile: (text box)
 - Fax: (text box)
 - Home: (text box)
 - Business email ID: (text box)
 - Private email ID: (text box)
- Address:
 - Address[1]: (text box)
 - Address[2]: (text box)
 - Address[3]: (text box)
 - Town/City: (text box)
 - County: (text box)
 - State: (text box)
 - Post Code: (text box)
 - Country: (dropdown menu)
- Security:
 - Password: (text box)
 - Confirm Password: (text box)

Navigation buttons at the bottom right: back, forward, cancel, and help.

6 Click Next.

Fig. 3.5
Node Details

The screenshot shows the 'Node Details' screen of the QAD CRM V6.1.1 Build 5 Installation Wizard. The left sidebar contains the following options: Business Unit, User, Data Synchronisation (selected), Base Currency and Business Year, and Default Data. The main area is titled 'Node details' and contains the following fields:

- Node ID: QAD
- Description: (text box)
- Time zone: PST/PDT
- Email ID: info@qad.com
- ☐ Enable Data Synchronisation
- No. of days modified records to be kept: 0


Navigation buttons at the bottom right: back, forward, cancel, and help.

7 Enter host node details.

Note A node is a database that the system uses. The host node is the main central database to which QAD CRM connects. Once the Node ID has been created, it cannot be changed. A Node ID is used in CRM to identify the database and also forms a prefix to certain keys generated by the system in various modules. Select the Node ID carefully before proceeding further.

8 Click Next.


Fig. 3.6
Selecting Base Currency

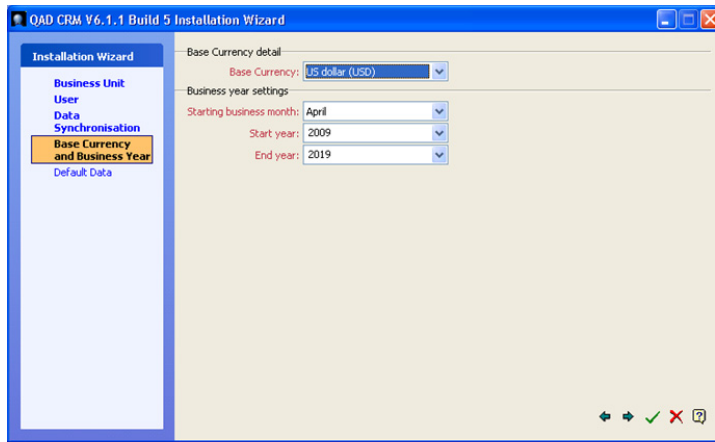

9 From the Base Currency drop-down list, select the base currency that your company uses for business.

10 Click Next.

Fig. 3.7
Setting Lookup Values

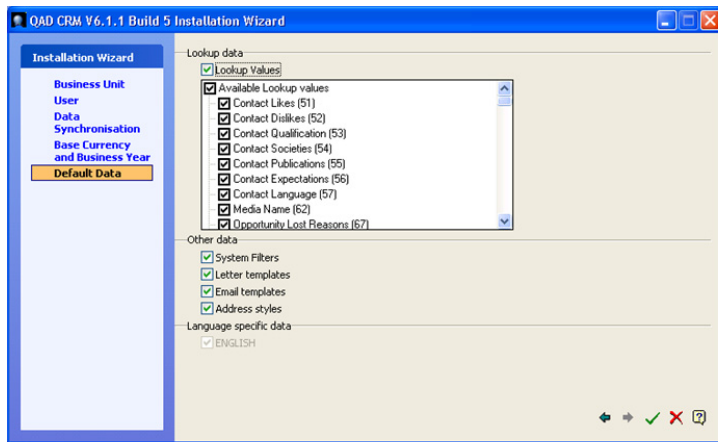

11 Select the required options to configure look-up values and select the languages that the system must support.


12 Click Save.

If you leave any mandatory input fields empty, the Configuration Wizard does not let you save the information. In this case use the Back and Next buttons to complete the information, then click Save.

The system is now configured with mandatory information.

13 Click OK. The message below appears.

Fig. 3.8
Data Load Process

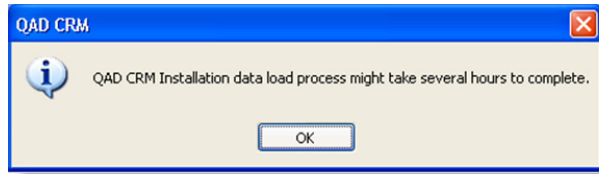

If necessary, you can modify the configuration from the System Setup module. See *QAD Customer Relationship Management Administration Guide* for details.

Warning Before modifying any mandatory information, analyze the results. For example, changing the base currency can adversely affect product pricing and exchange rates.

Loading Language Files into QAD CRM

If you need to load any language files after QAD CRM is installed, you must perform the tasks described below.


Perform the following general steps if you want to load language files after QAD CRM is installed:

- 1 Set up a new language record in the lookup table for lookup no = 10 and update the correct code page.
- 2 Run the QAD CRM Deployment Utility and then click the CRM Upgrade Utility button to launch the Upgrade Utility.
- 3 Specify the name of the parameter file to connect to the required databases you want to update with the language file. Then click the tick button to launch the Upgrade Utility to select and load the language file.

Setting Up a New Language Record

- 1 From the QAD CRM Main Menu, choose Settings|System|Lookup Values.
- 2 Set Lookup No. equals 10.00 as the search criteria and click Search Now.
- 3 Under the Lookup tab in the lower frame, right-click and select Add to add a new language code.
- 4 Enter the code, code page, and description in the corresponding fields and save the record.

Fig. 3.9
Setting Up a New Language Record

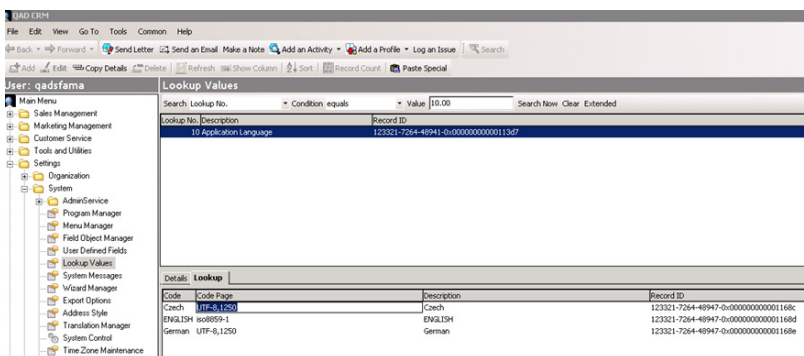

Code. Enter the language code as supplied in the below language table; for example, if you want to load Castilian Spanish, enter code as ‘CastSpaní’. The system will validate the language file name against the code identifier during file load and will not load if it does not match.

Code Page. Enter the language code page as supplied in the below language table corresponding to the language code. For example, if you want to load Castilian Spanish, enter “UTF-8, ISO8859-1” as code page. System validates the code page against the Progress session code page. It will not load if the system code page does not match the language code page.

Description. Enter the language description as supplied in the below language table corresponding to the language code.

Table 3.1
Language Table

Code	Code Page	Description
CastSpan	UTF-8, ISO8859-1	Castilian Spanish
Czech	UTF-8	Czech
Dutch	UTF-8, ISO8859-1	Dutch
French	UTF-8, ISO8859-1	French
German	UTF-8, ISO8859-1	German
Italian	UTF-8	Italian
Japanese	UTF-8	Japanese
Korean	UTF-8	Korean
LatiSpan	UTF-8, ISO8859-1	Latin Spanish
Polish	UTF-8	Polish
Portug	UTF-8, ISO8859-1	Portuguese
SimpChin	UTF-8	Simplified Chinese
TradChin	UTF-8	Traditional Chinese

Loading Language File

QAD CRM supports the following code pages:

- Unicode (UTF-8)


- ISO (ISO8859-1)

For non-iso languages, CRM databases should be configured to run in Unicode.


- 1 Make sure that the databases are running in multi-user mode. Modify the Upgrade utility parameter file (.pf) and connect to the same databases where you created the language records.
- 2 Launch the QAD CRM Deployment Utility and then click the QAD CRM Upgrade Utility button.
- 3 In the QAD CRM upgrade startup screen, specify the parameter file and the .ini file located under *QADCRMInstallDir\Environment* to connect to your CRM environment, then click the OK icon (green check mark).

The parameter file (.pf) file should connect to the same databases where you created the language record.

Fig. 3.10
CRM Upgrade Utility Startup Settings

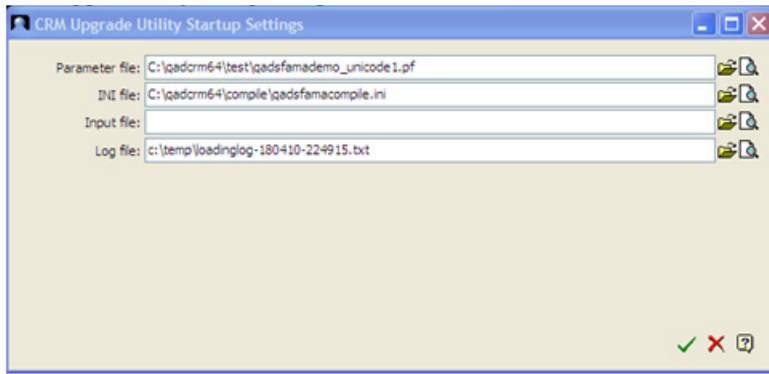


- 4 Under the Settings tab on the Upgrade Utility screen, select Load From Language File and specify the language file to load from the *QADCRMInstallDir\languages* directory, where all CRM language files are located. If the *QADCRMInstallDir\languages* directory was not created during installation or if new language files are provided, manually create the *languages* directory under *QADCRMInstallDir* and copy the language files you want to load to it.

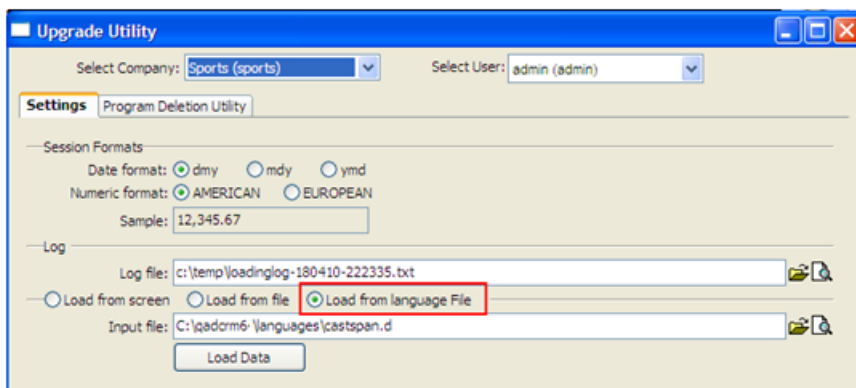


- 5 Click Load Data. The data load process begins.

- 6 After the language file load is complete, a message prompts you to view the log file. Click Yes to open the log file. The following illustration shows how the log file will look after loading the Czech.d file. Four tables get loaded as a result of loading a language file. They are as follows:

- bisgmsg
- fld_label
- obj_label
- lkup_val

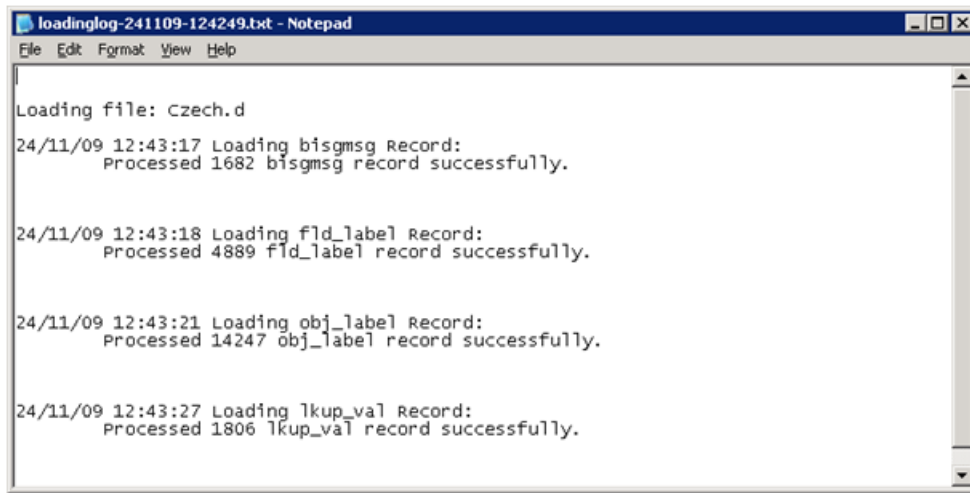

- 7 If the system fails to load them successfully, contact QAD Support.
- 8 Log out and log in to CRM again. In the log-in screen, select the language you just loaded the language file for from the Application Language field. After you log in, you will see the CRM user interface in the new language.

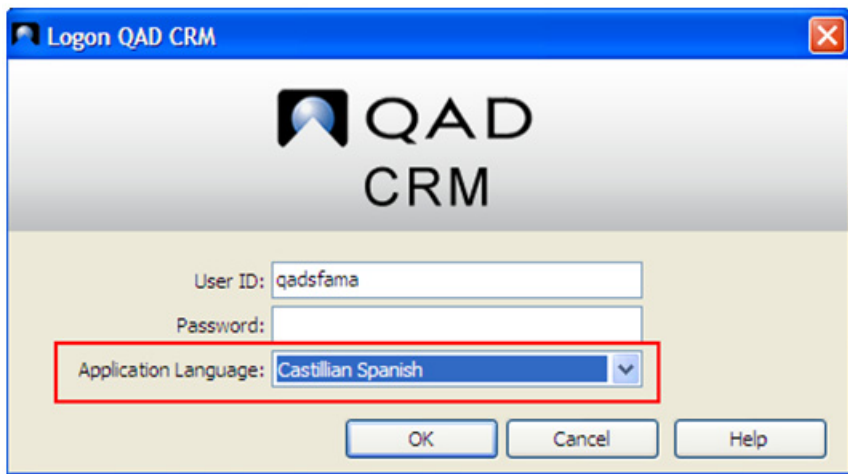

Configuring Function Information

Function information is supplied using various system setup features after the application has been configured with mandatory information. For details, see *QAD Customer Relationship Management Administration Guide*.

QAD provides the Dump and Load Utility that helps transfer CRM system settings from one environment to another; for example, from the Pilot environment to the Production environment.

Go to the QAD KnowledgeBase on the QAD Support Website at <https://www.qad.com/erp/Support/> for instructions on how to install and use the utility.

Upgrade

<i>Upgrading QAD CRM 6.1.1 to 6.3B1</i>	<i>104</i>
<i>Upgrading QAD CRM 6.3 to 6.3B1</i>	<i>111</i>
<i>Upgrading QAD CRM 6.3 B1 / 6.4 B2 to QAD CRM 6.4 B6</i>	<i>111</i>
<i>Upgrading QAD CRM 6.4 B2/6.4 B6 to QAD CRM 6.4 B8</i>	<i>117</i>
<i>Upgrading QAD CRM 6.4B8 to CRM 6.4.4 Patch Bundle 1</i>	<i>122</i>
<i>Upgrading QAD CRM 6.4.4 Patch Bundle1 to QAD CRM 6.5.1</i>	<i>122</i>
<i>Upgrading QAD CRM 6.5.1 to QAD CRM 6.6.1</i>	<i>123</i>
<i>Upgrading QAD CRM 6.6.1 to CRM 6.6.2</i>	<i>133</i>
<i>Upgrading QAD CRM 6.6.2 to CRM 6.6.3</i>	<i>142</i>
<i>Upgrading QAD CRM 6.6.3 to CRM 6.7</i>	<i>149</i>
<i>Upgrading QAD CRM 6.7 to CRM 6.7.1</i>	<i>156</i>
<i>Upgrading QAD CRM 6.7.1 to CRM 6.7.2</i>	<i>163</i>
<i>Upgrading QAD CRM 6.7.2 to CRM 6.7.3</i>	<i>170</i>
<i>Upgrading QAD CRM 6.7.3 to CRM 6.8</i>	<i>174</i>

Upgrading QAD CRM 6.1.1 to 6.3B1

Use the instructions in this section to convert QAD CRM versions 6.1.1 to the 6.3B1 release. This guide covers Windows conversions for Progress databases.

The upgrade process consists of several steps:

- 1 Installing QAD CRM 6.3B1
- 2 Converting 6.1.1 Databases to the Supported Progress Version
- 3 Converting 6.1.1 Databases to 6.3B1 (Non-Unicode)
- 4 Converting 6.3B1 Databases From Non-Unicode to Unicode
- 5 Performing Post-Upgrade Tasks

Note If the system breaks down during upgrade, you should start again with a backup copy. You cannot re-run the conversion on the same database.

Installing QAD CRM 6.3B1

- 1 Make sure the following prerequisite components are installed:
 - Progress OpenEdge 10.1C03 or 10.2A02, including the following components: Client Networking, Query Result, and OE Studio
 - QAD CRM 6.3 GA (September 2009) release
 - The appropriate version of QAD Enterprise Applications you want to integrate QAD CRM with
- 2 Download the QAD CRM 6.3B1 (QAD CRM 6.3 build 1) update bundle from the Product Changes and Advisories|Customer Advisories section on the QAD support Web site and install the package on top of the QAD CRM 6.3 GA (September 2009) release installation using the accompanying installation instructions.
- 3 Perform QAD CRM 6.1.1 data synchronization to make sure all remote nodes are synchronized with the host database. If you do not synchronize remote nodes now, they will be re-created after upgrade and all data residing in them will be lost.
- 4 Make sure none of the sub-directories under `QADCRMInstallDir\compile` contains any r-code files. Delete them if you find any.
- 5 Back up any QAD CRM 6.1.1 database you want to convert.
- 6 Make sure no other user is using the QAD CRM 6.1.1 database during the upgrade process.

Converting 6.1.1 Databases to the Supported Progress Version

QAD CRM 6.3B1 only supports Progress OpenEdge 10.1C03 and 10.2A02. Use the following steps to convert your QAD CRM 6.1.1 databases to the supported Progress version:

- 1 Stop all the QAD CRM databases.
- 2 Truncate the BI file using the old Progress version for each of the QAD CRM databases (bisgen, bisgmenu, and dataexch) using the following command:

```
proutil DBPath\bisgen.db -C truncate bi
proutil DBPath\bisgmenu.db -C truncate bi
proutil DBPath\dataexch.db -C truncate bi
```

- 3 Start all the QAD CRM databases using the new Progress version.


Converting 6.1.1 Databases to 6.3B1 (Non-Unicode)

- 1 Make a copy of *QADCRMInstallDir\compile\qadsfamacompile.ini* and rename it *qadsfamaupgrade.ini*.
- 2 Modify *qadsfamaupgrade.ini* using a text editor to include the conversion directory at the beginning of the PROPATH as in the following example:

```
PROPATH=
.,conversion,progs,system,dataexch,triggers,integration\mfgpro,report,lib,xrc,si\xrc,mfgsrv,mfgsrv\us,mfgsrv\us\sq,mfgsrv\triggers,mfgsrv\qxo,mfgsrv\us\tx,c:\apps\dlc\gui,c:\apps\dlc,c:\apps\dlc\bin
```

- 3 Modify *QADCRMInstallDir\compile\qadsfamaupgrade.pf* to connect the QAD CRM 6.1.1 databases. You do not need to connect the QAD Enterprise Applications databases.
- 4 Modify the properties of QAD CRM Upgrade Utility shortcut for QAD CRM 6.3B1 to change the INI file name from *qadsfamacompile.ini* to *qadsfamaupgrade.ini*.
- 5 Double-click the CRM Upgrade Utility icon to run the utility.
- 6 In the CRM Upgrade Utility Startup Settings window, specify the file paths; then click the OK icon (green check mark).

Fig. 4.1
CRM Upgrade Utility Startup Settings

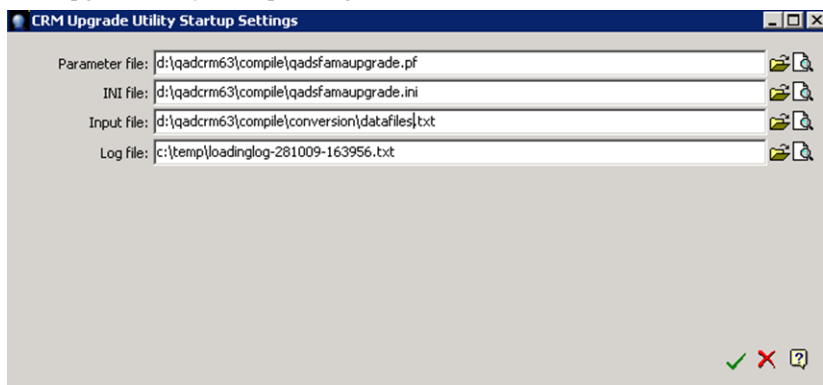

Parameter File. Enter *QADCRMInstallDir\compile\qadsfamaupgrade.pf*.


INI File. Enter `QADCRMInstallDir\compile\qadsfamaupgrade.ini`.

Input File. Enter `QADCRMInstallDir\compile\conversion\datafiles.txt`.

Log File. Leave the field as is.


- 7 The system prompts you to back up your existing databases before proceeding. Make sure you have backed up your databases and click Yes to continue.
- 8 A message informs you that data load is complete and prompts you to view the log file. Click No.
- 9 In the Upgrade Utility window, choose the proper company or business unit, select Load From File, and specify `QADCRMInstallDir\compile\conversion\datafiles.txt` as the input file; then click Load Data.

Fig. 4.2
CRM Upgrade Utility

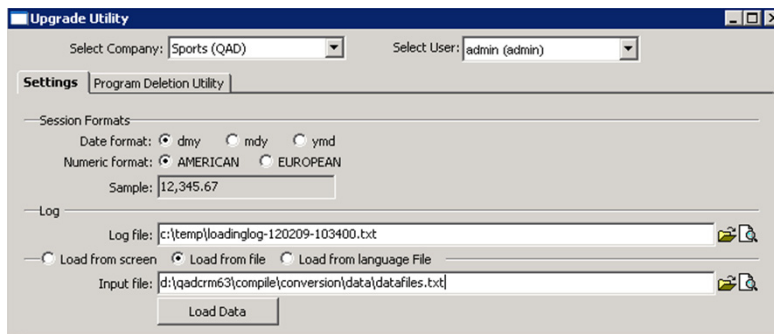

- 10 The system prompts you to back up your existing databases before proceeding. Make sure you have backed up your databases and click Yes to continue.
- 11 A message informs you that data load is complete and prompts you to view the log file. Click No.
- 12 Close the window.
- 13 Double-click the QAD CRM Upgrade Utility to run the utility again from the QAD CRM 6.3B1 environment.
- 14 In the CRM Upgrade Utility Startup Settings window, specify the file paths; then click the OK icon (green check mark).

Fig. 4.3
CRM Upgrade Utility Startup Settings

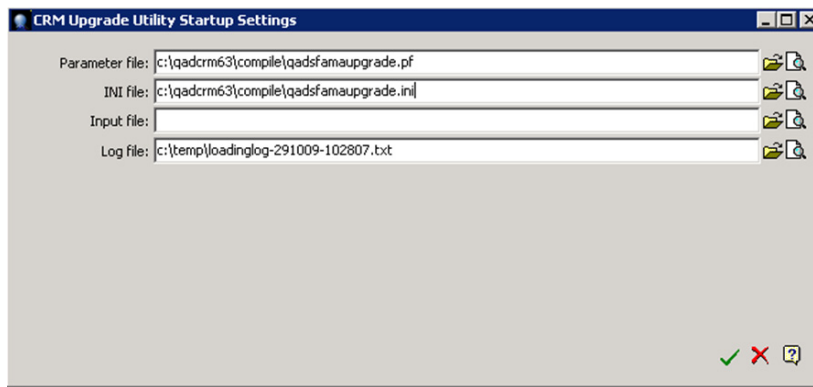

Parameter File. Enter `QADCRMInstallDir\compile\qadsfamaupgrade.pf`.


INI File. Enter `QADCRMInstallDir\compile\qadsfamaupgrade.ini`.

Input File. Leave the field as is.

Log File. Leave the field as is.


- 15 A message pops up prompting you to back up your existing databases before proceeding. Make sure you have backed up your existing databases and click Yes to continue.
- 16 A message is displayed informing you that data load is complete and prompting you to view the log file. Click No.
- 17 In the Upgrade Utility window, select Load From Screen and click the Load Data Files - I tab.

Fig. 4.4
CRM Upgrade Utility

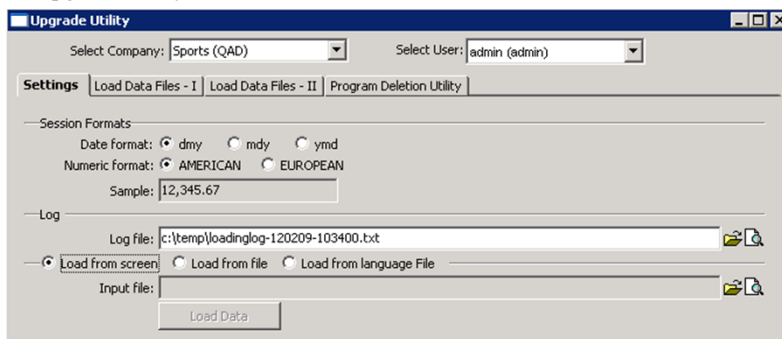

- 18 Under the Load Data Files - I tab, select Program to Run Before/After Data Loading and specify the following as the program to run after data loading:
`QADCRMInstallDir\compile\conversion\data\RAU240909-after_load.p`

Fig. 4.5
CRM Upgrade Utility

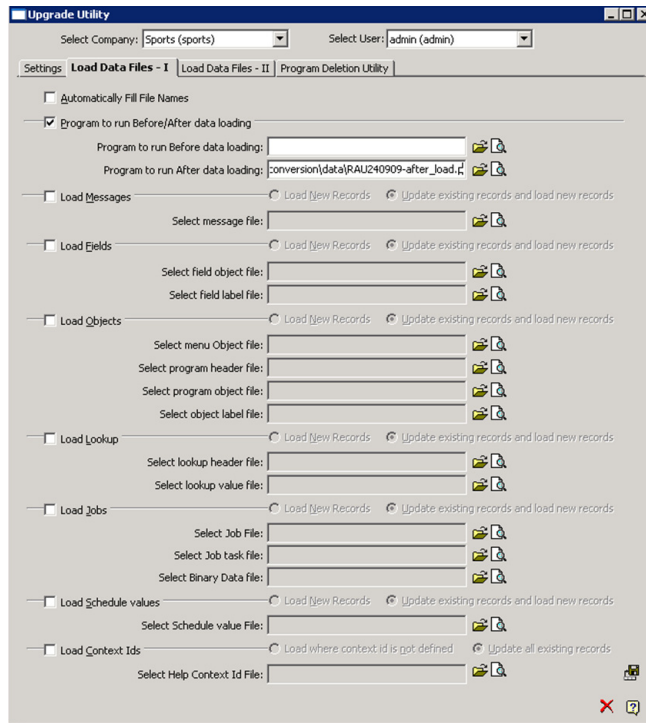

19 Click the Save icon and close the window when done.

Converting 6.3B1 Databases From Non-Unicode to Unicode

Perform these steps only if you want to change the code page of your QAD CRM 6.3B1 databases from non-Unicode to Unicode:

- 1** Stop all the QAD CRM databases.
- 2** Open the command prompt window and execute the proenv command.
- 3** Use the following command to convert each of the QAD CRM databases—bisgen, bisgmenu, and dataexch—to support UTF-8:

```
proutil DBPath\bisgen.db -C convchar convert UTF-8
proutil DBPath\bisgmenu.db -C convchar convert UTF-8
proutil DBPath\dataexch.db -C convchar convert UTF-8
```

- 4** Open Progress Procedure Editor with all the required databases connected in single-user mode.
- 5** Run Data Administration. For each of the QAD CRM databases—bisgen, bisgmenu, and dataexch—perform the following steps:
 - a** If not connected to the database, choose Database|Connect to connect it.
 - b** Choose Admin|Load Data and Definitions|Data Definitions (.df file). Locate the file icu-uca.df under \$DLC/prolang/utf and load it into the database.

c Ignore the following error and warning messages:

Error: Collation tables for database *DBName* have been changed. You must rebuild all the indexes in order to reconnect to this database. (2609)

Fig. 4.6
Warning Message



6 Stop all the QAD CRM databases.

7 Execute the following command to rebuild indexes for the new ICU-UCA collation:

```
proutil DBPath/bisgen -C idxbuild all -cpinternal UTF-8
proutil DBPath/bisgmenu -C idxbuild all -cpinternal UTF-8
proutil DBPath/dataexch -C idxbuild all -cpinternal UTF-8
```

8 If your existing database code page is not iso8859-1, modify the `codepage.txt` file under `QADCRMInstallDir\compile\conversion` to include your source code page value.


9 Modify `QADCRMInstallDir\compile\qadsfamaupgrade.pf` to change the following parameter values from the source code page to UTF-8 related values:

- -cpinternal UTF-8
- -cpstream UTF-8
- -cpcoll ICU-UCA
- -cpcase Basic

10 Double-click the CRM Upgrade Utility icon to run the utility.

11 In the CRM Upgrade Utility Startup Settings window, specify the file paths; then click the OK icon (green check mark).

Fig. 4.7
CRM Upgrade Utility Startup Settings

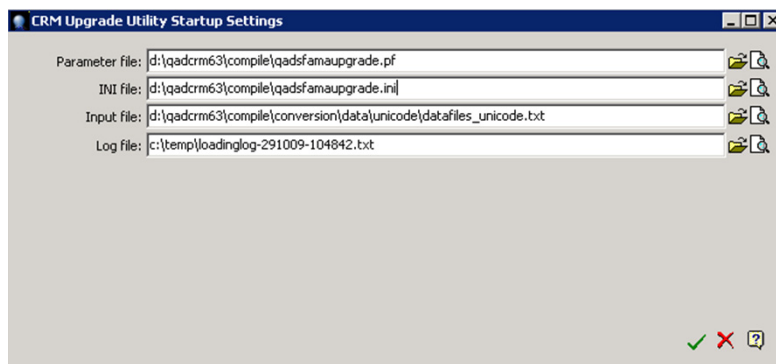

Parameter File. Enter `QADCRMInstallDir\compile\qadsfamaupgrade.pf`.

INI File. Enter `QADCRMInstallDir\compile\qadsfamaupgrade.ini`.


Input File. Enter

`QADCRMInstallDir\compile\conversion\data\unicode\datafiles_unicode.txt`.

Log File. Leave the field as is.

- 12 The system prompts you to back up your existing databases before proceeding. Make sure you have backed up your databases and click Yes to continue.
- 13 A message informs you that data load is complete and prompts you to view the log file. Click No.
- 14 In the Upgrade Utility window, select Load From File and specify `QADCRMInstallDir\compile\conversion\data\unicode\datafiles_unicode.txt` as the input file; then click Load Data.

Fig. 4.8
CRM Upgrade Utility

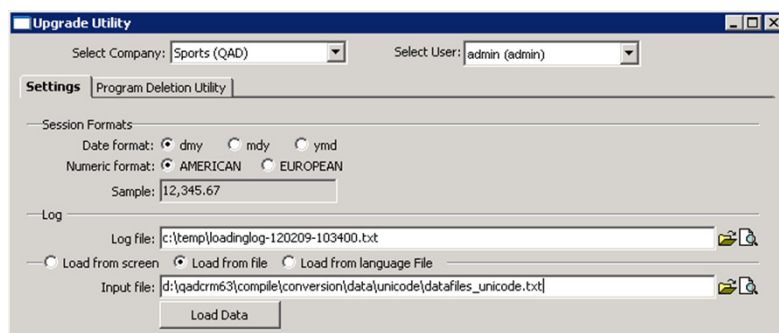

- 15 The system prompts you to back up your existing databases before proceeding. Make sure you have backed up your databases and click Yes to continue.
- 16 A message informs you that data load is complete and prompts you to view the log file. Click No.
- 17 Close the window.

Performing Post-Upgrade Tasks

The upgrade process deletes all the existing address style records but does not create any system-supplied records. Therefore, you need to re-create these records.

- 1 Switch on the following integrations based on the previous settings in QAD CRM 6.1.1 and modify the settings where necessary.
 - QAD Enterprise Applications Integration
 - Data Synchronization
 - QAD AdminService
 - Microsoft Exchange Integration
- 2 Modify node details for each node and enter such values as Business Unit. You may also need to check and modify the settings under the Node Details|Products tab.
- 3 Rebuild all the remote nodes.

- 4 Optionally, uninstall QAD CRM 6.1.1.
 - a Run the following program to unregister ocx, assembler, and other components:
`QADCRMInstallDir\compile\bin\QADCRMClientComponents\setup.exe`
 - b Delete the whole conversion directory under `QADCRMInstallDir\compile`.

Upgrading QAD CRM 6.3 to 6.3B1

Download the QAD CRM 6.3B1 (QAD CRM 6.3 build 1) update bundle from the Product Changes and Advisories|Customer Advisories section on the QAD support Web site and install the package on top of the QAD CRM 6.3 GA (September 2009) release installation using the accompanying installation instructions.

Upgrading QAD CRM 6.3 B1 / 6.4 B2 to QAD CRM 6.4 B6

Use the instructions in this section to convert QAD CRM version 6.3 B1 / 6.4 B2 to the 6.4 B6 release. This guide covers Windows conversions for Progress databases.

The conversion process consists of three major steps:

- 1 Pre-Upgrade Tasks.
- 2 Converting 6.3 B1 / 6.4 B2 databases to 6.4 B6 Format.
- 3 Post-Upgrade Tasks.

Note If the system breaks during upgrade then you should start again with a backup copy. Re-run of conversion on the same database is not allowed.

Pre-Upgrade Tasks


Perform the following steps before upgrading the QAD CRM database from version 6.3 B1 / 6.4 B2 to 6.4 B6.

- 1 Make sure the following prerequisite components are installed:
 - Progress 10.1C03 / 10.2A02 / 10.2B01 Client Networking, Query Result and OE Studio
 - QAD CRM 6.4 B6
 - The appropriate version of QAD Enterprise Applications (if you want to integrate QAD CRM with QAD Enterprise Applications)
- 2 Perform QAD CRM 6.3 B1 / 6.4 B2 data synchronization. That is, make sure all the remote nodes are synchronized with the host database because remote nodes need to be re-created after upgrade and if you do not synchronize then their data will not be available on host and this way they can lose the data.
- 3 Make sure that there are no r-code files available under various sub-folders of `QADCRM64InstallDir\compile` folder. In case any r-code files are available then delete them.


- 4 Back up the QAD CRM 6.3 B1 / 6.4 B2 databases (bisgen, bisgmenu and dataexch) you want to upgrade.
- 5 Make sure no user is using the version 6.3 B1 / 6.4 B2 database during upgrade.
- 6 Please skip this step if you are upgrading from 6.4 B2.

Make sure opportunity, prc_hdr, and product tables from the bisgen database are not frozen. This can be done using the following steps:


- Go to QAD CRM Procedure Editor and select Tools|Data Administration.

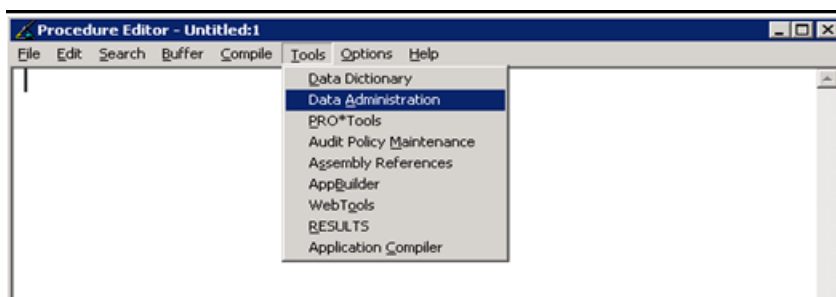


- Select Database > Select Working Database.

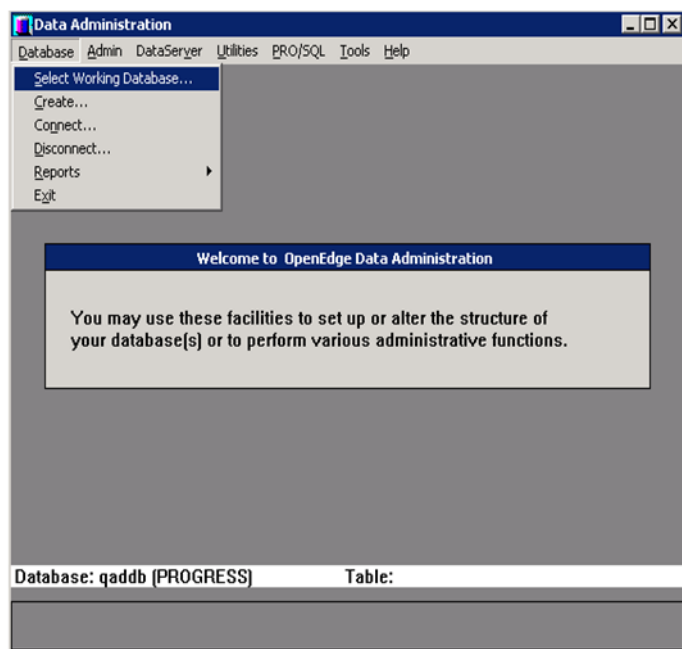


- Select bisgen database from the below Select Working Database screen and press OK.

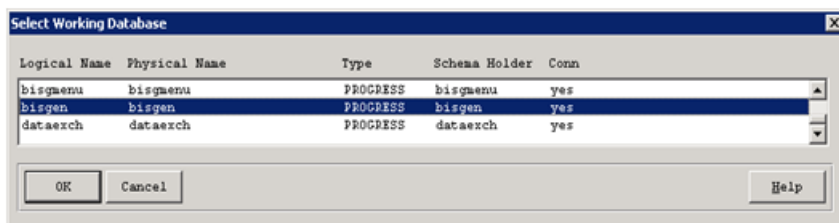


- Select Utilities > Freeze/Unfreeze.

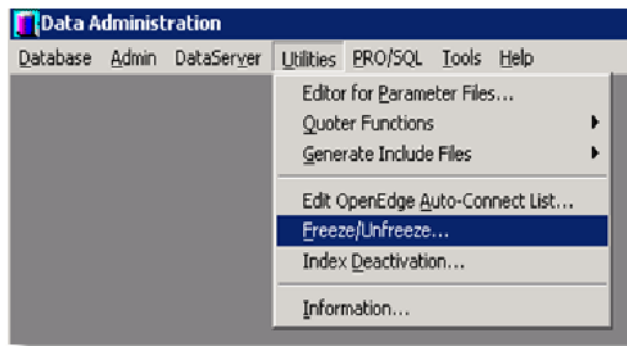

- Select the opportunity table and press OK.

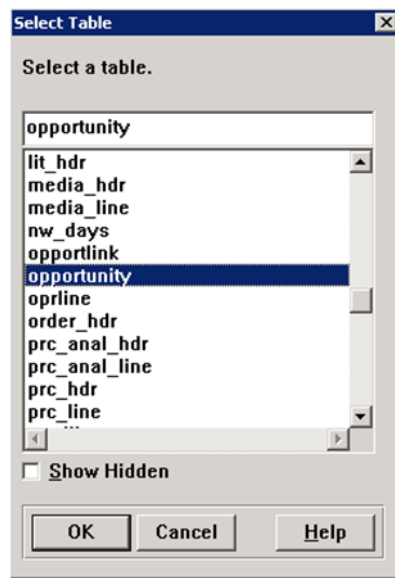

- Make sure the Frozen check box is unchecked and press OK.

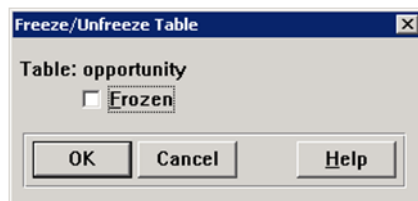


- Repeat the same thing for the prc_hdr and product tables.

Converting 6.3 B1 / 6.4 B2 Databases to 6.4 B6 Format


Perform the following steps in order to upgrade QAD CRM database from version 6.3 B1 / 6.4 B2 to 6.4 B6. Please skip steps from 2 to 13 if you are upgrading from 6.4 B2.

- 1 Modify `QADCRM64InstallDir\compile\qadsfamaupgrade.pf` to connect to QAD CRM 6.3 B1 / 6.4 B2 databases. You do not need to connect QAD Enterprise Applications databases.
- 2 Copy `emailc.txt` file from `QADCRM64InstallDir\compile\conversion\data` to `c:\temp` folder.
- 3 Choose Start|All Programs|QAD CRM 6.4|QAD CRM Upgrade Utility in order to apply df / data.
- 4 Select the value of “Parameter file” and “Input file” as shown in the following figure and then select the OK button.


The below screen assumes that QAD CRM 6.4 is installed in the `d:\qadcrm64` directory.

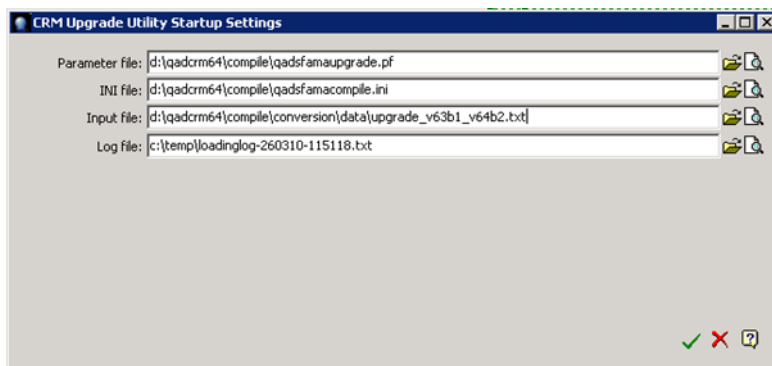


- 5 When you select OK, the following screen appears:

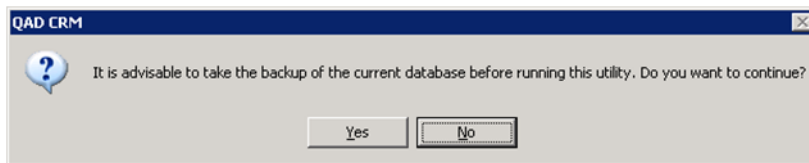


- 6 Make sure the CRM 6.3 B1 databases are backed up and select Yes. The following screen appears:

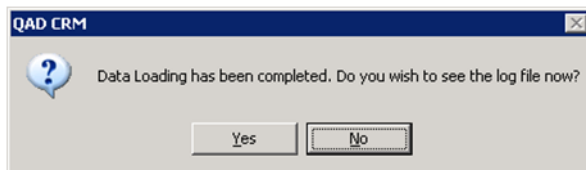


- 7 Select No. The following screen appears:

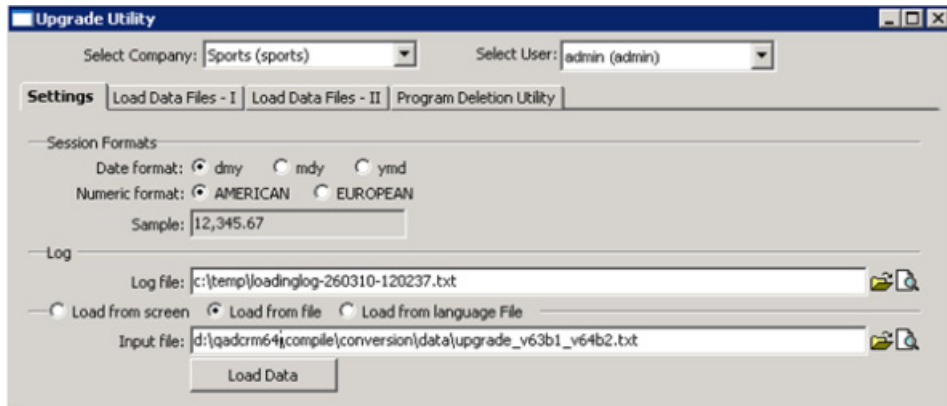


- 8 Select the correct Company (Business Unit) from Select Company combo and make sure that the “Load from file” option is selected and the value of “Input file” is correct as shown in the above figure.
- 9 Select the Load Data button. The following screen appears.

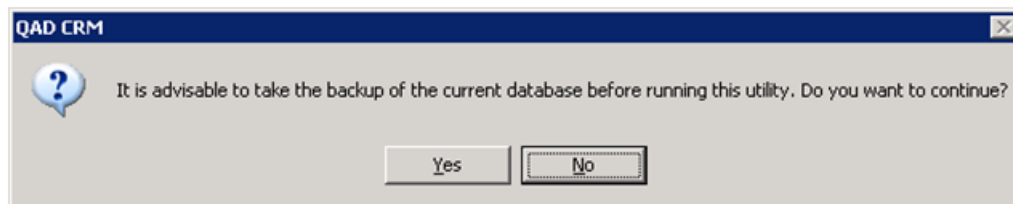

- 10 Make sure databases are backed up and select Yes. The following screen appears.

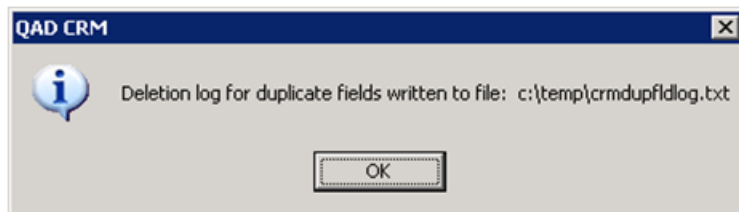


- 11 Select OK. The following screen appears:

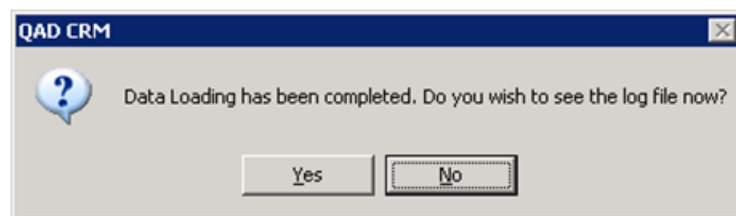


- 12 Select No. The original interface remains visible on the screen.
- 13 Select the Close button to close the interface.
- 14 Run Upgrade Utility. Choose Start|All Programs|QAD CRM 6.4|QAD CRM Upgrade Utility in order to apply df / data.


- 15 Select the value of “Parameter file” and “Input file” as shown in the following figure and then select the OK button. The below screen assumes that QAD CRM 6.4 is installed in the d:\qadcrm64 folder.

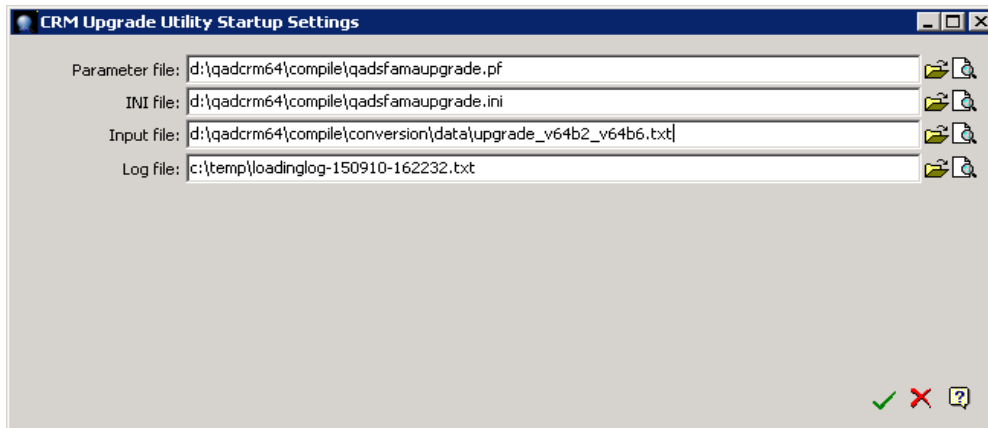


- 16 When you select OK, the following screen appears:

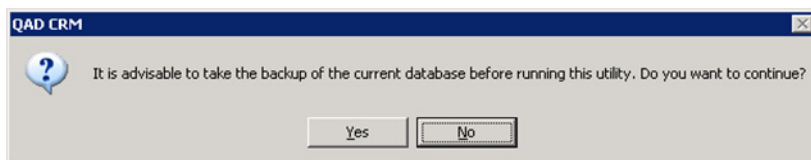

- 17 Make sure the CRM 6.3 B1/ 6.4 B2 databases are backed up and select Yes. The following screen appears:

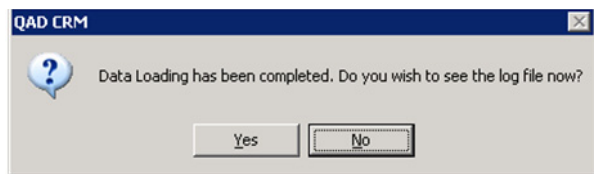


- 18 Select No. The following screen appears:

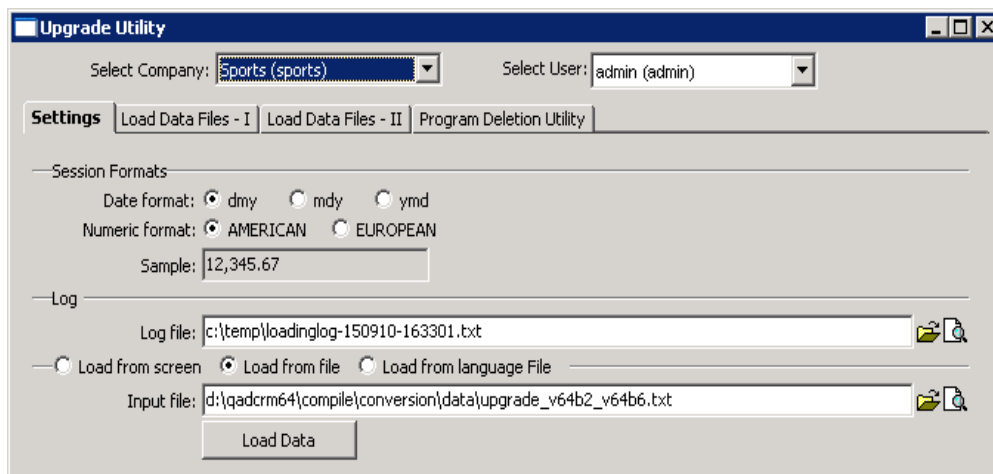


- 19 Select the correct Company (Business Unit) from Select Company combo and make sure that the “Load from file” option is selected and the value of “Input file” is correct as shown in the above figure.

- 20 Select the Load Data button. The following screen appears:

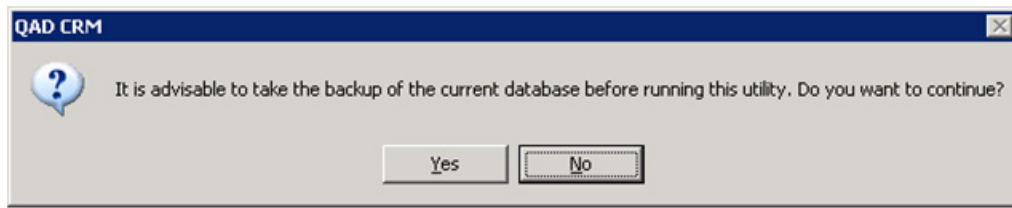

- 21 Make sure databases are backed up and select Yes. The following screen appears:

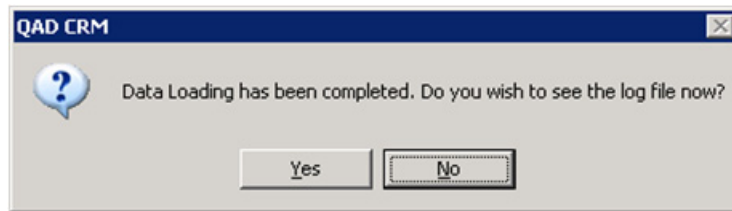

- 22 Select No. The original interface remains visible on the screen.
 23 Select the Close button to close the interface.

Post-Upgrade Tasks

Perform the following steps after upgrading QAD CRM database from version 6.3 B1 / 6.4 B2 to 6.4 B6.

- 1 If you are upgrading from 6.3 B1 to 6.4 B6 then make sure opportunity, prc_hdr, and product tables from the bisgen database are frozen. This can be done using the similar steps as mentioned in Pre-Upgrade Tasks section except that the "Frozen" check-box should be selected here.
- 2 Re-create all the Remote Nodes.
- 3 Un-install QAD CRM 6.3 B1 / 6.4 B2 once you have checked data conversion and it is no longer required.

In case you uninstall QAD CRM 6.3 B1 / 6.4 B2 then run

`QADCRMInstallDir\prod\netsetup\setup.exe` to re-register system files (ocx, assembler and so on), which got unregistered during un-installing QAD CRM 6.3 B1 / 6.4 B2.

Upgrading QAD CRM 6.4 B2/6.4 B6 to QAD CRM 6.4 B8

Use the instructions in this section to convert QAD CRM version 6.3 B2 / 6.4 B6 to the 6.4 B8 release.

The conversion process consists of three major steps:


- 1 Pre-Upgrade Tasks
- 2 Converting 6.3 B1 / 6.4 B2 Databases to 6.4 B6 Format
- 3 Post-Upgrade Tasks

Note If the system breaks during upgrade then you should start again with a backup copy. Rerunning the conversion on the same database is not allowed.


Pre-Upgrade Tasks

Perform the following steps before upgrading the QAD CRM database from version 6.4 B2 / 6.4 B6 to 6.4 B8.


- 1 Make sure the following prerequisite components are installed:
 - Progress 10.1C03 / 10.2A02 / 10.2B01 / 10.2B02 Client Networking, Query Result and OE Studio
 - QAD CRM 6.4 B8
 - The appropriate version of QAD Enterprise Applications (if you want to integrate QAD CRM with QAD Enterprise Applications)
- 2 Perform QAD CRM 6.4 B2 / 6.4 B6 data synchronization. That is, make sure all the remote nodes are synchronized with the host database because remote nodes need to be re-created after upgrade. If you do not synchronize then their data will not be available on the host; this way they can lose the data.
- 3 Make sure that there are no r-code files available under various sub-folders of *QADCRM64InstallDir\compile* folder. In case any r-code files are available then delete them, where *QADCRM64InstallDir* is your QAD CRM 6.4B8 installation directory.
- 4 Back up the QAD CRM 6.4 B2 / 6.4 B6 databases (bisgen, bisgmenu, and dataexch) that you want to upgrade.
- 5 Make sure that no user (including any Progress AppServer process) is using the QAD CRM 6.4 B2 / 6.4 B6 database during the upgrade.
- 6 Make sure that the product table in the bisgen database is not frozen using the following steps:
 - Go to QAD CRM Procedure Editor and select Tools|Data Administration.

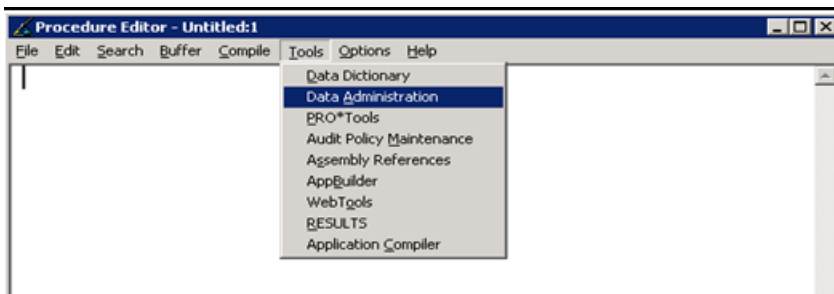


- Select Database > Select Working Database.

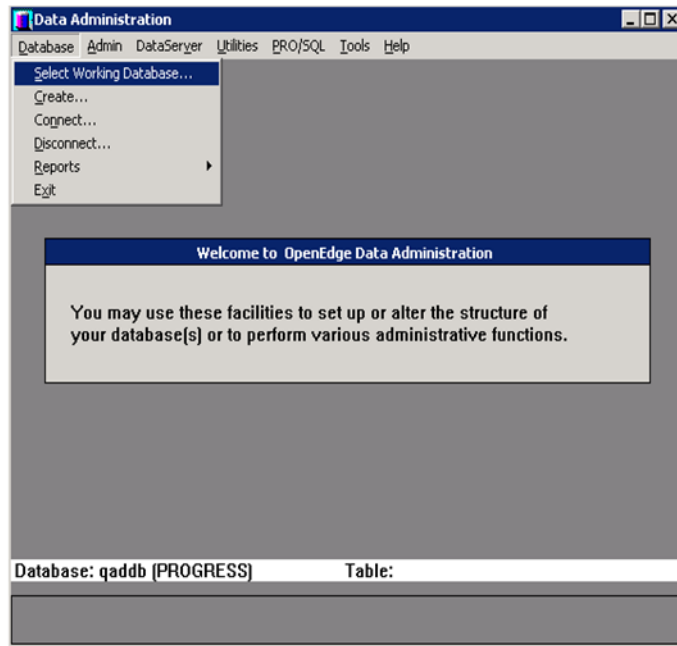

- Select bisgen database from the following Select Working Database screen and press OK.

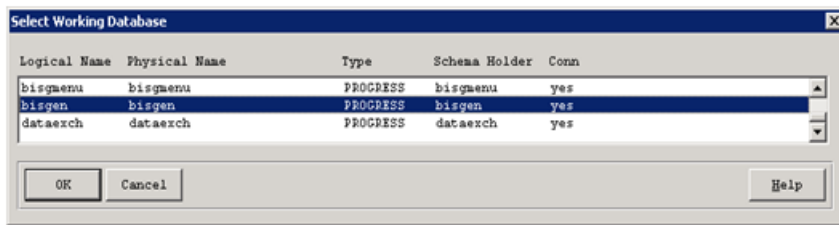

- Select Utilities > Freeze/Unfreeze.

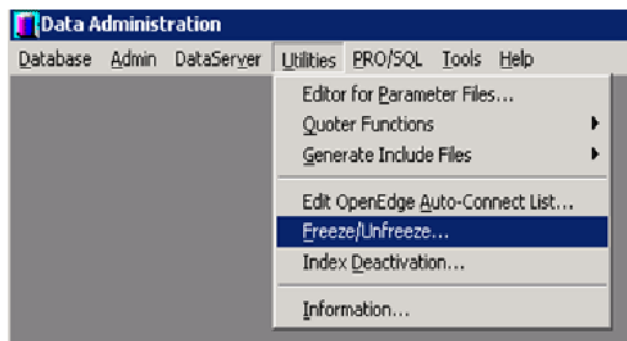


- Select the Product table from the list and press OK.
- Make sure the Frozen check box is unselected and press OK.

Converting QAD CRM 6.4 B2 / 6.4 B6 Databases to QAD CRM 6.4 B8

Perform the following steps to upgrade QAD CRM database from version 6.4 B2 / 6.4 B6 to 6.4 B8.

- 1 Modify `QADCRM64InstallDir\compile\qadsfamaupgrade.pf` to connect to the QAD CRM 6.3 B1 / 6.4 B2 databases. You do not need to connect QAD Enterprise Applications databases.
- 2 Run the Upgrade utility. Choose Start|All Programs|QAD CRM 6.4|QAD CRM Upgrade Utility in order to apply df / data.
- 3 Select the value of “Parameter file” and “Input file” as shown in the following screen and then select the OK button. The following screen assumes that QAD CRM 6.4B8 is installed in the `d:\qadcrm64` folder.

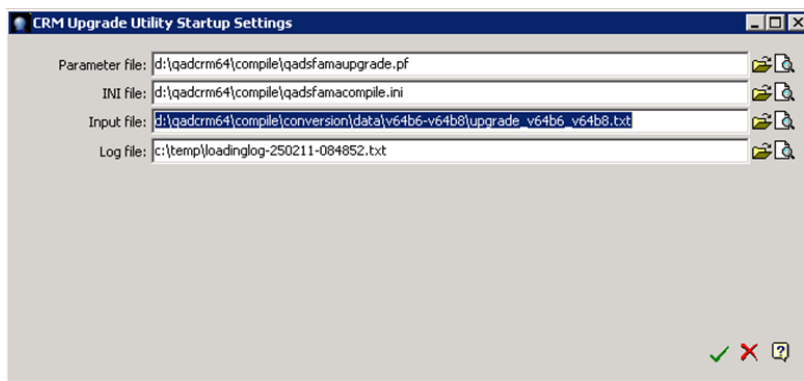


Input File. If you are upgrading from 6.4b2 to 6.4b8, specify the following:

`d:\qadcrm64\compile\conversion\data\v64b2-v64b8\upgrade_v64b2_v64b8.txt`


If you are upgrading from 6.4b6 to 6.4b8, specify the following:

`d:\qadcrm64\compile\conversion\data\v64b6-v64b8\upgrade_v64b6_v64b8.txt`


- 4 When you select OK, the following screen appears:

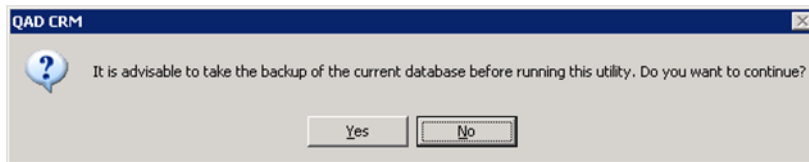


- 5 Make sure the CRM 6.4B2/B6.4B6 databases are backed up and select Yes. The following screen appears:

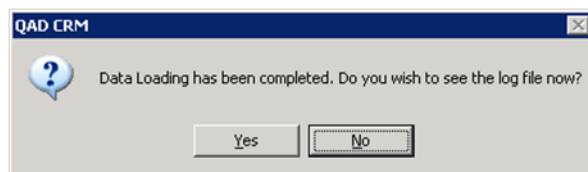


- 6 Select No. The following screen appears:

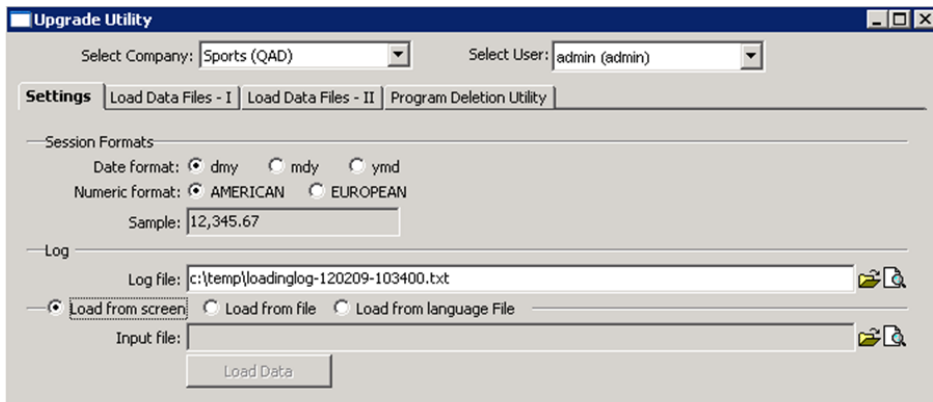

- 7 Select the correct Company (Business Unit) from Select Company combo and make sure that the “Load from file” option is selected and the value of “Input file” is correct as shown in the above figure.
- 8 Select the Load Data button. The following screen appears.

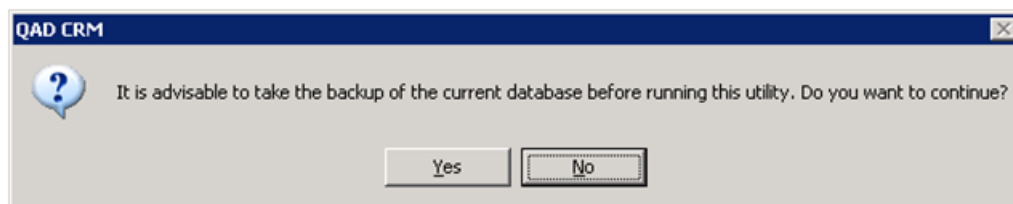

- 9 Make sure databases are backed up and select Yes. The following screen appears.

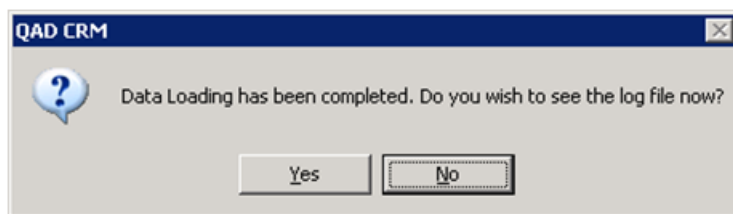

- 10 Select No. The original interface remains visible on the screen.
- 11 Select the Close button to close the interface.

Post-Upgrade Tasks

Perform the following steps after upgrading QAD CRM database from version 6.4 B2 / 6.4 B6 to 6.4 B8.

- 1 Make sure the product table from the bisgen database is frozen. This can be done using similar steps to those described in the Pre-Upgrade Tasks section, except that the “Frozen” check box should be selected here.
- 2 Re-create all the Remote Nodes.

- 3 Uninstall QAD CRM 6.4 B2 / 6.4 B6 once you have verified data conversion and it is no longer required.

In case you uninstall QAD CRM 6.4 B2 / 6.4 B6 then run

`QADCRMInstallDir\prod\netsetup\setup.exe` to re-register system files (ocx, assembler, and so on), which got unregistered when you uninstalled QAD CRM 6.4 B2 / 6.4 B6.

Upgrading QAD CRM 6.4B8 to CRM 6.4.4 Patch Bundle 1

For instructions on how to upgrade from CRM 6.4b8 to CRM 6.4 Patch bundle 1, refer to the following QAD Support Knowledge Base article:

<https://knowledgebase.qad.com/kmp/article/AA-64327>

The installer of CRM 6.4.4 Patch Bundle 1 is attached to this article.

Upgrading QAD CRM 6.4.4 Patch Bundle1 to QAD CRM 6.5.1

Pre-Upgrade Tasks

- 1 Perform QAD CRM 6.4.4 pb1 data synchronization to make sure all the remote nodes are synchronized with the host database because remote nodes need to be recreated after upgrade. If you do not synchronize, their data will not be available on the host and this way they can lose data.
- 2 Make sure following prerequisite components are installed:
 - Appropriate Progress 10.1C03/10.2A02/10.2B01/10.2b02 OE studio
 - QAD CRM 6.5b13 (=CRM 6.5.1)
 - Appropriate version of QAD ERP (If applicable—that is, if QAD CRM is to be integrated with ERP)
- 3 Backup the CRM 6.4.4 pb1 database to be upgraded.

Converting QAD CRM 6.4.4 Patch Bundle1 Databases to QAD CRM 6.5.1

- 1 During the upgrade process make sure that no users are using your existing QAD CRM 6.4.4 pb1 database.
- 2 With 6.4.4 pb1 databases connected, invoke the Progress Data Administration tool by using Tools|Data Administration in Progress Procedure Editor.
- 3 In Progress Data Admin tool, choose Database|Select Working Database to select the bisgmenu database.
- 4 Choose Utilities|Freeze/Unfreeze, select the prog_object table, and clear the Frozen check box to unfreeze the definition for the table.
- 5 Choose Admin|Load Data and Definitions|Data Definitions (.df file) to load the data definition file `bmsqv220611_live.df` supplied in the conversion directory of CRM 6.5b13.

- 6 Choose Utilities|Freeze/Unfreeze, select the prog_object table, and select the Frozen check box to freeze the definition for the table.
- 7 Make a copy of the qadsfamaupggrade.pf file in the CRM 6.5b13 installation directory and rename it qadsfama64pb1.pf; then edit the file to insert connection information for connecting to your existing 6.4.4 pb1 databases.
- 8 Run the QAD CRM 6.5b13 Deployment Utility.
- 9 Click the QAD CRM Upgrade Utility button.
- 10 In the Upgrade Utility window, select the modified qadsfama64pb1.pf file to connect to your existing 6.4.4 pb1 databases that you want to upgrade. Click OK.

Note If you started the 6.4.4 pb1 databases with Progress 10.2B and tried connecting them using Progress 10.2A, you may get Progress error 1178. So, make sure that your Progress version is consistent between CRM 6.5 and CRM 6.4.4 Pb1 environments.
- 11 Select the load from file option and specify upgrade_v64pb1_v65b13.txt as the input file; then click Load Data to load the data files supplied in this file.

Note upgrade_v64pb1_v65b13.txt contains information about all the files that need to be loaded and names of before and after load programs to tune the 6.4.4 pb1 database and bring it to the 6.5.1 state.

Post-Upgrade Tasks

- 1 Re-create each of the Remote Nodes, if needed.
- 2 Uninstall QAD CRM 6.4.4 patch bundle1 if the conversion is successful and you are sure that you want to retire this earlier version of QAD CRM.
- 3 Run QADCRMInstallDir\bin\qadcrm_webclient_client.exe to re-register the ocx/assembler, which was unregistered during the QAD CRM 6.4.4 Patch bundle1 uninstall.

Upgrading QAD CRM 6.5.1 to QAD CRM 6.6.1

Use the instructions in this section to upgrade QAD CRM 6.5.1 to QAD CRM 6.6.1.

Pre-Upgrade Tasks

It is recommended that you perform the upgrade from CRM 6.5.1 to CRM 6.6.1 using your TEST CRM 6.5.1 first. In this way you become familiar with the required steps before you apply the upgrade to the CRM 6.5.1 database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.5.1 data synchronization to ensure that all the remote nodes are synchronized with the host database, since remote nodes need to be recreated after upgrade.
- 2 Back up the existing QAD CRM 6.5.1 databases that you are planning to convert to QAD CRM 6.6b7. If you plan to integrate CRM 6.6.1 with QAD EA, then also back up the QAD EA databases, as well as the QXtend database if CRM 6.5.1 is integrated with QAD EA.

Note Certain CRM and MS Exchange integration functions cannot be run in both CRM 6.5.1 and CRM 6.6.1 simultaneously. For more details, see the relevant KnowledgeBase article on the QAD Support Web site.

Installing QAD CRM 6.6 B7 on the Deployment Server

Install QAD CRM 6.6b7 from the installation CD; for the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.


Note When you prompted to remove the existing CRM 6.5.1, answer No. You have the option of removing the CRM 6.5.1 configuration later after you have confirmed that the CRM 6.6.1 configuration is working correctly.

Note You do not need to follow the instructions in “Setting Up the Database Server” on page 21, since now you are converting the existing CRM 6.5.1 to CRM6.6.1.

Converting 6.5.1 Databases to 6.6.1 Format


- 1 After CRM 6.6b7 is installed, remove all the Progress compile code (*.r files) in the following folders from the newly installed QAD CRM 6.6b7 CD environment:
 - dataexch
 - lib
 - integration\mfgpro
 - progs
 - report
 - system
 - triggers
- 2 Modify the `crm661_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.5.1 databases in multi-user mode. If your QAD CRM 6.5.1 databases have been configured in the self-service (shared memory) mode on your database server, you must temporarily restart using the client server mode, so that the CRM 6.6.1 Deployment Utility can access the databases from the Windows Deployment server.
- 3 Make sure no other user or Progress process, including any AppServer process, is using the QAD CRM 6.5.1 databases that you are upgrading.
- 4 Click QAD CRM Deployment Utility.

Note If you are running QAD CRM 6.5.1 databases on the server using Progress 10.1C while your CRM 6.6.1 is set up against Progress 10.2Bxx, you might get an error message after you click the QAD CRM Deployment Utility icon.

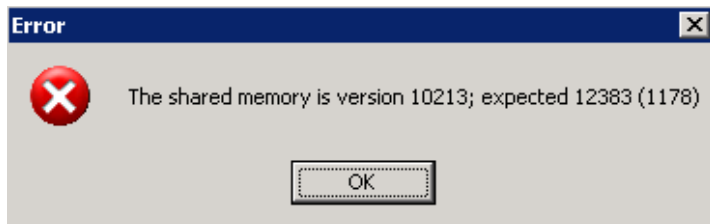


To resolve this error, connect to the QAD CRM 6.6.1 session using the Progress version that is compatible with the Progress version used by your 6.5.1 database server:

- a Modify all QAD CRM .ini files in `crm_install_dir` of your QAD CRM 6.6.1 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that is compatible with the Progress version used by your 6.5.1 database server.
 - b Modify the CRM 6.6.1 shortcut icons created as a result of CRM6.6.1 installation, and ensure that they also reference the compatible Progress file `prowin32.exe`.
- 5 On the QAD CRM Deployment Tools screen, click Progress Editor.

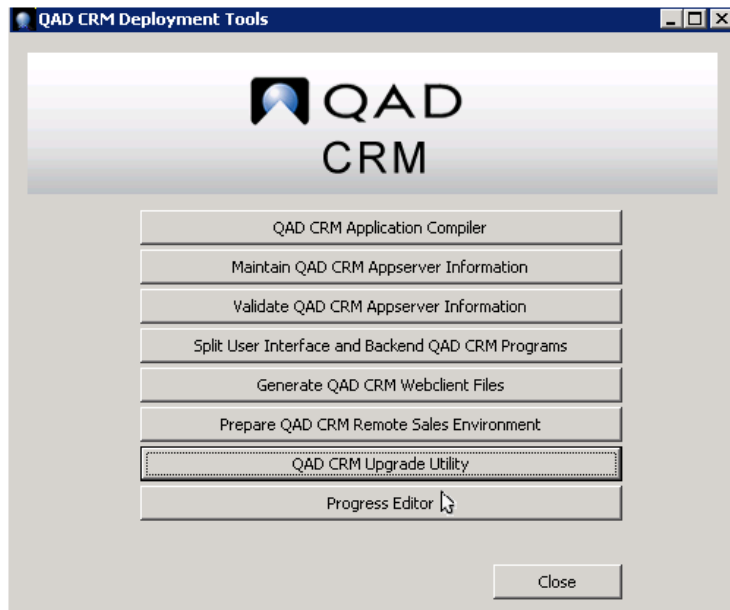

- 6 In the Procedure editor window, run the program `punfreezetbl.p`.
- a Enter the following command:
`run <crm661_install_dir>\conversion\punfreezetbl.p.`
 - b Select Compile|Run from the menu or Press F2.
 - c The program sets `_frozen= no` for all tables in CRM databases. After the program is executed, a confirmation message appears; click OK and close the editor window.
- 7 On the QAD CRM Deployment utility screen, click QAD CRM upgrade Utility, fill in the following Utility settings, and click OK.

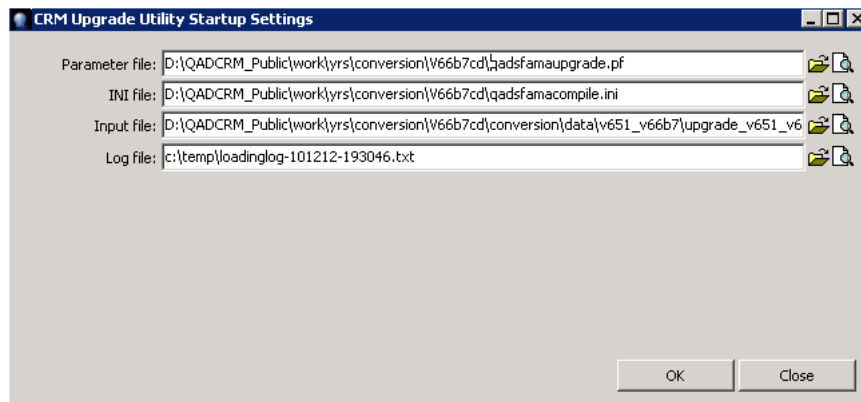


Parameter file. Specify the name of the parameter file (`qadsfamaupgrade.pf`) to connect to your CRM 6.5.1 databases running in multi-user mode.

INI file. This is pre-populated for you by default.

Input file. Specify the path to file `upgrade_v651_v66b7.txt`. You can locate this file in the `<crm661_install_dir>\conversion\v651_v66b7` folder.


Log file. Specify the name of the log file.

- 8 After you fill in the Utility settings, you are prompted to check whether you have backed up the databases. Make sure you have backed up the databases and click Yes to continue.

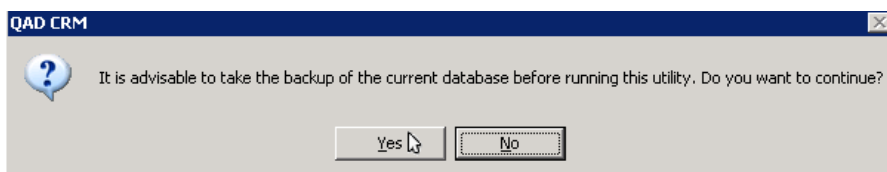


- 9 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

Note Some `.df` loading errors might be reported in the log file, since CRM uses Progress tools for loading the `.df` file. If the `.df` loading fails for some reason, see `bisgen.e`, `bisgmenu.e`, and `dataexch.e` files under `crm661_install_dir`.

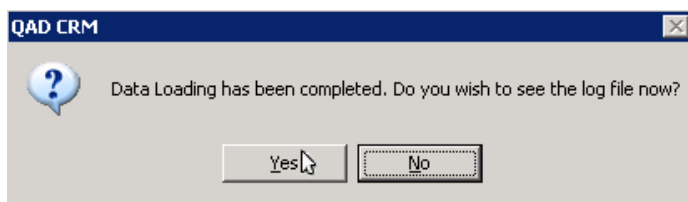

Make sure that you fix all errors before you proceed any further. If you encounter errors during the `.df` loading, restore the databases from the backup and continue again from step 3 on page 124.

- 10 When the `.df` loading is correct and there are no `.e` files in `crm661_install_dir`, the Upgrade Utility screen appears.

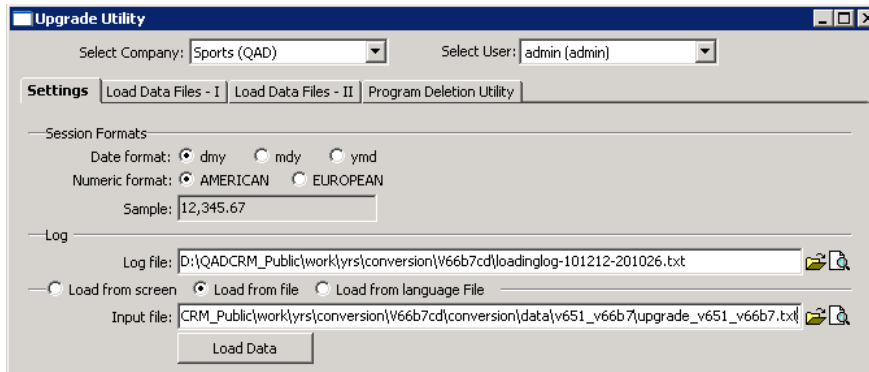


- a Make sure that the *Load from file* option is selected; by default, it is selected.
- b Make sure the Input file field displays the conversion file that you specified earlier; that is, *crm661_install_dir\conversion\v651_v66b7\upgrade_v651_v66b7.txt*.
- c Click Load Data.


Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading is complete, the system prompts you to view the log file. If you need any help to resolve errors in the log file, contact QAD CRM support.
- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.


- 11 Restart the Deployment Tools window again and click Progress Editor.

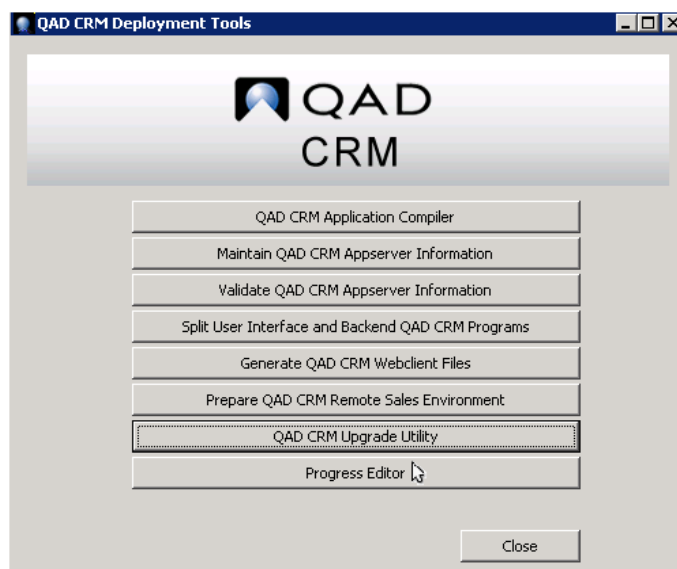


- a On the Progress Editor screen, select Tools |Data Administration.
- b On the Data Administration screen, click the Database menu, select *bisgen* as the working database, and click OK.

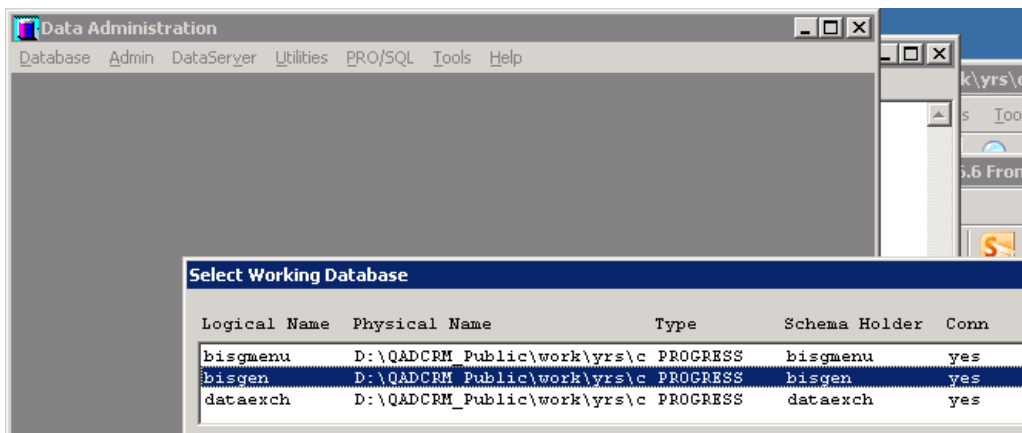

- c On the Data Administration screen, select Admin|Load Data and Definitions |Table Contents(.d file), choose the table *filter_val*, and click OK.

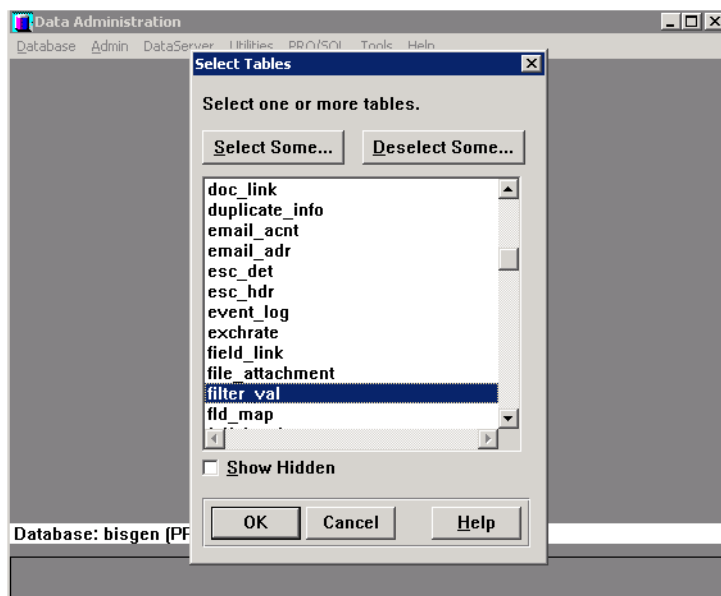


- d Before loading
`crm661_install_dir\conversion\v651_v66b7\qps120812-filter_val.d`, modify the .d file to replace domain ID sports with a valid domain ID. To enable the filters for other domains, modify domain ID and import the data again.
- e In loading data for the table *filter_val*, select the input file
`crm661_install_dir\conversion\v651_v66b7\qps120812-filter_val.d`
 and click OK.

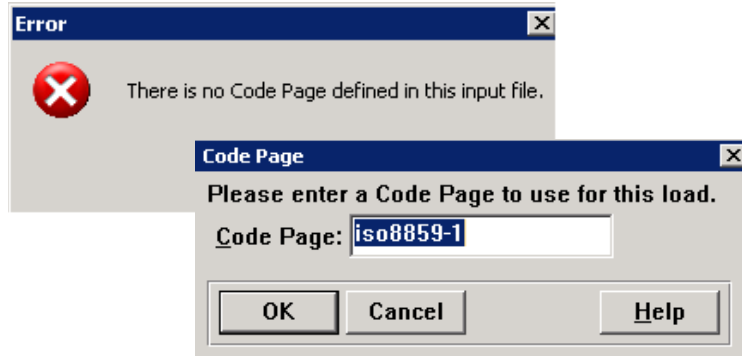

Note When a message about no code page defined in the input file appears, click OK and accept the default code values.

- f When database content loading is complete, make sure the Records Loaded column shows 3 and the Total Errors Column shows 0, and click OK to close the information window.

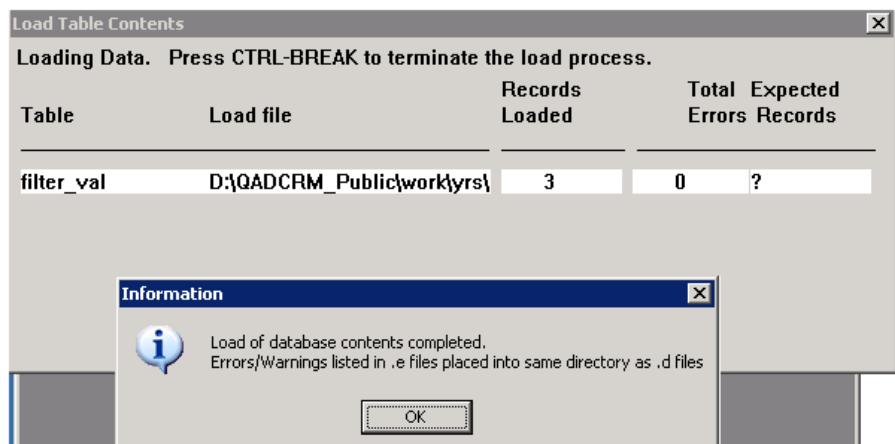

- g Exit the Data Admin window by selecting Database|Exit.
- h Exit Progress Editor by selecting File|Exit.
- i Restart Progress Editor and run the `pfreezetbl.p` program. To run the program, enter the following command, then select Compile|Run from the menu or Press F2.

```
run <crm661_install_dir>\conversion\pfreezetbl.p
```

This sets `_frozen = yes` for all tables in CRM databases. After the program is run, a confirmation message appears; click OK and close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.
- j Close the Deployment Utility. If you do not see any errors in the log file, your CRM 6.5.1 databases have now been upgraded to 6.6.1.

Configuring QAD CRM 6.6.1 on Deployment Server

Use the same steps in “Configuring QAD CRM on Deployment Server” on page 29.

Note `QADCRMInstallDir` refers to the new CRM6.6.1 folder that has been created by the CRM 6.6.1 Installer.

Compilation Procedure

Use the same steps in “Compilation Procedure” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.

Note Ignore the step “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can do this because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.6.1 database, which can be used for compilation purposes.

Configuring the Delivery Server

Use the same steps in “Configuring QAD CRM on Deployment Server” on page 29.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient661.war`. In this way, when you copy this .war file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that is used by your existing CRM 6.5.1 system.

Splitting UI and Backend Programs on the Deployment Server

Use the same steps in the section “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.

Copying QAD Backend Programs on the Application Server

Use the same steps in the section “Copying QAD Backend Programs on the Application Server” on page 130 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.
- Since you already have an existing CRM 6.5.1 system that is integrated with QAD EA, make sure that you create a new folder under *QADERPInstallDir/qadcrm/<New CRM6.6.1 env name>* to reflect the new CRM6.6.1 program files that need to be stored in the backend Application Server; for example, *QADERPInstallDir/qadcrm/qad661test*.

Compiling QAD CRM Backend Programs on the Application Server

Use the same steps in the section “Compiling QAD CRM Backend Programs on the Application Server” on page 35 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.
- If you have a 64-bit Progress AppServer, you must also perform the steps under “Compiling QAD CRM Backend Programs on the Application Server” on page 35.

Configuring Application Server

Use the same steps in “Configuring Application Server” on page 37 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.1 folders on your Windows Deployment server.
- Back up your existing *ubroker.properties* file before you make any changes to it.
- It is recommended that you define a new entry in the *ubroker.properties* file rather than updating the existing CRM6.5.1 entry. You can always remove the existing CRM6.5.1 AppServer later after your CRM 6.6.1 system is confirmed to be working.
- When defining the PROPATH for your AppServer, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.1 env name>* folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Use the same steps in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.1 folders on your Windows Deployment server.

Maintaining and Validating QAD CRM AppServer Information

Use the same steps in “Maintaining and Validating QAD CRM AppServer Information” on page 39.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.1 folders on your Windows Deployment server.

Generating and Copying QAD CRM WebClient Files

Use the same steps in “Generating and Copying QAD CRM WebClient Files” on page 41.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.

Integrating with QAD SE

If you need to integrate CRM 6.6.1 with your QAD SE system, you must implement the steps under the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.1 folders on your Windows Deployment server.


Note When you define the PROPATH in the configuration files, make sure you refer to the correct `QADERPInstallDir/qadcrm/<New CRM6.6.1 env name>` folder that you created earlier in the section “Copying QAD Backend Programs on the Application Server” on page 34.

On the first use of an upgraded CRM 6.6.1 application on any client, run Initial Address Data Load to bring all the necessary county data from the QAD SE system to the CRM 6.6.1 application.

Important Do the following steps only once.


- 1 Go to QAD ERP Integration|Settings and Switches|QAD ERP|QAD ERP Control Settings|Address. Make sure that you check all your required options under Transfer Address Information from QAD ERP to QAD CRM.

Fig. 4.9
QAD ERP Control Settings - Address

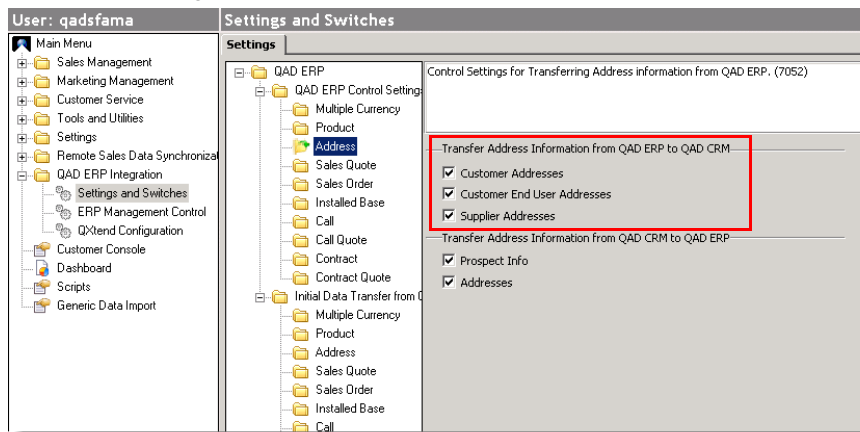

- 2 Go to QAD ERP Integration|Settings and Switches|QAD ERP|Initial Data Transfer from QAD ERP|Address. The Initial Address Transfer from QAD ERP to QAD CRM screen pops up.

Fig. 4.10
Initial Address Transfer from QAD ERP to QAD CRM Screen

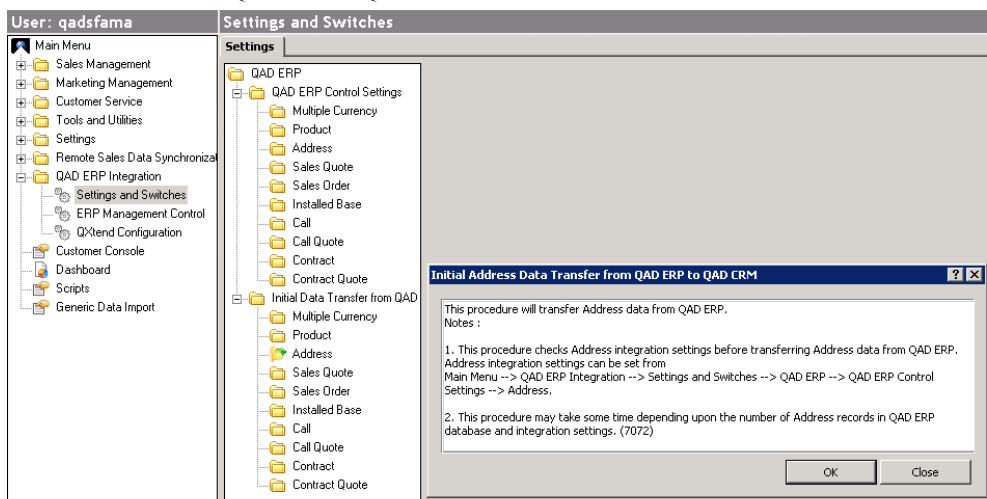

- 3 Click OK on the pop-up screen to finish the address data load.

Integrating with QAD EE

If you need to integrate CRM 6.6.1 with your QAD EE system, you need to implement the steps under the following sections:

- “Integrating QAD CRM with QAD EE” on page 48
- “Configuring QXtend for Integration” on page 50
- “Configuring the Environment for Sales Order Integration” on page 67

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.1 folders on your Windows Deployment server.

Note When you define PROPATH in configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.1 env name>* folder that you created earlier in the section “Copying QAD Backend Programs on the Application Server” on page 34.

Installing QAD CRM on End-User PC

Use the same steps in “Installing QAD CRM on End-User PC” on page 69.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.1 folders on your Windows Deployment server.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.6.1 to CRM 6.6.2

It is recommended that you perform the upgrade from CRM 6.6.1 to CRM 6.6.2 using your TEST CRM 6.6.1 first. In this way, you become familiar with the required steps before you apply the upgrade to the CRM 6.6.1 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.6.1 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after upgrade.
- 2 Back up the existing QAD CRM 6.6.1 databases that you are planning to convert to QAD CRM 6.6.2. If you plan to integrate CRM 6.6.2 with QAD EA, also back up the QAD EA databases. If CRM 6.6.1 is integrated with QAD EA, also back up the QXtend database.
- 3 Download the CRM 6.6.1 to CRM 6.6.2 Conversion Utility from <https://knowledgebase.qad.com/kmp/article/AA-86003>.

Installing QAD CRM 6.6.2 on the Deployment Server

Install QAD CRM 6.6.2 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- When you prompted to remove the existing CRM 6.6.1, answer No. You have the option of removing the CRM 6.6.1 configuration later after you have confirmed that the CRM 6.6.2 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this CRM Installation Guide, since now you are converting the existing CRM 6.6.1 to CRM 6.6.2.

Install QAD CRM 6.6.2 Upgrade Patch Bundle on Deployment Server

Copy the contents of this patch bundle from the `CRM_Upgrade_from_V661_to_V662` folder to the `crm662_install_dir\conversion` directory in Deployment Server.

Converting 6.6.1 Databases to 6.6.2 Format


- 1 After CRM 6.6.2 is installed, remove all the Progress compiled code (*.x files) in the following folders from the newly installed QAD CRM 6.6.2 CD environment:
 - dataexch
 - lib
 - integration\mfgpro
 - progs
 - report
 - system
 - triggers
- 2 Modify the `crm662_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.6.1 databases in multi-user mode. If your QAD CRM 6.6.1 databases have been configured in the self-service (shared memory) mode on your database server, temporarily restart using the client server mode to allow the CRM 6.6.2 Deployment Utility to access the databases from the Windows Deployment server.
- 3 Make sure no other user or Progress process, including any AppServer process, is using the QAD CRM 6.6.1 databases that you are upgrading.

Note In a CRM 6.6.1 system that is integrated with QAD ERP, shut down all the QAD ERP AppServers and those applications that would also have connections to the CRM 6.6.1 databases.

- 4 Convert your CRM 6.6.1 database to the Progress version that CRM 6.6.2 uses.


a Click QAD CRM Deployment Utility.

Note If you are running QAD CRM 6.6.1 databases on the server using Progress 10.1C while your CRM 6.6.2 is set up against Progress 10.2Bxx, you might get an error message after you click the QAD CRM Deployment Utility icon.

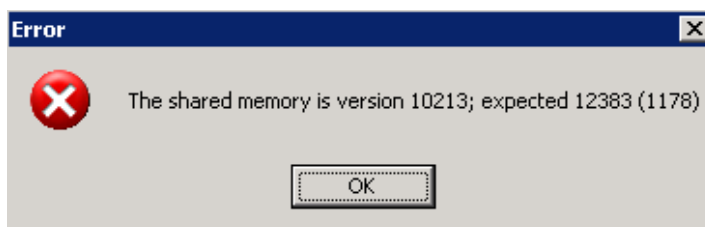


To resolve this error, connect to the QAD CRM 6.6.2 session using the Progress version that is compatible with the CRM 6.6.1 Progress version:

- b** Modify all QAD CRM .ini files in *crm_install_dir* of your QAD CRM 6.6.2 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that is compatible with the Progress version that the CRM 6.6.1 database server uses.
 - c** Modify the CRM 6.6.2 shortcut icons created as a result of CRM 6.6.2 installation, and ensure that they also reference the compatible Progress file *prowin32.exe*.
- 5** On the QAD CRM Deployment Tools screen, click Progress Editor.

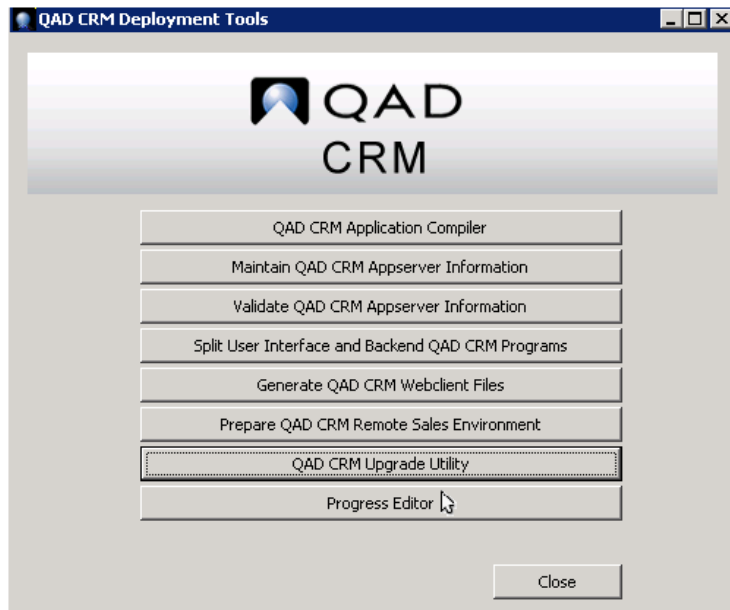

- 6** In the Procedure editor window, run the program *punfreezetbl.p*.
- a** Enter the following command:

```
run <crm662_install_dir>\conversion\punfreezetbl.p.
```
 - b** Select Compile|Run from the menu or Press F2.
 - c** The program sets *_frozen= no* for all tables in CRM databases. After the program is executed, a confirmation message appears; click OK and close the editor window.
- 7** On the QAD CRM Deployment utility screen, click QAD CRM upgrade Utility, fill in the following Utility settings, and click OK.

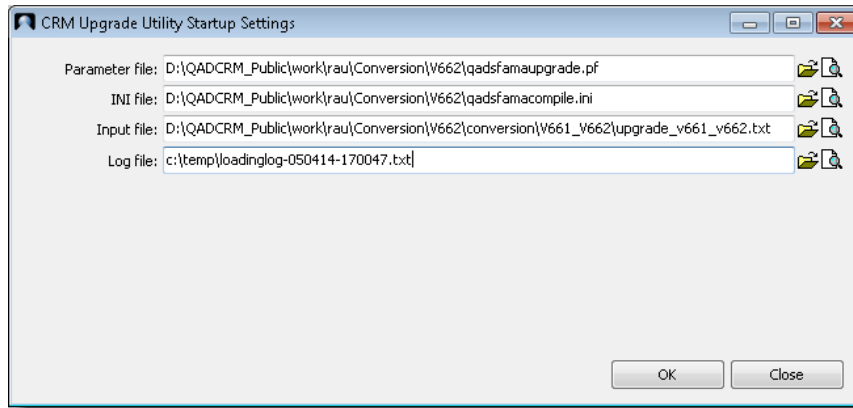


Parameter file. Specify the name of the parameter file (`qadsfamaupgrade.pf`) to connect to your CRM 6.6.1 databases running in multi-user mode.

INI file. It is pre-populated for you by default.

Input file. Specify the path to the `upgrade_v661_v662.txt` file. You can locate this file in the `<crm662_install_dir>\conversion\v661_v662` folder.


Log file. Specify the name of the log file.

- 8 After you fill in the Utility settings, you are prompted to check whether you have backed up the databases. Make sure that you have backed up the databases and click Yes to continue.

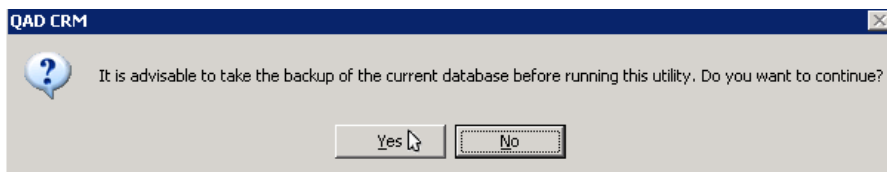


- 9 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

Note Some `.df` loading errors might be reported in the log file, since CRM uses Progress tools for loading the `.df` file. If the `.df` loading fails for some reason, see the `bisgen.e`, `bisgmenu.e`, and `dataexch.e` files under `crm662_install_dir`.

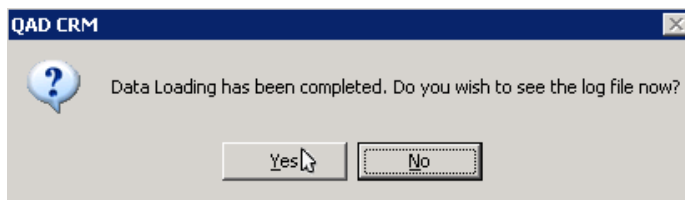

If you encounter errors during the `.df` loading, make sure that you resolve the errors and restore the databases from the backup and continue again from step 3 on page 124.

- 10 When the `.df` loading is correct and there are no `.e` files in `crm662_install_dir`, the Upgrade Utility screen appears.

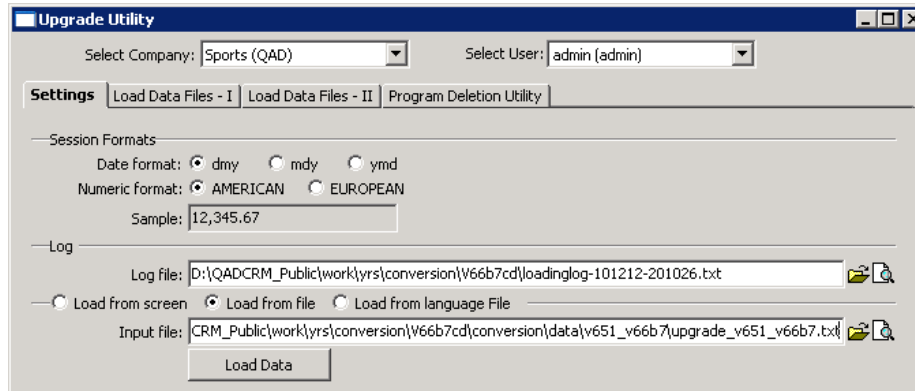

- a Make sure that the *Load from file* option is selected; by default, it is selected.

Important Do NOT change the Session Formats selected by default, even if you are not using the date and the numeric format.


- b Make sure that the Input file field displays the conversion file that you specified earlier; that is,
`crm662_install_dir\conversion\v661_v662\upgrade_v661_v662.txt.`

- c Click Load Data.

Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading is complete, the system prompts you to view the log file. If you need any help to resolve errors in the log file, contact QAD CRM support.
- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.

- 11 Restart the Deployment Tools window again and click Progress Editor.

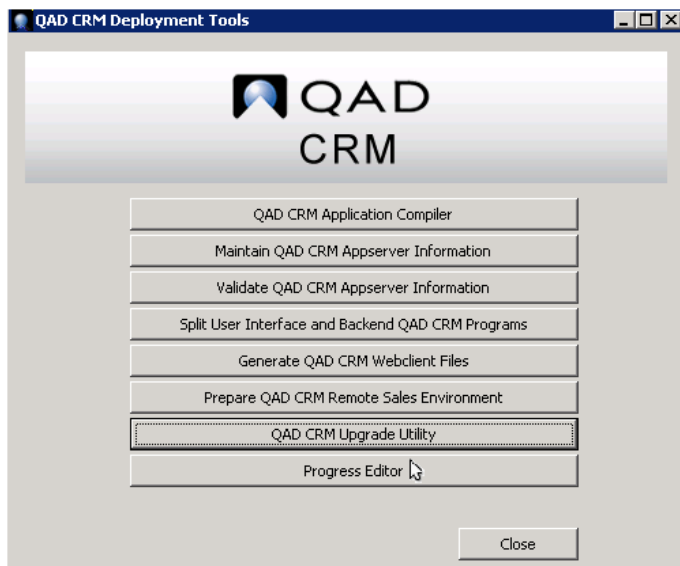

- a Restart Progress Editor and run the `pfreezetbl.p` program. To run the program, enter the following command, then select Compile|Run from the menu or press F2.

```
run <crm662_install_dir>\conversion\pfreezetbl.p
```

This command sets `_frozen = yes` for all tables in CRM databases. After the program is run, a confirmation message appears; click OK and close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.
- b Close the Deployment Utility. If you do not see any errors in the log file, your CRM 6.6.1 databases have now been upgraded to 6.6.2.

Configuring QAD CRM 6.6.2 on Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 29.

Note The term `QADCRMInstallDir` in this *CRM Installation Guide* refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.

Compilation Procedure

Follow the instructions in “Compilation Procedure” on page 30.

Note `QADCRMInstallDir` refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.

Important Ignore the step of “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can ignore this step because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.6.2 database, which can be used for compilation purposes.

Configuring the Delivery Server

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient662.war`. In this way, when you copy this `.war` file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that the existing CRM 6.6.1 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in the section “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Note *QADCRMInstallDir* refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.

Copying QAD Backend Programs on the Application Server

Follow the instructions in the section “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.
- Since you already have a CRM 6.6.1 system integrated with QAD EA, make sure that you create a folder under *QADERPInstallDir/qadcrm/<New CRM6.6.2 env name>* for CRM6.6.2 program files that need to be stored in the backend Application Server; for example, *QADERPInstallDir/qadcrm/qad662test*.
- If your CRM Progress AppServer machine is not using OE11.x (32 bit) or OE10.2Bxx (32 bit), copy the backend program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.6.2 database. In this scenario, follow all instructions related to the configuration of a Progress 64-bit AppServer in “Copying QAD Backend Programs on the Application Server” on page 34 and “Compiling QAD CRM Backend Programs on the Application Server” on page 35.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.
- Back up your existing `ubroker.properties` file before you change it.
- It is recommended that you define a new entry in the `ubroker.properties` file rather than updating the existing CRM6.6.1 entry. You can always remove the existing CRM6.6.1 AppServer later after your CRM 6.6.2 system is confirmed to be working.
- When defining the `PROPATH` for your AppServer, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.2 env name>* folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM Webclient (*.cab) files we will generate in the next step.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.

Integrating with QAD SE

If you need to integrate CRM 6.6.2 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.
- When you define the PROPATH in the configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM 6.6.2 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.6.1 programs. The PROPATH include the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.6.2 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.6.2 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48

- “Configuring the Environment for Sales Order Integration” on page 67
- Go to QXtend Inbound and update the Connection Pool `ee-crm.SIAPI` to use the CRM 6.6.2 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- `QADCRMInstallDir` refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.
- When you define `PROPATH` in configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/<New CRM6.6.2 env name>` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the `PROPATH` of all configuration files that are used to reference the old CRM 6.6.1 programs. The `PROPATH` include the `PROPATH` setting used by the .NET Connection Manager pool startup script, the `PROPATH` setting defined in the Progress `ubroker.properties` file for the QADUI AppServer, and etc. Update of the `PROPATH` ensures that all elements point to the new CRM 6.6.2 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have setup for the CRM 6.6.2 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.6.2 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.6.2 AppServer.

If you have set up QAD AdminService in CRM system, it is necessary to update all references to CRM 6.6.2 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Note `QADCRMInstallDir` refers to the newly installed CRM6.6.2 folders on your Windows Deployment server.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.6.2 to CRM 6.6.3

It is recommended that you perform the upgrade from CRM 6.6.2 to CRM 6.6.3 using your TEST CRM 6.6.2 first. In this way, you become familiar with the required steps before you apply the upgrade to the CRM 6.6.2 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.6.2 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after upgrade.
- 2 Back up the existing QAD CRM 6.6.2 databases that you are planning to convert to QAD CRM 6.6.3. If you plan to integrate CRM 6.6.3 with QAD EA, also back up the QAD EA databases. If CRM 6.6.2 is integrated with QAD EA, also back up the QXtend database.

Installing QAD CRM 6.6.3 on the Deployment Server

Install QAD CRM 6.6.3 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.6.2 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.6.3:

```
QAD CRM 6.6.2 is already installed on your system. It is recommended
to uninstall the previous version before installing QAD CRM 6.6.3. Do
you want to continue with the installation.
```

Select Yes to continue. You have the option of removing the CRM 6.6.2 configuration later after you have confirmed that the CRM 6.6.3 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.6.2 to CRM 6.6.3.

Converting 6.6.2 Databases to 6.6.3 Format

- 1 After CRM 6.6.3 is installed, remove all the Progress compiled code (*.r files) in the following folders from the newly installed QAD CRM 6.6.3 CD environment:
 - dataexch
 - lib
 - integration\mfgpro
 - progs
 - report
 - system
 - triggers
- 2 Modify the `crm663_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.6.2 databases in multi-user mode. If your QAD CRM 6.6.2 databases have been configured in the self-service (shared memory) mode on your database server, temporarily restart using the client server mode to allow the CRM 6.6.3 Deployment Utility to access the databases from the Windows Deployment server.

3 Make sure that no other user is using the QAD CRM 6.6.2 databases that you are upgrading.

4 Convert your CRM 6.6.2 database to CRM 6.6.3.

a Click QAD CRM Deployment Utility.

Note If you are running QAD CRM 6.6.2 databases on the server using Progress 10.1C, upgrade Progress to a version that QAD CRM 6.6.3 supports. See Table 2.2, “Software Requirements for Database Server,” on page 12 for the supported Progress versions.


b Modify all QAD CRM .ini files in *crm_install_dir* of your QAD CRM 6.6.3 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that CRM 6.6.2 database server uses.

c Modify the CRM 6.6.3 shortcut icons created as a result of CRM 6.6.3 installation, and ensure that they also reference the compatible Progress file *prowin32.exe*.

5 On the QAD CRM Deployment Tools screen, click QAD CRM Upgrade Utility.



6 On the CRM Deployment Utility Startup Settings screen, fill in the following Utility settings, and click OK.

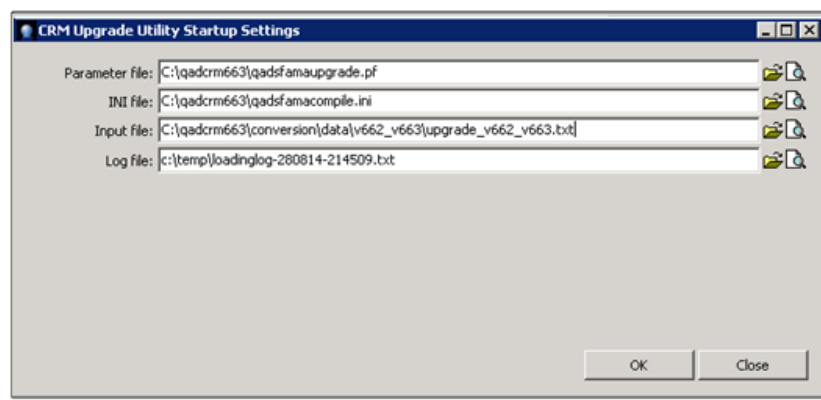


Parameter file. Specify the name of the parameter file (`qadsfamaupgrade.pf`) to connect to your CRM 6.6.2 databases running in multi-user mode.

INI file. It is pre-populated for you, by default.


Input file. Specify the path to the `upgrade_v661_v663.txt` file. You can locate this file in the `<crm663_install_dir>\conversion\v662_v663` folder.

Log file. Specify the name of the log file.

- 7 After you fill in the Utility settings, you are prompted to check whether you have backed up the databases. Make sure that you have backed up the databases and click Yes to continue.

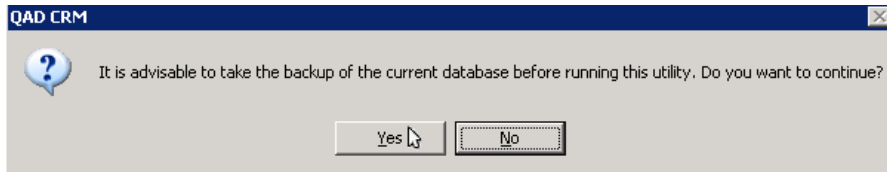


- 8 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

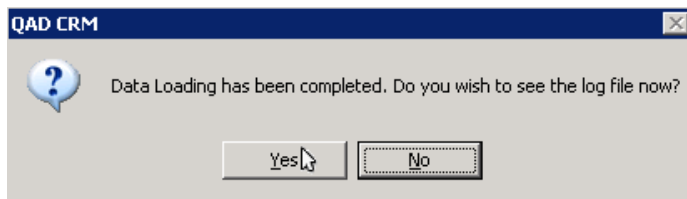

Note There are no schema changes from 6.6.2 to 6.6.3. You should not see anything in the log file at this step. Just open the file to make sure that there is no error.

- 9 When Step 8 is successful, the Upgrade Utility screen appears.

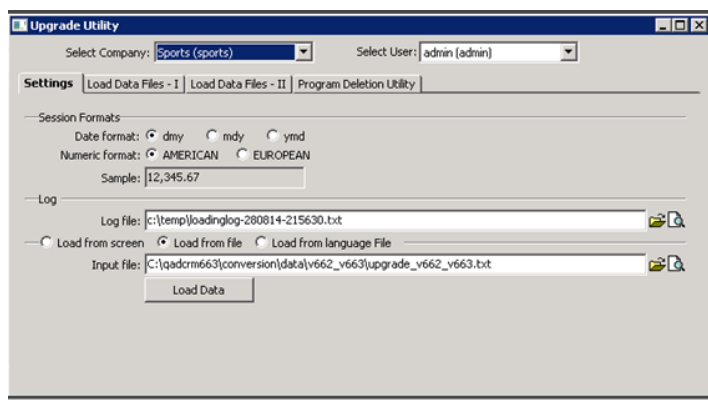

- a Make sure that the *Load from file* option is selected.

Important Do NOT change the Session Formats selected by default, even if you are not using the date and the numeric format.

- b Make sure that the Input file field displays the conversion file that you specified earlier; that is,
`crm663_install_dir\conversion\v662_v663\upgrade_v662_v663.txt`.

- c Click Load Data.

Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading is complete, the system prompts you to view the log file. If you need any help to resolve errors in the log file, contact QAD CRM support.
- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.

Note If you do not see any errors in the log file, your CRM 6.6.2 databases have now been upgraded to 6.6.3.

Configuring QAD CRM 6.6.3 on Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 29.

Note The term *QADCRMInstallDir* in this *CRM Installation Guide* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Compilation Procedure

Follow the instructions in “Compilation Procedure” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.2 folders on your Windows Deployment server.

Important Ignore the step of “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can ignore this step because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.6.3 database, which can be used for compilation purposes.

Configuring the Delivery Server

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient663.war`. In this way, when you copy this `.war` file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that the existing CRM 6.6.2 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in the section “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Copying QAD Backend Programs on the Application Server

Follow the instructions in the section “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.
- Since you already have a CRM 6.6.2 system integrated with QAD EA, make sure that you create a folder under *QADERPInstallDir/qadcrm/<New CRM6.6.3 env name>* for CRM 6.6.3 program files that need to be stored in the backend Application Server; for example, *QADERPInstallDir/qadcrm/qad663test*.
- If your CRM Progress AppServer machine is not using OE11.x (32 bit) or OE10.2Bxx (32 bit), copy the backend program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.6.3 database. In this scenario, follow all instructions related to the configuration of a Progress 64-bit AppServer in “Copying QAD Backend Programs on the Application Server” on page 34 and “Compiling QAD CRM Backend Programs on the Application Server” on page 35.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.
- Back up your existing *ubroker.properties* file before you change it.
- It is recommended that you define a new entry in the *ubroker.properties* file rather than updating the existing CRM 6.6.2 entry. You can always remove the existing CRM 6.6.2 AppServer later after your CRM 6.6.3 system is confirmed to be working.
- When defining the *PROPATH* for your AppServer, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.3 env name>* folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM Webclient (*.cab) files that are generated in the next step.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Integrating with QAD SE

If you need to integrate CRM 6.6.3 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.
- When you define the PROPATH in the configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.3 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.6.2 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.6.3 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.6.3 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.
- “Configuring the Environment for Sales Order Integration” on page 67.
- Go to QXtend Inbound and update the Connection Pool *ee-crm.SIAPI* to use the CRM 6.6.3 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.
- When you define the PROPATH in configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.6.3 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.6.2 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the

Progress `ubroker.properties` file for the QADUI AppServer, and so on. Update of the `PROPATH` ensures that all elements point to the new CRM 6.6.3 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the CRM 6.6.3 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.6.3 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.6.3 AppServer.

If you have set up QAD AdminService in CRM system, it is necessary to update all references to CRM 6.6.3 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.6.3 folders on your Windows Deployment server.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.6.3 to CRM 6.7

It is recommended that you perform the upgrade from CRM 6.6.3 to CRM 6.7 using your TEST CRM 6.6.3 first. In this way, you become familiar with the required steps before you apply the upgrade to the CRM 6.6.3 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.6.3 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after upgrade.
- 2 Back up the existing QAD CRM 6.6.3 databases that you are planning to convert to QAD CRM 6.7. If you plan to integrate CRM 6.7 with QAD EA, also back up the QAD EA databases. If CRM 6.6.3 is integrated with QAD EA, also back up the QXtend database.

Installing QAD CRM 6.7 on the Deployment Server

Install QAD CRM 6.7 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.6.3 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.7:

```
QAD CRM 6.6.3 is already installed on your system. It is recommended
to uninstall the previous version before installing QAD CRM 6.7. Do
you want to continue with the installation.
```

Select Yes to continue. You have the option of removing the CRM 6.6.3 configuration later after you have confirmed that the CRM 6.7 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.6.3 to CRM 6.7.


Converting 6.6.3 Databases to 6.7 Format

- 1 After CRM 6.7 is installed, remove all the Progress compiled code (*.x files) in the following folders from the newly installed QAD CRM 6.7 CD environment:
 - dataexch
 - lib
 - integration\mfgpro
 - progs
 - report
 - system
 - triggers
- 2 Modify the `crm67_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.6.3 databases in multi-user mode. If your QAD CRM 6.6.3 databases have been configured in the self-service (shared memory) mode on your database server, temporarily restart using the client server mode to allow the CRM 6.7 Deployment Utility to access the databases from the Windows Deployment server.

- 3 Make sure that no other user is using the QAD CRM 6.6.3 databases that you are upgrading.
- 4 Convert your CRM 6.6.3 database to CRM 6.7.
 - a Click QAD CRM Deployment Utility.
 - b Modify all QAD CRM .ini files in *crm_install_dir* of your QAD CRM 6.7 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that the CRM 6.6.3 database server uses.
 - c Modify the CRM 6.7 shortcut icons created as a result of CRM 6.7 installation, and ensure that they also reference the compatible Progress file *prowin32.exe*.
- 5 On the QAD CRM Deployment Tools screen, click QAD CRM Upgrade Utility.



- 6 On the CRM Deployment Utility Startup Settings screen, fill in the following Utility settings, and click OK.

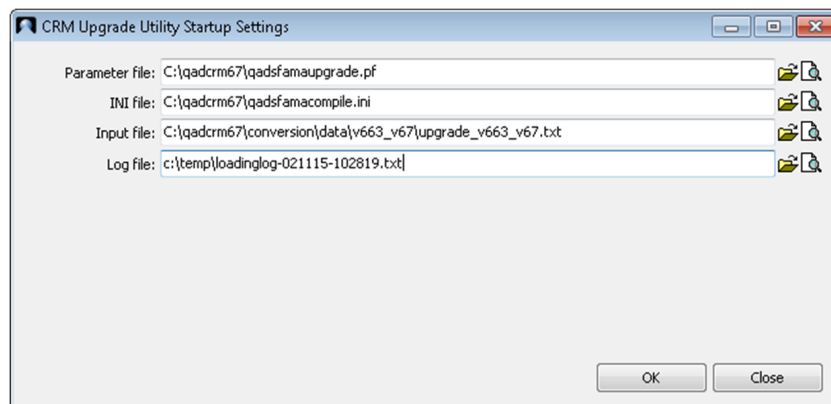


Parameter file. Specify the name of the parameter file (*qadsfamaupgrade.pf*) to connect to your CRM 6.6.3 databases running in multi-user mode.

INI file. This field is pre-populated for you, by default.


Input file. Specify the path to the `upgrade_v663_v67.txt` file. You can locate this file in the `<crm67_install_dir>\conversion\v663_v67` folder.

Log file. Specify the name of the log file.

- 7 After you fill in the Utility settings, you are prompted to confirm that you have backed up the databases. Make sure that you have backed up the databases and click Yes to continue.

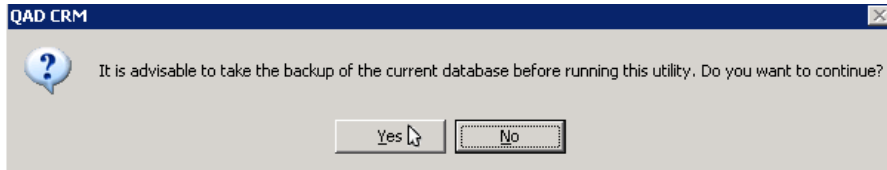


- 8 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

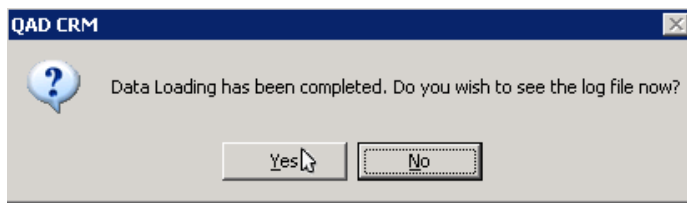

Note There are no schema changes from 6.6.3 to 6.7. You should not see anything in the log file at this step. Just open the file to make sure that there is no error.

- 9 When step 8 is successful, the Upgrade Utility screen appears.

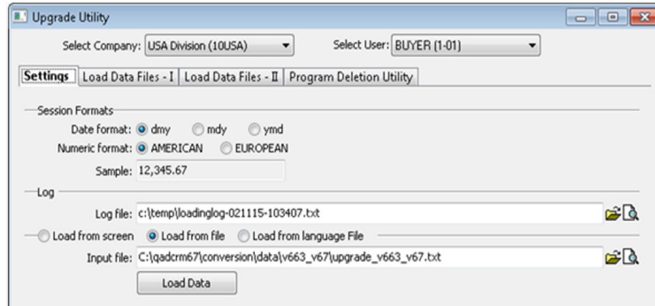

- a Make sure that the *Load from file* option is selected.

Important Do NOT change the Session Formats selected by default, even if you are not using the date and the numeric format.

- b Make sure that the Input file field displays the conversion file that you specified earlier; that is, `crm67_install_dir\conversion\v663_v67\upgrade_v663_v67.txt`.

- c Click Load Data.

Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading process is complete, the system prompts you to view the log file. If you need any help to resolve errors in the log file, contact QAD CRM support.

- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.

Note If you do not see any errors in the log file, your CRM 6.6.3 databases have now been upgraded to 6.7.

Configuring QAD CRM 6.7 on Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 29.

Note The term *QADCRMInstallDir* in this *CRM Installation Guide* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Compilation Procedure

Follow the instructions in “Compilation Procedure” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Important Ignore the step “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can ignore this step because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.7 database, which can be used for compilation purposes.

Configuring the Delivery Server

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Note Rename the *qadcrmwebclient.war* file; for example, *qadcrmwebclient67.war*. In this way, when you copy this *.war* file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that the existing CRM 6.6.3 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in the section “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Copying QAD Backend Programs on the Application Server

Follow the instructions in the section “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

- Since you already have a CRM 6.6.3 system integrated with QAD EA, make sure that you create a folder under `QADERPInstallDir/qadcrm/<New CRM6.7 env name>` for CRM 6.7 program files that need to be stored in the backend Application Server; for example, `QADERPInstallDir/qadcrm/qad67test`.
- If your CRM Progress AppServer machine is not using OE11.x (32 bit) or OE10.2Bxx (32 bit), copy the back-end program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.7 database. In this scenario, follow all instructions related to the configuration of a Progress 64-bit AppServer in “Copying QAD Backend Programs on the Application Server” on page 34 and “Compiling QAD CRM Backend Programs on the Application Server” on page 35.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- `QADCRMInstallDir` refers to the newly installed CRM 6.7 folders on your Windows Deployment server.
- Back up your existing `ubroker.properties` file before you change it.
- It is recommended that you define a new entry in the `ubroker.properties` file rather than updating the existing CRM 6.6.3 entry. You can always remove the existing CRM 6.6.3 AppServer later after your CRM 6.7 system is confirmed to be working.
- When defining the `PROPATH` for your AppServer, make sure that you refer to the correct `QADERPInstallDir/qadcrm/<New CRM6.7 env name>` folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM WebClient (*.cab) files that are generated in the next step.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Integrating with QAD SE

If you need to integrate CRM 6.7 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.
- When you define the PROPATH in the configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.6.3 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.7 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.
- “Configuring the Environment for Sales Order Integration” on page 67.

Go to QXtend Inbound and update the Connection Pool *ee-crm.SIAPI* to use the CRM 6.7 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.
- When you define the PROPATH in configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.6.3 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the CRM 6.7 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.7 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.7 AppServer.

If you have set up QAD AdminService in CRM system, it is necessary to update all references to CRM 6.7 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7 folders on your Windows Deployment server.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.7 to CRM 6.7.1

It is recommended that you perform the upgrade from CRM 6.7 to CRM 6.7.1 using your TEST CRM 6.7 first. In this way, you become familiar with the required steps before you apply the upgrade to the CRM 6.7.1 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.7 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after upgrade.
- 2 Back up the existing QAD CRM 6.7 databases that you are planning to convert to QAD CRM 6.7.1. If you plan to integrate CRM 6.7.1 with QAD EA, also back up the QAD EA databases. If CRM 6.7 is integrated with QAD EA, also back up the QXtend database.

Installing QAD CRM 6.7.1 on the Deployment Server

Install QAD CRM 6.7.1 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.7 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.7.1:

QAD CRM 6.7 is already installed on your system. It is recommended to uninstall the previous version before installing QAD CRM 6.7.1. Do you want to continue with the installation.

Select Yes to continue. You have the option of removing the CRM 6.7 configuration later after you have confirmed that the CRM 6.7.1 configuration is working correctly.

- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.7 to CRM 6.7.1.


Converting 6.7 Databases to 6.7.1 Format

- 1 After CRM 6.7.1 is installed, remove all the Progress compiled code (*.r files) in the following folders from the newly installed QAD CRM 6.7.1 CD environment:
 - dataexch
 - lib
 - integration\mfgpro
 - progs
 - report
 - system
 - triggers
- 2 Modify the `crm67_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.7 databases in multi-user mode. If your QAD CRM 6.7 databases have been configured in the self-service (shared memory) mode on your database server, temporarily restart using the client server mode to allow the CRM 6.7.1 Deployment Utility to access the databases from the Windows Deployment server.


- 3 Make sure that no other user is using the QAD CRM 6.7 databases that you are upgrading. Shut down the CRM appserver during the conversion process. Otherwise, the conversion utility cannot load 6.7.1 schema changes.
- 4 Convert your CRM 6.7 database to CRM 6.7.1.
 - a Click QAD CRM Deployment Utility.
 - b Modify all QAD CRM .ini files in *crm_install_dir* of your QAD CRM 6.7.1 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that the CRM 6.7 database server uses.
 - c Modify the CRM 6.7.1 shortcut icons created as a result of CRM 6.7.1 installation, and ensure that they also reference the compatible Progress file *prowin32.exe*.
- 5 Run the QAD CRM Deployment Utility.
 - a On the QAD CRM Deployment Tools screen, click Progress Editor.
 The Progress Editor opens. Run the program *conversion\punfreezetbl.p* in the editor. To run the program, enter the following command, then select Compile|Run from the menu or press F2.

```
run <crm671_install_dir>\conversion\punfreezetbl.p
```

 The installation directory depends on your CRM 6.7.1 installation folder.
 This program sets *_frozen = no* for all tables in CRM databases. After the program is complete, click OK on the confirmation message to close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.
 - b On the QAD CRM Deployment Tools screen, click QAD CRM Upgrade Utility.

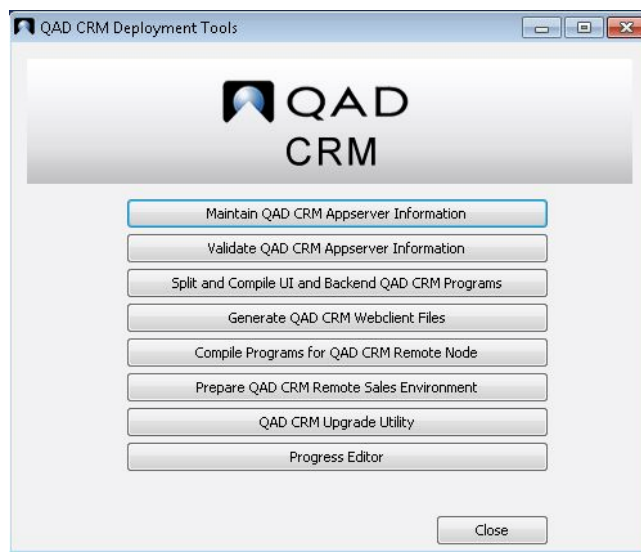

- 6 On the CRM Deployment Utility Startup Settings screen, fill in the following Utility settings, and click OK.

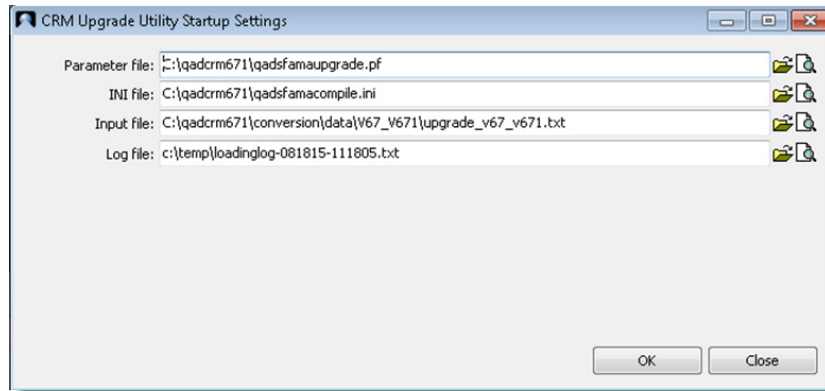

Parameter file. Specify the name of the parameter file (`qadsfamaupgrade.pf`) to connect to your CRM 6.7 databases running in multi-user mode.


INI file. This field is pre-populated for you, by default.

Input file. Specify the path to the `upgrade_v67_v671.txt` file. You can locate this file in the `<crm671_install_dir>\conversion\67_v671` folder.


Log file. Specify the name of the log file.

Note The image in the instruction is for reference only. Fill in the values as explained in the field descriptions.

- 7 After you fill in the Utility settings, you are prompted to confirm that you have backed up the databases. Make sure that you have backed up the databases and click Yes to continue.

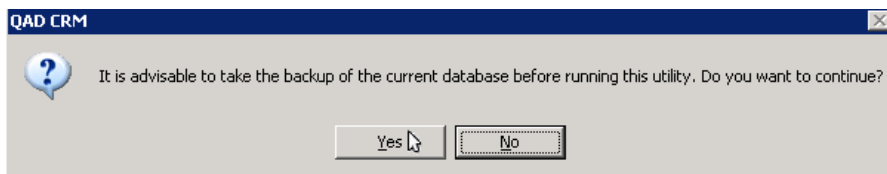


- 8 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

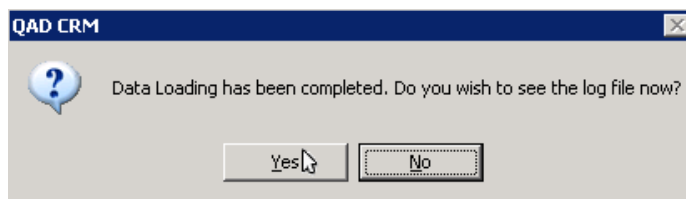

Note There are no schema changes from 6.7 to 6.7.1. Just open the file to make sure that there is no error. Also check the CRM root folder and your session temporary folder to ensure that there are no recent `bisgen.e`, `bisgmenu.e`, and `dataexch.e` files in those folders containing schema change load errors.

- 9 When step 8 is successful, the Upgrade Utility screen appears.

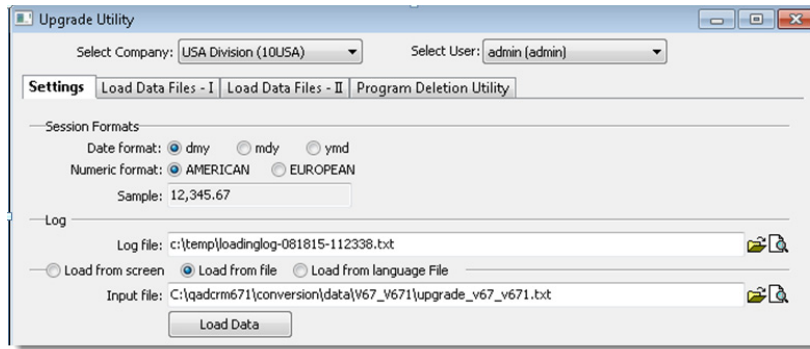

Note The image is for reference only. Fill in the values as explained in the procedure instructions.

- a Make sure that the *Load from file* option is selected.

Important Do NOT change the Session Formats selected by default, even if you are not using the date and the numeric format.

- b Make sure that the Input file field displays the conversion file that you specified earlier; that is, `crm671_install_dir\conversion\v67_v671\upgrade_v67_v671.txt`.
- c Click Load Data.

Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading process is complete, the system prompts you to view the log file. If you need any help to resolve errors in the log file, contact QAD CRM support.
- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.

Note If you do not see any errors in the log file, your CRM 6.7 databases have now been upgraded to 6.7.1.

Configuring QAD CRM 6.7.1 on Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 29.

Note The term `QADCRMInstallDir` in this *CRM Installation Guide* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Compilation Procedure

Follow the instructions in “Compilation Procedure” on page 30.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Important Ignore the step “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can ignore this step because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.7.1 database, which can be used for compilation purposes.

Configuring the Delivery Server

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Note Rename the *qadcrmwebclient.war* file; for example, *qadcrmwebclient671.war*. In this way, when you copy this .war file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that the existing CRM 6.7 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in the section “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Copying QAD Backend Programs on the Application Server

Follow the instructions in the section “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.
- Since you already have a CRM 6.7 system integrated with QAD EA, make sure that you create a folder under *QADERPInstallDir/qadcrm/<New CRM6.7.1 env name>* for CRM 6.7.1 program files that need to be stored in the backend Application Server; for example, *QADERPInstallDir/qadcrm/qad671test*.
- Copy the back-end program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.7.1 database.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.
- Back up your existing *ubroker.properties* file before you change it.
- It is recommended that you define a new entry in the *ubroker.properties* file rather than updating the existing CRM 6.7 entry. You can always remove the existing CRM 6.7 AppServer later after your CRM 6.7.1 system is confirmed to be working.
- When defining the *PROPATH* for your AppServer, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7.1 env name>* folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM Webclient (*.cab) files that are generated in the next step.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Note *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Integrating with QAD SE

If you need to integrate CRM 6.7.1 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- *QADCRMInstallDir* refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.
- When you define the PROPATH in the configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7.1 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7.1 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.7.1 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.

- “Configuring the Environment for Sales Order Integration” on page 67.

Go to QXtend Inbound and update the Connection Pool `ee-crm.SIAPI` to use the CRM 6.7.1 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- `QADCRMInstallDir` refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.
- When you define the PROPATH in configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/<New CRM6.7.1 env name>` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress `ubroker.properties` file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7.1 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the CRM 6.7.1 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.7.1 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.7.1 AppServer.

If you have set up QAD AdminService in your CRM system, it is necessary to update all references to CRM 6.7.1 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Note `QADCRMInstallDir` refers to the newly installed CRM 6.7.1 folders on your Windows Deployment server.

Post-Upgrade Tasks

- When the conversion process is successful, relaunch the QAD CRM Deployment Utility that connects to your newly converted CRM 6.7.1 databases.

Open the Progress Editor and run the program `conversion\punfreezetbl.p` in the editor. To run the program, enter the following command, then select Compile|Run from the menu or press F2.

```
run <crm671_install_dir>\conversion\punfreezetbl.p
```

The installation directory depends on your CRM 6.7.1 installation folder.

This program sets `_frozen = no` for all tables in CRM databases. After the program is complete, click OK on the confirmation message to close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.

- Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.7.1 to CRM 6.7.2

It is recommended that you perform the upgrade from CRM 6.7.1 to CRM 6.7.2 using your TEST CRM 6.7.1 first. In this way, you become familiar with the required steps before you apply the upgrade to the CRM 6.7.2 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.7.1 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after upgrade.
- 2 Back up the existing QAD CRM 6.7.1 databases that you are planning to convert to QAD CRM 6.7.2. If CRM 6.7.1 is integrated with QAD EA, back up the QXtend database along with QAD EA databases.

Installing QAD CRM 6.7.2 on the Deployment Server

Install QAD CRM 6.7.2 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.7.1 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.7.2:

```
QAD CRM 6.7.1 is already installed on your system. It is recommended
to uninstall the previous version before installing QAD CRM 6.7.2. Do
you want to continue with the installation.
```

Select Yes to continue. You have the option of removing the CRM 6.7.1 configuration later after you have confirmed that the CRM 6.7.2 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.7.1 to CRM 6.7.2.

Converting 6.7.1 Databases to 6.7.2 Format


- 1 Modify the `crm672_install_dir\qadsfamaupgrade.pf` file to connect to the QAD CRM 6.7.1 databases in multi-user mode. If your QAD CRM 6.7.1 databases have been configured in the self-service (shared memory) mode on your database server, temporarily restart using the client server mode to allow the CRM 6.7.2 Deployment Utility to access the databases from the Windows Deployment server.
- 2 Make sure that no other user is using the QAD CRM 6.7.1 databases that you are upgrading. Shut down the CRM appserver during the conversion process. Otherwise, the conversion utility cannot load 6.7.2 schema changes.
- 3 Convert your CRM 6.7.1 database to CRM 6.7.2.
 - a Modify all QAD CRM `.ini` files in `crm_install_dir` of your QAD CRM 6.7.2 installation. Change the DLC system variable and other Progress configuration parameters to point to a Progress version that the CRM 6.7.1 database server uses.
 - b Modify the CRM 6.7.2 shortcut icons created as a result of CRM 6.7.2 installation, and ensure that they also reference the compatible Progress file `prowin32.exe`.
- 4 Run the QAD CRM Deployment Utility.
 - a On the QAD CRM Deployment Tools screen, click Progress Editor.
 The Progress Editor opens. Run the program `conversion\punfreezetbl.p` in the editor. To run the program, enter the following command, then select Compile|Run from the menu or press F2.

```
run <crm672_install_dir>\conversion\punfreezetbl.p
```

 The installation directory depends on your CRM 6.7.2 installation folder.
 This program sets `_frozen = no` for all tables in CRM databases. After the program is complete, click OK on the confirmation message to close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.
 - b On the QAD CRM Deployment Tools screen, click QAD CRM Upgrade Utility.



- 5 On the CRM Deployment Utility Startup Settings screen, fill in the following Utility settings, and click OK.

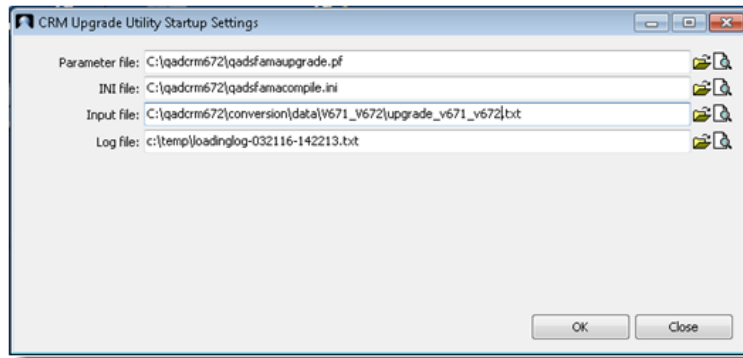

Parameter file. Specify the name of the parameter file (`qadsfamaupgrade.pf`) to connect to your CRM 6.7.1 databases running in multi-user mode.


INI file. This field is pre-populated for you, by default.

Input file. Specify the path to the `upgrade_v671_v672.txt` file. You can locate this file in the `<crm672_install_dir>\conversion\v671_v672` folder.


Log file. Specify the name of the log file.

Note The image in the instruction is for reference only. Fill in the values as explained in the field descriptions.

- 6 After you fill in the Utility settings, you are prompted to confirm that you have backed up the databases. Make sure that you have backed up the databases and click Yes to continue.

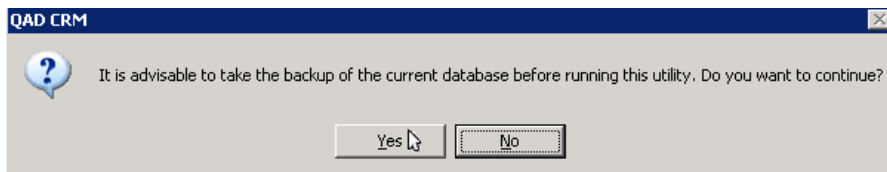


- 7 You see the following message after the data loading has been completed. You can click Yes to see if there are any errors recorded in the log file.

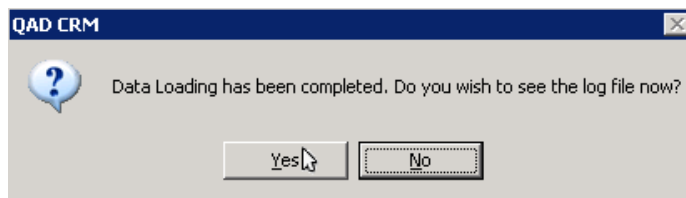

Note There are schema changes from 6.7.1 to 6.7.2. Just open the file to make sure that there is no error. Also check the CRM root folder and your session temporary folder to ensure that there are no recent `bisgen.e`, `bisgmenu.e`, and `dataexch.e` files in those folders containing schema change load errors.

- 8 When step 7 is successful, the Upgrade Utility screen appears.

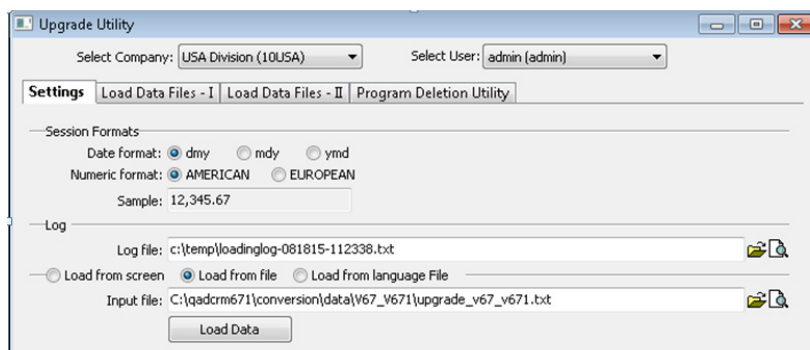

Note The image is for reference only. Fill in the values as explained in the procedure instructions.

- a Make sure that the *Load from file* option is selected.

Important Do NOT change the Session Formats selected by default, even if you are not using the date and the numeric format.

- b Make sure that the Input file field displays the conversion file that you specified earlier; that is,
`crm672_install_dir\conversion\v671_v672\upgrade_v671_v672.txt.`

- c Click Load Data.

Note After you click Load Data, you are prompted once again to confirm that your databases have been backed up. Click Yes to continue.

- d After the data loading process is complete, the system prompts you to view the log file. If you need any help resolving errors in the log file, contact QAD CRM support.
- e Close the Upgrade Utility window and any other Deployment utility windows, including the main Deployment Tools window.

Note If you do not see any errors in the log file, your CRM 6.7.1 databases have now been upgraded to 6.7.2.

Configuring QAD CRM 6.7.2 on Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 29.

Note The term `QADCRMInstallDir` in this *CRM Installation Guide* refers to the newly installed CRM 6.7.2 folders on your Windows Deployment server.

Compilation Procedure

Follow the instructions in “Compilation Procedure” on page 30.

Important Ignore the step “Modify the parameter file.” on page 30 when you are implementing the steps described in the Compilation Procedure section. You can ignore this step because you have already modified the same parameter file in an earlier step to connect to your recently converted CRM 6.7.2 database, which can be used for compilation purposes.

Configuring the Delivery Server

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient672.war`. In this way, when you copy this `.war` file to the Tomcat webapps folder, it can be extracted to a different webapps folder, other than the one that the existing CRM 6.7.1 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Copying QAD Backend Programs on the Application Server

Follow the instructions in “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- Since you already have a CRM 6.7.1 system integrated with QAD EA, make sure that you create a folder under `QADERPInstallDir/qadcrm/<New CRM6.7.2 env name>` for CRM 6.7.2 program files that need to be stored in the backend Application Server; for example, `QADERPInstallDir/qadcrm/qad672test`.
- Copy the backend program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.7.2 database.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- Back up your existing `ubroker.properties` file before you change it.
- It is recommended that you define a new entry in the `ubroker.properties` file rather than updating the existing CRM 6.7.1 entry. You can always remove the existing CRM 6.7.1 AppServer later after your CRM 6.7.2 system is confirmed to be working.
- When defining the `PROPATH` for your AppServer, make sure that you refer to the correct `QADERPInstallDir/qadcrm/<New CRM6.7.2 env name>` folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM Webclient (*.cab) files that are generated in the next step.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Integrating with QAD SE

If you need to integrate CRM 6.7.2 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- When you define the PROPATH in the configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7.2 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7.1 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7.2 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.7.2 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.
- “Configuring the Environment for Sales Order Integration” on page 67.

Go to QXtend Inbound and update the Connection Pool *ee-crm.SIAPI* to use the CRM 6.7.2 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- When you define the PROPATH in configuration files, make sure that you refer to the correct *QADERPInstallDir/qadcrm/<New CRM6.7.2 env name>* folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7.1 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress *ubroker.properties* file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.7.2 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the CRM 6.7.2 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.7.2 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.7.2 AppServer.

If you have set up QAD AdminService in your CRM system, it is necessary to update all references to CRM 6.7.2 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Post-Upgrade Tasks

- When the conversion process is successful, relaunch the QAD CRM Deployment Utility that connects to your newly converted CRM 6.7.2 databases.

Open the Progress Editor and run the program `conversion\punfreezetbl.p` in the editor. To run the program, enter the following command, then select Compile|Run from the menu or press F2.

```
run <crm672_install_dir>\conversion\punfreezetbl.p
```

The installation directory depends on your CRM 6.7.2 installation folder.

This program sets `_frozen = no` for all tables in CRM databases. After the program is complete, click OK on the confirmation message to close the editor window. Click No when you are prompted to save changes in the Progress Editor buffer.

- Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.7.2 to CRM 6.7.3

It is recommended that you perform the upgrade from CRM 6.7.2 to CRM 6.7.3 using your TEST CRM 6.7.2 environment first. In this way, you will become familiar with the required steps before you apply the upgrade to the CRM 6.7.3 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.7.2 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after the upgrade.
- 2 Back up the existing QAD CRM 6.7.2 databases that you are planning to convert to QAD CRM 6.7.3. If CRM 6.7.2 is integrated with QAD EA, back up the QXtend database along with QAD EA databases.

Installing QAD CRM 6.7.3 on the Deployment Server

Install QAD CRM 6.7.3 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.7.2 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.7.3:

```
QAD CRM 6.7.2 is already installed on your system. It is recommended
to uninstall the previous version before installing QAD CRM 6.7.3. Do
you want to continue with the installation?
```

Select Yes to continue. You have the option of removing the CRM 6.7.2 configuration later after you have confirmed that the CRM 6.7.3 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.7.2 to CRM 6.7.3.

Installing Using YAB

Configuring the Delivery Server

Follow these steps if you installed QAD CRM 6.7.2 using YAB:

- 1 Download the Customer Relationship Management Server (YAB) (`crm-server-release-6.7.3.0`) zip file from the QAD store or from QAD Release Fulfillment.
- 2 Move the file to a file system that is accessible from the UNIX host where your Enterprise Edition environment is installed.
- 3 Change to the directory where Enterprise Edition is installed.

```
cd directory
```
- 4 Unset the environment variables. Enter:

```
unset DLC
unset PROMSGS
```

```
unset PROTERMCAP
```

5 Enter:

```
yab install [ZIP FILE]
```

Example `yab install /dr01/crm-server-release-6.7.3.0.zip`

If the build is not successful, contact QAD Support.

Configuring the Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 80.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in “Splitting and Compiling UI and Backend QAD CRM Programs” on page 84.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 85.

Normal Installation

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient673.war`. In this way, when you copy this .war file to the Tomcat webapps folder, it can be extracted to a different webapps folder other than the one that the existing CRM system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Copying QAD Backend Programs on the Application Server

Follow the instructions in “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- Since you already have a CRM system integrated with QAD EA, make sure that you create a folder under `QADERPInstallDir/qadcrm/<New CRM6.7.3 env name>` for new CRM program files that need to be stored in the backend Application Server; for example, `QADERPInstallDir/qadcrm/qad680test`.
- Copy the backend program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM database.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- Back up your existing `ubroker.properties` file before you change it.
- It is recommended that you define a new entry in the `ubroker.properties` file rather than updating the existing CRM 6.7.2 entry. You can always remove the existing CRM 6.7.2 AppServer later, after your new CRM system is confirmed to be working.
- When defining the PROPATH for your AppServer, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM WebClient (*.cab) files that are generated in the next step.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Integrating with QAD SE

If you need to integrate the CRM system with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- When you define the PROPATH in the configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress `ubroker.properties` file for the QADUI AppServer, and so on. Updating the PROPATH ensures that all elements point to the new CRM programs that you have installed.

Integrating with QAD EE

To integrate the CRM system with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.
- “Configuring the Environment for Sales Order Integration” on page 67.

Go to QXtend Inbound and update the Connection Pool `ee-crm.SIAPI` to use the new CRM AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- When you define the PROPATH in configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress `ubroker.properties` file for the QADUI AppServer, and so on. Updating the PROPATH ensures that all elements point to the new CRM programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the new CRM system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the new 6.7.3 CRM AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM AppServer.

If you have set up QAD AdminService in your CRM system, it is necessary to update all references to the new CRM AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Upgrading QAD CRM 6.7.3 to CRM 6.8

It is recommended that you perform the upgrade from CRM 6.7.3 to CRM 6.8 using your TEST CRM 6.7.3 environment first. In this way, you will become familiar with the required steps before you apply the upgrade to the CRM 6.8 production database.

Perform the following steps before upgrading:

- 1 If you use Remote Sales, perform QAD CRM 6.7.3 data synchronization to ensure that all the remote nodes are synchronized with the host database. Re-create the remote nodes after the upgrade.
- 2 Back up the existing QAD CRM 6.7.3 databases that you are planning to convert to QAD CRM 6.8. If CRM 6.7.3 is integrated with QAD EA, back up the QXtend database along with QAD EA databases.

Installing QAD CRM 6.8 on the Deployment Server

Install QAD CRM 6.8 from the installation CD. For the installation instructions, see “Installing QAD CRM on the Deployment Server” on page 18.

Note

- If QAD CRM 6.7.3 is already installed on your system, the system prompts you with the following message when installing QAD CRM 6.8:

```
QAD CRM 6.7.3 is already installed on your system. It is recommended
to uninstall the previous version before installing QAD CRM 6.8. Do
you want to continue with the installation?
```

Select Yes to continue. You have the option of removing the CRM 6.7.3 configuration later after you have confirmed that the CRM 6.8 configuration is working correctly.
- You do not need to follow the instructions in Setting Up the Database Server in this *CRM Installation Guide*, since now you are converting the existing CRM 6.7.3 to CRM 6.8.

Installing Using YAB

Configuring the Delivery Server

Follow these steps if you installed QAD CRM 6.7.3 using YAB:

- 1 Download the Customer Relationship Management Server (YAB) (crm-server-release-6.8.0.0) zip file from the QAD store or from QAD Release Fulfillment.
- 2 Move the file to a file system that is accessible from the UNIX host where your Enterprise Edition environment is installed.
- 3 Change to the directory where Enterprise Edition is installed.

```
cd directory
```
- 4 Unset the environment variables. Enter:

```
unset DLC
unset PROMSGS
```

```
unset PROTERMCAP
```

5 Enter:

```
yab install [ZIP FILE]
```

Example `yab install /dr01/crm-server-release-6.8.0.0.zip`

If the build is not successful, contact QAD Support.

Configuring the Deployment Server

Follow the instructions in “Configuring QAD CRM on Deployment Server” on page 80.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in “Splitting and Compiling UI and Backend QAD CRM Programs” on page 84.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 85.

Normal Installation

Follow the instructions in “Configuring the Delivery Server” on page 30.

Note Rename the `qadcrmwebclient.war` file; for example, `qadcrmwebclient680.war`. In this way, when you copy this .war file to the Tomcat webapps folder, it can be extracted to a different webapps folder other than the one that the existing CRM 6.7.3 system uses.

Splitting UI and Backend Programs on the Deployment Server

Follow the instructions in “Splitting and Compiling UI and Backend QAD CRM Programs” on page 33.

Copying QAD Backend Programs on the Application Server

Follow the instructions in “Copying QAD Backend Programs on the Application Server” on page 34 with the following notes:

- Since you already have a CRM 6.7.3 system integrated with QAD EA, make sure that you create a folder under `QADERPInstallDir/qadcrm/<New CRM6.8.0 env name>` for CRM 6.8 program files that need to be stored in the backend Application Server; for example, `QADERPInstallDir/qadcrm/qad680test`.
- Copy the backend program source files from the Windows Deployment server to the AppServer machine and recompile them against your newly converted CRM 6.8 database.

Configuring Application Server

Follow the instructions in “Configuring Application Server” on page 37 with the following notes:

- Back up your existing `ubroker.properties` file before you change it.
- It is recommended that you define a new entry in the `ubroker.properties` file rather than updating the existing CRM 6.7.3 entry. You can always remove the existing CRM 6.7.3 AppServer later after your CRM 6.8 system is confirmed to be working.
- When defining the PROPATH for your AppServer, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created in an earlier upgrade step in “Copying QAD Backend Programs on the Application Server” on page 130.

Performing Additional Configurations for Integration with QAD EA

Follow the instructions in “Performing Additional Configurations for Integration with QAD Enterprise Applications” on page 38.

Maintaining and Validating QAD CRM AppServer Information

Follow the instructions in “Maintaining and Validating QAD CRM AppServer Information” on page 39. These steps generate the AppServer configuration file needed by the QAD CRM WebClient (*.cab) files that are generated in the next step.

Generating and Copying QAD CRM WebClient Files

Follow the instructions in “Generating and Copying QAD CRM WebClient Files” on page 41.

Integrating with QAD SE

If you need to integrate CRM 6.8 with your QAD SE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD SE” on page 45
- “Configuring the Environment for Sales Order Integration” on page 67

Note

- When you define the PROPATH in the configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7.3 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the Progress `ubroker.properties` file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.8 programs that you have installed.

Integrating with QAD EE

To integrate CRM 6.8 with your QAD EE system, implement the steps in the following sections:

- “Integrating QAD CRM with QAD EE” on page 48.
- “Configuring the Environment for Sales Order Integration” on page 67.

Go to QXtend Inbound and update the Connection Pool `ee-crm.SIAPI` to use the CRM 6.8 AppServer. It is unnecessary to reimplement all the steps in “Configuring QXtend for Integration” on page 50.

Note

- When you define the PROPATH in configuration files, make sure that you refer to the correct `QADERPInstallDir/qadcrm/` folder that you created earlier in “Copying QAD Backend Programs on the Application Server” on page 34.
- Ensure that you update the PROPATH of all configuration files that are used to reference the old CRM 6.7.3 programs. The PROPATH includes the PROPATH setting used by the .NET Connection Manager pool startup script, the PROPATH setting defined in the `Progress ubroker.properties` file for the QADUI AppServer, and so on. Update of the PROPATH ensures that all elements point to the new CRM 6.8 programs that you have installed.

Updating the AppServer Name Defined in QAD CRM

The name of the AppServer is referenced in the QAD CRM Application itself to enable CRM and ERP integration. Update the AppServer name to reflect the name of the new AppServer you have set up for the CRM 6.8 system.

In QAD CRM, go to Main Menu|Settings|System|AppServer Service Maintenance and define the CRM 6.8 AppServer. Follow the instructions in the “AppServer Service Maintenance” section in *QAD Customer Relationship Management Administration Guide*.

When the AppServer Service record has been created, go to Main Menu|QAD ERP Integration|ERP Management Control to update the QAD CRM Service Name field with the name of the new CRM 6.8 AppServer.

If you have set up QAD AdminService in your CRM system, it is necessary to update all references to CRM 6.8 AppServer by following the instructions in the “Configuring AppServer Settings” section in *QAD Customer Relationship Management Administration Guide*.

Installing QAD CRM on End-User PC

Follow the instructions in “Installing QAD CRM on End-User PC” on page 69.

Post-Upgrade Tasks

Re-create remote nodes for your users if applicable.

Signing Tools for OE11.3.1

Overview 180

Preparing Signing Tools 180

Setting Environment Variables 181

Overview

Starting with Progress version 11.3.1 and later, the WebClient Application Assembler requires you to specify the location of the signing tools so that it can use the tools when signing the cabinet files digitally.

The WebClient Application Assembler requires you to enter the path to the signing tools when generating the application. If the signing tools are available to the WebClient Application Assembler, the WebClient Application Assembler can detect the location of the signing tools and prepopulate the path for you.

Preparing Signing Tools

To make the signing tools available for WebClient Application Assembler:

- 1 Install Microsoft Windows SDK on CRM deployment server.

You can get the latest installer from the Microsoft site. If you do not perform a full installation, make sure that you install `signtool.exe` and `pvk2pfx.exe`.


- 2 Set one of the following environment variables to identify the location of the tools:

- `%WindowsSdkDir%`: Identifies the Windows SDK installation directory.

The WebClient Application Assembler looks for the signing tools in `%WindowsSdkDir%\bin`.

- `%OE_SIGNING_DIR%`: Used when you have more than one Windows SDK installed or when setting the `%WindowsSdkDir%` environment variable conflicts with other applications.

For information about setting environment variables, see “Setting Environment Variables” on page 181.

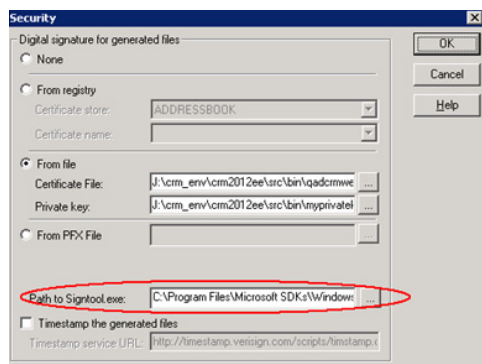

- 3 Verify that the right environment variable is set.

For Windows Server 2008 and 2003:

- a Click Start|Run
- b Type `cmd` and press Enter.
- c In the command window, enter `set` and press Enter.

Setting Environment Variables

You can set the environment variables:

- Temporarily for a session
- In a batch file or a shell script
- As user-specific variables
- As system variables

The environment variables set in a batch file or a shell script will overrule the environment variables set as user variables. The user-specific variables overrule the environment variables that are set as system variables.

Applications may also use their own files (for example, `.ini` files, `.cfg` files, and so on) and/or store environment settings specific to the application in the registry. These application-specific configuration files and registry settings overrule any other environment variable you have set.

Setting Temporary Variables

Use the following command to set an environment variable on a Windows system:

```
set variablename = variablevalue
```

To remove the environment variable, use:

```
set variablename =
```

Note Ensure that you set the variable again when you close the command window or when you restart the system.

Setting Variables in a Batch File or a Shell Script

To set the environment variable, use:

```
set variablename = variablevalue
```

To remove the environment variable, use:


```
set variablename =
```

Important Ensure that you set the variable again when you close the command window or when you restart the system.

Setting User Variables:

- 1 On the Windows desktop,
 - Right-click Computer and then select Properties (for Windows Server 2008).
 - Right-click My Computer and then select Properties (for Windows Server 2003).
- 2 Click Advanced System Settings to open the System Settings dialog box.
- 3 On the Advanced tab, add, change, or delete a user-specific environment variable.


Fig. A.1
Setting User-Specific Variables

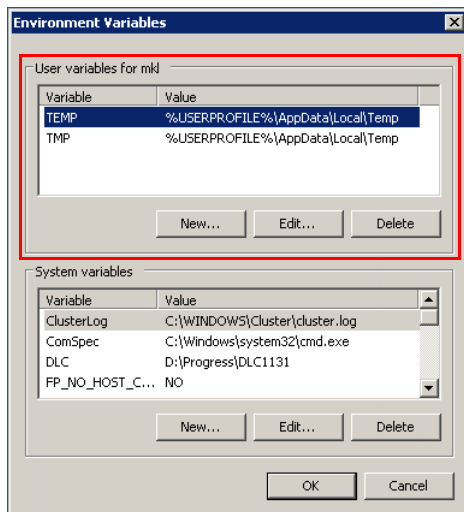

Setting System Variables

- 1 On the Windows desktop,
 - Right-click Computer and then select Properties (for Windows Server 2008).
 - Right-click My Computer and then select Properties (for Windows Server 2003).
- 2 Click Advanced System Settings to open the System Settings dialog box.
- 3 On the Advanced tab, add, change, or delete a system environment variable.

Fig. A.2
Setting System Variables

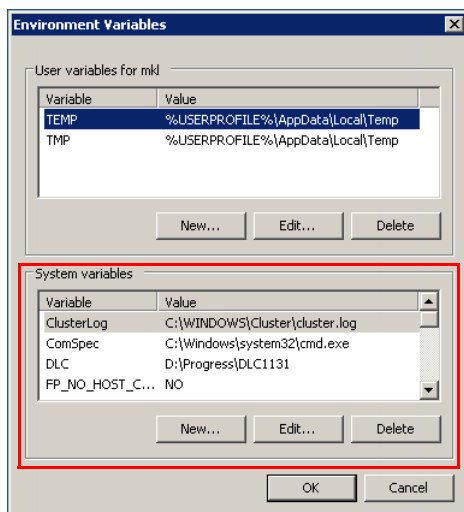

Product Information Resources

QAD offers a number of online resources to help you get more information about using QAD products.

[QAD Forums \(community.qad.com\)](https://community.qad.com)

Ask questions and share information with other members of the user community, including QAD experts.

[QAD Knowledgebase \(knowledgebase.qad.com\)*](https://knowledgebase.qad.com)

Search for answers, tips, or solutions related to any QAD product or topic.

[QAD Document Library \(documentlibrary.qad.com\)](https://documentlibrary.qad.com)

Get browser-based access to user guides, release notes, training guides, and so on; use powerful search features to find the document you want, then read online, or download and print PDF.

[QAD Learning Center \(learning.qad.com\)*](https://learning.qad.com)

Visit QAD's one-stop destination for all courses and training materials.

*Log-in required

Index

B

bisgen database 9
bisgmenu database 9

C

clients 10
configuration 5

D

database server setup 21
dataexch database 9
deployment server setup 18

E

environment variable
 batch file 181
 system 182
 temporary 181
 user-specific 181

F

function settings 5, 92

I

installation
 clients 10
 database server 9
 deployment 9
 deployment server 10
 overview 2, 4
 planning 8
 QAD Enterprise Applications integration 10
integration
 Microsoft Exchange Server 5, 11

M

mandatory tasks 5, 92, 93–97

Microsoft Exchange Server 5, 11
Microsoft Windows servers 24
multi-user mode 27

N

network requirements 17

O

overview
 installation 2, 4
 system 2

P

plan
 security 8

Q

QAD Remote Sales
 installation 5, 75
qadsfama user 8

R

requirements
 network 17
 system 11

S

security plan 8
singing tools 179
 environment variables 181
 preparing 180
system overview 2
system requirements 11

Y

YAB 76

