



QAD Adaptive Applications

# **User Guide**

# **QAD QXtend**

QAD QXtend Outbound  
QAD QXtend Inbound  
QAD QXtend Licensing  
Reference

This document contains proprietary information that is protected by copyright and other intellectual property laws. No part of this document may be reproduced, translated, or modified without the prior written consent of QAD Inc. The information contained in this document is subject to change without notice.

QAD Inc. provides this material as is and makes no warranty of any kind, expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. QAD Inc. shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance, or use of this material whether based on warranty, contract, or other legal theory.

This document contains trademarks owned by QAD Inc. and other companies.

Copyright ©2021 by QAD Inc.

Qxtend\_UG\_v0110.pdf

**QAD Inc.**

100 Innovation Place  
Santa Barbara, California 93108  
Phone (805) 566-6000  
<https://www.qad.com>

# Contents

## QAD QXtend User Guide

|                      |      |
|----------------------|------|
| Change Summary ..... | xvii |
|----------------------|------|

## Section 1 QAD QXtend Outbound..... 1

### Chapter 1 QAD QXtend Outbound Overview .....3

|                                              |    |
|----------------------------------------------|----|
| Application Overview .....                   | 4  |
| Business Objects and Outbound QDocs .....    | 4  |
| Business Events .....                        | 12 |
| Direct Data Publish .....                    | 13 |
| The QXO Outbound Process .....               | 14 |
| Implementation Overview .....                | 15 |
| Implementing QXO .....                       | 16 |
| Customizing QXO .....                        | 16 |
| Working with the QXtend User Interface ..... | 17 |
| General UI Functions .....                   | 17 |
| QXO Console .....                            | 20 |

### Chapter 2 Implementing QAD QXtend Outbound .....23

|                                                        |    |
|--------------------------------------------------------|----|
| General Implementation Steps .....                     | 24 |
| QXO Source Applications .....                          | 24 |
| Adding Source Application Databases .....              | 28 |
| Adding Source Application Domains .....                | 29 |
| Adding Source Application Business Object Groups ..... | 30 |
| Editing Source Application Event Types .....           | 31 |
| Adding Source Application Event Types .....            | 33 |
| Deleting Source Applications .....                     | 36 |
| QXO Services .....                                     | 36 |
| QXO Event Service Process .....                        | 36 |
| Defining a Message Publisher .....                     | 40 |
| Defining a Message Sender .....                        | 41 |
| QXO Subscribers .....                                  | 41 |
| Subscriber E-mail Notification .....                   | 41 |

|                                                                                     |           |
|-------------------------------------------------------------------------------------|-----------|
| Free Use of QXO .....                                                               | 42        |
| Defining a Subscriber .....                                                         | 42        |
| Configuring Subscriber Profiles .....                                               | 50        |
| Subscriber Visibility .....                                                         | 52        |
| Adding Session Context or an Additional Profile Table to a Subscriber Message<br>53 |           |
| QXO Delivery Schedules .....                                                        | 54        |
| QXO E-mail Alerts .....                                                             | 56        |
| Configuring E-mail Settings .....                                                   | 56        |
| Managing Alert Recipients .....                                                     | 58        |
| Managing Alert Groups .....                                                         | 58        |
| Email Service .....                                                                 | 62        |
| Importing Business Objects and Profiles .....                                       | 62        |
| Data Archive .....                                                                  | 63        |
| Archive Guidelines .....                                                            | 64        |
| Archiving Using a Cron Job .....                                                    | 65        |
| Validating QXO Configuration .....                                                  | 67        |
| Implementing Calculated Fields .....                                                | 70        |
| Calculated Fields Program Example .....                                             | 71        |
| Setting Up Outbound Control in QAD Enterprise Applications .....                    | 72        |
| <b>Chapter 3 QXtend Outbound Business Objects .....</b>                             | <b>73</b> |
| Introduction .....                                                                  | 74        |
| QAD and Custom Business Objects and Profiles .....                                  | 74        |
| Viewing Business Objects .....                                                      | 75        |
| Performance Considerations .....                                                    | 76        |
| Business Object Validations and Data Watches .....                                  | 77        |
| Viewing Business Object Subscribers .....                                           | 78        |
| Modifying Business Objects .....                                                    | 79        |
| Creating New Business Objects .....                                                 | 81        |
| Creating a Standard Business Object .....                                           | 82        |
| Creating a DDP Business Object .....                                                | 83        |
| Creating a Business Object for Custom Tables .....                                  | 84        |
| Deleting Business Objects .....                                                     | 85        |
| Modifying Business Object Data Objects .....                                        | 85        |
| Using Inner Joins in Data Objects .....                                             | 89        |
| Copying or Deleting Data Objects .....                                              | 90        |
| Managing Business Object XML Files .....                                            | 91        |
| <b>Chapter 4 QXtend Outbound Profiles .....</b>                                     | <b>93</b> |
| Introduction .....                                                                  | 94        |
| Viewing QXO Profiles .....                                                          | 94        |

|                                                         |            |
|---------------------------------------------------------|------------|
| Modifying Profiles .....                                | 95         |
| Deleting Profiles .....                                 | 98         |
| Modifying Profile Data Objects .....                    | 99         |
| Managing Profile XML Files .....                        | 102        |
| <b>Chapter 5 QXtend Outbound Dashboard .....</b>        | <b>103</b> |
| Introduction .....                                      | 104        |
| Viewing Services Summaries .....                        | 105        |
| Viewing Specific Services .....                         | 105        |
| Monitoring Source Applications .....                    | 106        |
| Dashboard Service .....                                 | 108        |
| <b>Chapter 6 QXtend Outbound Viewers .....</b>          | <b>111</b> |
| Introduction .....                                      | 112        |
| Application Event Viewer .....                          | 112        |
| Filtering View Output .....                             | 113        |
| Raw Message Viewer .....                                | 113        |
| Subscriber Messages Viewer .....                        | 115        |
| <b>Chapter 7 QXtend Outbound Log Monitor .....</b>      | <b>117</b> |
| Viewing QXO Logs and Exceptions .....                   | 118        |
| Additional Logs .....                                   | 118        |
| <b>Chapter 8 QXtend Outbound Tools .....</b>            | <b>121</b> |
| Introduction .....                                      | 122        |
| Mass Rowid Synchronization Tool .....                   | 122        |
| Session Control Tool .....                              | 123        |
| 32-bit Startup Option .....                             | 124        |
| <b>Chapter 9 Using the QXtend Message Monitor .....</b> | <b>125</b> |
| QXtend Message Monitor .....                            | 126        |
| Profile Message Summary .....                           | 127        |
| Subscriber Messages Tab .....                           | 127        |
| Subscriber Responses Tab .....                          | 129        |
| Subscriber Message Details .....                        | 130        |
| <b>Chapter 10 QXtend Query Service .....</b>            | <b>131</b> |
| Introduction .....                                      | 132        |
| Query Service API .....                                 | 132        |
| Query Service Setup .....                               | 133        |
| Direct Connection Setup .....                           | 134        |

|                                                                    |            |
|--------------------------------------------------------------------|------------|
| Progress AppServer Setup .....                                     | 134        |
| Web Service Setup .....                                            | 136        |
| Deploying the Query API .....                                      | 136        |
| <b>Chapter 11 QXtend Interaction with Financials .....</b>         | <b>139</b> |
| Introduction .....                                                 | 140        |
| Financials to QXtend Outbound Setup .....                          | 140        |
| Financials Event Setup .....                                       | 141        |
| Configuring the Connection Pool and Schema (QXI) .....             | 143        |
| Direct Data Publish Setup in QXO .....                             | 144        |
| <b>Chapter 12 Setting Up the Service Interface AppServer .....</b> | <b>147</b> |
| Introduction .....                                                 | 148        |
| Configuring the AppServer .....                                    | 148        |
| ubroker.properties .....                                           | 148        |
| Configuration Dialog Boxes .....                                   | 148        |
| <b>Section 2 QAD QXtend Inbound .....</b>                          | <b>151</b> |
| <b>Chapter 13 QXtend Inbound Overview .....</b>                    | <b>153</b> |
| QXtend Inbound Overview .....                                      | 154        |
| Direct API Programs .....                                          | 155        |
| QDocs .....                                                        | 156        |
| Custom QDocs .....                                                 | 157        |
| Transforming Non-Standard XML Documents .....                      | 158        |
| QDoc Authentication .....                                          | 158        |
| WSDL Document for Web Service Clients .....                        | 159        |
| QXtend Code Page Support .....                                     | 160        |
| Supported QXtend Integrations .....                                | 160        |
| <b>Chapter 14 Configuring and Using QXtend Inbound .....</b>       | <b>161</b> |
| Introduction .....                                                 | 162        |
| QDoc Response Data .....                                           | 162        |
| Default Warnings and Errors .....                                  | 162        |
| Include Java Trace Information .....                               | 163        |
| Include QAD Enterprise Applications Field Values .....             | 164        |
| Get Locked User ID .....                                           | 164        |
| Include Unique ID in Response QDocs .....                          | 165        |
| Performance Considerations .....                                   | 165        |
| Starting QXtend Manager .....                                      | 165        |
| Logging .....                                                      | 166        |

|                                            |     |
|--------------------------------------------|-----|
| Log Report Levels                          | 167 |
| qdocInfo.log                               | 167 |
| queue.log                                  | 168 |
| connectionPools.log                        | 168 |
| qdocInstall.log                            | 168 |
| outbound-ui.log                            | 168 |
| qdocSummary.log                            | 168 |
| transformationEngine.log                   | 168 |
| transformationengineRequests.log           | 168 |
| transformationengineRequests.log           | 169 |
| transformationEngine.debug                 | 169 |
| Testing QXI Processes                      | 169 |
| Process Request                            | 169 |
| Create Empty QDoc                          | 169 |
| Verify QDoc Supported                      | 169 |
| Verify Receiver                            | 169 |
| UI Adapter Connection Test                 | 170 |
| Suspending and Resuming Processing         | 170 |
| Resume QXtend                              | 170 |
| Controlling Data Resending                 | 171 |
| Securing Password in QDocs                 | 171 |
| Handling European Decimal Format           | 171 |
| Hiding Data in QDoc Response and Log Files | 172 |

## **Chapter 15 QXtend Inbound Queue Manager . . . . .173**

|                                           |     |
|-------------------------------------------|-----|
| Introduction                              | 174 |
| Multi-Threaded and Single-Threaded Queues | 175 |
| Initializing the Queue Manager            | 175 |
| Queue Manager Directory Structure         | 175 |
| Queue Manager Logs                        | 176 |
| QXI Transformation Engine                 | 176 |
| Create an XSLT Mapping Specification      | 177 |
| Creating a Request Parser                 | 177 |
| Modifying QXtend Configuration Files      | 178 |
| Starting the Queue Manager                | 179 |
| Using the Queue Manager                   | 179 |
| View Individual Queues                    | 179 |
| Edit Failed Submissions                   | 182 |
| Queue Manager Functions                   | 183 |
| Stop or Restart Queues                    | 184 |
| Add a Queue                               | 184 |
| Modify a Queue                            | 188 |
| Queue Manager Scripts                     | 188 |

**Chapter 16 QXtend Inbound Configuration Manager . . . . .189**

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| Introduction . . . . .                                                   | 190 |
| Inbound Receivers . . . . .                                              | 190 |
| Adding Inbound Receivers . . . . .                                       | 191 |
| Adding a Schema to an Existing Receiver . . . . .                        | 193 |
| Removing a Schema from an Existing Receiver . . . . .                    | 194 |
| Generating WSDLs for a Receiver/API . . . . .                            | 195 |
| Accessing WSDLs . . . . .                                                | 197 |
| Deleting a Receiver . . . . .                                            | 199 |
| QDoc Schemas . . . . .                                                   | 199 |
| Multiple Events Files . . . . .                                          | 200 |
| Viewing QDocs by QAD Enterprise Applications Version . . . . .           | 200 |
| Viewing Detailed Information About QAD-Supplied Standard QDocs . . . . . | 201 |
| Adding a Schema to the Master Lists . . . . .                            | 202 |
| Modifying a Schema Configuration . . . . .                               | 204 |
| Delete a Custom Schema Configuration . . . . .                           | 204 |
| QXI E-mail Alerts . . . . .                                              | 205 |
| Configuring E-mail Settings . . . . .                                    | 206 |
| Managing Alert Recipients . . . . .                                      | 207 |
| Alert Groups . . . . .                                                   | 208 |

**Chapter 17 QXI Connection Pool Manager . . . . .213**

|                                                |     |
|------------------------------------------------|-----|
| Introduction . . . . .                         | 214 |
| Starting the Connection Pool Manager . . . . . | 215 |
| Viewing the Connection Pool Log . . . . .      | 216 |
| Configuring Connection Pools . . . . .         | 216 |
| Adding a Connection Pool . . . . .             | 216 |
| Delete a Connection Pool . . . . .             | 222 |
| Connection Pool Administration . . . . .       | 222 |
| Connection Pool States . . . . .               | 222 |
| Viewing Connection Pools . . . . .             | 223 |
| Managing a Connection Pool . . . . .           | 223 |
| Manage User Sessions . . . . .                 | 224 |
| Connection Pool Manager Scripts . . . . .      | 225 |

**Chapter 18 QGen . . . . .227**

|                                                                  |     |
|------------------------------------------------------------------|-----|
| Introduction . . . . .                                           | 228 |
| Program Structure and Terminology . . . . .                      | 229 |
| QGen Files . . . . .                                             | 229 |
| Generating Native APIs . . . . .                                 | 230 |
| Starting QGen . . . . .                                          | 232 |
| Mapping a Program for Regular UIAPI Interface Programs . . . . . | 232 |



|                                                                  |            |
|------------------------------------------------------------------|------------|
| Map First Entry Events .....                                     | 234        |
| Map Iterations .....                                             | 235        |
| Map Comments .....                                               | 238        |
| Mapping a Program for Regular Non-UIAPI Interface Programs ..... | 239        |
| Running QGen Options .....                                       | 240        |
| Save .....                                                       | 240        |
| Load .....                                                       | 241        |
| Change Mode to Update .....                                      | 241        |
| Change Mode to Run Through .....                                 | 242        |
| New Run Through .....                                            | 242        |
| Generate Docs .....                                              | 242        |
| Troubleshooting QGen .....                                       | 245        |
| <b>Chapter 19 QXtend Inbound Pre- and Postprocessors .....</b>   | <b>247</b> |
| Introduction .....                                               | 248        |
| Enabling Pre- and Postprocessing in QXtend .....                 | 248        |
| Updating Events Files .....                                      | 249        |
| Creating Custom Pre- and Postprocessing Programs .....           | 249        |
| Program Structure .....                                          | 249        |
| Program Naming and Location .....                                | 250        |
| QDoc Iterations .....                                            | 250        |
| Warnings and Errors .....                                        | 250        |
| Modify the QDoc Iteration Node .....                             | 251        |
| <b>Chapter 20 Configuring the Progress AppServer .....</b>       | <b>253</b> |
| Introduction .....                                               | 254        |
| Native APIs .....                                                | 254        |
| Transaction Comments in Native APIs .....                        | 255        |
| Windows Setup .....                                              | 255        |
| Non-Windows OS Setup .....                                       | 255        |
| Progress AdminServer Details .....                               | 256        |
| Progress NameServer Setup .....                                  | 256        |
| Parameter File Setup .....                                       | 256        |
| Progress AppServer Setup .....                                   | 257        |
| Modifying the PROPATH .....                                      | 257        |
| Verifying the Implementation .....                               | 258        |
| Commands to Start Servers .....                                  | 258        |
| Commands to Query Servers .....                                  | 258        |
| Commands to Stop Servers .....                                   | 258        |
| <b>Chapter 21 QXtend Inbound with QAD Q/LinQ .....</b>           | <b>259</b> |
| Overview .....                                                   | 260        |

|                                              |     |
|----------------------------------------------|-----|
| Install and Configure Q/LinQ .....           | 260 |
| Define QXI URL .....                         | 261 |
| Define External Application Defaults .....   | 261 |
| Set Up Import Specifications for QDocs ..... | 262 |
| Set Up for Acknowledgements .....            | 265 |

## **Section 3 QAD QXtend Licensing ..... 267**

### **Chapter 22 Licensing .....269**

|                                            |     |
|--------------------------------------------|-----|
| Introduction .....                         | 270 |
| Licensing Types .....                      | 270 |
| License Manager .....                      | 271 |
| License Configuration .....                | 272 |
| Connection Pool Settings .....             | 272 |
| List Domains .....                         | 273 |
| Applications without Domains .....         | 273 |
| Outbound Licensing Settings .....          | 273 |
| Record License Codes .....                 | 274 |
| Agent, Receiver, and Sender Statuses ..... | 275 |
| Licensed Agents .....                      | 275 |
| Licensed Receivers .....                   | 275 |
| Licensed Senders .....                     | 276 |
| Licensing Reports .....                    | 277 |
| QXtend Inbound Usage Report .....          | 277 |

## **Section 4 Configuration Data Transfer ..... 279**

### **Chapter 23 Configuration Data Transfer.....281**

|                                                   |     |
|---------------------------------------------------|-----|
| Overview .....                                    | 282 |
| Exporting Configuration Data .....                | 282 |
| Exporting Data from QXI .....                     | 282 |
| Exporting Data from QXO .....                     | 283 |
| Importing Configuration Data .....                | 283 |
| Importing Data to QXI .....                       | 283 |
| Importing Data to QXO .....                       | 284 |
| Customizing Configuration Data Transfer .....     | 285 |
| Creating a Descriptor File .....                  | 285 |
| Generating a Descriptor File .....                | 286 |
| Defining System Response .....                    | 287 |
| Defining Configuration Component Attributes ..... | 288 |

|                                                               |                |
|---------------------------------------------------------------|----------------|
| Data Mapping for Importing .....                              | 290            |
| Generating a Mapping File .....                               | 291            |
| Defining the Mapping Rules .....                              | 291            |
| Viewing Reports .....                                         | 291            |
| Usage Scenario .....                                          | 292            |
| Task Description .....                                        | 292            |
| Procedures .....                                              | 293            |
| <br><b>Section 5 Reference .....</b>                          | <br><b>297</b> |
| <br><b>Chapter 24 QDoc Structure Reference .....</b>          | <br><b>299</b> |
| Introduction .....                                            | 300            |
| QDoc Data Files .....                                         | 300            |
| QDoc Schemas .....                                            | 301            |
| QDoc Schema 1.1 .....                                         | 301            |
| Mapping Transactions Comments .....                           | 303            |
| QDoc Schemas 1.0 .....                                        | 304            |
| Events Files .....                                            | 305            |
| Events File Example (1.1) .....                               | 305            |
| Events File Example (1.0) .....                               | 306            |
| <br><b>Chapter 25 QDoc Specifications and Standards .....</b> | <br><b>309</b> |
| QDoc Naming and Identification .....                          | 310            |
| Common QDoc Naming Convention .....                           | 310            |
| Common Message Envelope .....                                 | 310            |
| QDoc Namespaces .....                                         | 311            |
| Schema File Names and Versioning .....                        | 311            |
| QDoc XML Elements .....                                       | 312            |
| Business Content Expressed as Elements .....                  | 312            |
| Denormalized Data Associations .....                          | 313            |
| Common Response Data .....                                    | 313            |
| Errors Prior to Processing .....                              | 315            |
| Primitive Data Type Representations .....                     | 316            |
| Default, Empty, and Null Values .....                         | 316            |
| Array Representation .....                                    | 317            |
| Element Names .....                                           | 319            |
| QDoc XML Attributes .....                                     | 319            |
| xml:lang .....                                                | 320            |
| version .....                                                 | 320            |
| mnemonicsRaw .....                                            | 320            |
| scopeTransaction .....                                        | 321            |

|                                                              |            |
|--------------------------------------------------------------|------------|
| logTransaction .....                                         | 321        |
| transactionID .....                                          | 321        |
| suppressResponseDetail .....                                 | 322        |
| Common Attribute Group .....                                 | 322        |
| QAD Enterprise Applications-Specific QDoc Syntax .....       | 323        |
| QDoc Name .....                                              | 323        |
| Simple Elements .....                                        | 323        |
| Complex Elements .....                                       | 323        |
| Arrays .....                                                 | 325        |
| Element Order .....                                          | 325        |
| Required vs. Optional Elements .....                         | 325        |
| Normalized vs. Denormalized Representation .....             | 326        |
| CRUD QDocs .....                                             | 326        |
| Attributes .....                                             | 327        |
| QDoc Extensions and Customizations .....                     | 327        |
| QDoc Examples .....                                          | 327        |
| QAD Enterprise Applications Inbound QDoc Request (1.1) ..... | 328        |
| QAD Enterprise Applications QDoc Response (1.1) .....        | 329        |
| QAD Enterprise Applications Inbound QDoc Request (1.0) ..... | 330        |
| QAD Enterprise Applications QDoc Response (1.0) .....        | 333        |
| QDoc Message Envelope .....                                  | 335        |
| Header Block Content .....                                   | 335        |
| SOAP Compliance Limitations .....                            | 341        |
| Future Extensions and Forward Compatibility .....            | 342        |
| QDoc Envelope Examples .....                                 | 342        |
| SOAP Faults .....                                            | 345        |
| QDoc Requests Without SOAP Headers .....                     | 349        |
| <b>Chapter 26 Telnet Reference .....</b>                     | <b>351</b> |
| Introduction .....                                           | 352        |
| Creating Telnet Log-In Scripts .....                         | 352        |
| Editing QAD Enterprise Applications Telnet Scripts .....     | 353        |
| Sample Connection Manager Telnet Script .....                | 353        |
| PROMSGS .....                                                | 354        |
| PROPATH .....                                                | 354        |
| Database Connection Parameters .....                         | 354        |
| Additional Parameters .....                                  | 356        |
| UNIX Telnet Security .....                                   | 357        |
| Restricted Shells .....                                      | 357        |
| Examples of Security Measures .....                          | 357        |

**Chapter 27 SAX Writer Reference .....361**

|                               |     |
|-------------------------------|-----|
| Introduction .....            | 362 |
| SAX Writer Class .....        | 362 |
| SAX Writer API Methods .....  | 363 |
| setOutputToLongChar .....     | 363 |
| setOutputToFile .....         | 363 |
| setOutputToMemptr .....       | 363 |
| getXMLAsLongChar .....        | 363 |
| getXMLAsMemptr .....          | 363 |
| setQDocXMLSyntax10 .....      | 363 |
| setQDocXMLSyntax11 .....      | 364 |
| buildQdocFromProDataSet ..... | 364 |
| startQdocSOAPEnvelope .....   | 365 |
| endQdocSOAPEnvelope .....     | 365 |
| createQdocSOAPHeader .....    | 365 |
| startQdocSOAPBody .....       | 366 |
| endQdocSOAPBody .....         | 366 |
| startQdocRequestBody .....    | 366 |
| endQdocRequestBody .....      | 367 |
| startDocument .....           | 367 |
| startIteration .....          | 367 |
| addNode .....                 | 367 |
| addNamespace .....            | 367 |
| endIteration .....            | 368 |
| addNodesFromBuffer .....      | 368 |
| addAllNodesFromBuffer .....   | 368 |
| addNodesFromProDataSet .....  | 368 |
| writeDocument .....           | 369 |
| insertLogicalAttribute .....  | 369 |
| insertDocumentFragment .....  | 369 |

**Chapter 28 DOM Builder Reference .....371**

|                                 |     |
|---------------------------------|-----|
| Introduction .....              | 372 |
| DOM Builder Procedures .....    | 373 |
| DOM Builder and Q/LinQ .....    | 373 |
| QDoc-Specific API Methods ..... | 375 |
| createException .....           | 375 |
| createNewXMLDocument .....      | 376 |
| createReturnStatus .....        | 376 |
| createSOAPMessage .....         | 376 |
| General XML API Methods .....   | 377 |
| addAttributes .....             | 377 |

|                            |     |
|----------------------------|-----|
| addNode .....              | 378 |
| addNodeGroup .....         | 378 |
| addRecordNode .....        | 379 |
| createNewXMLDocument ..... | 379 |
| deleteDocument .....       | 380 |
| getXMLAsDOM .....          | 380 |
| getXMLAsFile .....         | 380 |
| getXMLAsString .....       | 380 |
| getXMLAsTempTable .....    | 381 |
| Utility Methods .....      | 381 |

## **Chapter 29 QAD QXtend Exception Codes .....383**

|                                       |     |
|---------------------------------------|-----|
| Overview .....                        | 384 |
| Transformation Exceptions .....       | 385 |
| Event Exceptions .....                | 387 |
| Connection Exceptions .....           | 390 |
| Queue Exceptions .....                | 391 |
| Queue Type Node .....                 | 394 |
| SOAP Exceptions .....                 | 394 |
| Transaction Exceptions .....          | 395 |
| Adapter Exceptions .....              | 396 |
| QDoc Exceptions .....                 | 396 |
| Configuration Exceptions .....        | 404 |
| Process Exceptions .....              | 409 |
| Failure Exceptions .....              | 410 |
| Internationalization Exceptions ..... | 411 |
| Reflection Exceptions .....           | 411 |
| License Exceptions .....              | 411 |

## **Chapter 30 QXO Entity Relationships and Tables Reference. ....413**

|                                   |     |
|-----------------------------------|-----|
| Entity Diagrams .....             | 414 |
| E-mail Alert .....                | 415 |
| Delivery Scheduler .....          | 416 |
| Message Traceability .....        | 417 |
| Subscriber .....                  | 418 |
| Business Object and Profile ..... | 419 |
| Service Session .....             | 420 |
| Source Application .....          | 421 |
| QXtend Table Descriptions .....   | 422 |

## **Chapter 31 SSH Reference. ....429**

|                    |     |
|--------------------|-----|
| Introduction ..... | 430 |
|--------------------|-----|

|                                                                  |                |
|------------------------------------------------------------------|----------------|
| Setting SSH Public Key Authentication .....                      | 430            |
| <b>Chapter 32 SSL-Enabled AppServer Reference.....</b>           | <b>433</b>     |
| Introduction .....                                               | 434            |
| Enabling SSL for AppServers .....                                | 434            |
| Setting OpenSSL on AppServer .....                               | 434            |
| Creating Private Key and Certificate Request .....               | 435            |
| Enabling SSL for AppServers .....                                | 436            |
| Generate the Public Key .....                                    | 437            |
| Enabling SSL for Java Clients of an AppServer .....              | 437            |
| Configuring Connection Pools for SSL-Enabled AppServer .....     | 438            |
| Configuring Outbound for SSL-Enabled QXOUI AppServer .....       | 439            |
| Other Configurations for SSL-Enabled AppServer .....             | 439            |
| Summary of QXtend Configurations for SSL-Enabled AppServer ..... | 440            |
| Limitations .....                                                | 440            |
| <br><b>Section 6 Appendix.....</b>                               | <br><b>441</b> |
| <br><b>Appendix A Data Synchronization .....</b>                 | <br><b>443</b> |
| Introduction .....                                               | 444            |
| Data Synchronization Work Flow .....                             | 444            |
| Completing Prerequisite Activities .....                         | 444            |
| Determining the Data to Synchronize .....                        | 444            |
| Define the Receivers .....                                       | 445            |
| Setting Up Data Synchronization .....                            | 446            |
| Example Scenario .....                                           | 447            |
| Set Up the Source Application .....                              | 447            |
| Import Your Business Objects .....                               | 448            |
| Activate the Tables to Synchronize .....                         | 449            |
| Set Up Your Subscribers .....                                    | 450            |
| Customizing Your Synchronization .....                           | 451            |
| Using Fixed Values .....                                         | 451            |
| Using Calculated Fields .....                                    | 452            |
| <br><b>Appendix B Parameter Data .....</b>                       | <br><b>453</b> |
| Operation Programs .....                                         | 454            |
| getOperationTag .....                                            | 454            |
| getOperationValue .....                                          | 454            |
| getOperationTags .....                                           | 454            |
| Session Context Parameters .....                                 | 455            |
| QXtend Inbound .....                                             | 455            |
| QXtend Outbound .....                                            | 456            |

|                                                      |            |
|------------------------------------------------------|------------|
| Inline Triggers .....                                | 456        |
| <b>Appendix C Response Parser .....</b>              | <b>459</b> |
| Overview .....                                       | 460        |
| Requirements .....                                   | 460        |
| Populating the Response Dataset .....                | 461        |
| Parsing SOAP Responses .....                         | 461        |
| <b>Appendix D Asynchronous Acknowledgement .....</b> | <b>467</b> |
| Overview .....                                       | 468        |
| Configuring a Subscriber in QXO .....                | 468        |
| Implementing Asynchronous Acknowledgement .....      | 469        |
| Subscriber Message Request .....                     | 469        |
| Subscriber Message Response .....                    | 469        |
| Acknowledgement Request .....                        | 470        |
| Acknowledgement Response .....                       | 472        |
| <b>Product Information Resources .....</b>           | <b>473</b> |
| <b>Index .....</b>                                   | <b>475</b> |



# QAD QXtend User Guide

## Change Summary

The following table summarizes significant differences between this document and the last published version.

| Date/Version          | Description                                                                                                                                       | Reference             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| September 2021/1.10   | Updated image on configuration setting and added field description for Connection Protocol.                                                       | page 220              |
| September 2018/1.9    | Documented more QDoc exceptions                                                                                                                   | page 402              |
| September 2017/1.8.8  | Rebranded for version 1.8.8                                                                                                                       | --                    |
| March 2016/1.8.7      | Added instructions on how to use <code>AdditionalContext.xml</code> to add session context or an additional profile table to a subscriber message | page 53               |
|                       | Added options for specifying record scope for the archive service to check                                                                        | page 67               |
|                       | Removed obsolete information from the instructions on creating a BO for custom tables                                                             | page 85               |
|                       | Added a parameter, <code>hideFields</code> , to the session context                                                                               | page 172,<br>page 455 |
|                       | Added a new attribute for setting the preprocess chunk size                                                                                       | page 248              |
|                       | Corrected the license type list                                                                                                                   | page 270,<br>page 274 |
|                       | Updated information in the License Manager section                                                                                                | page 272              |
| April 2015/1.8.6-Rev1 | Added information regarding basic flows delivered with inbound QDocs                                                                              | page 156              |
| March 2015/1.8.6      | Added rules for changing database configurations                                                                                                  | page 29               |
|                       | Added a new feature—Dashboard Service                                                                                                             | page 108              |
|                       | Updated the description of Business Object Key in QXtend Message Monitor                                                                          | page 127              |
|                       | Added a configuration element <code>includeUniqueIdInQdoc</code> in <code>qxtendconfig.xml</code>                                                 | page 165              |
|                       | Added Number of Records per Page field on the Edit Configuration page for queues                                                                  | page 186              |
|                       | Added date selector in QXI Usage Report                                                                                                           | page 277              |
|                       | Added a note for the connection manager Telnet script                                                                                             | page 354              |
|                       | Added <code>FailureException002</code> to the Failure Exception list                                                                              | page 410              |
| March 2014/1.8.5      | Added examples for AppServer parameters                                                                                                           | page 26               |
|                       | Updated QXtend AppServer configuration in Event Destination Create with protocol information.                                                     | page 141              |
|                       | Updated information about <code>sessionId</code> node in <code>qxtendconfig.xml</code>                                                            | page 337              |
|                       | Added <code>timeoutLimit</code> to Session Context Parameters                                                                                     | page 455              |

| Date/Version          | Description                                                                                                                                     | Reference            |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|                       | Added information about how to configure QXO for SSL-enabled AppServer                                                                          | page 439             |
| September 2013/1.8.4  | Updated the Data Archive part with additional information                                                                                       | page 64              |
|                       | Update the description of Resend field                                                                                                          | page 115             |
|                       | Added the description about the node encodePasswords                                                                                            | page 171             |
|                       | Added a section about handling European decimal format                                                                                          | page 171             |
|                       | Updated the information about Mass Rowid Synchronization Tool                                                                                   | page 122             |
|                       | Added the options related to SSH protocol for UIAPI connection pool settings                                                                    | page 217             |
|                       | Added the options related to SSL connection for SIAPI and FinAPI connection pool settings                                                       | page 221             |
|                       | Updated the information on transferring configuration data and moved the whole chapter from Appendix to Chapter 23                              | page 281             |
|                       | Removed the information about manually adding stty -icanon and stty ixoff to the connection script                                              | page 356             |
|                       | Added the pcLanguage parameter to the buildQdocFromDataSet parameters                                                                           | page 364             |
|                       | Added the pcLanguage parameter to the startQdocRequestBody parameters                                                                           | page 366             |
|                       | Added reference information about SSH                                                                                                           | page 429             |
|                       | Added reference information about SSL                                                                                                           | page 433             |
|                       | Added decimalSeparator into the table of QXI Session Context Parameters                                                                         | page 455             |
| April 2013/1.8.3 Rev1 | Updated QXO Entity Diagrams and Table Reference                                                                                                 | page 414 - 427       |
| March 2013/1.8.3      | Removed QXtend Browser Compatibility                                                                                                            | --                   |
|                       | Added WAN options to the Source Application Details page                                                                                        | page 27              |
|                       | Added Event Filter field for database events and non-DDP events on the Event Types page and the adding a new database/business event type pages | page 32              |
|                       | Allow Superseded option is not available for QAD BPM subscribers                                                                                | page 44              |
|                       | Added Exclude Top Level Node, File Name Pattern, and Add File Unique Reference options on Subscriber Profile Configuration Parameters page      | page 52              |
|                       | Added a step of copying profiles in Modifying Business Objects                                                                                  | page 79              |
|                       | Added information on how to enable getLockedUserName node                                                                                       | page 164             |
|                       | Added a note about Progress version limit to QGen                                                                                               | page 243             |
|                       | Added a note about licensed receiver                                                                                                            | page 275             |
|                       | Updated info on SOAP headers                                                                                                                    | page 349<br>page 455 |
|                       | Added a section about transferring configuration data between QXtend instances                                                                  | page 441             |
| September 2012/1.8.2  | Added Require Acknowledgement option in Subscriber Configuration Parameters                                                                     | page 45              |
|                       | Added information regarding QXO supporting import of BO and profiles that are not defined by QAD                                                | page 62              |
|                       | Added a note about listened-to event type information in BO dump and import                                                                     | page 91              |
|                       | Added the description for message status WAITACK                                                                                                | page 128             |
|                       | Added information of Controlling Data Resending                                                                                                 | page 171             |

| Date/Version         | Description                                                                                                                                                    | Reference          |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
|                      | System APIs are now displayed on the APIs screen; the screen shot has been updated                                                                             | page 198           |
|                      | The sender ID QAD Workflow has been replaced by QAD BPM & Alerts, which is the Sender ID used by both QAD BPM and QAD Alerts; the screen shot has been updated | page 276           |
|                      | Added information regarding caching session ID for FinAPI connections                                                                                          | page 337           |
| March 2012/1.8       | Added the assumptions of this book on QXtend implementation scenarios                                                                                          | page 1<br>page 151 |
|                      | Moved the section on the QXO UI to the Overview chapter                                                                                                        | page 17            |
|                      | Added a section about browser compatibility for QXtend                                                                                                         | page 17            |
|                      | Updated the Database Configuration screen shot and the description of the ID field                                                                             | page 29            |
|                      | Added information on setting socket-level authentication for external Web service subscribers                                                                  | page 42            |
|                      | Added new information on using inner joins in data objects                                                                                                     | page 89            |
|                      | Updated the profile Type field description to account for the QAD Alerts and QAD BPM profile types                                                             | page 96            |
|                      | Mentioned e-mail alerts on source application suspension                                                                                                       | page 107           |
|                      | Changed the renamed log file <code>qxtendserver.log</code> to <code>outbound-ui.log</code> throughout the book                                                 | --                 |
|                      | Added description of the new Reprocess button in the application event viewer                                                                                  | page 112           |
|                      | Added information on the new Suppress Response Detail Envelope setting                                                                                         | page 187           |
|                      | Updated the WSDL generation steps for new WSDL generation options                                                                                              | page 195           |
|                      | Added a new section on accessing WSDLs                                                                                                                         | page 197           |
|                      | Added a new section on QDoc authentication                                                                                                                     | page 158           |
|                      | Added description of the new log file <code>qdocSummary.log</code>                                                                                             | page 168           |
|                      | Added a section about QDoc requests without SOAP headers                                                                                                       | page 349           |
|                      | Updated the note on the email parameter                                                                                                                        | page 455           |
| September 2011/1.7.2 | Added explanation of the message publishing order                                                                                                              | page 15            |
|                      | Added a section on deleting source applications                                                                                                                | page 36            |
|                      | Added explanation of enforced profile naming conventions                                                                                                       | page 95            |
|                      | Updated the section on QDoc XML schemas regarding how to retrieve standard XML schemas                                                                         | page 156           |
|                      | Added a new section on viewing detailed information about QAD-supplied standard QDocs                                                                          | page 201           |
|                      | Updated the section on QGen Files                                                                                                                              | page 229           |
|                      | Updated License Administration screenshots                                                                                                                     | page 269           |
|                      | Added a new section Licensed Senders                                                                                                                           | page 276           |
|                      | Updated several screenshots of the QXI Configuration Manager                                                                                                   | --                 |



# QAD QXtend Outbound

This book assumes most general implementation scenarios for integrating different instances of QAD Enterprise Applications and integrating QAD Enterprise Applications with external applications using QXtend. For less common and product-specific integration processes, such as setting up QXtend to work with QAD Mobile Field Service and Configuring QXtend to process non-SOAP-compliant QDocs to communicate with external applications, such as QAD Business Process Management (BPM), see relevant user documentation for detailed implementation steps.

This section contains information on implementing and using QAD QXtend Outbound (QXO).

### ***QAD QXtend Outbound Overview 3***

Provides a functional and architectural overview of QAD QXtend Outbound (QXO) and QXO implementation.

### ***Implementing QAD QXtend Outbound 23***

Describes the steps required to configure QAD QXO.

### ***QXtend Outbound Business Objects 73***

Describes the implementation of QAD QXO business objects.

### ***QXtend Outbound Profiles 93***

Describes the implementation of QAD QXO profiles.

### ***QXtend Outbound Dashboard 103***

Describes the QAD QXO dashboard services and applications.

### ***QXtend Outbound Viewers 111***

Describes the QAD QXO viewers.

### ***QXtend Outbound Log Monitor 117***

Describes the QAD QXO logs.

### ***QXtend Outbound Tools 121***

Describes the QAD QXO tools.

### ***Using the QXtend Message Monitor 125***

Describes the QXtend Message Monitor.

### ***QXtend Query Service 131***

Describes the Query Service in QXtend Outbound.



# QAD QXtend Outbound Overview

This chapter provides a functional and architectural overview of QAD QXtend Outbound (QXO) and also provides an overview of QXO implementation.

## ***Application Overview    4***

Explains how QAD QXO relates to the QXtend framework, with details on business objects and outbound docs, business events, direct data publish, and the QXO outbound process.

## ***Implementation Overview    15***

Explains how to implement and customize QXO.

## ***Working with the QXtend User Interface    17***

Explains the QXtend user interface by looking at some QXO functions

## Application Overview

QXO is a component of the QAD QXtend interoperability framework. This framework provides a standardized data interface between QAD products, and between QAD products and external systems. The framework consists of:

- QXO, which exports user-configurable business objects as XML QDocs out of QAD products such as QAD Enterprise Applications to external subscribers. QXO is described in this section of this reference guide.
- QAD QXtend Inbound (QXI), which imports SOAP-compliant XML QDocs from external applications into QAD Enterprise Applications and other QAD applications. For details see “QAD QXtend Inbound” on page 151.

This interoperability framework replaces QAD products and solutions including CIM, Q/LinQ, and Data Synchronization. See *QAD Glossary User Guide* for definitions of terms and abbreviations.

QXO exports business objects from QAD Enterprise Applications versions eB and above. This user guide describes the implementation of QXO for QAD Enterprise Applications. Details about using and implementing QXO with other QAD applications can be found in the guides for those applications.

Because QXI and QXO have different data requirements, inbound and outbound QDocs are not always equivalent. Inbound QDocs provide input to QAD Enterprise Applications in the same way a user would. The data is input field-by-field through the user interface, but the input is automated. Therefore, inbound QDocs require a rigid data sequence and are limited to a single entry program, such as Sales Order Maintenance.

Outbound QDocs usually include data from multiple QAD Enterprise Applications tables, and possibly from multiple screens, in order to provide external subscribers with a comprehensive business object.

**Note** Data originating from the Financials module in QAD EE—due to the module’s underlying system architecture—is provided to QXO as a raw business object. As such there is no need to extract data for these business objects from the QAD Financials database.

## Business Objects and Outbound QDocs

All outbound QDocs are defined by an underlying business object. A business object usually consists of data from a related set of tables required from a source QAD application. One such set is the sales order business object, which consists of sales order header and line data; ship-to, sold-to, and bill-to customer information; Intrastat data; tax details; and comments.

Each business object is defined in the QXO administrative interface, which lets you select the tables and fields your target applications—your subscribers—need. However, all subscribers do not require the same elements from any given business object. To tailor business object output for multiple subscribers, you define profiles that filter and qualify business object data for one or more subscribers.

Business objects that are associated with a direct data publish (DDP) source application type are passed directly to QXO. For details see “Direct Data Publish” on page 13.

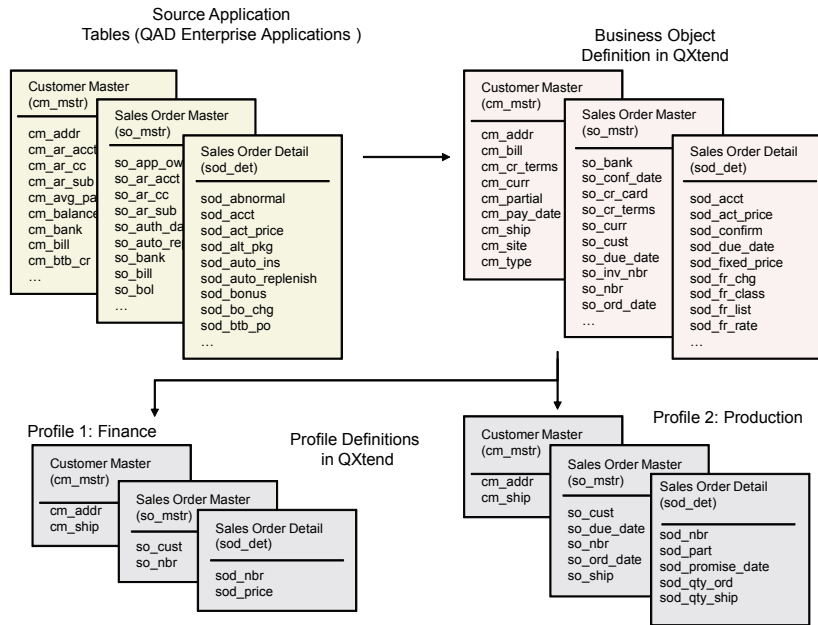




Figure 1.1 shows the basic data flow of data from QAD Enterprise Applications tables to the profiles that provide the template for outbound QDocs for specific subscribers.

**Fig. 1.1**

Data Flow from QAD Enterprise Applications to Profiles



With the current release of QXO, the following 36 business objects are shipped with the product.

**Table 1.1**

Standard QXO Business Objects for QAD Enterprise Applications

|                           |                        |                           |
|---------------------------|------------------------|---------------------------|
| Alternate Unit of Measure | Inventory Status       | Sales Order Price List    |
| Analysis Code             | Inventory Transaction  | Scheduled Sales Order     |
| Analysis Code Link        | Invoice History        | Service Category          |
| Analysis Code Selection   | Item                   | Service Support Call      |
| Carrier                   | Item Site Cost         | Service Support End User  |
| Cost Set                  | Master Comment         | Service Support Engineer  |
| Customer                  | Product Line           | Service Support Work Code |
| Customer Item             | Product Structure      | Shipper                   |
| Customer Schedule         | Product Structure Code | Ship-To Customer          |
| Department                | Purchasing Price List  | Site                      |
| Forecast                  | Routing                | Supplier Item             |
| Generalized Codes         | Sales Order            | Work Center               |

These business objects reference data in the tables listed in Table 1.3. Tables shown in Table 1.2 use database triggers or business events; if there is no business event indicated, a database trigger is used.

**Table 1.2**  
Tables with Programmatic Triggers

| Business Event                                                                | Table Name | Description                                 | QAD<br>EE | QAD<br>SE |
|-------------------------------------------------------------------------------|------------|---------------------------------------------|-----------|-----------|
| AccountMaintenance<br>CarrierAddressMaintenance<br>CurrencyAccountMaintenance | abs_mstr   | ASN/BOL/Shipper Master                      | ✓         | ✓         |
|                                                                               | absd_det   | Shipment Line Item Detail                   | ✓         | ✓         |
|                                                                               | absl_det   | Shipment Detail Line Charges                | ✓         | ✓         |
|                                                                               | absr_det   | Shipment Requirement Detail                 | ✓         | ✓         |
|                                                                               | ac_mstr    | Account Master                              |           | ✓         |
|                                                                               |            |                                             | ✓         |           |
|                                                                               | acdf_mstr  | Account Default Master                      |           | ✓         |
|                                                                               | actid_det  | Activity ID Detail                          |           |           |
|                                                                               | ad_mstr    | Address Master                              | ✓         | ✓         |
|                                                                               | an_mstr    | Analysis Code Master                        | ✓         |           |
|                                                                               | anl_det    | Analysis Link Code Detail                   | ✓         |           |
|                                                                               | ans_det    | Analysis Code Selection Detail              | ✓         |           |
|                                                                               | asc_mstr   | Account/Sub-Account/Cost Center Master      |           |           |
|                                                                               | aterr_mstr | Audit Trail Error Master                    |           |           |
|                                                                               | attmp_mstr | Audit Trail Temporary Master                |           |           |
| CustomerMaintenance<br>ShipToMaintenance                                      | bom_mstr   | Product Structure (Bill of Material) Master | ✓         | ✓         |
|                                                                               | ca_mstr    | Service/Support Call Master                 | ✓         | ✓         |
|                                                                               | cc_mstr    | Cost Center Master                          |           |           |
|                                                                               | ccd_mstr   | Service/Support Call Fault Code Master      | ✓         | ✓         |
|                                                                               | cd_det     | Master Comments                             | ✓         | ✓         |
|                                                                               | cm_mstr    | Customer Master                             | ✓         | ✓         |
|                                                                               | cm_mstr    | Customer Master                             | ✓         | ✓         |
|                                                                               | cmt_det    | Transaction Comments                        | ✓         | ✓         |
|                                                                               | code_mstr  | Generalized Code Master                     | ✓         | ✓         |
|                                                                               | com_mstr   | Commodity Code Master                       |           | ✓         |
| CreditTermsMaintenance                                                        | cp_mstr    | Customer Item Master                        | ✓         | ✓         |
|                                                                               | cs_mstr    | Cost Set Master                             | ✓         |           |
|                                                                               | ct_mstr    | Credit Terms Master                         |           | ✓         |

| Business Event             | Table Name | Description                              | QAD<br>EE | QAD<br>SE |
|----------------------------|------------|------------------------------------------|-----------|-----------|
| CommodityCodeMaster        | com_mstr   | Commodity Code Master                    | ✓         |           |
| CommodityCodeMaintenance   |            |                                          |           | ✓         |
|                            | ctd_det    | Credit Terms Detail                      |           |           |
| CountryMaintenance         | ctry_mstr  | Country Master                           | ✓         | ✓         |
| CurrencyAccountMaintenance | cu_mstr    | Currency Master                          |           | ✓         |
| CurrencyMaintenance        |            |                                          |           | ✓         |
|                            | dom_mstr   | Domain Master                            |           |           |
|                            | dpt_mstr   | Department Master                        | ✓         |           |
|                            | dy_mstr    | General Ledger Daybook Master            |           |           |
|                            | dybs_mstr  | Daybook Set Master                       |           |           |
|                            | egt_mstr   | Service/Support Engineer Tracking Master | ✓         | ✓         |
|                            | emp_mstr   | Employee Master                          |           |           |
|                            | en_mstr    | Entity Master                            |           |           |
|                            | eng_mstr   | Service/Support Engineer Master          | ✓         | ✓         |
|                            | eu_mstr    | Service/Support End User Master          | ✓         |           |
|                            | eud_det    | Service/Support End User Detail          |           |           |
| ExchangeRateMaintenance    | exr_rate   | Exchange Rate Master                     |           | ✓         |
| FormatPositionMaintenance  |            |                                          |           | ✓         |
| GeneralizedCodeMaintenance |            |                                          | ✓         | ✓         |
|                            | fcs_sum    | Forecast Summary                         | ✓         | ✓         |
|                            | fsc_mstr   | Service Category Master                  | ✓         | ✓         |
|                            | fwk_mstr   | Service/Support Work Code Master         | ✓         | ✓         |
|                            | gl_ctrl    | System/Account Control                   |           |           |
| CalendarMaintenance        | glc_cal    | General Ledger Calendar                  |           | ✓         |
|                            | glcd_det   | General Ledger Calendar Detail           |           |           |
|                            | idh_hist   | Invoice History Detail                   | ✓         | ✓         |
|                            | ied_det    | Import/Export Detail                     | ✓         | ✓         |
|                            | ie_mstr    | Import/Export Master                     | ✓         | ✓         |
|                            | ih_hist    | Invoice History Master                   | ✓         | ✓         |
| InventoryStatusMaintenance |            |                                          | ✓         | ✓         |
| InvoicePost                |            |                                          | ✓         | ✓         |
| ItemDataMaintenance        |            |                                          | ✓         | ✓         |

| Business Event               | Table Name | Description                                      | QAD<br>EE | QAD<br>SE |
|------------------------------|------------|--------------------------------------------------|-----------|-----------|
| ItemInventoryMaintenance     |            |                                                  | ✓         | ✓         |
| ItemMaintenance              | in_mstr    | Inventory Master                                 | ✓         | ✓         |
| ItemSiteInventoryMaintenance |            |                                                  | ✓         | ✓         |
|                              | isb_mstr   | Service/Support<br>Installed Base Item<br>Master | ✓         | ✓         |
|                              | isd_det    | Inventory Status Detail                          | ✓         |           |
|                              | is_mstr    | Inventory Status<br>Master                       | ✓         | ✓         |
|                              | itm_det    | Service/Support Call<br>Item Detail              | ✓         | ✓         |
|                              | lacd_det   | Logistics Accounting<br>Charge Detail            | ✓         | ✓         |
|                              | lng_mstr   | Language Master                                  |           |           |
|                              | ls_mstr    | Address List Detail                              | ✓         |           |
|                              | nr_mstr    | Number Range Master                              |           |           |
|                              | pc_mstr    | Price List Manager                               | ✓         |           |
|                              | pid_det    | Price List Detail                                | ✓         | ✓         |
|                              | pi_mstr    | Price List Master                                | ✓         | ✓         |
|                              | pl_mstr    | Product Line Master                              | ✓         | ✓         |
|                              | pod_det    | Purchase Order Detail                            |           | ✓         |
|                              | po_mstr    | Purchase Order Master                            |           | ✓         |
| ProductLineMaintenance       |            |                                                  | ✓         | ✓         |
|                              | ps_mstr    | Product Structure<br>Master                      | ✓         | ✓         |
|                              | pt_mstr    | Item Master                                      | ✓         | ✓         |
|                              | ptp_det    | Item Planning Detail                             | ✓         | ✓         |
|                              | qaddb_ctrl | Database Control for<br>QADDB                    |           |           |
|                              | rnd_mstr   | Rounding Method<br>Master                        |           |           |
|                              | ro_det     | Routing Operation<br>Detail                      | ✓         | ✓         |
|                              | schd_det   | Release Management<br>Schedule Detail            | ✓         | ✓         |
|                              | sch_mstr   | Release Management<br>Schedule Master            | ✓         | ✓         |
|                              | sct_det    | Cost Simulation Total<br>Detail                  | ✓         | ✓         |
|                              | scx_ref    | Scheduled Order<br>Cross-Reference               | ✓         | ✓         |
|                              | si_mstr    | Site Master                                      | ✓         | ✓         |
| SalesOrderMaintenance        | so_mstr    | Sales Order Master                               | ✓         | ✓         |
| SalesOrderPrint              | so_mstr    | Sales Order Master                               |           | ✓         |
| SalesOrderShip               | so_mstr    | Sales Order Master                               |           | ✓         |

| Business Event            | Table Name | Description                                 | QAD<br>EE | QAD<br>SE |
|---------------------------|------------|---------------------------------------------|-----------|-----------|
|                           | sob_det    | Sales Order<br>Configuration Bill<br>Detail | ✓         | ✓         |
|                           | sod_det    | Sales Order Detail                          | ✓         | ✓         |
|                           | sodlc_det  | Sales Order Detail Line<br>Charges          | ✓         | ✓         |
|                           | spt_det    | Cost Simulation Item<br>Detail              | ✓         | ✓         |
|                           | tr_hist    | Inventory Transaction<br>History            | ✓         | ✓         |
|                           | tx2d_det   | Tax Detail                                  | ✓         | ✓         |
|                           | um_mstr    | Unit of Measure<br>Conversion Master        | ✓         |           |
|                           | udd_det    | User Domain Detail                          |           |           |
|                           | usrgd_det  | User Group Detail                           |           |           |
| ShipToMaintenance         |            |                                             |           | ✓         |
| ShipperWorkbench          |            |                                             | ✓         | ✓         |
| ScheduledOrderMaintenance |            |                                             | ✓         | ✓         |
| SupplierMaintenance       | vd_mstr    | Vendor Master                               | ✓         | ✓         |
|                           | vp_mstr    | Supplier Item Master                        | ✓         |           |
|                           | wc_mstr    | Work Center Master                          | ✓         |           |
|                           | wo_mstr    | Work Order Master                           | ✓         | ✓         |
|                           | wod_det    | Work Order Detail                           | ✓         | ✓         |
|                           | wr_route   | Word Order Routing                          | ✓         | ✓         |

Each of the tables in Table 1.3 is defined in QXO as an event type. For these tables, schema triggers are loaded during installation and can be activated as needed. The tables vary slightly by QAD Enterprise Applications release. A check mark indicates that, by default, a trigger is provided in the database schema.

**Table 1.3**  
Tables with Schema Triggers

| Table<br>Name | Description                       | eB | eB2 | eB2.1 | QAD<br>SE | QAD<br>EE |
|---------------|-----------------------------------|----|-----|-------|-----------|-----------|
| absc_det      | Shipment Carrier Detail           |    |     |       |           | ✓         |
| absd_det      | Shipment Line Item Detail         |    | ✓   | ✓     | ✓         | ✓         |
| absl_det      | Shipment Detail Line Charges      |    | ✓   | ✓     | ✓         | ✓         |
| absr_det      | Shipment Requirement Detail       | ✓  | ✓   | ✓     | ✓         | ✓         |
| abs_mstr      | ASN/BOL/Shipper Master            | ✓  | ✓   | ✓     | ✓         | ✓         |
| acdf_mstr     | Account Default Master            | ✓  | ✓   | ✓     | ✓         |           |
| ac_mstr       | Account Master                    | ✓  | ✓   | ✓     | ✓         |           |
| ad_mstr       | Address Master                    | ✓  | ✓   | ✓     | ✓         | ✓         |
| anl_det       | Analysis Code Link Detail         |    |     |       |           | ✓         |
| ans_det       | Analysis Code Selection<br>Detail |    |     |       |           | ✓         |

| Table Name | Description                                 | eB | eB2 | eB2.1 | QAD SE | QAD EE |
|------------|---------------------------------------------|----|-----|-------|--------|--------|
| an_mstr    | Analysis Code Master                        |    |     |       |        | ✓      |
| bom_mstr   | Product Structure (Bill of Material) Master | ✓  | ✓   | ✓     | ✓      | ✓      |
| ca_mstr    | Service/Support Call Master                 | ✓  | ✓   | ✓     | ✓      | ✓      |
| ccd_mstr   | Service/Support Call Fault Code Master      | ✓  | ✓   | ✓     | ✓      | ✓      |
| cd_det     | Master Comments                             | ✓  | ✓   | ✓     | ✓      | ✓      |
| cm_mstr    | Customer Master                             | ✓  | ✓   | ✓     | ✓      | ✓      |
| cmt_det    | Transaction Comments                        | ✓  | ✓   | ✓     | ✓      |        |
| code_mstr  | Generalized Codes Master                    | ✓  | ✓   | ✓     | ✓      | ✓      |
| com_mstr   | Commodity Code Master                       | ✓  | ✓   | ✓     | ✓      |        |
| cp_mstr    | Customer Item Master                        | ✓  | ✓   | ✓     | ✓      | ✓      |
| cs_mstr    | Cost Set Master                             |    |     |       |        | ✓      |
| cu_mstr    | Currency Master                             | ✓  | ✓   | ✓     | ✓      |        |
| dpt_mstr   | Department Master                           |    |     |       |        | ✓      |
| egt_mstr   | Service/Support Engineer Tracking Master    | ✓  | ✓   | ✓     | ✓      | ✓      |
| eng_mstr   | Service/Support Engineer Master             | ✓  | ✓   | ✓     | ✓      | ✓      |
| eu_mstr    | Service/Support End User Master             | ✓  | ✓   | ✓     | ✓      | ✓      |
| fcs_sum    | Forecast                                    | ✓  | ✓   | ✓     | ✓      | ✓      |
| fsc_mstr   | Service Category Master                     | ✓  | ✓   | ✓     | ✓      | ✓      |
| fwk_mstr   | Service/Support Work Code Master            | ✓  | ✓   | ✓     | ✓      | ✓      |
| glc_cal    | General Ledger Calendar                     | ✓  | ✓   | ✓     | ✓      |        |
| idh_hist   | Invoice History Detail                      | ✓  | ✓   | ✓     | ✓      | ✓      |
| ie_mstr    | Import/Export Master                        | ✓  | ✓   | ✓     | ✓      | ✓      |
| ied_det    | Import/Export Detail                        | ✓  | ✓   | ✓     | ✓      | ✓      |
| ih_hist    | Invoice History Master                      | ✓  | ✓   | ✓     | ✓      | ✓      |
| in_mstr    | Inventory Master                            | ✓  | ✓   | ✓     | ✓      | ✓      |
| is_mstr    | Inventory Status Master                     | ✓  | ✓   | ✓     | ✓      | ✓      |
| isb_mstr   | Service/Support Installed Base Item Master  | ✓  | ✓   | ✓     | ✓      | ✓      |
| isd_det    | Inventory Status Detail                     |    |     |       |        | ✓      |
| itm_det    | Service/Support Call Item Detail            | ✓  | ✓   | ✓     | ✓      | ✓      |
| lacd_det   | Logistics Accounting Charge Detail          |    | ✓   | ✓     | ✓      | ✓      |
| ls_mstr    | Address List Detail                         | ✓  | ✓   | ✓     | ✓      | ✓      |
| pc_mstr    | Price List Master - Purchasing              |    |     |       |        | ✓      |
| pi_mstr    | Price List Master                           | ✓  | ✓   | ✓     | ✓      | ✓      |
| pid_det    | Price List Detail                           | ✓  | ✓   | ✓     | ✓      | ✓      |

| Table Name | Description                           | eB | eB2 | eB2.1 | QAD SE | QAD EE |
|------------|---------------------------------------|----|-----|-------|--------|--------|
| pl_mstr    | Product Line Master                   | ✓  | ✓   | ✓     | ✓      | ✓      |
| pod_det    | Purchase Order Detail                 | ✓  | ✓   | ✓     | ✓      |        |
| po_mstr    | Purchase Order Master                 | ✓  | ✓   | ✓     | ✓      |        |
| ps_mstr    | Product Structure Master              | ✓  | ✓   | ✓     | ✓      | ✓      |
| pt_mstr    | Item Master                           | ✓  | ✓   | ✓     | ✓      | ✓      |
| ptp_det    | Item Planning Detail                  | ✓  | ✓   | ✓     | ✓      | ✓      |
| ro_det     | Routing Operation Detail              | ✓  | ✓   | ✓     | ✓      | ✓      |
| sch_mstr   | Release Management Schedule Master    | ✓  | ✓   | ✓     | ✓      | ✓      |
| schd_det   | Release Management Schedule Detail    | ✓  | ✓   | ✓     | ✓      | ✓      |
| sct_det    | Cost Simulation Total Detail          | ✓  | ✓   | ✓     | ✓      | ✓      |
| scx_ref    | Scheduled Order Cross-Reference       | ✓  | ✓   | ✓     | ✓      | ✓      |
| si_mstr    | Site Master                           | ✓  | ✓   | ✓     | ✓      | ✓      |
| sob_det    | Sales Order Configuration Bill Detail | ✓  | ✓   | ✓     | ✓      | ✓      |
| sod_det    | Sales Order Detail                    | ✓  | ✓   | ✓     | ✓      | ✓      |
| sodlc_det  | Sales Order Detail Line Charges       |    | ✓   | ✓     | ✓      | ✓      |
| so_mstr    | Sales Order Master                    | ✓  | ✓   | ✓     | ✓      | ✓      |
| spt_det    | Cost Simulation Item Detail           | ✓  | ✓   | ✓     | ✓      | ✓      |
| tr_hist    | Inventory Transaction History         | ✓  | ✓   | ✓     | ✓      | ✓      |
| tx2d_det   | Tax Detail                            | ✓  | ✓   | ✓     | ✓      | ✓      |
| um_mstr    | Alternate Unit of Measure Master      |    |     |       |        | ✓      |
| vd_mstr    | Supplier Master                       | ✓  | ✓   | ✓     | ✓      | ✓      |
| vp_mstr    | Vendor Item Master                    |    |     |       |        | ✓      |
| wc_mstr    | Work Center                           |    |     |       |        | ✓      |
| wo_mstr    | Work Order Master                     | ✓  | ✓   | ✓     | ✓      | ✓      |
| wod_det    | Work Order Detail                     | ✓  | ✓   | ✓     | ✓      | ✓      |
| wr_route   | Work Order Routing                    | ✓  | ✓   | ✓     | ✓      | ✓      |

## Sequencing Business Dependencies

Because QXO supports multiple event services in a distributed environment, it is possible to load data messages in an incorrect sequence. For example, a sales order may be sent through before the new or revised customer record for that order. In certain scenarios, it is possible for you to enforce correct chronological sequencing of data messages to avoid this kind of situation.

By assigning business objects to a business object group, you can ensure that the business objects and their tables will be processed and published in the same order they are set up in the group, provided that all the active event types in the group are registered with the same event service. For

example, place the Customer and Sales Order business objects in a business object group and register all related active event types with the same event service so that if an event is generated for both these objects, the customer data will be always extracted prior to the sales order data.

However, if active event types in a business object group are not registered with the same event service, business objects in the group will be processed by different event services, which defeats the purpose of business object groups since you cannot guarantee that data of designated business objects will be processed as set up in the group in a single-thread manner. This gives rise to a warning message in configuration validation.

See “Adding Source Application Business Object Groups” on page 30.

For information on event type registration, see “Registering Event Types with an Event Service” on page 39.

Business object groups are set up as part of the source application configuration. Each business object can belong to only one group.

**Note** Business object groups are not defined for business objects that employ DDP.

## Business Events

Previous versions of QXtend Outbound only used database triggers as events; in version 1.6 a business process can also be the event that triggers a business object to be extracted. The term for event-based notification triggers is *business events*.


Business events enhance your control over when a business object is extracted, including the ability to trigger processing at crucial stages within a workflow.

The term *workflow* typically denotes a built-in automated approval process that can be applied to any record (or document) created in the system. Essentially a workflow depicts a sequence of operations within a business process. Workflow can be used for various purposes including:

- Approve supplier invoices
- Release invoices for payment
- Notify stakeholders of changes to accounts, GL data, and customer or supplier data
- Escalate overdue customer invoices

For example, a sales order typically has a well-defined lifecycle, from entering the sales order into the system, through processing the shipment, then printing and posting related invoices, as shown in Figure 1.2.

**Fig. 1.2**  
Sales Order Lifecycle

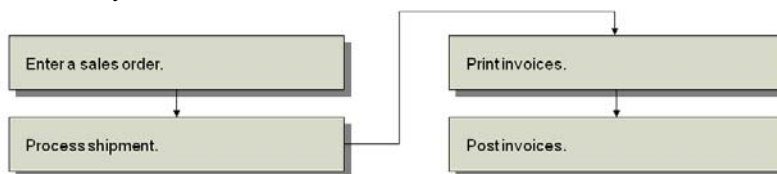

Using business events you could extract a business object for processing if a quantity value or ship-to location is changed on a line item, or promote the business object into a different workflow stage.



In non-direct data publish source applications, events can be database triggers (raised against a specific database table) or business events (raised against business objects). In DDP source application types, business events are the only event type.

You can configure profiles to receive only the business object messages you want based on the business events raised by a source application. For details, see “Modifying Profiles” on page 95. You also can configure subscribers to receive specific profile messages based on events raised by the source application. For details, see “Configuring Subscriber Profiles” on page 50.

## Direct Data Publish

QAD EE uses the QAD Reference Architecture technology, which supports true business object functionality where the change in state of a business object can be detected—it is not necessary to poll the `qxevents` database for changes and extract the data. Instead the raw business object event data is saved in an XML file and passed directly to QXO via an event message API—the resulting QDoc is published without the need for further processing.

This ability is known as *direct data publish* (DDP), and enables data to be synchronized between one instance of the Financials module and another, or between the Financials module and an external application.

Since DDP source application types post event data directly to QXO, no event service is required. The QDoc is published using the standard message publisher functionality.

DDP employs a direct data publishing API to process event messages and schemas originating from a source application type that employs DDP. The direct data publishing API utilizes the service interface adapter API to input data into the target application.


Several configuration steps are required in order to implement DDP in QAD Enterprise Applications EE and QXtend. For details, see Chapter 11, “QXtend Interaction with Financials,” on page 139.

**Note** DDP documents must be associated with a valid business event, otherwise the document will not be published. The business event is provided in the session context parameter. The system checks to verify that the business event is a valid event type for the source application. If the event is not valid, the system raises an exception. For details about session context parameters, see Appendix B, “Parameter Data,” on page 453.

## The QXO Outbound Process

Creating QDocs from extracted QAD Enterprise Applications data is accomplished in several steps. Each step is defined in—and can be monitored in—the QXO administration interface.

**Fig. 1.3**  
Basic QXO Architecture

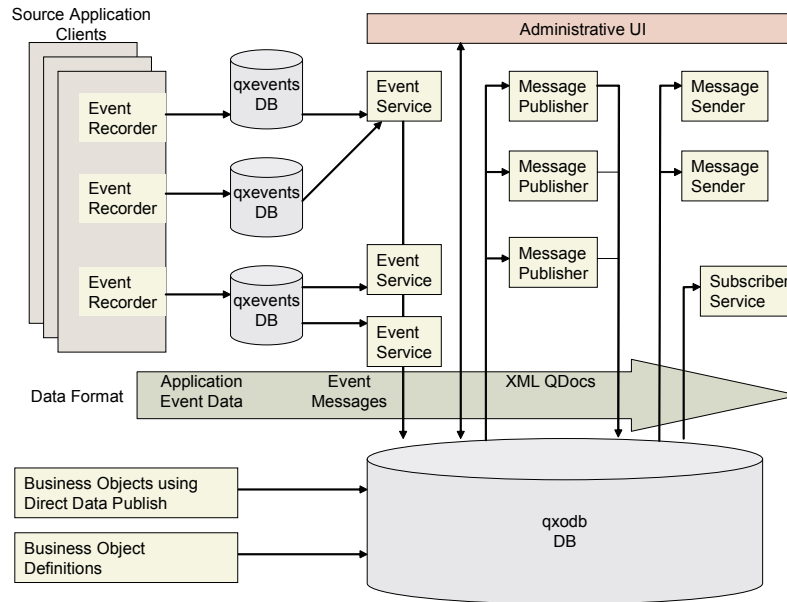

The steps for data include the following:

- 1 A change occurs to watched data in QAD Enterprise Applications. Change notifications are written out to the qxevents database.  
**Note** DDP business objects are passed directly from the source application to the qxodb database in QXO, then processed by the message publisher.
- 2 QXO queries QAD Enterprise Applications for the changed records.
- 3 The extracted data is published as QDocs.
- 4 The QDocs are delivered to the assigned subscribers.

Taking each step in turn, the product architecture and implementation requirements become clear. Refer to Figure 1.3 on page 14 to see product architecture and data flow through QAD QXtend.

### Change to Watched Data in QAD Enterprise Applications

Data becomes watched when you install and then activate replication triggers on the tables for a given business object. In order to avoid performance overhead, the triggers are simple: they write out a notification of a changed record to a side database, qxevents. A change is any add, modify, or delete to these tables.

The triggers required for supported QXO business objects are shipped and installed with the product. However, even unused triggers, if active, create a small performance overhead. Therefore, each implementation determines which triggers are activated.

Triggers are not required for DDP business objects since the entire business object is passed directly to QXO—it is not necessary to watch event data for these objects.

### QXO Queries QAD Enterprise Applications

QXO uses an event service to connect to the `qxevents` database and poll for change notifications, using either the table rowid or a unique identifier field on the database table to identify where changes occurred. When it encounters a change record, the event service queries the QAD Enterprise Applications tables that make up the impacted business objects in QXO.

For business objects that employ DDP an event service is not required since these business objects are passed directly to the `qxodb` database in QXO, and from there processed as usual.

One table can be a component of multiple business objects. For example, the customer master, `cm_mstr`, is a component of the customer, customer item, and sales order business objects, among others. Depending on setup, queries can be for the full business object, or only for the primary index fields and any changed field data.

No query against QAD Enterprise Applications is run when:

- No valid or active business object exists for the changed data.
- No active profiles exist for the data.
- No active subscribers request this data.

The event service writes the extracted data to the QXO database.

### Publishing the Data

Next, the message publisher generates one or more QDocs using the profiles as templates and stores the QDocs in `qxodb`. The QDocs generated are XML documents in proprietary QAD format. The SOAP-compliant container—an envelope, a header, and a footer—in which the QDoc is wrapped by the message sender (if the subscriber is thus configured) allows the QDoc to be sent to Web services that accept or poll for XML documents.

When publishing multiple profile messages from the same business object instance, the Message Publisher processes the messages in alphabetical order so that the sequence can be easily managed by the user.

### Delivering the Data

The QDocs can be delivered to a directory location where the subscriber polls for and picks up new QDocs. Alternately, the QDocs can be delivered to a Web service listening for new QDocs through a URL (Universal Resource Locator).

The subscriber can be another QAD Enterprise Applications instance, another QAD product, or a third-party application or messaging broker set up to receive and interpret QDocs. QDocs moving between QAD products start as outbound QDocs and are picked up by QAD QXtend Inbound.

## Implementation Overview

This section provides an overview of the steps required to implement and customize QXO.

## Implementing QXO

- 1 Configure each QAD Enterprise Applications instance as a source application.
- 2 Activate all required event types for each source application.
- 3 Configure QXO services: event services, message publishers, and message senders.
- 4 Set up subscribers.
- 5 Identify the required business objects.
- 6 Set up or modify the required business objects. For each business object you can:
  - Add or modify the table joins to use.
  - Add or modify the WHERE clause to select what data to retrieve.
  - Set fixed export values for specific data elements.
  - Write and assign calculations for specific data.
  - Add custom fields.
  - Determine if unchanged data is published.
- 7 Create profiles.
- 8 Activate the required triggers in QAD Enterprise Applications.
- 9 Define delivery schedules (optional).
- 10 Define e-mail alerts (optional).
- 11 Configure archive settings (optional).
- 12 Validate your configuration (optional).

## Customizing QXO

You only need to customize QXO for QAD Enterprise Applications if you want to modify existing business objects or add new ones. More extensive customization is needed if you want to add business objects for custom QAD Enterprise Applications applications or a Progress-based application other than QAD Enterprise Applications.

To modify QAD Enterprise Applications business objects or add new ones, you must:

- 1 Define the business object requirements.
- 2 Identify the QAD Enterprise Applications tables required and activate or add these event types.
- 3 Update qaddb schema and compile supplied trigger files for any tables not currently configured for QXO.
- 4 Follow implementation steps 4 through 12 in the previous section.

For details, see “Creating New Business Objects” on page 81.



## Working with the QXtend User Interface


Both QXO and QXI administrative user interfaces are browser-based and use tab-based HTML forms. This section discusses common aspects of the QXO UI in the various functions, and describes how to use them. Many of these UI features also apply to QXI, which uses the same Web-based technologies. If you are unfamiliar with Web or HTML applications, you may want to review the material in this section.

### General UI Functions

#### Navigating Tree Views

Many of the QXO administrative screens display items in a tree view. Navigate the tree by clicking nodes to expand or collapse them. Icons indicate if a node is expandable, fully expanded, or cannot be expanded. Figure 1.4 illustrates a navigation tree.

**Fig. 1.4**  
Navigation Tree

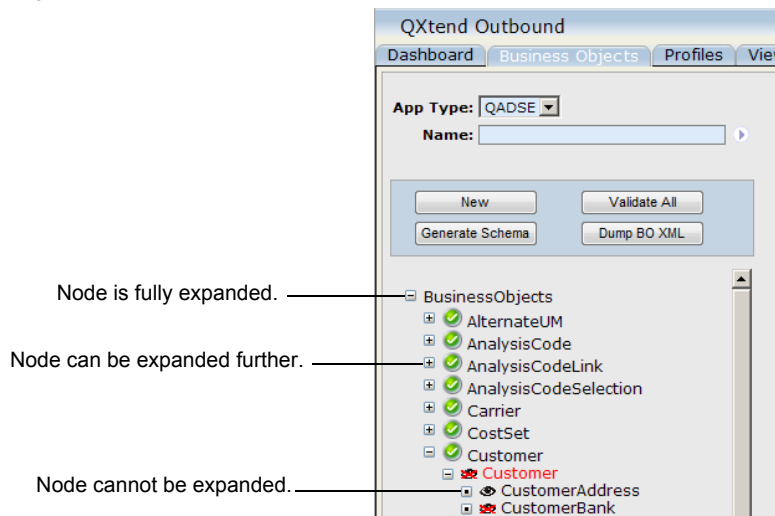

#### Entering Data in HTML Forms


The data entry forms as illustrated in Figure 1.5 show field names and values. Access the fields by clicking or by tabbing through the fields. Fields displaying a red asterisk (\*) are required.

**Fig. 1.5**  
HTML Data Entry Form

## Filtering Names

On many QXO administrative screens, you can enter a name to filter the items displayed for update or viewing. Figure 1.6 illustrates the Name filter field for business objects. The rules for entering values in other Name fields are the same as for this one.

**Fig. 1.6**  
Name Filter Field

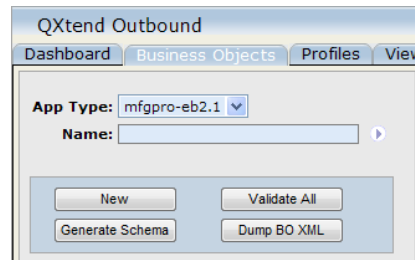


Enter a value in the Name field to determine what displays in the left pane for selecting items to view or update.

- Enter a specific search value to find an exact match. For example, enter Carrier to update the carrier record.
- Enter a search value followed by the wild card (\*) to find all items with names that start with that value. For example, enter sales\* to see business objects with names that start with sales.
- Leave blank to display all items.

## Using Table Filters

On QXO screens where you review data, such as the logs and viewers, you can filter data by one or more sets of criteria. To add or modify filter criteria, click Filter. A screen like the one in Figure 1.7 displays.

**Fig. 1.7**  
Filtering



Use the Add button to add a row for specifying an additional filter. Use the Delete button to remove a filter line. Click Run to apply the filter to the displayed information. Click Reset to close the filter view.

Choose an attribute from the drop-down list. The attributes match the columns of data being displayed. For example, to filter by message text, choose text as the attribute for the filter.

You can use the following operators with filters:

| Operator              | Description                                                                   |
|-----------------------|-------------------------------------------------------------------------------|
| <b>Text Operators</b> |                                                                               |
| begins                | The system returns records with values that start with the value you specify. |

|         |                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------|
| >       | The system returns records with values that start with a value greater than the one you specify. |
| matches | The system returns records with values that exactly match the value you specify.                 |

---

**Numeric Operators**


---

|    |                                                                                                           |
|----|-----------------------------------------------------------------------------------------------------------|
| >= | The system returns records with values that start with the value you specify or any value higher than it. |
| <  | The system returns records with values that start with the a value less than the one you specify.         |
| =  | The system returns records with values that exactly match the value you specify.                          |
| <> | The system returns records with values that do not exactly match the value you specify.                   |
| <= | The system returns records with values that start with the value you specify or any value lower than it.  |


Use the Condition setting when you have more than one filter criterion to indicate whether you want values that meet all conditions to be returned (AND condition) or values that meet any one of the conditions (OR condition).

## Using Lookups

In many QXO screens, you can associate one type of record with another. For example, you can associate source applications with event services. To make this kind of association, you choose values from a lookup that displays all available records in one list and the records currently associated in another.

These lookups all operate in the same fashion. The screen shown in Figure 1.8 illustrates the lookup for source applications.


**Fig. 1.8**  
Register Source Applications for a Session Profile

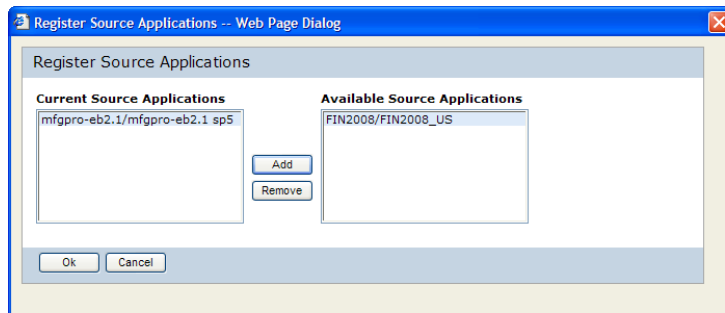

Use the Add and Remove buttons to move selected objects from one list to the other. Click OK when you are satisfied with your changes; click Cancel to discard changes without saving them.

In some lookups, you can filter the values that display in the available records list. For example, when you register business objects, additional fields display that let you filter the list, as shown in Figure 1.9.

**Fig. 1.9**  
Register Business Objects for a Message Publisher

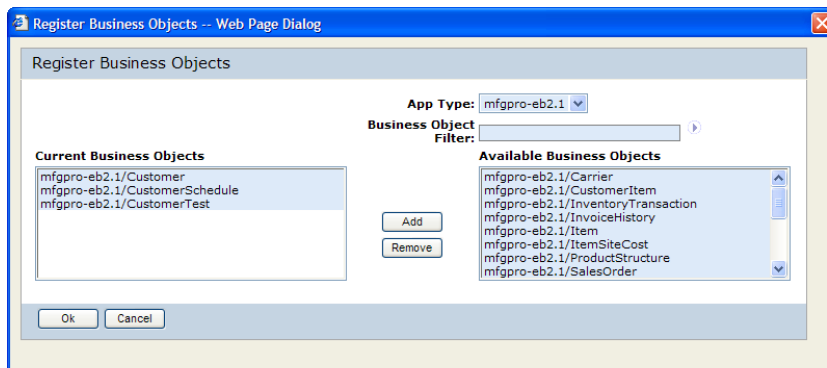


Enter a source application value in the App Type field. Then specify a filter value in the Business Object Filter field—or leave the field blank to display all. Click the arrow to display matching business objects in the Available Business Object list. Then use the Add and Remove buttons to move values from one list to the other as needed.

## QXO Console

QXO displays as a multi-function console that includes graphing capabilities and lets you view, monitor, and configure QXO components through a set of tabs. Figure 1.10 illustrates the initial view displaying the Dashboard tab.

**Fig. 1.10**  
QXO Administrative Console

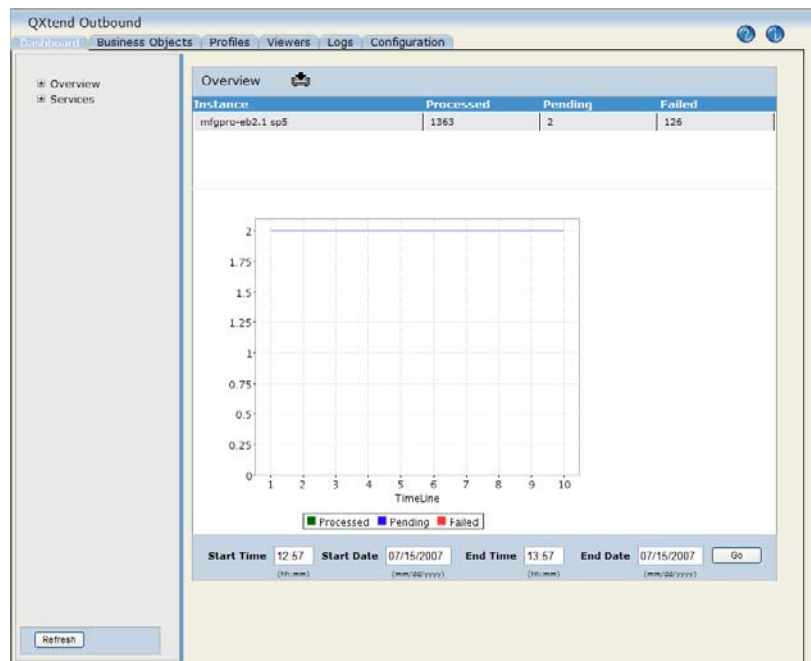

The various tabs provide quick access to the following functions:

**Dashboard.** Display the current status and statistics about QXO processes and drill down to more detailed views.



*Business Objects.* Create or modify business objects in a tree view and display data related to each node in the object.

*Profiles.* Create or modify business object profiles in a tree view and review and modify the fields associated with each node.

*Viewers.* View messages generated by QXO at various points in the transformation process.

*Logs.* View logs related to events, messages, and QDocs.

*Configuration.* Create and update profiles for components of QXO, including source applications, event services, message publisher services, message sender services, delivery schedules, archive settings, and subscribers.



# Implementing QAD QXtend Outbound

The following material covers the steps required to configure QAD QXtend Outbound (QXO).

## **General Implementation Steps 24**

Explains how QXO uses a sequential processing flow, describes the QXO consoles and general UI functions.

## **QXO Source Applications 24**

Explains how to create new application types, add source application databases, add source application domains, add source application business object groups, edit source application event types, and add source application event types.

## **QXO Services 36**

Describes the QXO event service process, define a message publisher, and define a message sender.

## **QXO Subscribers 41**

Explains subscriber e-mail notifications, free use of QXO, define subscribers, configure subscriber profiles, and subscriber visibility.

## **QXO Delivery Schedules 54**

Discusses QXO delivery schedule types and setup.

## **QXO E-mail Alerts 56**

Explains how to configure e-mail settings, manage alert recipients and groups, and use the Email Service option on the Dashboard.

## **Importing Business Objects and Profiles 62**

Explains how to use the XML Import feature.

## **Data Archive 63**

Discusses archive guidelines and how to archive using a cron job.

## **Validating QXO Configuration 67**

Explains how to use the Validate Configuration feature.

## **Implementing Calculated Fields 70**

Explains how to implement calculated fields, including an example.

## General Implementation Steps

QXO relies on a sequential processing flow to:

- 1 Gain notification of a change in a source application.
- 2 Extract data from the source application.
- 3 Publish the data as XML QDocs.
- 4 Send the QDocs to subscribers.

**Note** Steps 1 and 2 in the sequence above do not apply to business objects that employ DDP.

To implement this sequence:

- 1 Define your source applications.
- 2 Define an event service to check for and then extract the data.
- 3 Define a message publisher to publish the QDocs.
- 4 Define a message sender to send the QDocs.
- 5 Define subscribers to receive the QDocs.
- 6 Define a delivery schedule (optional).
- 7 Define e-mail alerts (optional).
- 8 Configure archiving settings (optional).

## QXO Source Applications

Source applications are the specific databases from which the QXO event service extracts data. Each source application database that shares a unique schema—for example, all QAD Enterprise Applications eB2, SP3 databases—can be managed under a single source application type. For version eB2.1 or above databases, this also extends to multiple domains that share a schema definition.

A source application type also lets you identify the specific event types—database triggers and/or business events—you want to extract from the databases within that type. Event types are essentially the tables within the source databases.

Source applications that employ DDP post business objects directly to QXO via the service interface API, and consequently do not require an event service. For DDP source application types there is no need to define databases, domains, or business object groups.

You can also define business object groups for any source application. Business object groups enforce the correct chronological sequencing of data messages from dependent business objects. It is required, however, that all active event types of these business objects are all registered with the same event service. Each business object can belong to only one group.

See “Sequencing Business Dependencies” on page 11.

**Note** Business object groups cannot be defined for business objects that employ DDP.




In this first step, you define all the source applications from which you require data. You must also define a source application before you can update business objects or profiles.

In the QXO Console, click the Configuration tab to gain access to all the processing implementation services. Click the Source Applications node in the left-hand tree view. If it was not already displayed, the Source Application Types screen displays.

- 1 Click New in the Source Application Types screen. An entry line is added to the screen.

**Fig. 2.1**  
Creating a New Source Application Type

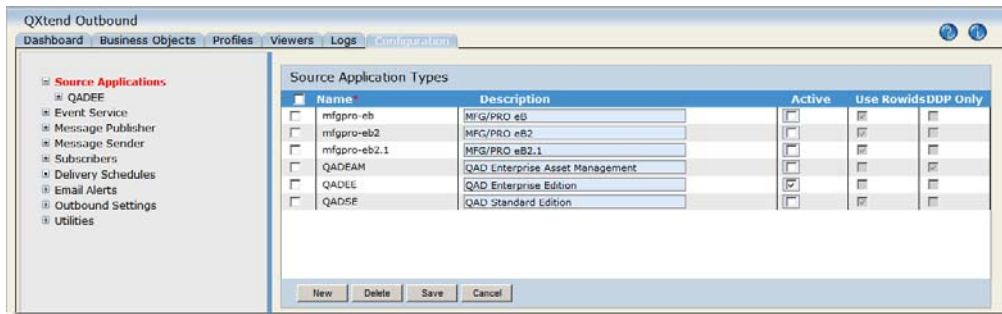

**Name.** Specify the name of the new source application type.

**Description.** Enter a description as required.

**Active.** Select this option to indicate the source application type is active. The source application type must be active to be available on the Business Object and Profile tabs. In addition, the event service will not extract data from a source application unless the source application is active.

**Use Rowids.** This setting indicates whether the source application type uses a rowid or object identifier (OID) to identify the data object that has changed. A rowid is an internal system-generated identifier used by the database, whereas an OID is an actual field on the table.

Source application types eB and eB2 use rowids only. Types eB2.1 and above can use either a rowid or OID.

**Note** In order to use the OID index in eB2.1 or QAD SE you must first load the optional Enhanced Controls schema. For the QAD EE source application loading this schema is not required since by default the OID index is on.

The Use Rowids option is preset and cannot be changed for predefined source application types. Source applications that do not use rowids require the unique identifier in the data object to be specified. For details see “Modifying Business Object Data Objects” on page 85.

**DDP Only.** Indicates if this source application posts event data directly to QXO. This setting cannot be changed for predefined source application types.

If this setting is selected, the source application node on the tree menu does not display further information—databases, domains, business object groups, and event types, for example.

For details see “Direct Data Publish” on page 13.

**Important** In order to load the QAD standard business objects and profiles, the business objects use the following predefined source application types provided with QAD QXtend:


- mfqpro-eb

- mfgpro-eb2
- mfgpro-eb2.1
- QADSE
- QADEE

If you choose to change the naming convention, the folders containing the QAD-standard business object XML to be loaded must be renamed to the defined source application type. See “Importing Business Objects and Profiles” on page 62. The XML resides in `QX0srvInstallDir\boXML`.


- 2 Click Source Applications in the navigation tree to open the node. The active source application types display. Click it to open the Source Applications screen.

**Fig. 2.2**  
Source Applications

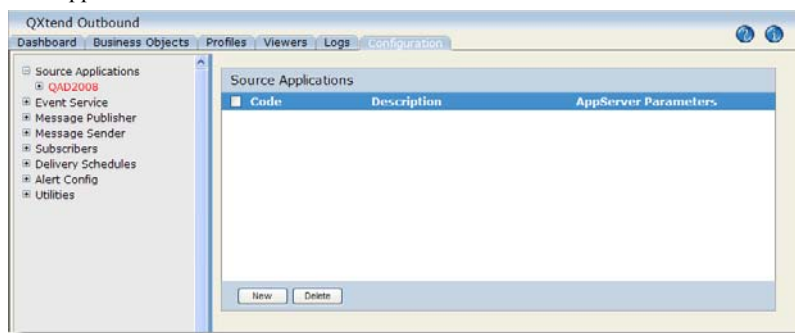

- 3 Click New to display the Source Application Details screen.

**Fig. 2.3**  
Source Application Details

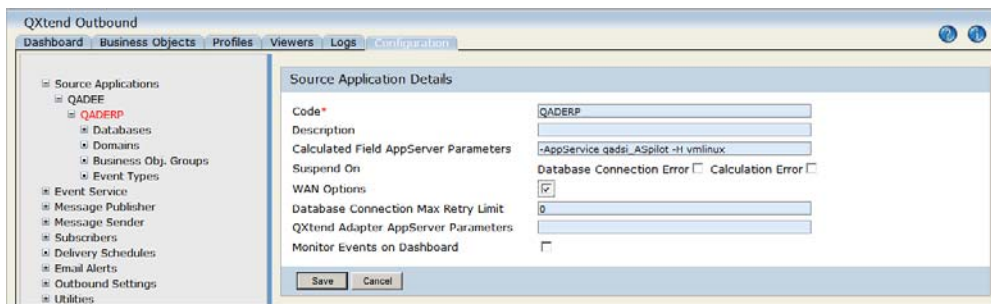

**Code.** Enter a code identifying a source application from which QXO messages originate. You use this code to identify the source application in the event services definition.

**Description.** Enter a brief description as needed.

**Calculated Field AppServer Parameters.** In general, enter the AppServer name (-AppService) and the AppServer host (-H); for example:

```
-AppService qadsi_AS -H vmlinux
```

In the example, the application service is qadsi\_AS and the host is vmlinux.

If you have set the connection between AppServer and connection pool to secure, direct, or both, you are required to enter the connection type. See Table 2.1 on page 27 for examples.

**Table 2.1**  
Examples of AppServer Parameters

| Direct Connection | Secure Connection | AppServer Parameter Examples                                                     |
|-------------------|-------------------|----------------------------------------------------------------------------------|
| No                | No                | -AppService <i>qadsi_AS</i> -H <i>vmlinux</i>                                    |
| Yes               | No                | -AppService <i>qadsi_AS</i> -H <i>vmlinux</i> -S <i>5048</i> -DirectConnect      |
| No                | Yes               | -AppService <i>qadsi_AS</i> -H <i>vmlinux</i> -ssl                               |
| Yes               | Yes               | -AppService <i>qadsi_AS</i> -H <i>vmlinux</i> -S <i>5048</i> -DirectConnect -ssl |

The AppServer Parameters field supports the use of calculated field programs documented in “Implementing Calculated Fields” on page 70.

**Note** If calculated field programs are not required to be executed on the AppServer, then this field can be left blank.

Additional values can be entered in this field. For details on AppServer parameters, see the Progress documentation.

**Suspend on.** Specify whether to suspend the source application on one or both of the following errors: database connection error and calculation error.

If you select Database Connection Error, the source application will be automatically suspended on database connection error; if you select Calculation Error, the source application will be automatically suspended on calculated field program error.

All QXO services only process events and messages of active source applications and ignore events and messages of suspended source applications. In addition, suspended source applications cannot be connected for any UI operations, such as source application configuration.

You can manually resume or suspend source applications through QXO Dashboard or batch process scripts. Batch process query shows the Suspended status.

When a source application is resumed, QXO services automatically reprocesses the extracted data and raw messages with the ERR status.

You can configure e-mail alerts to be sent on calculation and database errors to registered recipients. See “QXO E-mail Alerts” on page 56.

**WAN Options.** Select this field to turn on WAN options. When it is selected, the following three options are displayed.

Enabling WAN Options can help to achieve better system performance and reliability when QXtend connects to a source application through a Wide Area Network.

**Database Connection Max Retry Limit.** Specify the maximum times for QXO to reconnect to the source application database after connection failed.

**Note** If Suspend on Database Connection Error is selected, the system will not suspend the source application until it has failed to connect after multiple retries.

**QXtend Adapter AppServer Parameters.** Enter an AppServer (for example, *qadsi\_AS*) that connects to source application databases and has the QXtend Adapter directory in the Propath. When this parameter is set, QXtend can run event consolidation on the AppServer instead of

in event service, which can significantly reduce the time for event consolidation over a WAN connection. In general, the parameters include the AppServer name (-AppService) and the AppServer host (-H); for example:

```
-AppService qadsi_AS -H vmlinux
```

If you have set the connection between AppServer and connection pool to secure, direct, or both, you are required to enter the connection type. See Table 2.1 on page 27 for examples.

**Monitor Events on Dashboard.** Determines whether to monitor event counts on QXO Dashboard.

If the source application is connected through a WAN connection, it takes a long time to refresh the Dashboard. Before the refresh is completed, some information—such as the number of events processed—is not displayed; but you can use the buttons on the Dashboard.

- 4 Click Save to save the new source application.
- 5 Repeat these steps for each source application in the source application type.


## Adding Source Application Databases

Each source application can contain multiple databases, as long as all the databases in the source application type share the same schema.

**Note** Source application databases are not relevant for source application types that employ DDP.

- 1 Click the source application in the navigation tree under the source application type. The tree expands to display the source application components.
- 2 Click Databases under the source application. The Databases overview screen displays.

**Fig. 2.4**  
Databases

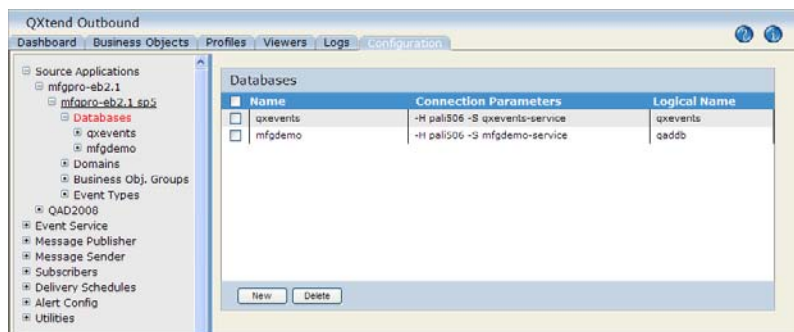

- 3 Click New to add a database. You must define the production qaddb databases as well as the qxevents database.



**Fig. 2.5**  
Database Configuration

The screenshot shows a 'Database Configuration' dialog box. It contains three text input fields. The first field, labeled 'Name\*', contains the text '/dr01/qadapps/db/mfgprod'. The second field, labeled 'Connection Parameters', is empty. The third field, labeled 'ID\*', contains the text 'qadddb'. Below the input fields are two buttons: 'Save' and 'Cancel'.

**Name.** Specify the physical file name of the source application database (without the .db extension).

**Connection Parameters.** Specify any Progress connection parameters the system should use to connect to this database. For details, see the *Progress System Administration Guide*.

**ID.** Specify the ID of the database connection. For the qadddb and qxevents databases, the ID must be qadddb and qxevents respectively, regardless of their logical database names.

- 4 Click Save to save the database definition.
- 5 Repeat these steps for each database in the source application.

Databases are disconnected whenever you modify the database configuration. By default, the database is automatically reconnected when you have finished the modifications and choose Save. If you encounter reconnection errors, refer to *QAD QXtend Installation Guide* for assistance.

You can change the database configuration later, including the connection ID, by following these rules:

- Always stop all event service instances before changing the database configuration.
- Restart Outbound AppServers and services after changing the database connection. If the connection ID is changed and it is explicitly used in business objects (for example, joins, filters, and so on), update those business objects.
- Databases (of different source applications) with the same schema must have the same connection ID. Otherwise, the events from some of the source applications cannot be processed.

QXtend Outbound gives error or warning messages when you change the database configuration.


## Adding Source Application Domains

Domains exist in the QAD Enterprise Applications databases for versions eB2.1 and above. If no domain is defined here for the source database, then data from all domains in the source database is extracted. If subscriber applications require the domain designation of extracted data, you must add one or more domains to the source application. Otherwise, domains are optional.

**Note** Domains are not relevant for source application types that employ DDP.

- 1 Click Domains under the source application. The Domains overview screen displays.
- 2 Click New to add a domain.

**Fig. 2.6**  
Domains

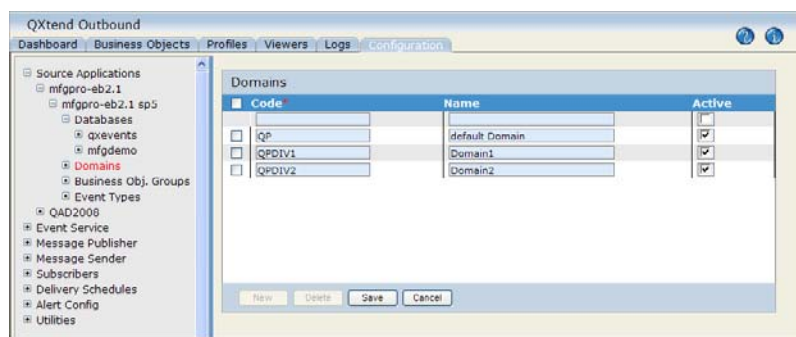

**Code.** Enter a code identifying a domain in the source application.

**Description.** Enter a brief description.

**Active.** Indicate if this domain is active. If this is not checked, future data processing that accesses this domain will not occur.

- 3 Click Save to save the domain definition.
- 4 Repeat these steps for each domain in the source application.

## Adding Source Application Business Object Groups

The advantage of creating a business object group is that when all active event types within the group are registered with the same event service, the tables within the group are processed in the sequence you set up. For instance, you may always want a customer's base data (ad\_mstr and cm\_mstr) processed prior to sales data (so\_mstr and sod\_det).


If active event types in a business object group are not registered with the same event service, business objects in the group will be processed by different event services, which defeats the purpose of business object groups since you cannot guarantee that data of designated business objects will be processed as set up in the group in a single-thread manner. This gives rise to a warning message in configuration validation.

**Note** Due to sequencing requirements, these business objects are processed in a single thread. Since this will inhibit performance, business object groups should be used only if absolutely necessary.

**Note** Business object groups are not relevant for source application types that employ DDP.

- 1 Click Business Object Groups under the source application. The Business Object Groups overview screen displays.
- 2 Click New to add a new business object group. The Business Object Group Details screen displays.

**Fig. 2.7**  
Business Object Group Details

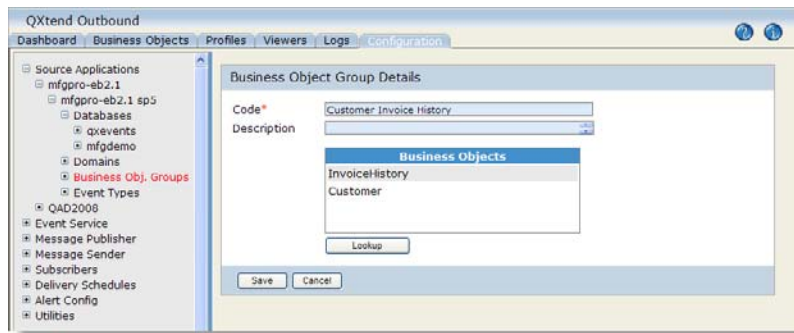


**Code.** Enter a name for the business object group.

**Description.** Enter a brief description.

- 3 Click Lookup to add the business objects to the group. The Update Business Object Group lookup displays, listing available objects.

**Fig. 2.8**  
Update Business Object Group Lookup

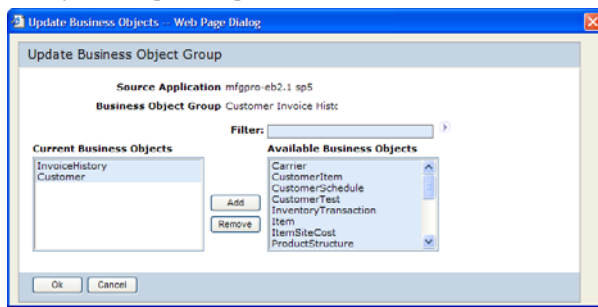

- 4 Optionally, you can enter a filter such as `cust *` to reduce the number of business objects you see. Click the arrow to the right of the filter box to display either filtered or unfiltered business objects.
- 5 Select business objects from the Available list and click Add. To remove groups, highlight the group name in the Current Business Objects list and click Remove.
- 6 Click OK to save the business objects.
- 7 Click Save to save the new business object group.

## Editing Source Application Event Types

Source application event types—either database triggers or business events—are the tables that are activated for this source application. Before any data can flow through QXO, you must manually select which event types to turn on for each source application you define. The event types are not active by default because there is a performance impact associated with the lookups QXO must do for each event.

You can edit the available events to make particular tables inactive for this source application. This can be accomplished under the event types node under the appropriate source application.

If you deactivate a table, the trigger for that table in the source application still executes, but no record is written.

- 1 Click Event Types under the source application. The Event Types overview screen displays.

**Fig. 2.9**  
Event Types

- 2 Edit event filter for database events and non-DDP business events.

Event filter is a filter on database records that determines whether an event should be raised. You can use Event Filter to prevent unwanted events from being raised, instead of having the event service or publisher determine its usability. It is especially useful when you want certain events from tables with high-volume data changes.


The entered filter uses Progress 4GL expressions and will be verified when you save the configuration. For example, if you enter a filter `pt_prod_line = 10` for event type ItemMaintenance, events will be raised only for item records with product line equal to 10.

- 3 Select the Active check box to activate a data object; clear the Active check box to deactivate a data object. The Active check box indicates if data should be extracted for this data object. If not, the triggers still execute in QAD Enterprise Applications, but no data is extracted.
- 4 If you selected the Active check box, the Data Object Listening window pops up. The window displays all the business objects and data objects associated with the event type using the following formats:
  - *BusinessObject/DataObject \** for data objects at the top level of business objects with the asterisk indicating that it is a top-level data object
  - *BusinessObject/.../DataObject* for data objects at lower levels of business objects. To see the full path of a data object under the business object, move the mouse cursor over or double-click the abbreviated pathname.

A warning symbol displays if a business object is not registered to any message publisher. Select the data objects you want to listen to the event type; then click OK.

**Important** You must activate the event types as well as configure the data objects to listen to the event types before any data extraction can take place. No data will be extracted for an inactive event type or an active event type with no data objects set to the listening mode. Also, do not activate any event types or turn on the listening mode for any data objects you do not plan to register with any event service to be processed.

**Fig. 2.10**  
Data Object Listening Configuration

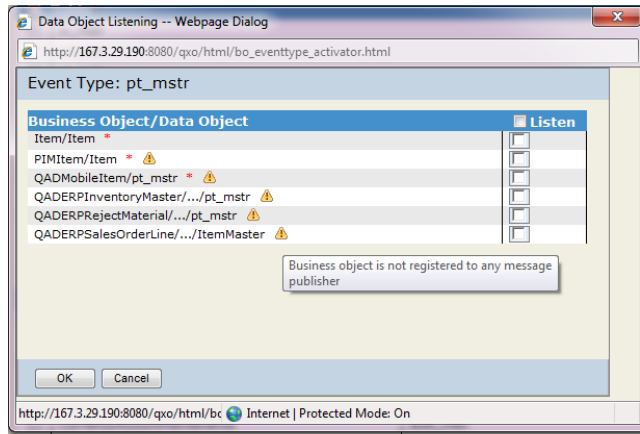

- 5 Click Save to save your changes.

**Important** If you navigate to other screens without saving, any changes you made to the event type and data object configurations before your last save will be lost.

## Adding Source Application Event Types

The business objects supplied with QXO use only a subset of QAD Enterprise Applications tables, which correspond to the set of default event types to be activated. If you create new business objects to accommodate your own business requirements that reference data from tables not already defined as events, you must add new event types and activate them. See “Creating New Business Objects” on page 81.

You will also need to do this if your business object includes custom tables or references tables in a non-QAD Enterprise Applications database.

**Note** Additional steps are required to use new event types with business objects. These are described in “Creating New Business Objects” on page 81.


You can add two types of events: database triggers or business events. You also can define business events for source application types that are DDP.

Click Event Types under the source application. The Event Types overview screen displays.

## Adding Database Triggers

- 1 Click New.
- 2 A Database Event Type window is displayed. Specify a table name for the database trigger event type. The table name you enter must match exactly the name of the table in the application schema that it is associated with.  
If you want to create a database event type for a specific event, enter the event in the Event Filter field.

**Fig. 2.11**  
Adding a New Database Trigger Event Type

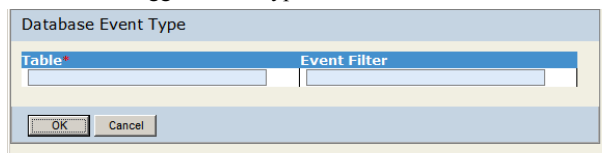

- 3 Click Save to save your changes.  
**Note** A warning message displays if the table does not exist. A warning symbol displays if the replication-write and/or replication-delete trigger is missing from the schema definition in the source application. A tooltip on this icon displays indicating if one or both of the triggers are missing.  
**Note** A warning symbol displays if the event type is active but not registered with any event service.

## Adding Business Events

Along with database triggers, business events can be added. This allows for business processes to trigger an event, rather than a database change.


You can add a business event manually by using the Add button and specifying the business event name, or use the Import button to import business events from the source application database.

If you define business events manually, when you attempt to save the event type the system checks the source application database to ensure that the table or object you specify exists. If the system cannot find a table or object of that name, it checks the database for a business object. If the system cannot validate the business event entry, it displays an error.

To manually add a business event:

- 1 Click New.
- 2 A Business Event Type window is displayed. Specify the event name and associated table/object. The table/object name must be a valid table or a DDP business object.  
If you want to create a business event type for a specific event, enter the event in the Event Filter field.

**Fig. 2.12**  
Adding a New Business Event Type

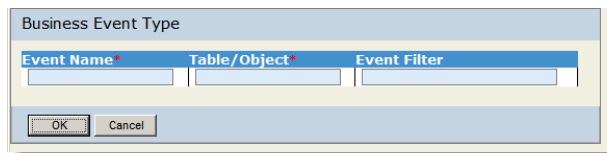


The dialog box titled "Business Event Type" contains three input fields: "Event Name\*", "Table/Object\*", and "Event Filter". Below these fields are "OK" and "Cancel" buttons.

3 Select the Active check box to extract data for this event type.

4 Click Save to save your changes.

Business events can be exported by clicking the Export button. Business events are exported to the source application type folder in the events folder. For example, events for the QADEE source application type are exported to `qadapps/qxtend/qxoAppserver/events/QADEE`.

**Fig. 2.13**  
Exporting Business Events

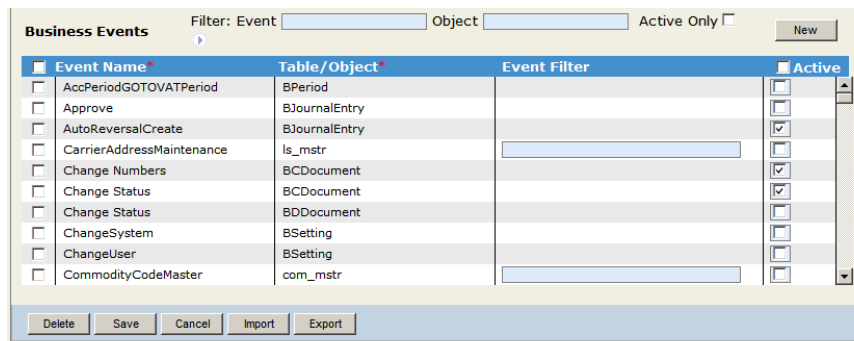

The "Business Events" window shows a list of events with columns: Event Name\*, Table/Object\*, Event Filter, and Active. The "Active" column has checkboxes. At the bottom are buttons: Delete, Save, Cancel, Import, and Export. A "Filter: Event" field and an "Object" field are at the top right, along with an "Active Only" checkbox and a "New" button.

| Event Name*                                        | Table/Object* | Event Filter | Active                              |
|----------------------------------------------------|---------------|--------------|-------------------------------------|
| <input type="checkbox"/> AccPeriodGOTOVATPeriod    | BPeriod       |              | <input type="checkbox"/>            |
| <input type="checkbox"/> Approve                   | BJournalEntry |              | <input type="checkbox"/>            |
| <input type="checkbox"/> AutoReversalCreate        | BJournalEntry |              | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> CarrierAddressMaintenance | ls_mstr       |              | <input type="checkbox"/>            |
| <input type="checkbox"/> Change Numbers            | BCDocument    |              | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> Change Status             | BCDocument    |              | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> Change Status             | BCDocument    |              | <input type="checkbox"/>            |
| <input type="checkbox"/> ChangeSystem              | BSetting      |              | <input type="checkbox"/>            |
| <input type="checkbox"/> ChangeUser                | BSetting      |              | <input type="checkbox"/>            |
| <input type="checkbox"/> CommodityCodeMaster       | com_mstr      |              | <input type="checkbox"/>            |

QXO automatically detects business events in DDP published data and saves them as inactivated if the events are not in the QXO database.

**Note** This does not apply to DDP Only source applications.

In order to be published, DDP documents must be associated with a valid business event. The system checks to verify that the business event is a valid event type for the source application and raises an exception if the event is invalid.

### Searching for Database and Business Events

You can use the Filter panel on top of the database and business events lists to search for specific event types.

To search for database events, enter a table name using a wildcard (for example, `*_mstr`), and specify the active status; then click the Search icon.

To search for business events, enter an event, table, object name, or a combination of them using wildcards, and specify the active status; then click the Search icon. For example, enter `*/bcurrency` in the Object field to find all event types for object bcurrency; enter `create/*` in the Event field to find all objects with the "create" event type.

Search/filter criteria are not case-sensitive.

## Deleting Source Applications

When you delete a source application from QXO, the system displays a message indicating that if there is data associated with the source application, all affected message context will be lost, and prompts you to confirm the deletion.

## QXO Services

QXO uses six types of services: event, message publisher, message sender, archive, e-mail, and dashboard. The profiles for the event, message publisher, and message sender services contain the same parameters, the only difference being that:

- Event services are associated with source applications—except source applications that employ DDP.
- Message publisher services are associated with business objects.
- Message sender services are associated with subscribers.

You choose the source application, business object, or subscriber using a lookup that displays available values and lets you move names from one list to another.

You do not have to create the archive service or the e-mail service. The archive service is created automatically the first time the archive routine is run. For details, see “Data Archive” on page 63.

For information about viewing specific services and operating services from the command line, see “Viewing Specific Services” on page 105.

## QXO Event Service Process

Event services are the QXO processes that initially connect to the `qxevents` database to identify what changes have occurred in the source application and then to the production database to extract the data and write it to the `qxodb`.

The actual process an event service follows is:

- 1 Poll for and identify an eligible event in `qxevents`.
- 2 Identify affected business objects in QXO.
- 3 Build a data object to hold the data.
- 4 Extract the data from `qaddb` into the data object.
- 5 Store the data object in `qxodb`.

**Note** These steps are not applicable to business objects that employ DDP since these business objects are passed directly to the `qxodb` database in QXO.

An event service can extract data from source applications using either the table rowid or an OID on the database table. The event service does not extract data from a source application if the source application type is suspended. For details see “QXO Source Applications” on page 24.

**Note** In QAD QXtend version 1.4, the XML format of event messages changed. Messages in the old format that were previously extracted and stored are converted to the new format when they are required.





## Creating an Event Service

Event services are defined to operate with a specified set of source applications.

- 1 In the Configuration tab, click Event Service in the navigation tree. The Event Services overview screen displays.
- 2 Click New to create a new event service.

**Fig. 2.14**  
Event Services Configuration Parameters

**Session Code.** Enter a code (maximum 10 characters) for this service. Using a naming convention such as EVS<serviceName> makes it easier to identify the service as an event service later on.

**Session Description.** Specify a description (maximum 15 characters).

**Polling Frequency.** Enter the number of seconds for the service to wait between polls to the qxevents database.

**Max Retry Limit.** Enter the maximum number of times during a single session that the service will attempt to reprocess a failed application event (maximum 9999).

**Alert Monitor Frequency.** Specify the number of minutes between alert messages when the Alert Message Type is set to MSG and thresholds have been set. See “Alert Message Types” on page 37.

**Number of Agents.** Specify the number of agents to start for the service when the AppServer is started.

**Events to Process.** Enter the maximum number of events to be processed by a source application before switching to a different one. This is used only when an event service is defined with more than one source application, and is used to ensure throughput across all registered source applications.

**Alert Message Types.** Check the message types that you want to be raised as alert conditions for this profile. Choose one or all of the following: MSG (used for metric-related alert messages), ERR (errors), WRN (warnings).

**Note** For details on configuring e-mail alerts for metric-related alert messages see “QXO E-mail Alerts” on page 56.

When you select MSG, additional options display.

**Fig. 2.15**  
Setting MSG Alert Metrics

The MSG alert metrics let you specify alert thresholds for Processed, Pending, or Error conditions. In Figure 2.19, a threshold on processed messages is set. If the defined threshold is reached, an alert is raised. Another alert will not be raised—although processing will continue—until the value specified in the Alert Monitor Frequency has elapsed. For example, if the Pending value is set to greater than 20 and the Alert Monitor Frequency is set to 10, if there are 100 messages pending an alert would be raised. If 10 minutes later there were still more than 20 messages pending, another alert would be raised.

**Note** The type of conditions reflect the type of service being configured. For an event service, for example, the conditions relate to event processing. For the message publisher and message sender, the conditions relate to QDoc creation and QDoc delivery, respectively.

**Operator.** Choose the numeric operator for each processing condition.

**Threshold.** Enter the number of events to occur before an alert is issued.

- 3 Click Lookup to register source applications with this service. A lookup displays available and currently assigned source applications. Use the Add and Remove buttons to update the lists.

**Fig. 2.16**  
Source Application Lookup

- 4 Click OK to save and exit the Register Source Applications screen.
- 5 Click Save to save the event service configuration.


**Note** Two Oracle source applications with the same logical name (specified in the connection parameters of the source application database) cannot be registered to one event service.

## Registering Event Types with an Event Service

After you create a new event service, it appears under Event Service in the navigation tree. By default, all active event types in the event service's registered source applications are automatically registered with it as well. However, you can configure an event service to only process specific event types so as to create dedicated event service instances for high-priority events, allowing them to be processed as soon as they arise. This is achieved through registering specific event types of a source application with an event service for processing.


- 1 Under Event Service in the navigation tree, click the event service you want to configure to display all its registered source applications under it.
- 2 Click a source application.
- 3 The Event Registration screen on the right shows that all active event types in the source application are automatically registered with the event service. Clear the Auto Register All Events option.

**Fig. 2.17**  
Event Registration (Default)




- 4 Click Register Events to register event types with this service.

**Fig. 2.18**  
Event Registration

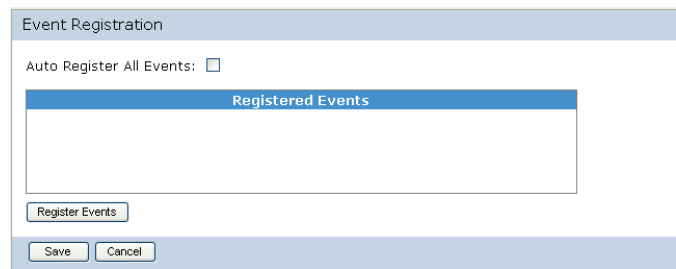

- 5 A lookup window displays available and currently registered event types. Use the Add and Remove buttons to update the lists.

**Fig. 2.19**  
Event Registration Lookup

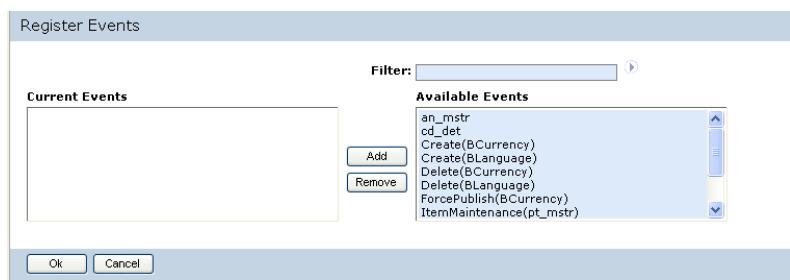

- 6 Click OK to save and exit the Register Events screen.
- 7 Click Save to save the event service configuration.

## Defining a Message Publisher

Message publishers poll the qxodb database for new data objects created by an event service, as well as for new business objects passed directly to the qxodb database from the QAD EE Financials module.


Message publisher services:

- 1 Poll for and identify an eligible data object in qxodb .
- 2 Identify affected business objects in QXO.
- 3 Identify applicable profiles.
- 4 Build an XML QDoc using a profile.
- 5 Store the QDoc in qxodb .
- 6 Create a delivery request for each associated subscriber, using the appropriate QDoc syntax for each subscriber.
- 7 Store the delivery requests in the subscriber's delivery queue.

As described in “QXO Services” on page 36, the parameters for message publishers are identical to those for event services.

- 1 In the Configuration tab, click Message Publisher in the navigation tree. The Message Publishers overview screen displays.
- 2 Click New to create a new message publisher. Enter values as described in “QXO Event Service Process” on page 36.
- 3 Click Lookup to register business objects with this publisher. A lookup displays available and currently assigned business objects. Use the Add and Remove buttons to update the lists.

**Fig. 2.20**  
Business Object Lookup

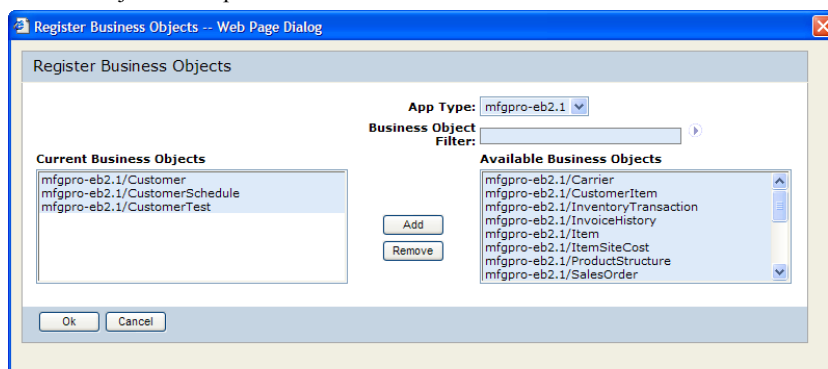

- 4 Click OK to save and exit the Register Business Objects screen.
- 5 Click Save to save the message publisher configuration.

## Defining a Message Sender

Message senders poll the qxodb database for new QDocs created by a message publisher. Message sender services:

- 1 Poll for delivery requests in the subscriber's delivery queue.
- 2 Send QDocs—using the appropriate QDoc standard—to the designated subscribers.

Message senders can forward the QDoc either through a Web service call to a URL, or by dropping the QDoc into a directory. As described in “QXO Services” on page 36, the parameters for message senders are identical to those for event services.

- 1 In the Configuration tab, click Message Senders in the navigation tree. The Message Senders overview screen displays.
- 2 Click New to create a new message sender. Enter values as described in step 2 in “QXO Event Service Process” on page 36.
- 3 Click Lookup to register subscribers with this sender. A lookup displays available and currently assigned subscribers. Use the Add and Remove buttons to update the lists.
- 4 Click OK to save and exit the Register Subscribers screen.
- 5 Click Save to save the message sender configuration.

## QXO Subscribers

A subscriber is a delivery point for a QDoc or other published XML document. Another application can be the delivery point, or an instance of QXI. Subscribers have an associated delivery schedule and delivery method: either a directory location or a Web service. The subscriber is responsible for retrieving the outbound document.

A subscriber can be defined using either the 1.1 or 1.0 QDoc syntax specification. In addition you can specify parameters that are used in the most common forms of SOAP headers—or define your own header if QXI is not the intended target application.

**Note** If your current QXtend installation is updated, all existing subscribers are converted to use the QDoc 1.1 specification standard. For details, refer to *QAD QXtend Installation Guide*.

To bring a new subscriber up to date, a Force Publish function is available. You can also restrict specific source applications to ensure a subscriber sees only the data intended for them.

You also can configure profiles for individual subscribers by using the Subscriber Profile Configuration Parameters screen. Configuring a profile allows you to specify the event types you want to use for that subscriber profile. For details, see “Configuring Subscriber Profiles” on page 50.

## Subscriber E-mail Notification

Based on the result of processing subscriber messages, the system can send e-mail to a user that generated the event (for non-DDP source applications) or to the user defined within the message structure (for DDP applications).

When an event is generated by a non-DDP source application, the system stores the name of the user that triggered the event. When the event service successfully extracts the raw message, the system determines the email address of the user responsible for the change.

Messages that are sent via DDP can define email addresses of recipients interested in the result of the subscriber message. If a user address is included in the session context, it will always send an e-mail to the addresses in the session context, overriding the Email Data Owner setting in the subscriber configuration.

Raw messages generated by the event service are delivered using the subscriber settings. Messages that are sent via DDP use session context values. Delivered e-mail messages are formatted using the current default email template. For details on defining custom e-mail configurations, see “Managing Alert Groups” on page 58.

## Free Use of QXO

Certain messages processed by QAD QXtend are processed free of charge and do not require a license code:

- When the subscriber type is QAD QXtend. In this case, sending messages from QXO to QXI is considered a free operation and thus not restricted by the number of licensed agents.
- When other (valid) applications are registered in QXI. In this case, messages can be sent to a Web service or file drop.

Table 2.2 describes the free use of QXO and QXI.

**Table 2.2**  
Free Use of QXO and QXI

| Communication Method | Subscriber Type  | Outbound Free | Inbound Free |
|----------------------|------------------|---------------|--------------|
| File Drop            | Ext. application | No            | n/a          |
| File Drop            | QAD application  | Yes           | n/a          |
| Web Service          | Ext. application | No            | No           |
| Web Service          | QAD application  | Yes           | No           |
| QXtend Web Service   | QXtend           | Yes           | Yes          |
| QXtend Web Service   | QAD application  | Yes           | Yes          |

**Note** You can use the QXtend Inbound Usage Report to view which messages originated from licensed applications and which are free QAD messages. For details see “QXtend Inbound Usage Report” on page 277.

## Defining a Subscriber

To define a subscriber:

- 1 In the Configuration tab, click Subscribers in the navigation tree. The Subscribers overview screen displays.
- 2 Click New to create a new subscriber.

**Fig. 2.21**  
Subscriber Configuration Parameters

**Subscriber Code.** Enter a code (up to 15 characters) that identifies the external system or application.

**Subscriber Description.** Enter a description (up to 35 characters).

**Source Domain.** Identify any domain this subscriber requires (for version eB2.1 and higher source applications only).

**Source Entity.** Identify any entity this subscriber requires (for version eB2.1 and higher source applications only).

**Suspend on.** Specify whether to suspend the subscriber on one or more of the following errors: sending error, SOAP error, and application error.

Message Sender does not send messages to suspended subscribers and suspended subscribers can be resumed later through the UI or a batch process script.

You can configure e-mail alerts to be sent on calculation and database errors. See “QXO E-mail Alerts” on page 56.

**Sending Option.** Choose a sending option to be used when sending messages.

**Send Immediately.** Send the document to the subscriber immediately. This is the default if there are no delivery schedules defined.

**Use Delivery Schedule.** Send the document to the subscriber using a defined delivery schedule.

**Delivery Schedule.** This drop-down list displays only when the Use Delivery Schedule option is selected. The default delivery schedule displays as selected in the Delivery Schedules summary screen. Choose a different delivery schedule if required. See “QXO Delivery Schedules” on page 54.

**Communication Method.** Choose the method used to send messages.

**File Directory Service:** In this method, outbound QDocs are placed in a directory for the subscribing application to read. Specify a target directory. Selecting this option causes the subscriber Type to default to External Application.

**Web Service:** In this method, outbound QDocs are delivered to a URL where the subscriber is set up to listen for incoming documents. Specify a target URL. Selecting this option causes the subscriber Type to default to External Application.

For the fields specific to a Web Service subscriber, see Figure 2.22 and the field descriptions following it.

**QXtend Web Service:** In this method, users can connect to QAD QXtend without needing to know the full URL of the Web service. Selecting this option causes the subscriber Type to default to QAD QXtend.

The QXtend Web Service method also denotes communication that is carried free of charge.

**Note** For details about QAD QXtend licensing, see Chapter 22, “Licensing,” on page 269.

For the fields specific to a QXtend Web Service subscriber, see Figure 2.24 and the field descriptions following it.

**QAD Alerts:** The system sends messages through the QAD Alerts Event Publishing Web service. For details, see *QAD Alerts User Guide*.

**QAD BPM:** Use this method if you are configuring QAD BPM as the subscriber. The QAD BPM subscriber sets up the communication channel between QXO and QAD BPM and publishes business events and data to the QAD BPM server. For information about BPM, see the QAD BPM documentation.

**Subscriber Type.** Specify the type for the subscriber. The options on this dropdown represent the valid applications that have been registered with QXI. For details about the communication method/subscriber type combinations that permit the use of free messaging, see Table 2.2 on page 42.

**Note** If the communication method is File Directory Service or Web Service, the default type is External Application. If the method is QXtend Web Service, the default type is QAD QXtend.

**XML Syntax.** Specify the version of the XML syntax to use for the subscriber. The options are QDoc 1.1, QDoc 1.0, or Other. Selecting the Other option requires the SOAP action—as well as SOAP envelope and header—to be configured.

**Allow Superseded.** Indicate whether the subscriber only accepts the latest revision of a document or incremental updates of a document. This option is typically used when multiple QDocs exist for the same rowid or OID that has been updated multiple times, and only the latest QDoc is required.

**Note** Allow Superseded option is not available for the subscribers with the Communication Method set to QAD BPM.



Yes. The subscriber only accepts the final revision of a document. Setting the Allow Superseded option to Yes means messages containing errors that were not sent and were superseded are marked as such. These superseded messages cannot be resubmitted.

No. The subscriber only accepts incremental updates of a document. Setting the Allow Superseded option to No means that when messages containing errors are superseded, further updates cannot be sent until the errors in the message have been fixed and are set to the HOLD status until the previous message is successfully sent or deleted. If there are two messages with the same rowid or OID for the same subscriber, messages are sent in a single thread in order to prevent the most recent document from being sent to the database first. All errors in the message must be fixed before further updates can be sent—or the QDoc can simply be deleted.

*Require Acknowledgement.* For File Directory Service, Web Service, and QAD BPM, specify whether QXtend requires acknowledgement of message processing results from the subscriber.

Yes. When a subscriber message is successfully delivered to the subscriber, the status of the subscriber message is set to WAITACK (waiting for acknowledgement). After the subscriber message is processed, the subscriber sends acknowledgement to QXtend and the subscriber message status is updated accordingly to DLV, APPERR, or WRN.

No. No acknowledgement is required. The message status is indicated as DLV when the message has been successfully delivered and will not be updated even though there is an error or a warning when the message is processed by the subscriber.

*Target Directory.* For file directory service, specify the location on the file system where outbound QDocs for this subscriber should be placed. If a full path is not specified, QDocs are placed in the current working directory.

*File Extension.* For the file directory service, designate the file extension of QDocs for filedrop subscribers; for example, you can specify .req as the QDoc file extension so that QDocs can be directly dropped into a queue to be processed by Queue Manager.

**Fig. 2.22**  
Web Service URL Subscriber Entry (XML Syntax is QDoc 1.1)

| Configuration Parameters   |                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Subscriber Code*           | <input type="text"/> (25 Character Max)                                                                               |
| Subscriber Description     | <input type="text"/>                                                                                                  |
| Source Domain              | <input type="text"/>                                                                                                  |
| Source Entity              | <input type="text"/>                                                                                                  |
| Suspend on                 | Sending Error <input type="checkbox"/> SOAP Error <input type="checkbox"/> Application Error <input type="checkbox"/> |
| Sending Option             | <input type="button" value="Send Immediately"/>                                                                       |
| Communication Method       | <input type="button" value="Web Service"/>                                                                            |
| Subscriber Type            | <input type="button" value="External Application"/>                                                                   |
| XML Syntax                 | <input type="button" value="Qdoc 1.1"/>                                                                               |
| Allow Superseded           | <input type="checkbox"/>                                                                                              |
| Require Acknowledgement    | <input type="checkbox"/>                                                                                              |
| Target URL*                | <input type="text"/>                                                                                                  |
| Response Parser            | <input type="text"/>                                                                                                  |
| Response Timeout*          | <input type="text" value="120"/>                                                                                      |
| HTTP Version*              | <input type="button" value="1.1"/>                                                                                    |
| Receiver*                  | <input type="text"/>                                                                                                  |
| Destination Domain         | <input type="text"/>                                                                                                  |
| Destination Entity         | <input type="text"/>                                                                                                  |
| Scope Transaction          | <input type="checkbox"/>                                                                                              |
| User Name                  | <input type="text"/>                                                                                                  |
| Password                   | <input type="text"/>                                                                                                  |
| Encode Password            | <input type="checkbox"/>                                                                                              |
| Email Data Owner           | <input type="checkbox"/>                                                                                              |
| <b>Registered Profiles</b> |                                                                                                                       |

**Target URL.** For Web service, specify the URL where outbound QDocs for this subscriber are sent. This URL must be set up as a Web service.

**Response Parser.** Specify the response parser the subscriber uses to parse QDoc information. Response parser is a Progress class that you can define to parse information for your subscriber application. For information on developing your custom response parser, see Appendix C, “Response Parser,” on page 459.

**Response Timeout.** Enter a number of seconds for QXO to wait for a response from the subscriber. If no response is received in that time period, an error is raised for the QDoc in QXO.

**HTTP Version.** Specify which version of HTTP to use when making the Web Service call. Web services require SOAP headers on all incoming communications in order to validate the sender and destination. QXO supports HTTP versions 1.0 or 1.1. QAD recommends that you use HTTP 1.1.

**Receiver.** Specify the receiver associated with this subscriber. A receiver is a named QAD Enterprise Applications instance. This field is required if XML syntax version 1.1 or 1.0 is selected.

**Destination Domain.** Optionally, specify a domain in the receiver. Domains exist in the QAD Enterprise Applications databases for versions eB2.1 and above. This field displays only when XML syntax version 1.1 or 1.0 is selected.

**Destination Entity.** Optionally, specify an entity in the receiver. Entities exist in the QAD Enterprise Applications databases for versions eB2.1 and above. This field displays only when XML syntax version 1.1 or 1.0 is selected.

**Scope Transaction.** Select this option to indicate whether QDocs sent to this subscriber should be scoped as single transactions. This field displays only when XML syntax version 1.1 or 1.0 is selected. For details see page 321.

**User Name.** Specify a user name for logging in to QAD Enterprise Applications. If a user name is not provided, no user name information is entered into the context section of the QDoc. This field displays only when XML syntax version 1.1 or 1.0 is selected.

**Password.** Specify a password for logging in to QAD Enterprise Applications. Any password entered into this field is masked. This field displays only when either the XML syntax version 1.1 or 1.0 is selected. This field is disabled if the User Name field is blank.

**Note** For security, any user name and password login credentials specified here are masked as asterisk characters (\*) when returned in the QXI response document.

**Encode Password.** Specify whether you want to encode the password for the subscriber. Ensure that you select this option when it is a QXI subscriber and the `encodedPasswords` in the `qxtendconfig.xml` file is set to `True`.

**Email Data Owner.** Select this check box to indicate e-mail should be sent to the owner of the data when a message raises an exception. Typically this check box is used in a data synchronization scenario when data in one domain may not exist in the target domain. You must select this check box to display the Message Status options.

**Note** This field is disabled if the Active check box in the Email Configuration Parameters screen is not selected; for details, see “Configuring E-mail Settings” on page 56.

**Message Status.** Select the processing result that will trigger the e-mail to be sent. (Message Status is available only when the Email Data Owner check box is selected.)

**Fig. 2.23**  
Web Service URL Subscriber Entry (XML Syntax is Other)

The screenshot shows a web form for entering subscriber details. On the left, there are labels for 'Include Soap Action', 'Soap Envelope\*', 'Soap Header', 'User Name', 'Password', 'Encode Password', and 'Email Data Owner'. The 'Include Soap Action' checkbox is checked. The 'Soap Envelope\*' text area contains the following XML code:

```
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header>&1</soapenv:Header>
  <soapenv:Body>&2</soapenv:Body>
</soapenv:Envelope>
```

The 'Soap Header' text area is empty. Below these fields are input boxes for 'User Name' and 'Password'. The 'Encode Password' checkbox is checked, and the 'Email Data Owner' checkbox is unchecked. At the bottom, there is a 'Registered Profiles' section with a 'Register Profiles' button, and a 'Source Application Restriction' section with the text 'QADEE/QADERP'.

**Include SOAP Action.** If using the XML Syntax option of Other, select this option to include the SOAP action specified in the SOAP Action field. This option must be selected if the subscriber is for a QXI instance.

**SOAP Action.** If using the XML Syntax of Other with a SOAP action, enter a SOAP action, if required. Leave this field blank if the subscriber is a QXI instance.

**SOAP Envelope.** The SOAP envelope element is the root element of a SOAP message and allows QDocs to be sent to Web services that accept or poll for XML documents. When the message is sent, the &2 element of the SOAP envelope is substituted for the profile message. This option displays only when the Other option is selected on the XML Syntax drop-down. Use the default that displays in the text box.

**SOAP Header.** Copy the SOAP header from a valid QDoc directed to this subscriber and paste it in here. The SOAP header provides sender and destination details. This option displays only when the Other option is selected on the XML Syntax drop-down.

If you require a specific user-defined SOAP header for a specific Web service requirement, enter that header here.

**User Name/Password.** Specify the username and password for socket-level authentication by external Web service subscribers.

**Encode Password.** When communication method is Web Service and XML syntax is Other, this field is not used.

**Fig. 2.24**  
QXtend Web Service Host Subscriber Entry

**Configuration Parameters**

Subscriber Code\*  (25 Character Max)

Subscriber Description

Source Domain

Source Entity

Suspend on Sending Error ☐ SOAP Error ☐ Application Error ☐

Sending Option

Communication Method

Subscriber Type

XML Syntax

Allow Superseded ☐

Tomcat Host\*

Tomcat Port\*

Webapp Name\*

SSL ☐

Response Timeout\*

HTTP Version\*

Receiver\*

Destination Domain

Destination Entity

Scope Transaction ☐

User Name

Password

Encode Password ☐

Email Data Owner ☐

**Registered Profiles**

If you select QXtend Web Service as the communication method, the Configuration Parameters window contains the following additional fields:

*Tomcat Host.* Specify the hostname of the Tomcat server that hosts the Web service.

*Tomcat Port.* Specify the port number where the Web service is available.

*Webapp Name.* Specify the name of the Web service used to connect to QXtend Inbound.

*SSL.* Select the field to use Secure Socket Protocol https encryption on messages to and from the Tomcat server.

**Note** If SSL is selected, then Tomcat Host must include domain name of the host.

- 3 Identify the profiles used to format QDocs for this subscriber by clicking on Register Profiles. A standard lookup displays, listing available profiles and those currently assigned. Use the Add and Remove buttons to move selected profiles from one list to the other.
- 4 If you want to restrict this subscriber to receiving data from one or more given source applications, click Register Src Apps. Add the source applications this subscriber should receive data from. When none are specified, the subscriber can receive from all valid source applications.
- 5 Click Save to save and exit the Configuration Parameters screen. The new subscriber displays in the overview screen.

**Note** Profiles assigned to a subscriber are listed under the subscriber in the left-hand navigation menu.

If the subscriber is new, you can click Force Publish in the Subscriber overview screen to force the publication of a QDoc for every record associated with a profile or set of profiles. Force Publish queries every record in the source application that fits the filter criteria of each selected profile and creates an event for them.

You can also click Generate Schema to generate the XML schemas for every profile registered to this subscriber.

## Configuring Subscriber Profiles

You now can configure individual profiles for subscribers to enhance your control over when messages are sent. For example, you can specify which events must occur before a message is published to a subscriber. The message will be sent only when the event types you select were the original trigger for the raw message.

You can define a sending option, and filter based on data within the profile message, and substitute values for tokens in the profile message. You can also define which operations—Add, Modify, and so on—the subscriber requires.

You configure subscriber profiles using the Subscriber Profile Configuration Parameters screen. To display this screen, click the name of the profile under the subscriber to which the profile is registered.

**Fig. 2.25**  
Subscriber Profile Configuration Parameters

The screenshot shows the 'Subscriber Profile Configuration Parameters' window. It contains the following sections:

- Profile:** QADEE/AnalysisCode2/AnalysisCode2
- Sending Option:** Use Subscriber Default (dropdown)
- Filter:** (empty text box)
- Operations:**
  - Add: ☐
  - Modify: ☒
  - Delete: ☒
  - Unmodified: ☐
- Event Types:**

| Event Type | Table/Object | Listen                              |
|------------|--------------|-------------------------------------|
| an_mstr    | an_mstr      | <input checked="" type="checkbox"/> |
- Field Substitution:**

| Token    | Data Type | Fixed Value | Calc Prog. |
|----------|-----------|-------------|------------|
| No token |           |             |            |
- Detailed Response:** ☐
- Exclude Top Level Node:** ☐
- File Name Pattern:** AnalysisCode2- (text box with example: e.g ItemMaster-\$ptPart\$)
- Add File Unique Reference:** ☒

Buttons at the bottom: Save, Cancel, and a Reset Default button.

**Sending Option.** Choose a sending option to use when sending messages.

**Use Subscriber Default.** Send the document to the subscriber using the delivery schedule that is defined for the subscriber.

**Send Immediately.** Send the document to the subscriber immediately. If there are no delivery schedules defined, this is the default.

**Use Delivery Schedule.** This option is available only if delivery schedules have been defined. Selecting this option displays a dropdown of the defined schedules.

**Filter.** Enter a valid Progress query to use with the subscriber profile. The subscriber will only deliver the profile message if the filter defined on the subscriber is true for the data in the top-level table in the profile. On saving the subscriber profile, the system validates the query and returns an error message if the query expression is not valid.

**Note** If a subscriber profile is modified, every subscriber that registers that profile must validate the filter. If the filter results in an invalid query, a warning is displayed.

**Operations.** By default, all operations are selected except Unmodified. At least one option must be selected; otherwise the system displays an error.

When the message publisher determines the operation of the top-level buffer, the system will not create a subscriber message if the operation is invalid for the subscriber. If the Detect Operations check box is not selected on the profile, the message publisher determines the operation based on the existence of the previous and current message. Before creating the subscriber message record, the filter query must be satisfied. If the filter query produces a Progress error, the system issues an alert. The operation is based only on the top-level table.

**Event Types.** Displays the event types associated with the subscriber profile; these are the active event types for all the data objects in the related business object. The Listen check box must be selected to activate an event type. By default all event types are selected.

The message publisher will create a subscriber message if the original event that created the raw message is selected.

The Event Types table reflects any changes made to the event types included in a data object for a business object.

**Field Substitution.** To edit a token, select the check box to the left of the token name and click Edit. Then enter a fixed value and/or calculated program as required.

The Field Substitution table displays a list of tokens and the values to substitute into those tokens when generating a profile message for the current subscriber. The tokens, which come from the profile, are signified by an “at” symbol (@) on either side of the variable, and are placed in the fixed value fields. The message publisher determines if any tokens need replacing in a profile message and creates a different profile message for each subscriber. For example, each subscriber may require a different fixed value “Site,” and the remainder of the profile data to remain the same.

**Token.** Specify any required tokens to set values on the profile based on the subscriber that is receiving them.

**Data Type.** Displays the data type of the field: character, date, datetime, datetime-tz, decimal, int64, integer, or logical.

**Fixed Value.** Optionally, specify a fixed value to use in the QDoc for this field or specify a value using the format =\${<node>}, in which case the field will be populated with the value in the specified node.

You can double-click in the Fixed Value field and view or enter data in a pop-up window.

The fixed value you provide must be consistent with the data type specified for the field. If there is a mismatch, the system displays an error message when you try to save the subscriber profile configuration parameters.

**Calculated Program.** Optionally, enter the name of a Progress program (.p) to run. The program can be either in the QXOServer PROPATH or on the AppServer. The local version will be run if it exists; otherwise, it runs on the AppServer.

Make sure the calculated value will be consistent with the data type specified for the field. If there is a mismatch, the system does not prevent you from saving the subscriber profile configuration parameters, but will run into errors during data publishing.

**Detailed Response.** Specify whether to set the suppressResponseDetail attribute of QDoc requests to true or false for a subscriber profile.

Yes: suppressResponseDetail is set to false.

No: suppressResponseDetail is set to true.

For detailed information and the effects of the suppressResponseDetail attribute, see “suppressResponseDetail” on page 322.

**Exclude Top Level Node.** Specify whether to exclude the top-level dataset node from the generated QDoc for a profile. This option is available only when the subscriber’s XML Syntax is set to Other. Use this option when the recipient of a message does not want the dataset level node in the message.

**File Name Pattern.** Enter the file name pattern you want to use.

**Add File Unique Reference.** Specify whether to append the mpt\_publ\_msg\_obj reference to the file name to make it unique. This unique reference is an 18-digit number.

The two options, File Name Pattern and Add File Unique Reference, provide you with the ability to define the QDoc file names. They are available only when the subscriber’s Communication Method is set to File Directory Service.

By default, File Name Pattern is *<profile\_name>*- and Add File Unique Reference is Yes. The QDoc file name will be:

*<profile\_name>*-*<mpt\_publ\_msg\_obj>*.*<file\_extension>*.

You can include field values of profile messages in file names. For example, for an ItemMaster message, if you use *ItemMaster-\$ptPart\$*- as the name pattern, *\$ptPart\$* will be replaced with item number in the file name. Only the fields in top-level data objects can be referred to. When there are multiple top-level data objects, you can specify the DO name as prefix of the field name, for example, *\$tBusinessRelation.BusinessRelationCode\$*. And the field to be referred to can be a calculated field or a custom field, which provides flexibility.

Clicking on Reset Default restores the default values of File Name Pattern and Add File Unique Reference.

## Subscriber Visibility

Some planning and consideration are needed when applying filters to profiles and business objects. Depending on what filters you define in the business objects or, more typically, in the profiles, a subscriber may have interrupted visibility to some data changes.

**Example** Table 2.3 shows the QDocs generated for one sales order for two different profiles; one receives all sales orders and the other filters only for sales orders over \$5,000.

**Table 2.3**  
Subscriber Visibility Scenario

| Description               | Price  | Subscriber 1:<br>All orders | Subscriber 2:<br>Over \$5,000 |
|---------------------------|--------|-----------------------------|-------------------------------|
| Initial order             | \$4933 | ✓                           |                               |
| Add item                  | \$5345 | ✓                           | ✓                             |
| Reprice with 10% discount | \$4810 | ✓                           |                               |



| Description                   | Price  | Subscriber 1:<br>All orders | Subscriber 2:<br>Over \$5,000 |
|-------------------------------|--------|-----------------------------|-------------------------------|
| Add on-site assembly          | \$6250 | ✓                           | ✓                             |
| Split assembly to separate SO | \$4810 | ✓                           |                               |

Subscriber 1 sees all the changes, while Subscriber 2 only sees the two changes that temporarily raise the so\_price value above \$5,000.

## Adding Session Context or an Additional Profile Table to a Subscriber Message

Outbound allows you to add session context or an additional profile table to a subscriber message. This feature is useful in specific scenarios.

To add session context to a subscriber message, open the `AdditionalContext.xml` file from `<qxoserver>/conf` and set the context extensions as in the following example:

```
<?xml version="1.0"?>
<ContextExtensions>
  <Object>
    <SourceApplication>*/SourceApplication>
    <BusinessObject>BBusinessRelation</BusinessObject>
    <Profile>*Sync</Profile>
    <Context>
      <PropertyQualifier>QAD</PropertyQualifier>
      <PropertyName>ShutdownSession</PropertyName>
      <PropertyValue>>true</PropertyValue>
    </Context>
  </Object>
</ContextExtensions>
```

In this example, the session context `ShutdownSession` is added to the `BBusinessRelation` profile that ends with `Sync`. The session context allows the session in the target system to be shut down after synchronization of the business relation record.

To add an additional profile table to a subscriber message, open the `AdditionalProfileTable.xml` file from `<qxoserver>/conf` and set the additional tables as in the following example:

```
<?xml version="1.0"?>
<AdditionalTables xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <AdditionalTable>
    <Profile>Currency</Profile>
    <Table>tContextInfo</Table>
    <Schema>tContextInfo.xsd</Schema>
  </AdditionalTable>
</AdditionalTables>
```

The schema should be available in the same directory. In this example, it is the `tContextInfo.xsd` file. Additionally, the profile must have `calcOperations.p` defined as the Operation Program.

In the example, an additional table, `tContextInfo`, is added to `Currency` profile. The table supports data synchronization between a non-Financials MFG/PRO object and a Financials object.

## QXO Delivery Schedules

A delivery schedule can be defined to control the transmission of a single document or multiple documents in a batch to subscribers at one or more specific times. You can select one delivery schedule to be used as the default schedule.

Outbound messages are sent only if they exist—that is, if the delivery time defined in a delivery schedule arrives and there are no outbound messages, nothing is sent.


Various types of schedule can be defined for transmitting documents:

- Immediately when published. If no delivery schedules are defined this is the default system behavior. You select this option when defining a subscriber. See “QXO Subscribers” on page 41.
- At a specified time (or times) during the day. You can choose from several predefined times or specify one or more user-specified times.
- On selected days of the week at specified times.
- During selected months on specified days at specific times.

**Example** The QXO system administrator wants to configure a delivery schedule to send documents each hour during business days. A delivery schedule called BusinessHours is created and configured thus: the Sending Type is Weekly; the days Monday, Tuesday, Wednesday, Thursday, and Friday are selected; Sending Times are specified for 08:00 – 17:00.

- 1 In the Configuration tab, click Delivery Schedules in the navigation tree. The Delivery Schedules overview screen displays. Use this screen to select the delivery schedule the system should use by default.
- 2 Click New to create a new delivery schedule. Figure 2.26 shows the configuration options available for the Daily sending type.

**Fig. 2.26**  
Delivery Schedule Configuration Parameters

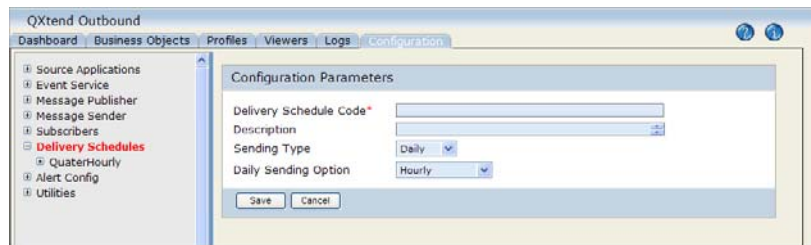

**Delivery Schedule Code.** Enter a code (up to 10 characters) that identifies the delivery schedule.

**Description.** Enter a description (up to 35 characters).

**Sending Type.** Choose a sending type for the outbound messages.

**Fig. 2.27**  
Daily Sending Type

If Sending Type is Daily, outbound messages are sent daily.

**Daily Sending Option.** Choose a daily sending option (Hourly, Half-Hourly, Quarter-Hourly, or User Defined). If User Defined is selected, specify a sending time or times by clicking the Add button. Sending times must be entered in 24-hour format. To remove a specified time, select the time and then click Remove.

**Fig. 2.28**  
Weekly Sending Type


If Sending Type is Weekly, outbound messages are sent weekly. Select the days of the week on which to send the outbound messages. To add a sending time, click Add and then type a time into the New Time field. To remove an existing time, select the time you want to remove and then click Remove.

**Fig. 2.29**  
Monthly Sending Type

If Sending Type is Monthly, outbound messages are sent monthly. Select the months in which to send the outbound messages. Select the Day option and enter a date to specify a specific day, or select the “The” option to specify a day; for example, the First Sunday of the month. Then enter a time in the Sending Time field.

**Note** If a value is entered in the Day field that is invalid for one or more selected months, outbound messages are sent on the last day of the month. For example, if 31 is entered in the Day field and the months January, February, and April are selected, the outbound messages are sent January 31, February 28 (during non-leap years), and April 30.

**Fig. 2.30**  
Delay Sending Type



If Sending Type is Delay, the system postpones sending subscriber messages by a specified amount of time after message creation.

*Delay Sending Option/Delay Amount.* Specify the amount of time after message creation to publish subscriber messages.

- 3 Click Save to save the delivery schedule configuration.

## QXO E-mail Alerts

The e-mail alerts feature allows specified recipients to receive e-mail alerts that are raised by QXO for events relating to specific subscribers and profiles.

Alerts in QXO are generated by three types of events:

- Default (system) alerts, which are triggered by QXO at a stage in processing that does not yet involve a specific subscriber or profile. Default alerts may arise during event extraction, during the creation of business objects by the event service, when services are started with no subscribers configured, or when the delivery of a processing alert fails.
- Processing alerts, which are triggered by processes involved in the handling of events or during QDoc creation. Processing alerts may arise if, for example, a required business object is not registered with a message publisher, or if the creation of a subscriber profile message fails.
- Metric-related alerts, which are triggered when MSG thresholds for metrics are exceeded for an event, message publisher, or message sender service. For details of these metrics see “QXO Services” on page 36.

Default alerts and metric-related alerts are typically used by system administrators to facilitate QXO configuration troubleshooting.

E-mail alerts are delivered using simple mail transfer protocol (SMTP).

**Note** Similar e-mail alert functionality—tailored to the processing of inbound documents—is available in QXI. For details see “QXI E-mail Alerts” on page 205.

In the QXO Console you can:

- Configure e-mail settings.
- Manage alert recipients.
- Manage alert groups.

## Configuring E-mail Settings

Use the Email Configuration Parameters screen to configure e-mail settings. You can validate your e-mail setup by clicking the Verify button. The process for configuring e-mail settings in QXO is the same as that in QXI.

**Note** Before configuring e-mail settings, ensure that access is available to the SMTP server.

- 1 In the QXO Console click the Configuration tab.
- 2 Click the Email Alerts node in the left-hand tree view. If it was not already displayed, the Email Configuration Parameters screen displays.

**Fig. 2.31**  
Email Configuration Parameters

- 3 Enter the following values as required.

*SMTP Server.* Specify the address of the SMTP server used to deliver the alerts.

*Port Number.* Specify the port number used to access the SMTP server.

*Email From.* Specify the address to use in the “From:” in the header of the e-mail message. This field is required.

*Poll Frequency.* Specify the pause time before next check when the service does not detect any e-mail to be sent.

*Authentication.* Select this option if the SMTP server to be used requires authentication. When this check box is selected, the User Name and Password fields display.

*User Name.* If authentication is required, specify a user name.

*Password.* If authentication is required, specify a user password.

*Active.* Select this option to activate e-mail alerts and to create the e-mail service. No e-mail alerts will be distributed unless this option is selected.

**Note** If this option is not selected alerts will still be stored in qxodb.

*Verify.* Click to validate the SMTP configuration settings. The Recipient dialog displays.

**Fig. 2.32**  
Recipient


Enter an e-mail address in the Recipient field and click OK. If the SMTP server is available and can be communicated with, a success message is sent to the specified address and a message appears on the Recipient dialog. If the setup is incorrect—or if the SMTP server cannot be communicated with—an error message displays.

## Managing Alert Recipients

Use the Register Users screen to view the e-mail recipients currently defined in QXO. You also can add or delete recipients using this screen.

- 1 In the QXO Console, click the Configuration tab.
- 2 Choose Email Alerts|Recipients to view the currently defined recipients.

**Fig. 2.33**  
Register Users

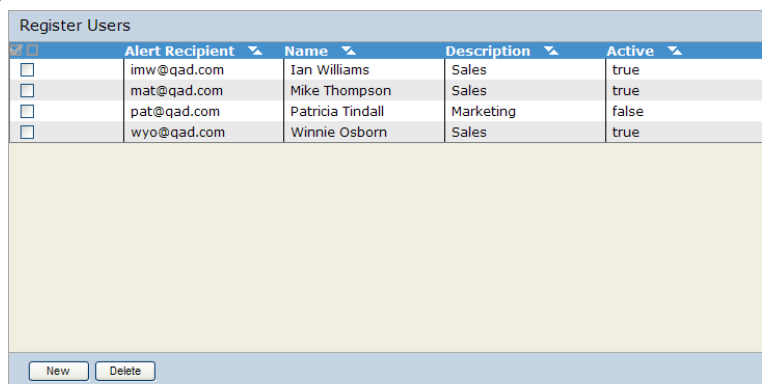

| <input checked="" type="checkbox"/> | Alert Recipient | Name             | Description | Active |
|-------------------------------------|-----------------|------------------|-------------|--------|
| <input type="checkbox"/>            | imw@qad.com     | Ian Williams     | Sales       | true   |
| <input type="checkbox"/>            | mat@qad.com     | Mike Thompson    | Sales       | true   |
| <input type="checkbox"/>            | pat@qad.com     | Patricia Tindall | Marketing   | false  |
| <input type="checkbox"/>            | wyo@qad.com     | Winnie Osborn    | Sales       | true   |

New Delete

## Add an Alert Recipient

- 1 Click New on the Register Users screen to display the Email User Parameters screen.

**Fig. 2.34**  
E-mail User Parameters



|                   |                                     |
|-------------------|-------------------------------------|
| Alert Recipient * | imw@qad.com                         |
| Name              | Ian Williams                        |
| Description       | Sales                               |
| Active            | <input checked="" type="checkbox"/> |

Save Cancel

- 2 Enter the following values as required.
 

*Alert Recipient.* Specify the e-mail address of the alert recipient. This field is required.

*Name.* Specify the name of the alert recipient.

*Description.* Enter a brief description as needed.

*Active.* Select this option to activate the recipient. The recipient will not receive e-mail alerts unless this option is selected.
- 3 Click Save to save the new recipient.

## Managing Alert Groups

Use the Register Alert Groups screen to view the alert groups currently defined in QXO and the number of members in each group. You also can add or delete alert groups using this screen, as well as define the message configuration (template) if required.

Managing an alert group consists of:

- Adding an alert group
- Registering recipients
- Setting the alert options
- Registering subscribers and profiles

- 1 In the QXO Console click the Configuration tab.
- 2 Choose Email Alerts|Groups to view the currently defined alert groups.

**Fig. 2.35**  
Register Alert Groups

| <input type="checkbox"/> | Alert Group     | Description           | Active | Number of Members |
|--------------------------|-----------------|-----------------------|--------|-------------------|
| <input type="checkbox"/> | Marketing Group | Marketing alert group | true   | 1                 |
| <input type="checkbox"/> | Sales           | Sales alert group     | true   | 0                 |

New Delete

## Add an Alert Group

- 1 Click New on the Register Alert Groups screen. The Group Configuration Parameters screen displays.

**Fig. 2.36**  
Group Configuration Parameters

Group Configuration Parameters

Group Name\*

Description

Active ☐

Message Configuration Default

| Alert Recipient                | Name | Description | Active |
|--------------------------------|------|-------------|--------|
| <span>Recipients Lookup</span> |      |             |        |

Receive metric alerts ☐

Receive system alerts ☐

Receive alerts for all subscribers ☐

**Registered Subscribers**

Subscribers Lookup

Save Cancel

- 2 Enter the following values as required.

**Alert Group.** Specify a name for the alert group. This field is required.

**Description.** Enter a brief description as needed.

**Active.** Select this option to activate the alert group. No e-mail alerts will be distributed for this group unless this option is selected.

**Message Configuration.** Specify whether to use the default message configuration or a custom message configuration.

**Default.** The message will use the description stored in qxodb.

**Custom.** The message will use the subject and body you provide. Selecting this option causes the Email Subject, Email Body, and Attachments fields to display.

**E-mail Subject.** Enter a brief subject description as needed (for custom message configuration only); for example:

A QXtend alert has been triggered.

**E-mail Body.** Enter the text to use to precede the error message and attachments (for custom message configuration only). For example:

There has been a raised alert from QXtend. This event was triggered automatically and the following message has been recorded:


**Attachments.** Select the Request and/or Response check boxes to include the request and/or response as an attachment in the body of the e-mail alert (for custom message configuration only).

## Register Recipients

- 1 Click Recipients Lookup to register the alert recipients to the alert group. The Register Recipients lookup displays. Click the arrow next to Filter to populate the Available Recipients list. Use the Add and Remove buttons to update the lists.

**Note** For details about using the Filter feature see “Filtering Names” on page 18.

**Fig. 2.37**  
Register Recipients

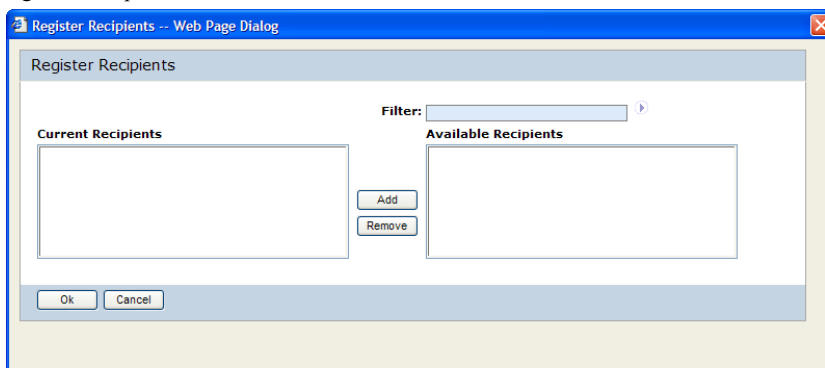

- 2 Click OK to save and exit the Register Recipients lookup.

## Select Alert Options

- 1 Select the Receive metric alerts option to generate e-mail alerts when defined MSG alert metrics have been exceeded for a service. For details on services see “QXO Services” on page 36.
- 2 Select the Receive system alerts option to generate e-mail alerts that are triggered by system-related processes.




## Register Subscribers

- 1 Select the Receive alerts for all subscribers option to cause e-mail alerts to be generated for all subscribers. If you select this option, specify the severity of the exceptions—ERR, WRN, or MES—that will generate an e-mail alert. Click Save to save your alert group configuration. Otherwise leave this option clear to specify which subscribers to register in step 2.
- 2 Click Subscribers Lookup to register subscribers to the group. The Register Subscribers lookup displays. Click the arrow next to Filter to populate the Available Subscribers list. Use the Add and Remove buttons to update the lists.
- 3 Click OK to save and exit the Register Subscribers lookup.
- 4 For each subscriber, indicate the severity of the exceptions that will generate an e-mail alert.
- 5 Click Save to refresh the left-hand tree menu.

## Register Profiles


- 1 In the left-hand tree menu, click a group/subscriber. The Configuration Settings screen displays for the group/subscriber.

**Fig. 2.38**  
Group/Subscriber Configuration Settings

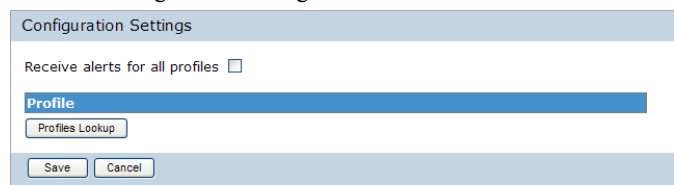

- 2 Select the Receive alerts for all profiles option to cause e-mail alerts to be generated for all profiles. If you select this option, specify the severity of the exceptions that will generate an e-mail alert. Click Save to save your alert group configuration. Otherwise leave this option clear to specify which profiles to register in step 3.
- 3 Click Profiles Lookup to register the profiles to the group/subscriber. The Register Profiles lookup displays. Select the application type and then click the arrow next to Filter to populate the Available Profiles list. Use the Add and Remove buttons to update the lists.

**Fig. 2.39**  
Register Profiles

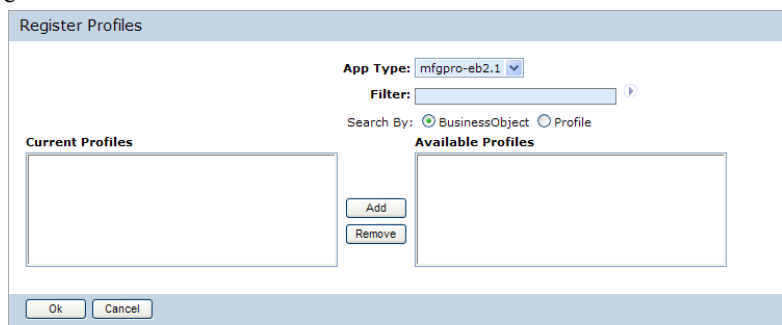

- 4 Click Save to save and exit the Register Profiles lookup.
- 5 Indicate the severity of the exceptions that will generate an e-mail alert.
- 6 Click Save to save the alert group.

## Email Service

Use the Services|Email Service option on the Dashboard to view information about the existing e-mail service, such as e-mails sent, alerts pending, and so on. Use the Start and Stop buttons to control the e-mail service as required.

**Fig. 2.40**  
Email Service



**Note** If you stop an e-mail service, the e-mail service stops during the next poll, according to the configured poll frequency. This can result in a delay between issuing the Stop command and the service registering the stop request. The longest possible delay is equal to the configured poll frequency.

For details about services, see “Viewing Specific Services” on page 105.

## Importing Business Objects and Profiles

Using the XML Import feature under the Utilities node in the Configuration tab, you can import XML documents. This is a required step during initial system implementation to populate the database with QAD-supplied default data, and can be used to transfer XML business object and profile definitions from one QXO instance to another. See “Managing Business Object XML Files” on page 91 for information on dumping XML from QXO.

Prior to running this load, the source applications must be set up in QXO using the correct naming convention.

**Important** The predefined source application types are used to load the QAD standard business objects and profiles. These source application types are named:

- mfgpro-eb
- mfgpro-eb2
- mfgpro-eb2.1
- QADSE
- QADEE


The standard QAD objects to be loaded reside in:

`QXOsrvInstallDir\boXML`

This is also the directory location used when you export business objects and profiles as described in “Managing Business Object XML Files” on page 91. You must copy the files from the originating QXO server to the target server prior to loading them into another instance of QXO.

- 1 In the XML Import screen under the Configuration tab, enter the source application type as defined in Source Applications, and two asterisks to denote a full import for both business objects and profiles. For example, for eB2 enter:


**Fig. 2.41**  
XML Import of QAD Business Objects and Profiles

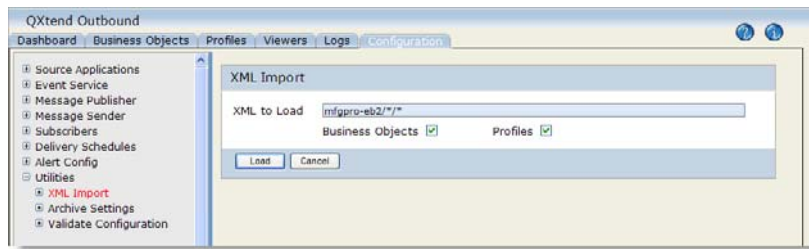

- 2 Select both checkboxes and choose Load. A processing note displays during the load.
- 3 After the load, messages display to inform you of the successful loads of each object.

To load specific files, such as those originating from another instance of QXO, follow the same steps, but enter the source application and the specific object names you want to import.

**Fig. 2.42**  
XML Import of Custom or Individual Objects

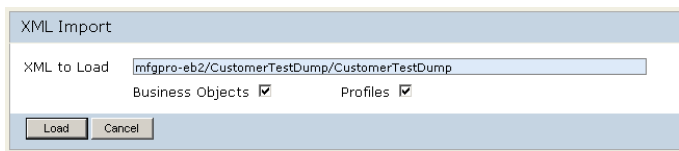

You can reload BOs, profiles, or both that are not defined by QAD. All links to the existing transactions (for example, raw messages and subscriber messages) are kept after the reload.

## Data Archive

Using the Archive Settings feature under the Utilities node in the Configuration tab, you can configure archive settings. You can delete and optionally archive data in the qxodb database that is no longer necessary for the day-to-day running of QXO.

Using the archive feature you can:

- Archive raw data from business objects
- Archive profile messages, including child data such as responses and exceptions
- Archive alerts and logs
- Schedule archive runs
- Run an archive service

Your business requirements will dictate the types of data—alerts and logs, published messages, event messages—you need to archive and how often you should archive.

## Archive Guidelines

Archiving allows you to constrain the increase in size of the qxodb database to acceptable limits while giving you access to message data should you require it. Typically organizations delete message data once it has been sent, but certain regulatory or legal requirements might necessitate message data to be archived for a certain period of time.

All data can be safely archived. QXO will retain the necessary data to ensure correct operations, and delta fields are created for subscriber messages.

Logs and alerts typically occupy minimal space in the database. However, your business requirements may require logs to be archived for auditing purposes.

Event messages occupy most space in the database as they often have associated child data. Event messages can be archived to provide a record of business object modifications.

Typically, you delete subscriber messages because the transactional data will never be modified.

After successful archive, the data you archived is deleted from the Viewers. However, if the Detect Operation option is selected for a profile of a business object and the profile message has been sent to the subscriber, you still can see the business object in Raw Messages Viewer. The XML file for the business object is displayed as archived or deleted.

**Fig. 2.43**  
Detect Operation Option for Profile

|                                                                                                                                                                                                                  |                                     |                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------|
| <b>Profile</b>                                                                                                                                                                                                   |                                     |                                                                    |
| <b>Name:</b>                                                                                                                                                                                                     | SalesOrder                          | <b>Bus. Obj.:</b> SalesOrder1                                      |
| <b>Domain:</b>                                                                                                                                                                                                   |                                     | <b>Modified:</b> 08/21/13 20:40:44                                 |
| <b>Entity:</b>                                                                                                                                                                                                   |                                     | <b>Type:</b> Other                                                 |
| <b>Desc:</b>                                                                                                                                                                                                     | [Default Profile]                   | <b>QAD:</b> [ ]                                                    |
| <b>QDoc Name:</b>                                                                                                                                                                                                | SalesOrder                          |                                                                    |
| <b>QDoc Version:</b>                                                                                                                                                                                             |                                     |                                                                    |
| <b>QDoc Namespace:</b>                                                                                                                                                                                           |                                     |                                                                    |
| <b>Dataset Name:</b>                                                                                                                                                                                             |                                     |                                                                    |
| <b>Detect Operations:</b>                                                                                                                                                                                        | <input checked="" type="checkbox"/> | <b>Publish Unchanged Rows:</b> <input checked="" type="checkbox"/> |
| <b>Operation Program:</b>                                                                                                                                                                                        |                                     | <b>Delta QDoc:</b> <input type="checkbox"/>                        |
| <input type="button" value="Edit"/> <input type="button" value="Save"/> <input type="button" value="Cancel"/> <input type="button" value="Add Custom Field"/> <input type="button" value="Delete Custom Field"/> |                                     |                                                                    |
| <b>Event Type</b>                                                                                                                                                                                                | <b>Table/Object</b>                 | <b>Listen</b>                                                      |
| No event types                                                                                                                                                                                                   |                                     |                                                                    |

**Fig. 2.44**

Raw Messages Viewer - Archived Data with Detect Operation Selected in Profile

The screenshot displays the QXtend Outbound Raw Messages Viewer. The top navigation bar includes Dashboard, Business Objects, Profiles, Viewers, Logs, and Configuration. The main content area is divided into three sections: Events, Raw Messages, and Subscriber Messages. The Raw Messages section is active, showing a table with the following data:

| Src App | Domain | Identifier              | Event Type            | Business Object | Date - Time             | Msg   | State |
|---------|--------|-------------------------|-----------------------|-----------------|-------------------------|-------|-------|
| QADERP  | 10USA  | 201308210000593006.0009 | SalesOrderMaintenance | SalesOrder      | 08/21/2013 20:44:30.853 | 70442 | PUB   |

Below the table, there are buttons for Filter, Refresh, and Delete. The Alerts section shows a message: "There are no alerts associated with this message." The Event Message section shows a redacted message: "<deleted />".

## Archiving Using a Cron Job

You can also run the archive feature by using a cron job. In the crontab file, specify the archive program `qxoarchive.p`. Using a cron job lets you schedule archiving to occur at multiple times per day, if required. Configuring archiving using the Archive Settings screen constrains archiving to occur only once per day on the days you specify.

**Note** Use the archive service to start or stop the archive routine and to view its current status. You do not have to create an archive service—you just have to enable it. For details on using services, see “Viewing Services Summaries” on page 105.

- 1 In the Configuration tab, click Utilities|Archive Settings in the navigation tree. The Archive Settings overview screen displays.

**Fig. 2.45**  
Archive Settings Configuration

**Enabled.** Indicates whether the archive routine is enabled. To run the archiving routine this check box must be selected, regardless of whether archiving is configured from the Archive Settings screen or scheduled using a cron job.

**Logs.** Indicates whether archiving is enabled for logs.

**Delete.** Indicates whether to delete the archived logs. You must select this check box in order to enable the Archive option.

**Archive.** This option is enabled when the Delete check box is selected. Indicates whether to archive logs to a file.

**Published Messages.** Indicates whether archiving is enabled for published messages and associated child data.

**Delete.** Indicates whether to delete the archived published messages. You must select this check box in order to enable the Archive option.

**Archive.** This option is enabled when the Delete check box is selected. Indicates whether to archive published messages to a file.

**Event Messages.** Indicates whether archiving is enabled for event messages and associated child data.

**Delete.** Indicates whether to delete the archived event messages. You must select this check box in order to enable the Archive option.

**Archive.** This option is enabled when the Delete check box is selected. Indicates whether to archive event messages to a file.

**Days To Retain.** Indicates the number of days the data will remain in the QXO database before it is archived. The default value is 30; the maximum value permitted is 999.

**Directory.** Specify a location for the archive files. This directory contains all archived data except subscriber messages and responses (child data). The directory must exist and be writable before the archive routine is started. If not, the archive routine fails and the failure is logged.

The archive routine outputs the data into a file called `<table-name>.<yyyymmdd>.arc` where `<table-name>` is the name of the application table being archived and `<yyyymmdd>` is the creation date. If the archive routine is run more than once in a day, any archived data is appended to the end of the existing archive file.

**XML Directory.** Specify a location for the archived subscriber messages and responses. This directory is populated only if you specify that you want to archive published messages. This directory must exist and be writable. If this field is left blank, by default any data is saved to the location specified in the Directory field.

**Scheduled Time.** Enter a time to commence the archive routine. Time must be entered in a 24-hour format.

**Scheduled Days.** Select the days on which to run the archive routine.

**Check.** Indicate the scope of the records to check when running the archive routine.

If you select the From Last Checked Date option, the archive service only checks the new records added since the last run, instead of checking all records.

**Last Archive Date.** Displays the date on which the archive routine was last run.

**Next Archive Date.** Displays the date on which the archive routine is next scheduled to run based on the Archive Settings configuration.

## Validating QXO Configuration

Using the Validate Configuration feature under the Utilities node in the Configuration tab, you can validate your QXO configuration. Validating your configuration helps you identify and rectify any issues with your QXO setup.

Using the validation feature you can validate your configuration for the following:

- Source applications
- Business objects
- Profiles
- Subscribers
- Delivery schedules
- Archive settings

- Event types

- 1 In the Configuration tab, click Utilities\Validate Configuration in the navigation tree. The Validate Configuration screen displays.

**Fig. 2.46**  
Validate Configuration

| Validate Configuration |                        |                         |                                                                                                                        |
|------------------------|------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------|
| Severity               | Setting                | Type                    | Description                                                                                                            |
| 1                      | mfgpro-eb2.1 sp5       | Source Application      | No subscribers configured                                                                                              |
| 1                      | QAD2008                | Source Application Type | No source applications defined                                                                                         |
| 1                      | QAD2008                | Source Application Type | No business objects defined                                                                                            |
| 1                      | sub1.0                 | Subscriber              | No registered source applications                                                                                      |
| 1                      | sub1.1                 | Subscriber              | No registered source applications                                                                                      |
| 1                      | DropFile1.1            | Subscriber              | No registered source applications                                                                                      |
| 1                      | DropFile1.0            | Subscriber              | No registered source applications                                                                                      |
| 2                      | Carrier                | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | InvoiceHistory         | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | SalesOrder             | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | ScheduledSalesOrder    | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | ServiceSupportEndUser  | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | ServiceSupportEngineer | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | Shipper                | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | ShipToCustomer         | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | CustomerTest           | Business Object         | Has active event types but is not registered to a message publisher for source application type mfgpro-eb2.1           |
| 2                      | maintainCustomer       | Profile                 | Profile for active business object Customer for source application type mfgpro-eb2.1 is not registered to a subscriber |
| 2                      | maintainCustomerShipTo | Profile                 | Profile for active business object Customer for source application type mfgpro-eb2.1 is not registered to a subscriber |
| 2                      | QuarterHourly          | Delivery Schedule       | Not assigned to a subscriber                                                                                           |

The Validate Configuration utility provides validation information—severity, message, and cause—about each aspect of your QXO configuration. A severity level of 1 indicates a critical error. A severity level of 2 is an advisory to check your configuration.

Table 2.4 shows the types of information provided.

**Table 2.4**  
Configuration Messages

| Severity                        | Message                             | Cause                                                                                                                   |
|---------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>SOURCE APPLICATION TYPES</b> |                                     |                                                                                                                         |
| 1                               | No source application types defined | No source application types have been set up in the Configuration/Source Applications menu.                             |
| 1                               | No source applications defined      | No source applications have been set up for a source application type in the Configuration/Source Applications menu.    |
| 1                               | No business objects defined         | The default business objects have not been loaded for the source application type, and none have been manually entered. |
| <b>SOURCE APPLICATIONS</b>      |                                     |                                                                                                                         |



| Severity                            | Message                                                                                                        | Cause                                                                                                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                   | No databases defined                                                                                           | No databases have been set up in the configuration/source applications/databases menu.                                                                                 |
| 1                                   | Could not connect to the qxevents database                                                                     | Either the qxevents database configuration is incorrect or the database is not running.                                                                                |
| 2                                   | No domains defined                                                                                             | In a source application with a domain enabled QAD Enterprise Applications database, no domains have been set up in the Configuration/Source Applications/Domains menu. |
| 1                                   | No event types defined                                                                                         | The default data has not been loaded into the qxevents database.                                                                                                       |
| 1                                   | No event types are active                                                                                      | No event types in the Configuration/Source Applications/Event Types list have been checked as activated.                                                               |
| 1                                   | No event service configured                                                                                    | There are either no event services set up, or no existing event service has the source application registered.                                                         |
| 1                                   | No subscribers configured                                                                                      | There are either no subscribers set up, or no existing subscriber has the source application registered.                                                               |
| <b>SOURCE APPLICATION DATABASES</b> |                                                                                                                |                                                                                                                                                                        |
| 1                                   | <Progress database connection message>                                                                         | Error connecting to the database. Either it is incorrectly configured in the settings, or the database is not running.                                                 |
| <b>DOMAIN</b>                       |                                                                                                                |                                                                                                                                                                        |
| 1                                   | Does not exist in QAD Enterprise Applications for source application <src-app>                                 | The source application has a domain configured, but it does not exist in the QAD Enterprise Applications database for this source application.                         |
| <b>EVENT TYPES</b>                  |                                                                                                                |                                                                                                                                                                        |
| 2                                   | Has no related business object for source application <src-app>                                                | An event type has been set to be activated, but there is no business object that uses it.                                                                              |
| 2                                   | Not registered with event service for source application QADERP                                                | The active event type is not registered with any event service.                                                                                                        |
| <b>BUSINESS OBJECTS</b>             |                                                                                                                |                                                                                                                                                                        |
| 2                                   | Has active event types but is not registered to a message publisher for source application type <src-app-type> | A business object has an activated event type but has no message publisher, so it will not be published.                                                               |
| 1                                   | Registered to message publisher <msg-publisher> but has no active event types                                  | A business object is registered to a message publisher but there are no active event types, either because they are not activated or the data watch is turned off.     |
| <b>BUSINESS OBJECT Group</b>        |                                                                                                                |                                                                                                                                                                        |

| Severity                  | Message                                                                                         | Cause                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2                         | Related event types are not registered with the same event service.                             | If active event types in a business object group are not registered with the same event service, business objects in the group will be processed by different event services, which defeats the purpose of business object groups since you cannot guarantee that data of designated business objects will be processed as set up in the group in a single-thread manner. |
| <b>PROFILES</b>           |                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                           |
| 2                         | Profile for active business object <bo-name> is not registered to a subscriber                  | The business object is active, and a profile other than the default has been created, but it has not been registered with a subscriber.                                                                                                                                                                                                                                   |
| 1                         | Registered to subscriber <sub-name> for business object <bo-name> but has no active event types | The business object this profile is related to is not active yet the profile is registered to a subscriber.                                                                                                                                                                                                                                                               |
| <b>SUBSCRIBERS</b>        |                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                           |
| 1                         | No registered profiles                                                                          | The subscriber has no registered profiles.                                                                                                                                                                                                                                                                                                                                |
| 1                         | No registered source applications                                                               | The subscriber has no registered source applications.                                                                                                                                                                                                                                                                                                                     |
| 1                         | No message sender defined                                                                       | The subscriber is not registered with any message senders.                                                                                                                                                                                                                                                                                                                |
| <b>DELIVERY SCHEDULES</b> |                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                           |
| 2                         | Not assigned to a subscriber                                                                    | The delivery schedule is configured but is not being used by any subscribers.                                                                                                                                                                                                                                                                                             |
| <b>ARCHIVE</b>            |                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                           |
| 2                         | Configured to delete event messages but no active business objects are set to archive           | The archive service will delete event messages if directed, however each individual business object has an archive flag, and in this case no active business objects have that flag set.                                                                                                                                                                                  |

## Implementing Calculated Fields

A calculated field holds a value that is the result of a mathematical operation performed by a program. The calculated field program can be placed in the QXO service PROPATH—that is, defined in `start-sess.sh`—or run from an AppServer if the calculation requires input from a database. If it is a simple calculation that does not require access to a database, place it in the QXO service PROPATH, as this is faster. If it requires database access, use the AppServer.

If connecting to a database, calculated fields require correct connection parameters for the AppServer. See “QXO Source Applications” on page 24 for details on setting up AppServer parameters.

You can find sample calculated field programs in `<QXOSrvInstallDir>/src/samples`. One of those sample programs, `samplecalc1.p`, is listed here.

```
define input parameter dataset-handle phDataset.
define input parameter pcBuffer as character.
define input parameter pcQueryString as character.
define output parameter pcResult as character.
pcResult = string(now).
delete object phDataset no-error.
```

This program is provided as an example of the format that a calculated field program should take. The important part is the signature and the input and output parameters:

- The first parameter is the entire profile message defined as a dataset.
- The second parameter is the name of the buffer in the dataset that is currently in scope.
- The third parameter is the query string for that buffer that locates the exact record in the dataset that is in scope.
- The fourth parameter is the result of the calculation.

The AppServer Parameter field on the source application configuration contains all the necessary parameters for Progress to connect to the AppServer. A typical set of AppServer parameters might be:

```
-AppService qxoappserver -H co9906
```

This allows QAD QXtend to access the calculated field program on an AppServer named qxoappserver on the machine co9906. The contents of this field are executed in the code like the following:

```
create server hAppServer.
hAppServer:connect("-AppService qxoappserver -H co9906").
run value("myprogram.p") on hAppserver (input dataset-handle phProfile by-value, input
pcBuffer, input pcQueryString, output output pcResult).
```

If you are implementing a calculated field program that accesses the QAD Enterprise Applications databases, the program should use an application server separate from the one defined for QXO. For simple calculated field programs where the logic applied is local to the calculation program, it is safer and faster to locate the program in the normal code base.

## Calculated Fields Program Example

The following program used by QXO is an example of a calculated field program. The code converts the value stored in a database field into another format in the outgoing QDoc. The resulting format is suitable for use in an incoming QDoc through QXI.

```
$RCSfile: cp-pipartcode.p,v $
Copyright 1986-2004 QAD Inc., Carpinteria, CA, USA.
All rights reserved worldwide. This is an unpublished work.
Description: Checks the value of the pi_part_code field extracted from QAD Enterprise
Applications. If it matches qadall variable we require to place blank for pi_part_code in
the published business object
```

```
=====
```

```
define input parameter dataset-handle phDataset.
define input parameter pcBuffer as character.
define input parameter pcQueryString as character.
define output parameter pcResult as character.
```

```
define variable hQuery as handle no-undo.
define variable hBuffer as handle no-undo.
define variable hField as handle no-undo.
```

```
define variable cQadAll as character initial "qadall---+---+---+---+" no-undo.
```

```

define variable cValue as character initial "" no-undo.

hBuffer = phDataset:get-buffer-handle(pcBuffer).

create query hQuery.
hQuery:add-buffer(hBuffer).
hQuery:query-prepare(pcQueryString).
hQuery:query-open().
hQuery:get-first().

if hBuffer:available then do:
    hField = hBuffer:buffer-field("piPartCode") no-error.
    if valid-handle(hField) then
        cValue = hField:buffer-value.

    if cValue = cQadAll then
        cValue = "".

end.

hQuery:query-close().


pcResult = cValue.
delete object phDataset no-error.

```

## Setting Up Outbound Control in QAD Enterprise Applications

Use QXtend Outbound Control (36.16.19) in QAD Enterprise Applications to configure QXO settings.

**Fig. 2.47**  
QXtend Outbound Control (36.16.19)

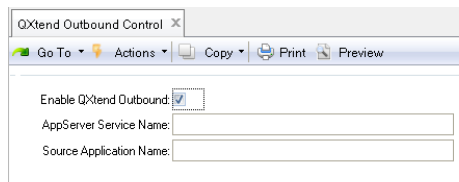

**Enable QXtend Outbound.** Specify whether any changes in QAD Enterprise Applications will trigger events to QXtend.

**AppServer Service Name.** Specify the AppServer service name for Direct Data Publish when you want to create a program to call the DDP API provided in QAD Enterprise Applications to publish data to QXtend. To use this feature, please contact QAD Services.

**Source Application Name.** Specify the source application name for Direct Data Publish when you want to create a program to call the DDP API provided in QAD Enterprise Applications to publish data to QXtend. To use this feature, please contact QAD Services.

# QXtend Outbound Business Objects

The following material covers implementation of QAD QXtend Outbound (QXO) business objects.

## ***Introduction 74***

Discusses how QXO uses business objects and includes information on QAD and custom business objects and profiles.

## ***Viewing Business Objects 75***

Explains how to use the Business Objects tab, with details on performance considerations, business object validations and data watches, and viewing business object subscribers.

## ***Modifying Business Objects 79***

Explains how to modify existing business objects.

## ***Creating New Business Objects 81***

Explains how to create standard and DDP business objects, and business objects for custom tables.

## ***Deleting Business Objects 85***

Explains how to delete business objects.

## ***Modifying Business Object Data Objects 85***

Explains how to modify data objects related to business objects and use inner joins in data objects.

## ***Copying or Deleting Data Objects 90***

Explains how to copy or delete data objects.

## ***Managing Business Object XML Files 91***

Explains how to manage business object XML files with the navigation tree frame.

## Introduction

A business object is a set of related data, such as the data that makes up a sales order or a customer record. In the source application, the data that makes up a business object usually resides in a set of related tables, even though this set of tables may be maintained in a single menu program. In QAD Enterprise Applications and most other source applications, menu programs are the closest representation of a business object.

You define a business object in QXO that encompasses all the possible attributes of a particular type of document, order, or data set. You define which source application tables you want, how the tables are related to each other, and which fields in each table to include. You can define custom fields as well, to contain either a fixed value every time the business object is updated, or a value calculated at each update.

You can define business objects as DDP, regardless of whether or not the source application is DDP. Tables and fields in DDP business objects cannot be added, modified, or deleted—the business object itself can be deleted. For details see “Modifying Business Objects” on page 79.

Not all subscribers for your system need the entire business object. Most subscribers need distinct components of a business object; shipping needs address and inventory data, sales needs sales figures, accounting needs sales and tax data, and so on.

To select which components of a business object are sent to which subscribers, QXO lets you define profiles. The way you define a profile is nearly identical to the way you define a business object.

Business objects and profiles are closely linked. When you create or copy a business object, a default profile with the same name is automatically created for it. When you add or delete tables or fields from a business object, the change is automatically reflected in the associated profiles as well. If you change the name of a business object, a new default profile with the same name as the new business object name is created for it. Any existing profiles associated with the original business object remain unchanged.

## QAD and Custom Business Objects and Profiles

QXO is shipped with a selection of critical business objects and profiles. These can either be used as they are—or more likely—copied and used as templates for your own business objects and profiles.

For a listing of standard QXO business objects, see Table 1.1 on page 5.

**Important** Only an experienced professional with an understanding of the target application database structure should customize QAD-supplied business objects. QAD does not support custom or non-QAD-defined business objects. To ensure support for your customizations, engage QAD Services personnel to create new or modified business objects.

Typically, a business object has one primary table and other related tables that are joined to it. The business object definition identifies the join relationships. You can also specify filters to limit the data retrieved from the joined table. Then for each field in the table you can specify:

- Whether the field is always published regardless of profile settings
- Whether the field is part of a primary table index



- Any fixed constant field values
- Programs to call to return the value for the field

When you start with a copy of a QAD business object or build your own, you can add additional tables and fields—as long as that business object does not employ DDP. You can also add your own custom fields to tables. These represent static values that you want to include whenever data from this business object is published. If, for example, you are designing a business object that will create an outbound QDoc that corresponds to an inbound QDoc, you might need to include values for fields that control the behavior of the QAD Enterprise Applications UI and that are not stored in the database.

To streamline the creation of business objects, you can copy and paste data objects from one business object to another. For example, if you are creating a new object that references an address, you can copy the address data object associated with a different business object and paste it into the one you are creating.


**Note** You cannot copy and paste data objects from business objects that employ DDP.

Profiles are views of business objects tailored for the requirements of specific subscribers. You use profiles to select which components of a business object are sent to subscribers. The method for defining a profile is nearly identical to the method for defining a business object; however, unlike business objects, profiles always start as a copy of a default profile.

## Viewing Business Objects

When you click the Business Objects tab, the screen illustrated in Figure 3.1 displays.

**Fig. 3.1**  
Business Objects

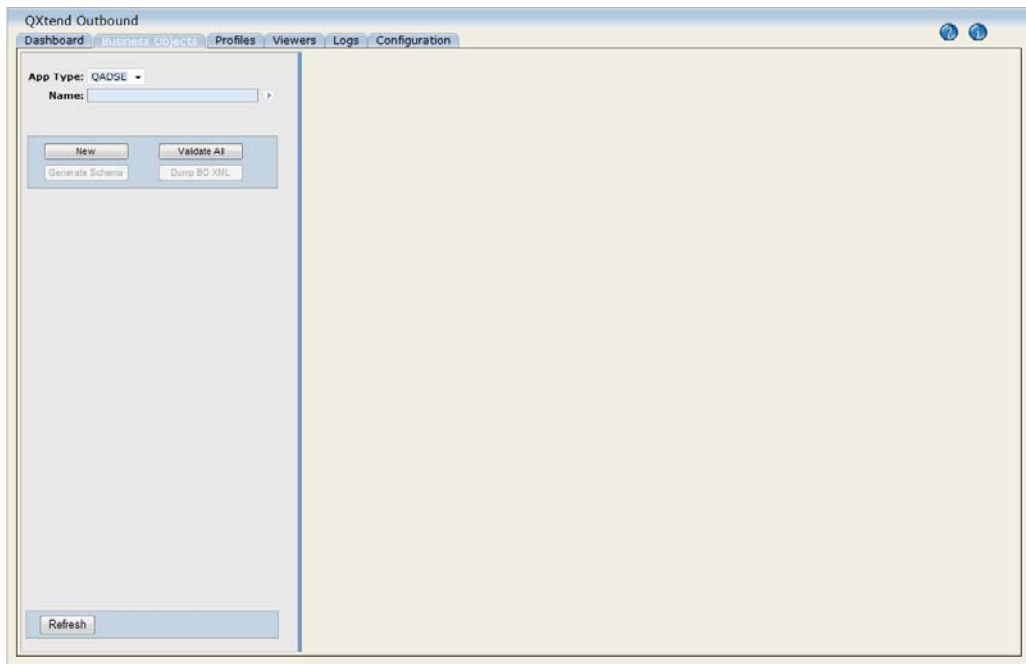


**App Type.** Select the source application type from the drop-down list. Source applications are defined in the Configuration tab. The last selected value is saved and used as the default entry the next time this screen is viewed. See “QXO Source Applications” on page 24.

**Name.** Use the Name field to find business objects to view or update. See “Filtering Names” on page 18.

Click the arrow next to Name to display all available business objects with the Name field left blank, or to search within the available business objects for objects that match your Name entry. Objects display in a tree view as shown in Figure 3.2.

**Fig. 3.2**  
Business Object Tree View

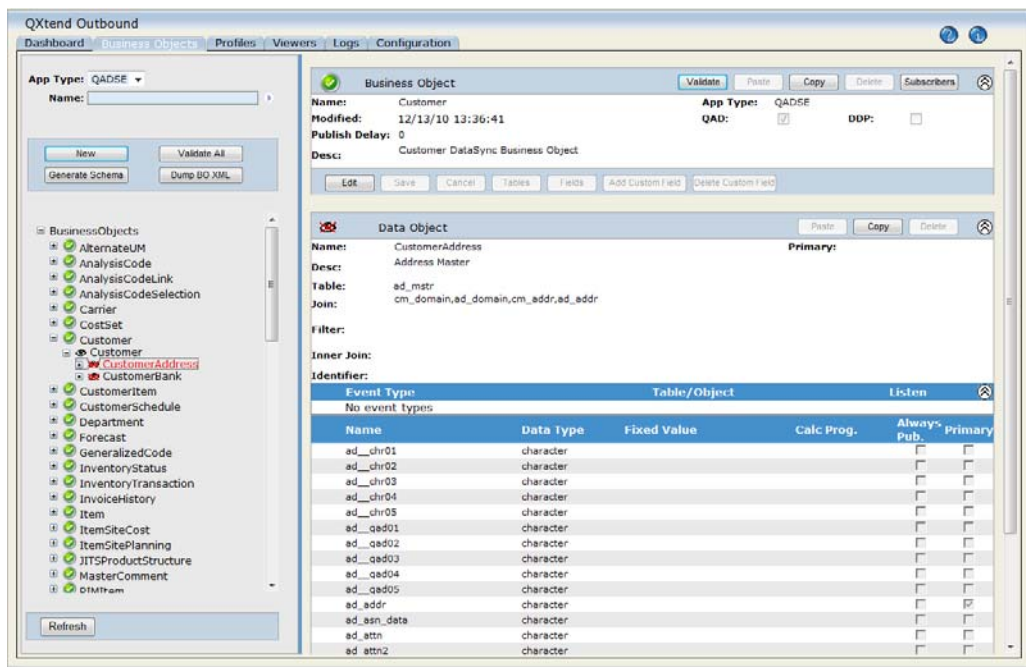

## Performance Considerations

Each business object contains one or more data objects maintained in a hierarchy. The entire set of data objects under a business object is referred to as a *business object tree*. Since QXO must search up and down the tree for different functions—at least for business objects that do not employ DDP—each tree is validated in both directions during the initial load of business objects.

If the available indexes in one of the source application tables does not sort the records correctly for the searches being performed, whole-index search may occur. In these instances, the entire index may be scanned. The search still works but takes much longer to complete.

When you are populating a business object tree with a data set—for example, during a forced load of data from your source application to one or more subscribers—QXO knows the business objects required, but not all the data objects. In this case, it searches down the tree. Where the indexes are inadequate, a whole-index search occurs. However, these are generally one-time events and are not a performance concern.



When an event occurs in a source application, QXO knows which data objects are impacted, but not which business objects they belong to. In this case, the search goes up the tree. These searches occur during production processing and are of greater concern. Where the indexes are inadequate, a reverse whole-index search occurs.

**Note** In the case of event data for business objects that use DDP, the raw business object is published to QXO and performing a search is not required, significantly reducing processing time.


## Business Object Validations and Data Watches

Both types of searches are tested during business object validation. A validation occurs against the connected source applications during the initial load of business objects—at least for business objects that do not employ DDP. The result of this validation determines the color of the icon of each business object in the business object navigation tree.

- A green icon shows that the validation was successful.
- A yellow icon displays when reverse whole-index searches are required for one or more data objects in the business object tree during one or both of the validation passes.
- A red icon displays when invalid joins appear, or when a business object has not been validated.

To control which data objects are watched—that is, the data objects that have active event types that are being “listened” to—an Event Type section displays on each data object. Select the Listen check box to determine which event types you want to be active on the data object. Event types essentially operate as multiple data watches on a data object. QAD has set this option for the default business objects to minimize the number of reverse whole-index searches and yet retrieve all essential business data. Two business objects—Customer Schedules and Sales Orders—still have unavoidable reverse whole-index searches.

**Fig. 3.3**  
Validations and Data Watch Symbols on Business Objects

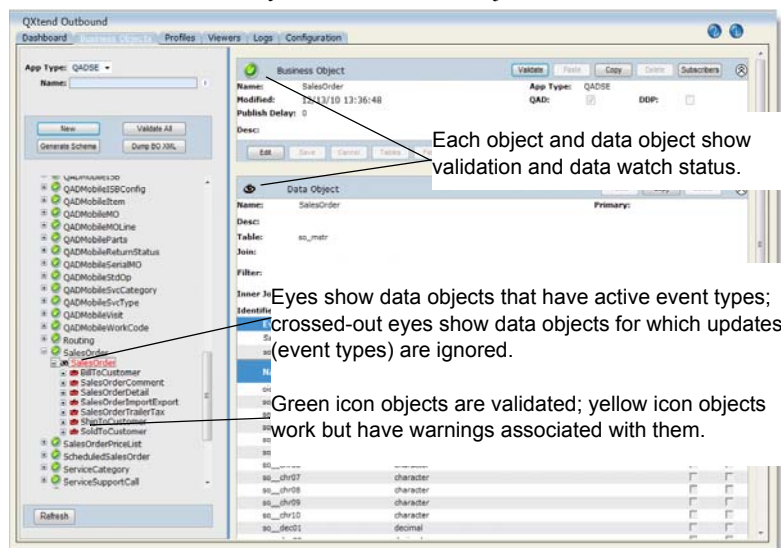

When you open a business object node in the navigation tree, each data object has an eye icon.

- An eye alone means that the data object is watched; that is, the object has one or more active event types. A watched data object is aware of updates to that object's tables in the source application.
- An eye crossed out means that data object is unwatched; that is, either the data object has no defined event types, or its event types are all inactive. An unwatched data object ignores updates to the object tables, but the data for that object is still retrieved when events affect other data objects in the parent business object.


To modify these or other business objects, see the section “Modifying Business Objects” on page 79.

## Viewing Business Object Subscribers

In order to determine more easily which subscribers will receive messages based on a business object—and the events that will trigger messages—you can display a Subscribers report. The Subscribers report lists the following:

- Activated event types
- Profiles related to this business object that also have this event type enabled
- Subscribers that receive these profiles based on the event type

**Fig. 3.4**  
Subscribers Report

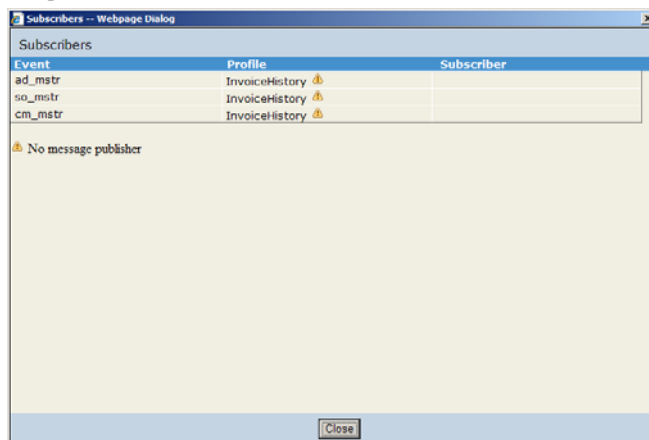

| Event   | Profile          | Subscriber |
|---------|------------------|------------|
| ad_mstr | InvoiceHistory ⚠ |            |
| so_mstr | InvoiceHistory ⚠ |            |
| cm_mstr | InvoiceHistory ⚠ |            |

⚠ No message publisher

To display the Subscribers report, display the Business Objects tab, and then click the Subscribers button at the top-right corner of the business object configuration screen.

If a profile is not assigned to a message publisher, a warning symbol displays next to it. Similarly, if a subscriber is not assigned to a message sender, a warning symbol displays next to it. A tooltip for the warning symbols indicates the exact reason.

A warning icon is displayed next to any event type name that is not registered with any event service.


## Modifying Business Objects

Since you cannot edit the QAD-supplied business objects, you must either copy an existing business object and modify it, or create a new one. When you create or copy a business object, a default profile of the same name is also created.

**Note** For business objects that employ DDP, only certain attributes can be modified. Those attributes that can be modified are indicated on the interface during edit mode.

- 1 Select the source business object from the tree view.
- 2 Click Copy. The new object is created including all related data objects.

**Fig. 3.5**  
Modifying a Business Object

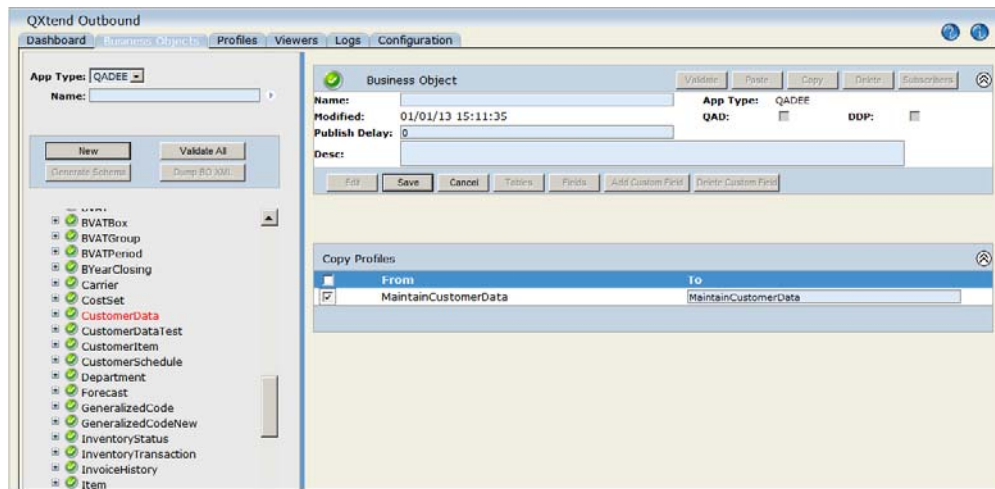

- 3 Enter values for the new business object as follows:

**Name.** Enter a new name for the copied business object.

**Modified.** No edit allowed. This displays the date and time this business object was last saved.

**Publish Delay.** Set this to a nonzero value for business objects that may generate multiple notifications to the qxevents database prior to completion of data entry. For example, sales order entry creates one or more notifications as different tables are updated before data entry is complete. Setting the value to 60 seconds or more allows time for data entry to complete and only the final data to be exported.

**Desc.** Enter a description of the object. Consider including the creation date, object author, and purpose.


This attribute may be modified for business objects that employ DDP.

- 4 In the Copy Profiles frame, select the profiles you want to copy with the BO and edit the profile name in the To field, if needed.

**Note** The default profile will be generated by the system and is not listed in the Copy Profiles frame.

- 5 To add or delete tables from the copied business object, click Tables. Update Data Objects displays. Click the arrow next to Table Filter to populate the Available Tables list.

**Fig. 3.6**  
Business Object Table Selection

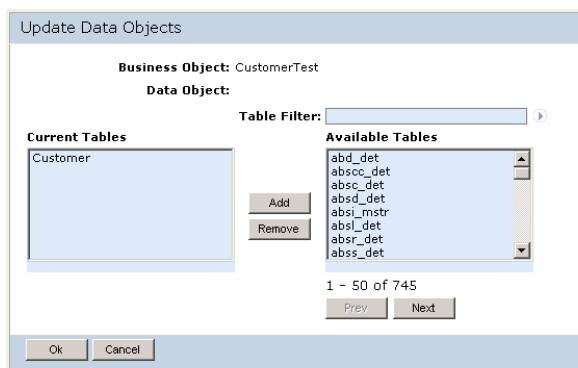

- 6 Select tables in either list and use the Add or Remove buttons to move the tables between lists. When the Current Tables list contains the tables you require for the business object, click OK. You return to the Business Object screen.

**Note** If you need to add new tables that are not listed, see “Creating New Business Objects” on page 81.

Prior to using the new business object, you must validate it and optionally modify the data watch attributes—that is, the active event types—on the data objects to improve performance.


### Validating and Optimizing Business Objects

When you copy or create a business object, the new object has a red dot next to it in the navigation tree. This means the business object has not yet been validated; it cannot be used until it has been validated.

**Note** Business objects that employ DDP are not validated.

- 1 On any new or copied business object, click Validate. Any validation warnings or errors appear above the business object definition. The whole-index warnings are WHOLE-INDEX for top-down searches where the business object is known but not the data objects, and REVERSE WHOLE-INDEX where the data objects are known but not the business objects they reside in.


**Fig. 3.7**  
Validation Messages for a Copied Business Object

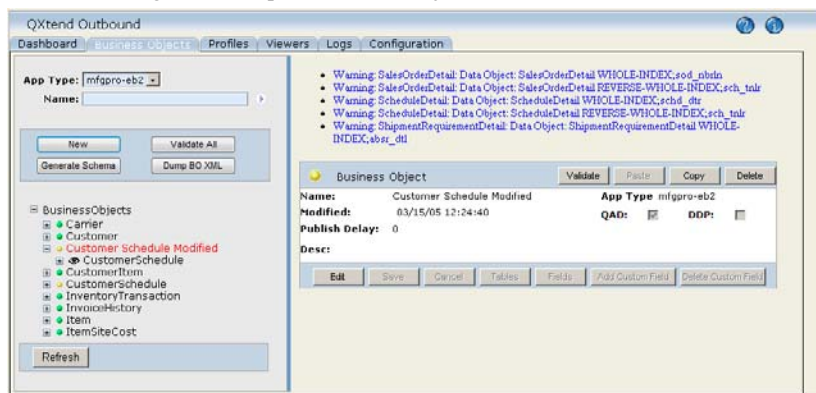

For any data object you received a REVERSE WHOLE-INDEX warning on, determine whether you require refreshed data from an update to the object. For example, on a sales order object, you may not want to refresh data when comments are updated, but do want to when addresses and sales data are changed.

- 2 Select the data object in the navigation tree to open it.
- 3 Select the event types you want to be active. When inactive, events in the data object's source application tables are ignored. However, the data for the object is retrieved when events occur in other watched data objects for the business object.

**Fig. 3.8**  
Event Type Activated on the SalesOrderDetail Data Object

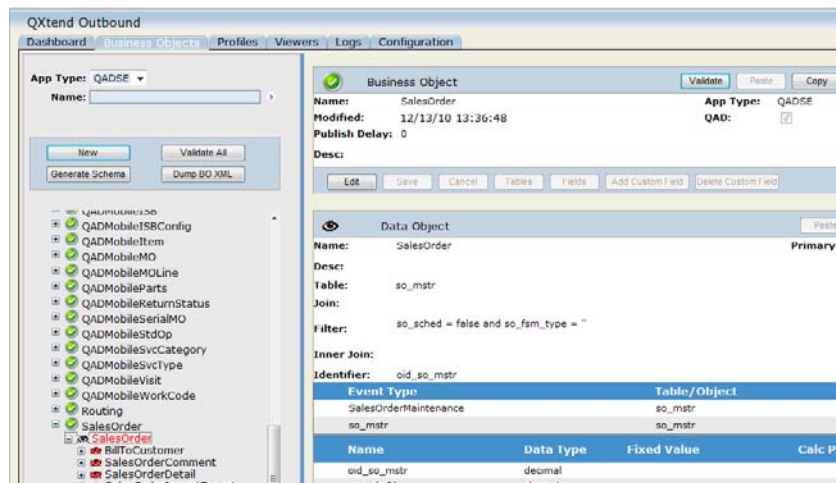

- 4 Click Validate again to verify your changes.
  - 5 Click Save to save the new business object. The screen redisplay with the Edit button available.
- You can edit the modified business object at any time including the object name, publish delay, description, and tables.

## Creating New Business Objects

You can create new business objects to accommodate your own business requirements. If you do this, you should keep the following considerations in mind.

- QXO is installed with a set of event types. These event types represent a subset of QAD Enterprise Applications tables that already include schema triggers. If you need to reference data in an QAD Enterprise Applications table that is not included in this subset, you must add schema triggers to the table.
- QXO is also installed with trigger files for every standard QAD Enterprise Applications table. Triggers in QAD Enterprise Applications SE and above are capable of sending either the rowid or an OID. Only the subset of these trigger files associated with the standard event types is compiled. If you add triggers to a table, you must also compile the associated trigger files. The schema triggers are usually compiled during installation; however, they must be added to the database schema to take effect. See Step 7 in “Creating a Standard Business Object” on page 82 for details.

- QXO is configured to work with standard QAD Enterprise Applications tables. However, it can be extended to work with business objects based on custom tables or in a side database or a non-QAD Enterprise Applications database. A non-QAD Enterprise Applications database must be Progress based and support the use of triggers. To implement these kinds of business objects requires that you create your own trigger files, since these are not included when QXO is installed.

**Note** These considerations do not apply to business objects that employ DDP, since direct publishing passes the entire business object to QXO—schema triggers are not relevant.

Instructions are provided here for creating:

- New standard business objects
- Business objects that employ DDP
- Business objects for custom tables or non-QAD Enterprise Applications tables

**Note** Only alphanumeric characters, dash, and underscore are allowed in business object names.

## Creating a Standard Business Object

Use the following steps to create a new business object that references data from standard QAD Enterprise Applications tables.

- 1 In the left-hand Business Objects frame, click New. The Business Object definition screen displays.
- 2 Enter values as described in step 3 under “Modifying Business Objects” on page 79.
- 3 Use the Tables button to add tables to the object. Click OK to save the table definitions.
- 4 After the new tables appear as data objects in the navigation tree, click on Validate to test the new business object tree.  
If you receive warnings, use the instructions in “Validating and Optimizing Business Objects” on page 80 to modify data watch settings.
- 5 Click Save to save the new object.
- 6 Ensure that all tables included in the new business object are active event types.
  - a If the table is defined as an event type, all you need to do is follow the steps in “Editing Source Application Event Types” on page 31 to activate it.
  - b If the table is not already defined as an event type, follow the steps in “Adding Source Application Event Types” on page 33 to add it. Then complete steps 7 and 8.
- 7 If your business object includes data from one or more tables that are not already in the subset of tables that includes triggers, you must add replication write and replication delete triggers to the QAD Enterprise Applications schema for each table.
  - a Locate the following file and open it in a text editor:  
`MfgproInstallDir\qxtend\qxo\progress\mfgpro\src\df\delta.df`
  - b Remove existing entries.



- c Add an entry for each new table you are activating. The name of the replication write trigger is based on the table name prefix with `rw.t` appended; the delete trigger appends `rd.t`. For example, to activate the `abs_mstr` table, create the `absrw.t` and `absrd.t` triggers.
 

```
UPDATE TABLE "abs_mstr"
TABLE-TRIGGER "REPLICATION-WRITE" NO-OVERRIDE PROCEDURE "absrw.t" CRC "?"
UPDATE TABLE "abs_mstr"
TABLE-TRIGGER "REPLICATION-DELETE" NO-OVERRIDE PROCEDURE "absrd.t" CRC "?"
```
  - d Launch MFG/UTIL and choose Database|Load Database Schema (.df) File.
  - e Connect to your QAD Enterprise Applications `qaddb` database.
  - f Select the `delta.df` file you modified with the triggers and choose OK.
- 8 After adding schema triggers, you must compile the associated trigger files.
- a Create a compile list file named `NewTriggers.wrk` in:
 

```
QXOMFGsrvInstallDir\qxo\src
```
  - b List all of the new trigger files that correspond to the triggers you are adding to the schema. In the previous example, the work file would list:
 

```
absrw.t
absrd.t
```
  - c Launch MFG/UTIL and choose Programs|Compile Procedures. Compile the work file specifying the new compile list name.

## Creating a DDP Business Object

You can define DDP business objects for source applications regardless of their type (DDP and non-DDP). DDP business objects are indicated by the DDP check box in the Business Object screen.


For DDP business objects that have more than one top-level table, one data object must be flagged as the primary data object, by which the raw message will be identified based on the value of the data identifier field of that data object; this is usually `tContextInfo`. When you load a DDP business object, `tContextInfo` is marked by default as being the primary data object. This is indicated on the screen by the selection of the Primary check box.

Use the following steps to create a new DDP business object.

- 1 In the left-hand Business Objects frame, click New. For a non-DDP source application type, the New Business Object box displays.

**Note** For a DDP source application type, the Load Schema box displays directly.


**Fig. 3.9**  
New Business Object Box



- 2 Click Yes. The Load Schema box displays.



**Fig. 3.10**  
Load Schema

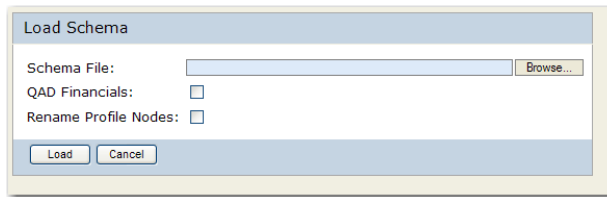

*Schema File.* Specify the schema document for the business object.

**Note** If required, the schema document for the business object can be reimported later by clicking the Reload button at the top of the business object definition screen. The schema may have to be reimported if the source application is modified. Reimporting the schema allows you to retain previous messages.

*QAD Financials.* Select the field if the schema you are loading is for QAD EE Financials.

*Rename Profile Nodes.* Select the check box to have the system convert the underscore-delimited names of tables in your business object into camelcase notation when creating the nodes in the associated profile. For details about notation used for elements, see Chapter 25, “QDoc Specifications and Standards,” on page 309.

- 3 Click Save to save the new object.

## Creating a Business Object for Custom Tables

Use the following steps to create a new business object that references data from custom QAD Enterprise Applications tables, a custom side database, or a non-QAD Enterprise Applications Progress database.

- 1 In the left-hand Business Objects frame, click New. The Business Object definition screen displays.
- 2 Enter values as described in step 3 under “Modifying Business Objects” on page 79.
- 3 Use the Tables button to add tables to the object. QAD QXtend reads all the tables from the connected database and displays them for selection. Click OK to save the table definitions.
- 4 Click Save to save the new object.
- 5 Create event types for each table to be referenced using the instructions in “Adding Source Application Event Types” on page 33. Ensure that the new event types are active.

For each table associated with an active event type, add a replication write and replication delete trigger to the schema. Create a .df file with an entry for each table you are activating using the instructions in step 7 under “Creating a Standard Business Object” on page 82 as a model.

For custom QAD Enterprise Applications tables, you can use MFG/UTIL to load the .df file. For other applications, use the tools supplied with your application.

- 6 Trigger files are provided with QXO for all standard QAD Enterprise Applications tables. For non-standard tables, you must create replication write and replication delete trigger files for each affected table. Use the following code samples as a model.



For QAD SE and above, this is the trigger procedure for replication write for `cm_mstr`:

```
/* RECORD OUTBOUND EVENT. */
{qxotrig.i
  &TABLE-NAME = 'cm_mstr'
  &ROW-ID = string(rowid(cm_mstr))
  &OID = string(cm_mstr.oid_cm_mstr)
  &TRIGGER-TYPE = 'WRITE'}
```

For QAD SE and above, this is the trigger procedure for replication delete for `cm_mstr`:

```
/* RECORD OUTBOUND EVENT. */
{qxotrig.i
  &TABLE-NAME = 'cm_mstr'
  &ROW-ID = string(rowid(cm_mstr))
  &OID = string(cm_mstr.oid_cm_mstr)
  &TRIGGER-TYPE = 'DELETE'}
```

**Note** `global_domain` is used when creating event records for QAD SE and QAD EE.

- 7 After adding schema triggers and creating the corresponding trigger code, you must compile the code using your application compiler. For QAD Enterprise Applications custom tables, you can use MFG/UTIL.
- 8 Add the trigger file directory to the application PROPATH so that the code can be executed.

## Deleting Business Objects

To delete a business object you created, follow these steps. This process deletes the business object and any profiles that are based on it. You cannot delete QAD-supplied business objects.

- 1 Select the business object from the navigation tree. The business object displays. The Edit, Copy, and Delete buttons are active.
- 2 Click Delete to remove the profile. You are prompted to confirm.
- 3 Click OK to continue.

## Modifying Business Object Data Objects

Once you have created or modified a business object, you can modify the related data objects.

**Note** Business objects that employ DDP cannot be modified, except for those values that are enabled on screen during edit mode. These attributes are indicated below.

- 1 In the object tree on the left, open the new business object and select a table within the tree. The data object details for that table display in the right-hand frame.  
If you select the top-level table, no join information displays. If you select one of the lower-level tables as shown in Figure 3.11, the join information displays.

- Click Edit in the Business Object frame at the top left. The editable fields in the data object become active.

**Fig. 3.11**  
Table Data Object

The screenshot shows the 'QXtend Outbound' application window. The 'Business Object' section is active, showing fields for Name, App Type, Modified, Publish Delay, and Desc. Below this is the 'Data Object' section, which is also active. It contains fields for Name, Desc, Table, Join, Filter, Inner Join, and Identifiers. A table at the bottom lists fields like cm\_addr, cm\_bill, cm\_class, etc., with columns for Name, Data Type, Fixed Value, Calc Prog., Always Pub., and Primary.

| Name         | Data Type | Fixed Value      | Calc Prog. | Always Pub.                         | Primary                             |
|--------------|-----------|------------------|------------|-------------------------------------|-------------------------------------|
| cm_addr      | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_bill      | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_class     | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_domain    | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_region    | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_site      | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_slipsn    | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_sort      | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| cm_type      | character |                  |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| salesPerson1 | character | = \$cm_slipsn[1] |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| salesPerson2 | character | = \$cm_slipsn[2] |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| salesPerson3 | character | = \$cm_slipsn[3] |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Enter values for the data object as follows:

**Name.** Enter a name (maximum 35 characters) for this data object. Data object names must be unique within a business object.

**Table.** The system displays the application table name.

**Description.** Enter a brief description (maximum 30 characters).

This attribute may be modified for business objects that employ DDP.

**Join.** Enter a comma-separated list of join field pairs, each of which is also comma-delimited. Each pair contains the parent table join field, then the child table join field.

The joins are used to navigate upward to the top of the business-object hierarchy when processing application events.

**Filter.** Optionally, enter filter criteria to limit the data stored after extraction from the application. The filter uses Progress 4GL expressions.

Figure 3.12 shows a relatively complex join and filter designed to join the abs\_mstr and sod\_det using the fields abs\_order and sod\_nbr, and then limiting or filtering the data extracted to those records where the sod\_line value is equal to the abs\_line value as converted to an integer.

**Fig. 3.12**  
Complex Join and Filter

| Data Object    |                              | Paste                 | Copy | Delete |
|----------------|------------------------------|-----------------------|------|--------|
| <b>Name:</b>   | CISalesOrderDetail           | <b>Table:</b> sod_det |      |        |
| <b>Desc:</b>   |                              |                       |      |        |
| <b>Join:</b>   | abs_order,sod_nbr            |                       |      |        |
| <b>Filter:</b> | sod_line = integer(abs_line) |                       |      |        |

**Inner Join.** Specify the inner join query you want to use. An inner join requires each record in the joined tables to have a matching record in order for the join to be successful. For details about using inner joins, see “Using Inner Joins in Data Objects” on page 89.

**Identifier.** Specify the field in the data object that is the unique identifier. This field is used to match the current event message object with the previous object in order to determine what changes may have occurred. This field must exist on the data object and be the only field on a unique index. The identifier must be specified if the Use Rowids check box for the source application type is not selected. For details see “QXO Source Applications” on page 24.

**Important** The identifier must always be specified if the source application type does not use rowids to identify events. For application types QAD SE and QAD EE the identifier defaults to the OID field of the table, which uses the pattern oid\_<tablename>—for example, oid\_ad\_mstr.

- 3 You can modify the behavior of individual fields in the table. Each field in the table displays in a table with active fields. Modify the values for each field as follows:

**Data Type.** If it is a custom field, select from one of the following data types: character (default), date, datetime, datetime-tz, decimal, int64, integer, and logical; if it is a database field, the data type is populated by the system and is read-only.

**Fixed Value.** Optionally, specify a fixed value that you always want to use in the QDoc for this field, or specify a value using the format =<node>\$, in which case the field will be populated with the value in the specified node.

For example, if a profile data object contains two nodes—field1 and field2—and the fixed value component of field2 is =field1, field2 will be populated with the value of field1. If field1 does not exist, the string =field1 will be the value of field2.

Fixed value fields can also contain Progress expressions and perform built-in Progress calculations; for example, =today+2. Fields from the current buffer can be referenced in the current calculation by including the XML node name surrounded by dollar (\$) characters; the expression must start with an equals sign (=) character. For example, =substring(\$ptDesc1\$, 1, 12).

The system determines node values in this order: a fixed value, a calculated value, the value supplied in the event message.

You can double-click in the Fixed Value field and view or enter data in a pop-up window.

Fixed values are typically used with custom fields, described in step 5.

The fixed value you provide must be consistent with the data type you specified for the field. If there is a mismatch, the system displays an error message when you try to save the data object.

**Calc Program.** Optionally, enter the name of a Progress program (.p) to be run. The program can be either in the QXOSever PROPATH or on the AppServer. The local version will be run if it exists; otherwise it runs on the AppServer. For details on calculated field programs see “Implementing Calculated Fields” on page 70.

Make sure the calculated value will be consistent with the data type you specified for the field. If there is a mismatch, the system does not prevent you from saving the data object, but will run into errors during data publishing.

**Note** The Progress program does not necessarily have to run on the AppServer.

The system determines node values in this order: a fixed value, a calculated value, the value supplied in the event message. Calculated values are typically used with custom fields.

**Note** Fixed values and calculated programs can be defined on the business object, the associated profile, or both. If you define a fixed value or calculated program on the *business object*, all profiles associated with that business object will have that fixed value or calculated result. Defining a fixed value or calculated program on a business object means that associated profiles can filter on that value or result. If you define a fixed value or calculated program on the *profile*, only that profile has that fixed value or calculated result.

**Always Publish.** Indicate if the field should be published whenever the data object that contains it is published, regardless of whether the field was changed by the application event.


This attribute may be modified for business objects that employ DDP.

**Primary.** Indicate if this field is part of the primary index for the table associated with this data object. For QAD-supplied business objects, the primary fields are already set.

This attribute may be modified for business objects that employ DDP.

- 4 Buttons in the Business Object frame allow additional configuration of the data object. Click Fields to display the Update Fields screen.

**Fig. 3.13**  
Update Data Object Fields

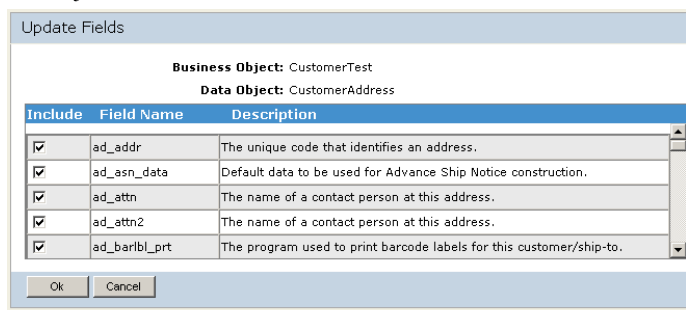

By default all fields in a QAD-supplied business object are included. To exclude a field from the business object, clear the Include check box for the field.

- 5 Click Add Custom Field to add a new field to the data object.

**Fig. 3.14**  
Adding a Custom Field

**Data Object**

Name: SalesOrder Primary: ☒

Desc:

Table: so\_mstr

Join:

Filter: so\_fsm\_type = ""

Inner Join:

Identifier: oid\_so\_mstr

| Event Type            | Table/Object | Listen                   |
|-----------------------|--------------|--------------------------|
| SalesOrderMaintenance | so_mstr      | <input type="checkbox"/> |
| so_mstr               | so_mstr      | <input type="checkbox"/> |

| Name                     | Data Type | Fixed Value | Calc Prog. | Always Pub.              | Primary                             |
|--------------------------|-----------|-------------|------------|--------------------------|-------------------------------------|
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | decimal   |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | logical   |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | character |             |            | <input type="checkbox"/> | <input type="checkbox"/>            |

1 - 9 of 9 Prev Next

Enter a field name, specify a data type, and add a fixed value or Progress calculation program if needed.

To delete a custom field, click the check box to the left of the field and click Delete Custom Field.

- Click Save to save the data object and any changes you have made.

## Using Inner Joins in Data Objects

An inner join is essentially a filter that consists of fields and/or tables that may or may not be part of the current data object. Using inner joins enhances your ability to extract the types of data you want from business objects in your system.

For example, you could create an inner join query to extract only those sales orders that have line items:

```
first sod_det where
  so_nbr=sod_nbr
  so_domain=sod_domain
```

You use inner joins to query fields and tables in other business objects in your system that contain other types of data you require—address information, for example—not related to the current data object.

```
first ad_mstr where
  ad_addr=so_cust and
  ad_ctype="US" and
  ad_domain=so_domain
```

You combine multiple inner join queries by using a comma to separate the queries, as shown here:

```
first sod_det where
  so_nbr=sod_nbr
  so_domain=sod_domain,
first ad_mstr where
  ad_addr=so_cust and
  ad_ctype="US" and
  ad_domain=so_domain
```

In this example, the query first searches the `sod_det` table in the current business object and identifies those sales orders that have line items. Then the query searches the `ad_mstr` table—this table could be in a different data object in a different domain—and returns the rows that have customers that are located in the US. When specifying inner joins, all query conditions you specify must be true in order for the query to extract data.

When QXO first connects to a source application with no domains and then connects to another source application with domains, and these two source applications are registered to one event service, you must add a prefix—`qaddb`—to the table name in the inner join query; otherwise, the inner join will not work properly. For example, in the abovementioned scenario, you must use `qaddb.ad_mstr` instead of `ad_mstr` in the inner join query.

```
first qaddb.ad_mstr where
  ad_addr=so_cust and
  ad_etry="US" and
  ad_domain=so_domain
```


**Note** If you want to use the Query Service on business objects that have filters and/or inner joins as part of their definition, you can control whether these conditions remain active in the request QDoc by setting the `IgnoreBOFilter` and `IgnoreBOInnerJoin` nodes as required. These nodes take logical values. For details about the Query Service, see Chapter 10, “QXtend Query Service,” on page 131.

## Copying or Deleting Data Objects

You can copy a data object and its profile from one business object and paste them into another. This eliminates configuration steps where multiple business objects such as sales orders, invoice history, and customer all share a data object such as addresses. You can also delete data objects if they were copied into the wrong business object.

**Note** Data objects cannot be copied to or deleted from business objects that employ DDP.

**Fig. 3.15**  
Copying a Data Object and Its Profile

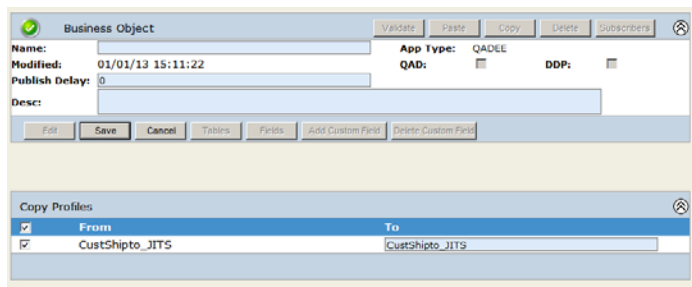

- 1 While the source business object is in edit mode, select the source data object in the left-hand navigation tree.
- 2 In the Data Object frame, click Copy.
- 3 Use the navigation tree to open the target business object, and data object, as necessary.
- 4 In the target business object Data Object frame, click Paste. The copied data object is pasted in.

- 5 To delete a data object from a business object, open the data object using the navigation tree. Click Delete in the Data Object frame.

## Managing Business Object XML Files

Two additional business object functions let you generate an XML schema from the business object in order to validate the XML structure, and dump the business object and associated profiles in an XML format that can be loaded into another instance of QXO.

Navigate to the business object you want to work with. In the navigation tree frame click:

*Validate All.* Validate all business objects under the selected source application type.

**Note** If there are many business objects, the validation process may take a few minutes.

*Generate Schema.* Generate the XML schema from the business object in order to validate its structure.

*Dump BO XML.* Create a file with the XML representation of the business object and its associated profiles. These files can be loaded into another instance of QXO using the XML Load utility on the Configuration tab. See “Importing Business Objects and Profiles” on page 62. Please note that for DDP business objects, the system dumps XSD schema files as well as XML files.

The dump file is created with the following naming convention:

`QXtendInstallDir\boXML\AppType\BOName\ProfileName`

**Note** The listened-to event type information of a business object is included in the dumped BO XML files and can be loaded to other instances of QXO after importing the dumped business object.





# QXtend Outbound Profiles

The following material covers implementation of QXtend Outbound (QXO) profiles.

***Introduction* 94**

Explains how profiles work.

***Viewing QXO Profiles* 94**

Explains how to use the Profiles tab.

***Modifying Profiles* 95**

Explains how to copy and modify profiles.

***Deleting Profiles* 98**

Explains how to delete profiles.

***Modifying Profile Data Objects* 99**

Explains how to modify data objects.

***Managing Profile XML Files* 102**

Explains how to manage profile XML files with the navigation tree.

## Introduction

Profiles are views of business objects tailored for the requirements of specific subscribers.

To select which components of a business object are sent to which subscribers, QXO lets you define profiles. The way you define a profile is nearly identical to the way you define a business object.

Business objects and profiles are closely linked. When you create or copy a business object, a default profile with the same name is automatically created for it. When you add or delete tables or fields from a business object, the change is automatically reflected in the associated profiles as well. If you change the name of a business object, a new default profile with the same name as the new business object name is created for it. Any existing profiles associated with the business object remain unchanged.

Besides the default profile, some business objects may also have default data synchronization profiles supplied by QAD. These data synchronization profiles are used for synchronization of data between different QAD Enterprise Applications domains or instances. A data synchronization profile usually has the same name as that of the corresponding QDoc used on the QXtend Inbound side and also contains the QDoc version information. Default data synchronization profiles typically use UIAPI QDocs. In QAD EE, if there is a SIAPI QDoc available for the business object, then the default profile uses this SIAPI because of its better performance.

Profiles can be triggered to be published only when certain event types were the original trigger for the raw message.


**Important** New customers to QXtend will always use QDoc Version 1.1. QDoc Version 1.0 is described for backward compatibility reasons.

## Viewing QXO Profiles

Profiles are the means you use to select which components of a business object are sent to subscribers. The method of defining a profile is nearly identical to the method of defining a business object; however, unlike business objects, profiles always start as a copy of a default profile.

When you click the Profiles tab, the screen illustrated in Figure 4.1 displays.

**Fig. 4.1**  
Profile Screen

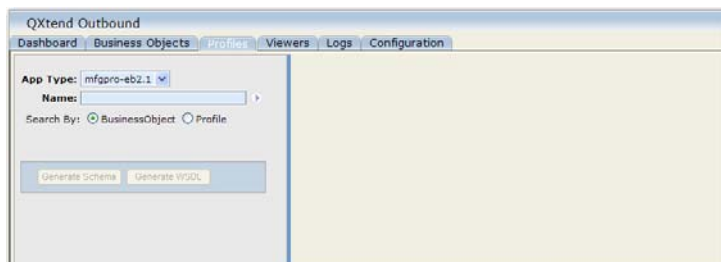

**App Type.** Select the source application type from the drop-down list. Source applications are defined in the Configuration tab. See “QXO Source Applications” on page 24. The last selected value is saved and used as the default entry the next time this screen is viewed.

**Name.** Use the Name field to find profiles to view or update. Click Business Object to search by business object names; click Profile to search by profile names. See “Filtering Names” on page 18.


Click the arrow next to Name to display all available business objects with the Name field left blank, or to search within the available business objects for objects that match your Name entry.

## Modifying Profiles

Since you cannot edit the QAD-supplied profiles or create a new one, you must copy an existing profile and modify it. To create a copy and modify a profile, follow these steps.

- 1 Select the source profile from the navigation tree. If it is a QAD-supplied object, the only button active is Copy.
- 2 Open the nodes in the profile in the navigation tree to view the data objects in the profile.

**Fig. 4.2**  
Profile Copy

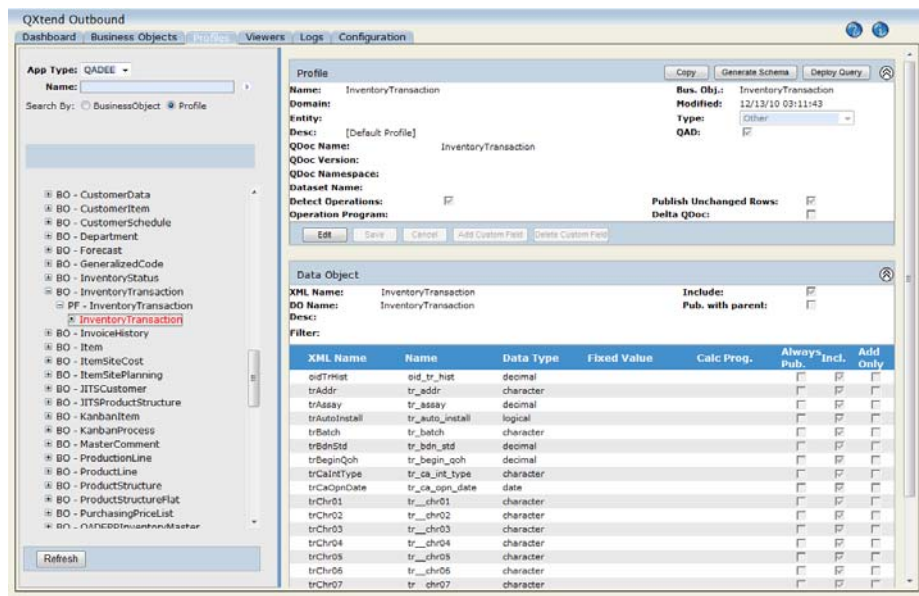

- 3 Click Copy. The new profile is created including all related data objects. The new profile definition screen displays. A new name is provided for the profile by default.

**Note** Only alphanumeric characters, dash, and underscore are allowed in business object names.

**Fig. 4.3**  
Profile Definition

**4** Enter values for the new profile as follows:

**Name.** Update the name as required. Only alphanumeric characters, dash, and underscore are allowed in profile QDoc names.

**Business Object.** The business object this profile is based on displays in this field.

**Domain.** For eB2.1 or above databases, specify the domain associated with the profile. If you leave this field blank in eB2.1 or above, the profile applies to all domains in the database. If a domain value is specified, the profile only sends QDocs for events extracted from the specified domain.

For other application types, you can use domain according to your own business requirements or leave it blank.

**Entity.** Specify the entity you want to create the QDoc for.

If you leave the field blank, the profile will create the QDoc for all entities.

**Modified.** No edit allowed. This displays the date and time this profile was last saved.

**Type.** Choose a profile type. The profile type identifies the response type so that the response can be parsed correctly.

**Data Synchronization:** The subscriber of the profile is another instance of QAD Enterprise Applications or an add-on application. You normally use this profile type for data synchronization.

**QAD Alerts:** The subscriber of the profile is QAD Alerts. For information on QAD Alerts, see *QAD Alerts User Guide*.

**QAD BPM:** The subscriber of the profile is QAD BPM. For information on QAD BPM, see *QAD BPM User Guide*.

**Desc.** Enter a description of the object. Consider including the creation date, object author, and purpose.

**QAD.** Indicates a QAD-standard profile.

**Delta QDoc.** Indicates whether this profile will send delta QDocs or complete QDocs. A delta QDoc excludes non-primary elements of the business object that have not changed since the last update. If a field is tagged Always Publish in the business object, it overrides the delta setting here.

**QDoc Version.** Use this to distinguish between QAD Enterprise Applications QDoc versions. This is the version designation that appears in the QDoc headers and is one of the values required to validate the QDoc.

**QDoc Namespace.** If using the QDoc XML Syntax setting of Other, specify a URL for QDocs generated using this profile. You do not have to specify a namespace if using an XML Syntax setting of 1.1 or 1.0. Like the QDoc version, the QDoc namespace is a required value in the QDoc headers to validate the source of the QDoc.

**Dataset Name.** Specify the name of the root node in the QDoc XML.

**Detect Operations.** If you select this field without specifying an operation program, an operation node will be included in every data object in the QDoc, and the message will be compared to the last successful message sent to the subscriber to determine the operation of each data object. If you select the field and specify an operation program, the program must determine what the operation is and enter the result into a field on each data object in the profile.

**Note** For details about customizing operation programs, see “Operation Programs” on page 454.

If you leave the field blank, the QDoc will not contain an Operation node and will create a subscriber message based entirely on the current raw message.

If you use the Add Only option to avoid overwriting fields that are locally owned by the target application, you must enable the Detect Operations option.

The archive service will not archive subscriber messages that are required to correctly determine the operation of future subscriber messages.

**Publish Unchanged Rows.** Select the field if you want to publish unchanged rows in the current message as well as changed rows. To publish changed rows only, clear the check box.

Publish Unchanged Rows only works with Detect Operations and operates in a similar way to delta QDocs, except at the table—rather than the field—level.

**Example** You have a sales order consisting of 20 line items, and the price of one line item changes. Select Publish Unchanged Rows to publish the changed row and unchanged rows. To publish only the changed row, clear the check box.

**Operation Program.** Enter the name of the operation program to use with this profile. This option is used in conjunction with the Detect Operation check box. The operation program you enter must be a Progress (.p) program contained in the PROPATH.

**Note** Only select this check box if you want to perform an operation calculation, or if you want the operation value to be entered into a different field than the operation node. For details about using operation programs in profiles, see Appendix B, “Parameter Data,” on page 453.

- 5 Click Add Custom Field to add a new field to the data object.

**Fig. 4.4**  
Adding a Custom Profile Field

| XML Name | Name      | Data Type | Fixed Value | Calc. Prog. | Always Incl. Pub.                   | Add Only                            |
|----------|-----------|-----------|-------------|-------------|-------------------------------------|-------------------------------------|
| adAddr   | ad_addr   | character |             |             | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| adDomain | ad_domain | character |             |             | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| adName   | ad_name   | character |             |             | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Enter a field name, specify a data type, and add a fixed value or Progress calculation program if needed. The field name must contain only alphanumeric characters; the name is validated to ensure no illegal characters are included and that the field name is a valid XML node.

To delete a custom field, click in the selection box to the left of the field and click Delete Custom Field.

**Event Types.** Select or clear the check boxes for event types as required to determine which events must occur in order for the profile to be published. By default the Listen check box is enabled for all event types for the profile.

The event types that are available are the activated event types for all data objects in the business object related to the profile. Hence these event types are related to the profile as a whole, not to a specific data object. The profile event types do not appear when editing a data object for the profile.

- 6 Click Save to save the new profile and any changes you have made.

## Deleting Profiles

To delete a profile you have copied and modified, follow these steps. This process deletes the profile and the data objects stored within it. You cannot delete the QAD profiles or data objects.

If you delete all user-configured profiles associated with a business object, a new default profile is generated. This occurs because a business object cannot exist without a profile. In this scenario, the delete essentially refreshes the default profile for the business object.

In addition, if a QDoc does not have an associated profile because the profile has been deleted, the profile name displays as UNAVAILABLE in the various reports and views.

- 1 Select the profile from the navigation tree. The profile displays. The Edit, Copy, and Delete buttons are active.

**Fig. 4.5**  
Profile Header


- 2 Click Delete to remove the profile. You are prompted to confirm.
- 3 Click OK to continue.

## Modifying Profile Data Objects

Once you have created a copy of a profile and saved it, you can modify the data objects within the profile.

- 1 Select a non-QAD profile in the navigation tree and open the data object you want to modify or delete.

**Fig. 4.6**  
Profile Data Object Nodes



- The data object displays in the right pane. Click Edit to access the profile and data object fields.

**Fig. 4.7**  
Profile and Data Object Definition

**Profile**

Name: QADERPSSalesOrder Bus. Obj.: QADERPSSalesOrder  
 Domain: Modified: 12/06/10 02:37:42  
 Entity: Type: Other  
 Desc: QAD: ☐

QDoc Name: QADERPSSalesOrder  
 QDoc Version:  
 QDoc Namespace:  
 Dataset Name:  
 Detect Operations: ☒ Publish Unchanged Rows: ☒  
 Operation Program: Delta QDoc: ☐

Edit Save Cancel Add Custom Field Delete Custom Field

---

**Data Object**

XML Name: ad\_mstr Include: ☒  
 DO Name: SoldToAddress Pub. with parent: ☐  
 Desc: Address Master  
 Filter:

| XML Name | Name      | Data Type | Fixed Value | Calc. Prog. | Always Incl. Pub.        | Add Only                            |
|----------|-----------|-----------|-------------|-------------|--------------------------|-------------------------------------|
| adAddr   | ad_addr   | character |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| adDomain | ad_domain | character |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| adName   | ad_name   | character |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

1 - 3 of 3 Prev Next

- Use the descriptions in step 4 in “Modifying Profiles” on page 95 to modify the profile settings. Use the following field descriptions to modify the data object.

**XML Name.** The name of the XML element or node for the data object in published QDocs.

**Include.** Indicate if you want this data object included in QDocs generated based on this profile. This setting applies to all of the fields in the object. When you include the object, you can also determine on a field-by-field basis which fields to include.

**DO Name.** The system displays the name given this data object in the business object used as a template.

**Publish with Parent.** Indicate if you want the fields in this data object to be published automatically whenever data in the business object’s parent is published. For example, when a field associated with a sold-to customer changes, you may always want to publish the sold-to customer address.

The hierarchical display in the navigation tree shows the parent/child relationship between data objects.

**Note** This option will only work if a parent record has only one child record. If a parent record has multiple child records, when the child records are modified the changes might not appear in the generated QDoc as the QDoc will only contain data for the first child record.

**Description.** Enter a brief description.

**Filter.** Optionally, enter filter criteria to limit the data extracted from the application. The filter uses Progress 4GL expressions.

- Below the profile data object, you can modify settings related to each field in the profile.

**XML Name.** Enter the XML element node name used to publish this field in outbound messages.



**Data Type.** If it is a custom field, select from one of the following data types: character (default), date, datetime, datetime-tz, decimal, int64, integer, and logical; if it is a database field, the data type is populated by the system and is read-only.

**Fixed Value.** Optionally, specify a fixed value that you always want to use in the QDoc for this field, or specify a value using the format `=<node>$`, in which case the field will be populated with the value in the specified node.

For example, if a profile data object contains two nodes—field1 and field2—and the fixed value component of field2 is `=field1`, field2 will be populated with the value of field1. If field1 does not exist, the string `=field1` will be the value of field2.

Fixed value fields can also contain Progress expressions and perform built-in Progress calculations; for example, `=today+2`. Fields from the current buffer can be referenced in the current calculation by including the XML node name surrounded by dollar (\$) characters; the expression must start with an equals sign (=) character. For example, `=substring($ptDesc1$, 1, 12)`.

The system determines node values in this order: a fixed value, a calculated value, the value supplied in the event message.

Fixed values are typically used with custom fields.

The fixed value you provide must be consistent with the data type you specified for the field. If there is a mismatch, the system displays an error message when you try to save the data object.

**Calc Program.** Optionally, enter the name of a Progress program (.p) to be run. The program can be either in the QXOSever PROPATH, or on the AppServer. The local version will be run if it exists; otherwise it runs on the AppServer. For details on calculated field programs see “Implementing Calculated Fields” on page 70.

The system determines node values in this order: a fixed value, a calculated value, the value supplied in the event message. Calculated values are typically used with custom fields.

Make sure the calculated value will be consistent with the data type you specified for the field. If there is a mismatch, the system does not prevent you from saving the data object, but will run into errors during data publishing.

**Note** Fixed values and calculated programs can be defined on the business object, the associated profile, or both. If you define a fixed value or calculated program on the *business object*, all profiles associated with that business object will have that fixed value or calculated result. Defining a fixed value or calculated program on a business object means that associated profiles can filter on that value or result. If you define a fixed value or calculated program on the *profile*, only that profile has that fixed value or calculated result.

**Always Publish.** Indicate if the field should be published whenever the data object that contains it is published, regardless of whether the field was changed by the application event.

**Include.** Indicate if you want this field included in messages generated based on this profile.

**Add Only.** Indicate if you want to include this field in the resulting QDoc if the operation is an ADD operation.

By using the Add Only check box, you can define the fields that are locally owned by the target application, and update transactions in the target application without overwriting locally owned data. Selecting the Add Only check box automatically selects the Include check box.

Any field that is specified as Add Only must have its Always Publish check box disabled and the Default Operations check box selected. On saving the data object, the system displays an error message for fields that have incorrect check box selections. An error also displays if Add Only is selected for a key field.

For example, you might use the Add Only check box in a data synchronization scenario where you have fields that are maintained in the local domain and not replicated from the master domain, except in the case where the record is being created. Selecting the Add Only check box means the fields are published only when the record is being added.

- 5 Click Save to save the data object changes.

## Managing Profile XML Files

An additional profile function lets you generate an XML schema from the profile in order to validate the XML structure.

- 1 In the navigation tree, select the profile you want to work with.
- 2 Click Generate Schema. This generates the XML schema from the profile.

# QXtend Outbound Dashboard

The following material covers the QXtend Outbound (QXO) dashboard.

***Introduction 104***

Explains how to use the Dashboard.

***Viewing Services Summaries 105***

Discusses different service statuses.

***Viewing Specific Services 105***

Explains how to view different services with the Event Services Dashboard.

***Monitoring Source Applications 106***

Explains how to use the Overview node.


***Dashboard Service 108***

Introduces the QXO Dashboard Service.

## Introduction

The Dashboard displays by default with a system overview. There are two basic views—Overview and Services—displayed in the navigation tree. Click Overview to view the output from your defined source applications and subscribers. Click Services to view details for event services, message publishers, message senders, email service, archive service, and dashboard service.

**Fig. 5.1**  
Outbound Services Dashboard

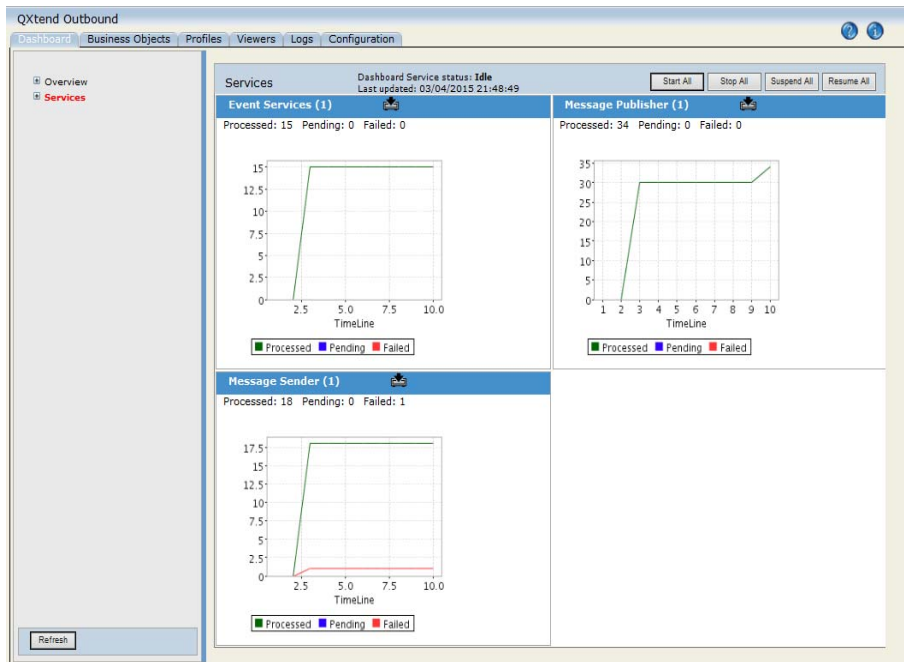

**Note** The input date format on the dashboard UI is American and is not configurable. Database date formats can be either dmy or mdy, but both the qxevent s and the qxodb databases must have the same format. Note also that time data being returned from the database, such as Date-Time fields on the Logs screen or modification time fields on the profiles, are in the format of the qxodb database.

Use the navigation tree on the left to drill down to further details. The charts that display for each source application, service, and subscriber view use a standard timeline format showing the previous hour of activity broken into ten six-minute periods. Adjust the view by resetting the start and finish times in the individual views. The minimum total period is 10 minutes.

**Note** The archive service, email service, and dashboard service display service status information as a table, not a chart.

Click the Download icon in the title bar of a chart to view the data represented in the chart in an HTML table. You can then save this data for import to a spreadsheet application such as Excel and create your own graphs.

**Fig. 5.2**  
Download Icon



Note the numbers at the top of each chart in Figure 5.1. One event service, one message publisher, and one message sender are running. The event service processed 15 events.

## Viewing Services Summaries

When you select one of the top-level services nodes—Event Service, Message Publisher, and so on—a summary of all the services of that type displays. In the table at the top of the screen, each instance of the service and its status are displayed. The possible statuses are:

**STRT.** The instance is starting. Blue.

**STOP.** The instance is stopped. You can restart the instance using the Start button at the bottom of the screen. Red.

**IDLE.** The instance is idle. Green.

**PROC.** The instance is processing an event or a message. Yellow.


**SUSP.** The instance is suspended. You can resume the instance using the Resume button at the bottom of the screen. Light gray.

**DEAD.** The instance is dead. You can replace the instance by creating a new one. Dark gray.

## Viewing Specific Services


Figure 5.3 shows how the Dashboard looks after you have drilled down into the event services view. The views for message publishers, senders, and subscribers are identical, except that subscribers do not require the buttons displayed in the other screens. The archive service and email service display status information as a table, not a graph.

**Fig. 5.3**  
Event Services Dashboard

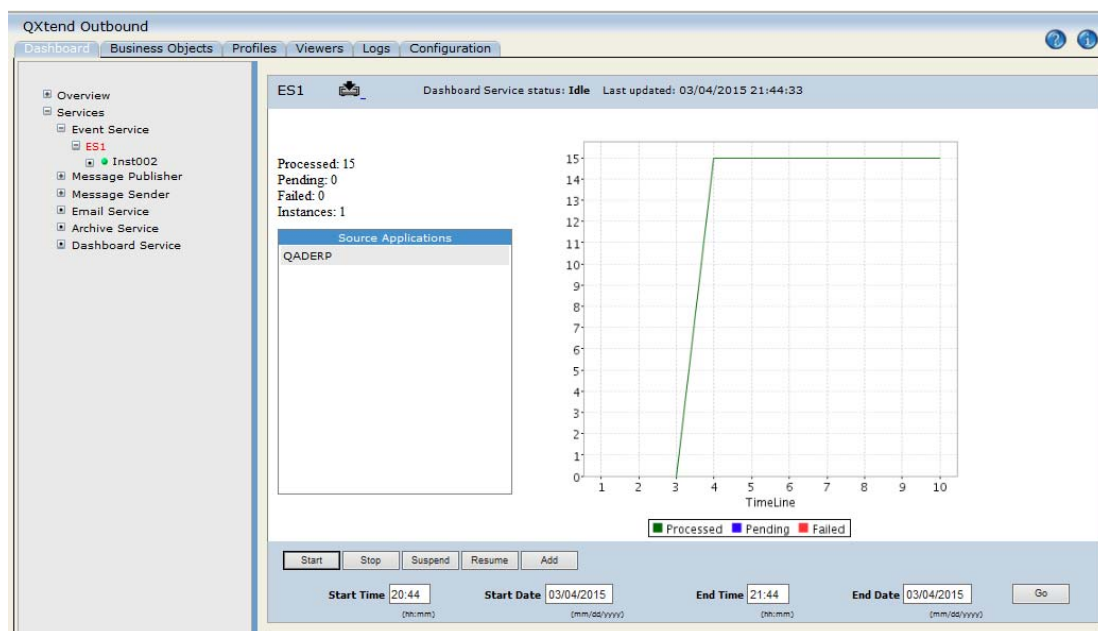

The status of the individual service instance displays as a round, colored icon next to the instance name. See “Viewing Services Summaries” on page 105 for a summary of the color codes.

**Fig. 5.4**  
Status Color Code for Services Instance



You can use the buttons to perform the following actions:

- Start.* Start all services if not already started.
- Stop.* Stop all services if not already stopped.
- Suspend.* Suspend all services if not already suspended.
- Resume.* Resume all services that have been suspended.
- Add.* Add a new instance of the service based on this session profile.

**Important** If an active event type is not registered with any event service, it still generates events in the qxevents database but they will never be processed. To prevent unwanted events from accumulating in the qxevents database, the system stops any event service that has registered source application with active event types not registered with any event service. When you start an event service, the system checks whether all the active event types within each of its registered source applications are registered with an event service. If not, the system shuts down the just started event service and displays a warning message. For information on event type registration, see “Registering Event Types with an Event Service” on page 39.


Use the start and end time fields to limit the data displayed in the chart.

You also can control services from the command line; for details, see “Session Control Tool” on page 123.

## Monitoring Source Applications

Under the Overview node, you can monitor your source applications. Each source application is listed under the Overview node. Click the Overview link to see a summary of all source application activity.


**Fig. 5.5**  
Source Application Overview

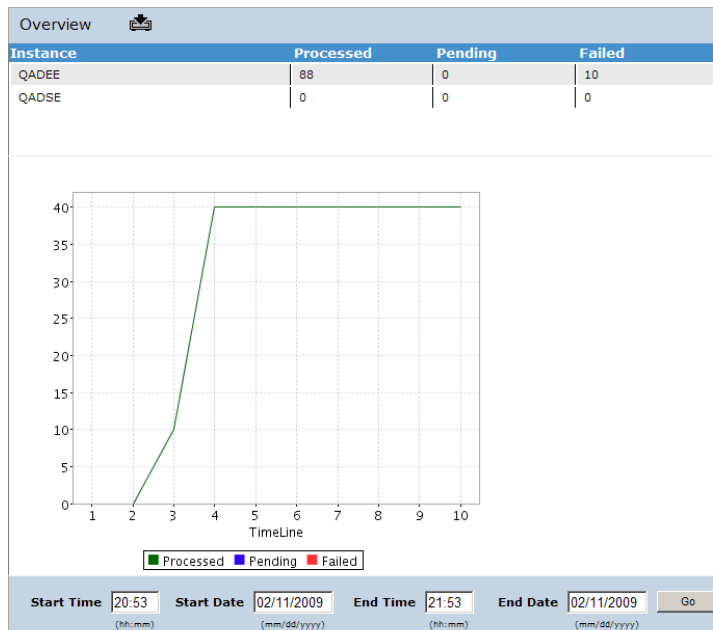

The table at the top shows the individual source applications. Instance is the source application name. Processed, Pending, and Failed shows the number of events in each stage. The chart shows the cumulative processing for all source applications.

Open the Overview node in the navigation tree and click any one of the source applications to view specifics.

**Fig. 5.6**  
Individual Source Application View

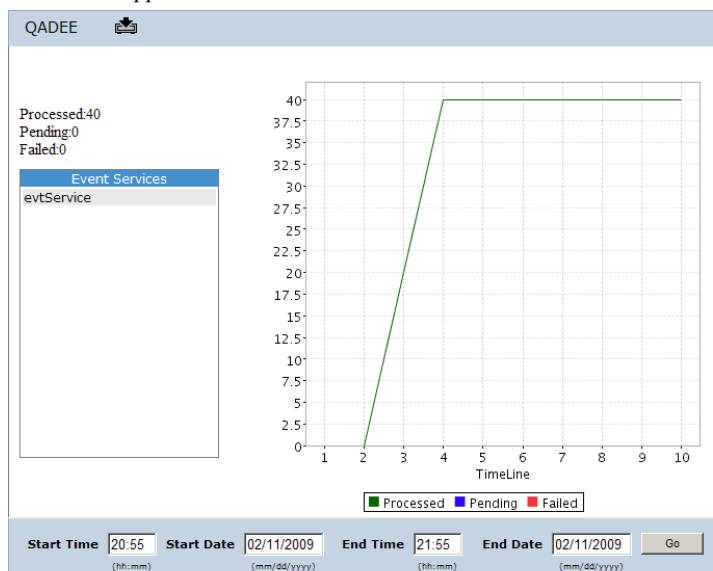


The event services associated with the source application appear in the table to the left.

## Dashboard Service

The Dashboard Service is a QXtend Outbound service that counts events, publisher messages, and sender messages to prepare data for the dashboard. The Dashboard Service improves the performance of QXtend Outbound and ERP transactions that create events.

**Fig. 5.7**  
Dashboard Service page

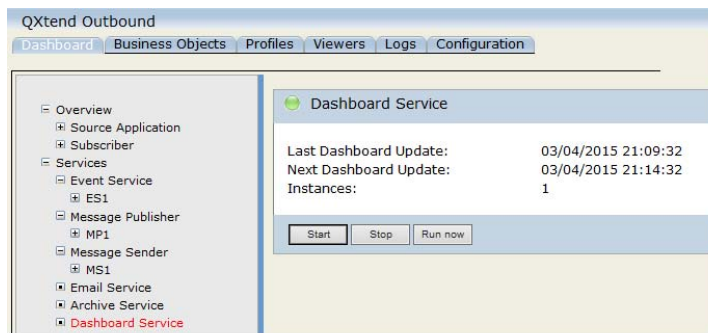


To open the Dashboard Service page, go to Dashboard|Services|Dashboard Service. The Dashboard Service page displays the following information:

- Last Dashboard Update: Shows the time of the last dashboard update
- Next Dashboard Update: Shows the time of the next scheduled dashboard update
- Instances: Shows the number of instances

The frequency of counting message numbers depends on the settings in Configurations|Utilities|Dashboard Settings. The default setting is 5 minutes.

**Fig. 5.8**  
Dashboard Settings

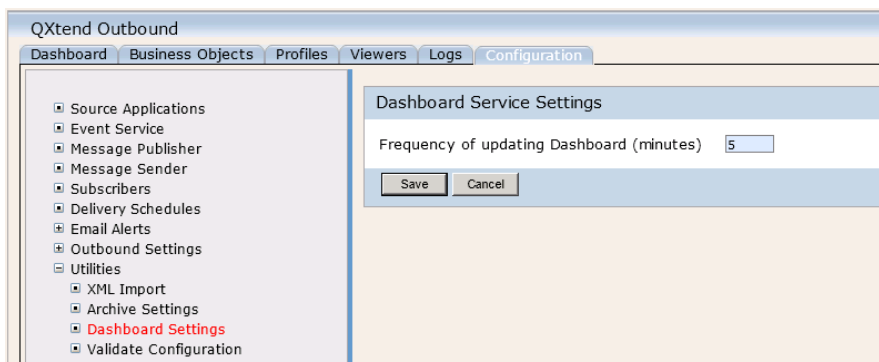


On the Dashboard Service page, use the following buttons to start or stop the Dashboard Service:

- Start: starts the Dashboard Service.
- Stop: stops the Dashboard Service.
- Run Now: counts message numbers right now. If the dashboard update process is running, clicking this button displays a warning message.

QXO Dashboards also display status of the Dashboard Service. The Dashboard Service status and the time of last update are displayed on each QXO Dashboard.



**Fig. 5.9**  
Dashboard Service Status Display

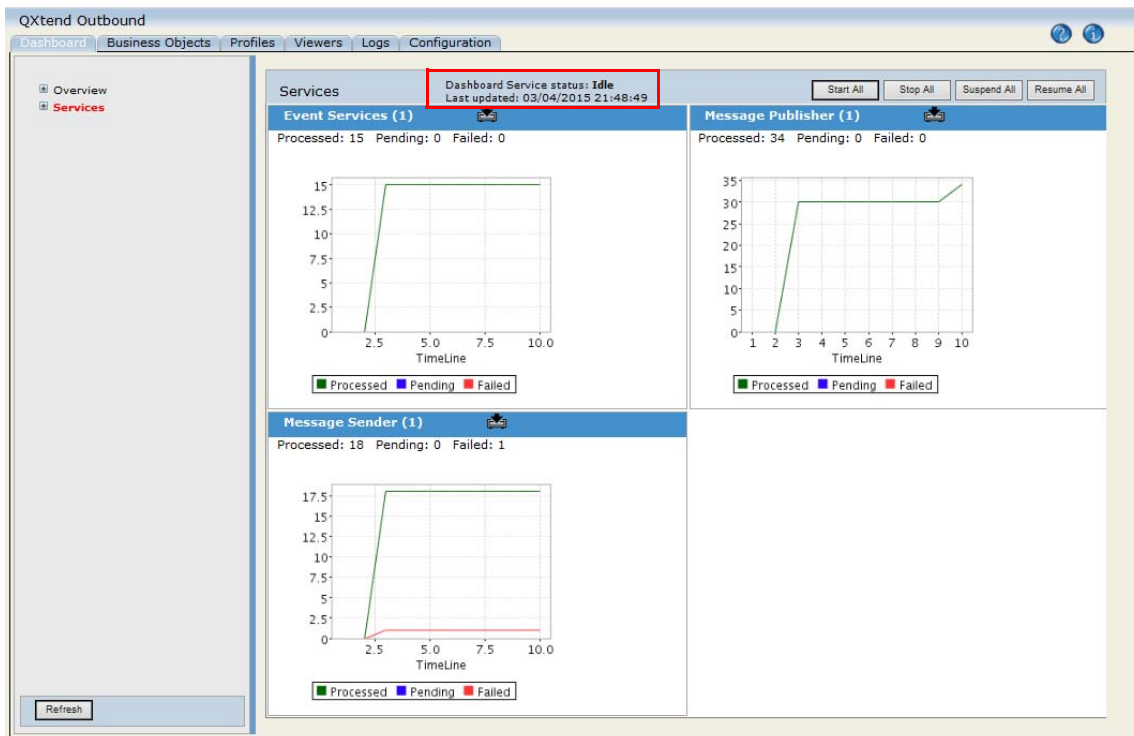



## QXtend Outbound Viewers

The following material covers the QXtend Outbound (QXO) viewers.

***Application Event Viewer* 112**

Explains how to use the Applications Event Viewer.

***Filtering View Output* 113**

Explains how to filter the output of a view.

***Raw Message Viewer* 113**

Explains how to use the Raw Message Viewer.

***Subscriber Messages Viewer* 115**

Explains how to use the Subscriber Messages Viewer.

## Introduction

Use the Viewers tab to view:

- Messages generated when QXO successfully reads an event from the qxevent's database
- Raw data extracted from a source application for all profiles that are monitoring that data
- QDocs created from the business object profiles

Information displays in filterable tables. Each view displays the 50 most recent records. Next and Previous buttons move up and down through the records. If alerts occur, you can display and filter them also. See “Using Table Filters” on page 18 for details on using filters.

## Application Event Viewer

**Fig. 6.1**  
Application Event Viewer

| Session | Date-Time               | Src. App | Domain | Type    | Event | State |
|---------|-------------------------|----------|--------|---------|-------|-------|
| ES1     | 02/22/2012 15:28:09.537 | QADERP   | QMSUS  | an_mstr | 27    | PUB   |
| ES1     | 02/22/2012 15:26:21.146 | QADERP   | QMSUS  | an_mstr | 26    | PUB   |
| ES1     | 02/22/2012 15:25:54.788 | QADERP   | QMSMEA | an_mstr | 25    | PUB   |
| ES1     | 02/22/2012 15:24:38.319 | QADERP   | QMSUS  | an_mstr | 24    | PUB   |
| ES1     | 02/22/2012 15:24:13.203 | QADERP   | QMSMEA | an_mstr | 23    | PUB   |
| ES1     | 02/22/2012 03:58:33.365 | QADERP   | QMSUS  | an_mstr | 22    | PUB   |
| ES1     | 02/22/2012 03:28:01.917 | QADERP   | QMSUS  | an_mstr | 21    | PUB   |
| ES1     | 02/22/2012 03:27:58.880 | QADERP   | QMSMEA | an_mstr | 20    | PUB   |
| ES1     | 02/22/2012 03:26:35.471 | QADERP   | QMSMEA | an_mstr | 19    | PUB   |
| ES1     | 02/22/2012 03:22:42.624 | QADERP   | QMSUS  | an_mstr | 18    | PUB   |
| ES1     | 02/22/2012 03:22:20.511 | QADERP   | QMSMEA | an_mstr | 17    | PUB   |
| ES1     | 02/22/2012 03:18:53.795 | QADERP   | QMSUS  | an_mstr | 16    | PUB   |
| ES1     | 02/22/2012 03:18:21.633 | QADERP   | QMSMEA | an_mstr | 15    | PUB   |
| ES1     | 02/22/2012 03:06:42.186 | QADERP   | QMSMEA | an_mstr | 14    | PUB   |

**Delete.** Use the Delete button to delete application event messages with state ERR.

When application data being monitored by QXO is changed, a record is written to the qxevent's database and queued for processing by the event service. The event service polls the qxevent's database for new events and when it finds one, it extracts the related application data from QAD Enterprise Applications and saves it in the qxodb database in the form of raw data.

A message is recorded each time an event is processed. The message indicates the time the event was processed, any errors that occurred, the source application that caused the event, and other pertinent information.

If there are events with processing errors, you can use the Reprocess button to reprocess them.

The application event viewer does not show messages for business objects that employ DDP since these objects are not processed by the event service. However, messages for these business objects are recorded in the raw message viewer.


## Filtering View Output

To filter the output of a view, use the following steps:

- 1 Under the Viewers tab, select the view you want to filter from the menu along the top. The full view displays. See also “Using Table Filters” on page 18.
- 2 Click Filter to open the filter panel.
- 3 In the filter panel, enter a filter Attribute—session, type, date-time, and so forth as displayed across the top of the viewer—an Operator, and the Value you want to filter by.

There are two different sets of operators possible, one for numeric values, the other for text as shown in Figure 6.2.

**Fig. 6.2**  
Text Operators

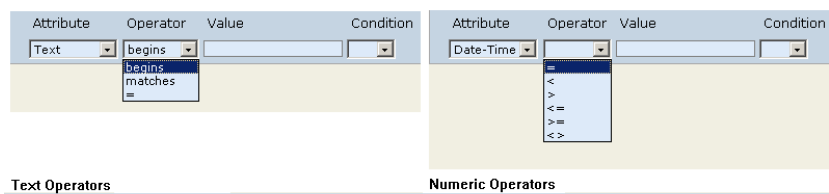


- 4 If you want to search by multiple values, enter a Condition and click Add. The next filter line displays.
- 5 Click Run to filter the viewer.  
**Note** If you change the filter values, then click Next or Previous before clicking Run, your filter changes are lost.
- 6 Click Delete or Reset to close the filter pane.

## Raw Message Viewer

The raw message viewer displays information about the messages stored in the qxodb database by the event services. Click any message to view associated alerts and the message content.

The raw message viewer also displays information about business objects that employ DDP, which are passed directly to the qxodb database by the source application.

**Fig. 6.3**  
Raw Message Viewer

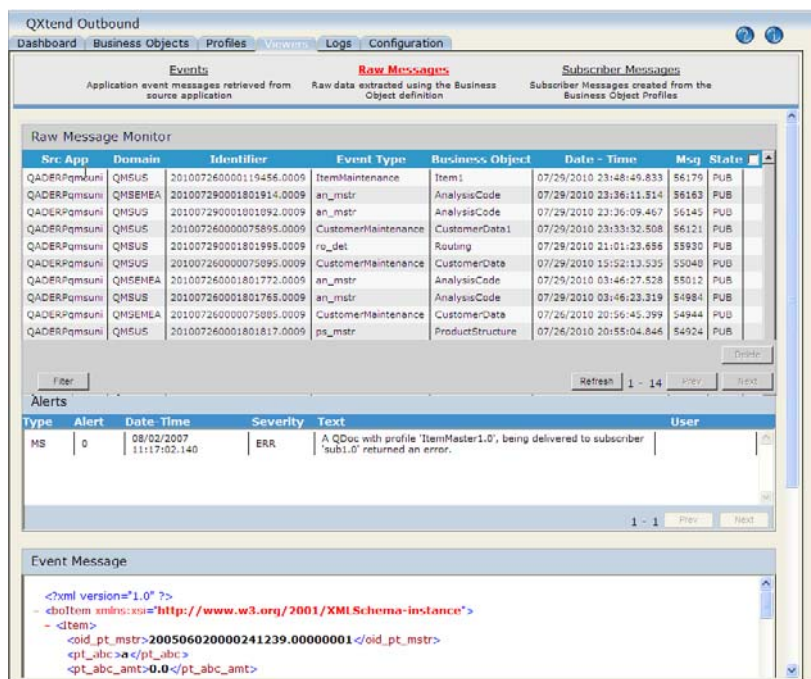

**Delete.** Use the Delete button to delete extracted data with state ERR.

**Note** Message Publisher automatically deletes from the qxodb database any raw messages from which no profile messages are created.

Scroll down to view the raw message content.


**Fig. 6.4**  
Raw Message Content



## Subscriber Messages Viewer

The subscriber messages viewer displays subscriber messages created from business object profiles. Click any subscriber message to view any associated alerts and the raw XML of the request.

**Fig. 6.5**  
Subscriber Messages Viewer

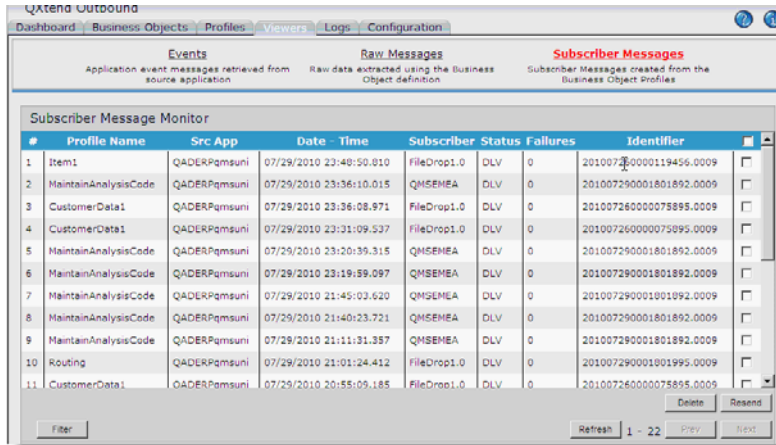

| #  | Profile Name         | Src App      | Date - Time             | Subscriber  | Status | Failures | Identifier               |
|----|----------------------|--------------|-------------------------|-------------|--------|----------|--------------------------|
| 1  | Item1                | QADERPqmsuni | 07/29/2010 23:49:50.810 | FileDrop1.0 | DLV    | 0        | 201007290000119456.0009  |
| 2  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 23:36:10.015 | QHSEMEA     | DLV    | 0        | 2010072900001801892.0009 |
| 3  | CustomerData1        | QADERPqmsuni | 07/29/2010 23:36:08.971 | FileDrop1.0 | DLV    | 0        | 201007260000075895.0009  |
| 4  | CustomerData1        | QADERPqmsuni | 07/29/2010 23:31:09.537 | FileDrop1.0 | DLV    | 0        | 201007260000075895.0009  |
| 5  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 23:20:39.315 | QHSEMEA     | DLV    | 0        | 2010072900001801892.0009 |
| 6  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 23:19:59.097 | QHSEMEA     | DLV    | 0        | 2010072900001801892.0009 |
| 7  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 21:45:03.620 | QHSEMEA     | DLV    | 0        | 2010072900001901092.0009 |
| 8  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 21:40:23.721 | QHSEMEA     | DLV    | 0        | 2010072900001801892.0009 |
| 9  | MaintainAnalysisCode | QADERPqmsuni | 07/29/2010 21:11:31.357 | QHSEMEA     | DLV    | 0        | 2010072900001801892.0009 |
| 10 | Routing              | QADERPqmsuni | 07/29/2010 21:01:24.412 | FileDrop1.0 | DLV    | 0        | 2010072900001901995.0009 |
| 11 | CustomerData1        | QADERPqmsuni | 07/29/2010 20:55:09.185 | FileDrop1.0 | DLV    | 0        | 201007260000075895.0009  |

**Identifier.** The Identifier column uniquely identifies a subscriber message. Identical message identifiers indicate the same subscriber message processed multiple times.

**Delete.** Use the Delete button to remove a QDoc from the viewer. This also deletes the QDoc record in the qxodb database.

**Resend.** Use Resend to forward a QDoc to any subscribers that are registered for the QDoc profile. A resend changes the status to PEND. After delivery, the status changes to ERR or DLV depending on the success of the delivery. You cannot resend the QDocs in PEND status.

Scroll down to view the QDoc.

**Fig. 6.6**  
Response



**Show Response.** Use the Show Response button at the bottom of the viewer to view the response returned from the subscriber. Using this button you can view the response to a QDoc if you cannot access the QXtend Message Monitor in the .NET UI.





# QXtend Outbound Log Monitor

The following material covers the QXtend Outbound (QXO) logs.

***Viewing QXO Logs and Exceptions* 118**

Explains how to use the Log tab.

***Additional Logs* 118**

Explains how to use additional troubleshooting features.

## Viewing QXO Logs and Exceptions


Use the Log tab to view log and alert messages for all transactions in the QXO system and filter them by various criteria.

Messages are written to the log by all of the QXO services when data is extracted and when QDocs are created and published.

You can delete and optionally save all alerts and logs generated by the system by running the archive routine. See “Data Archive” on page 63.

Figure 7.1 illustrates the Logs portion of this screen.

**Fig. 7.1**  
Log Tab

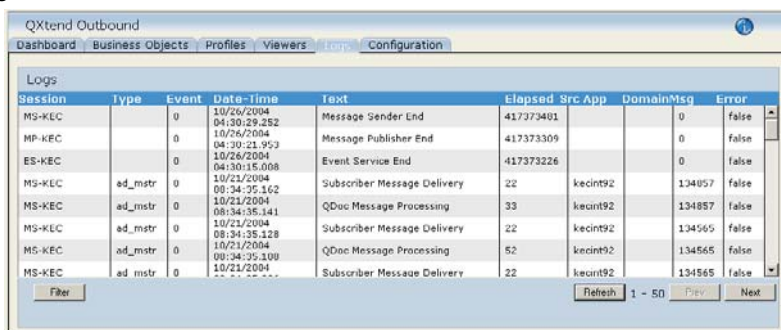

| Session | Type    | Event | Date-time               | Text                        | Elapsed   | Src App  | Domain | Msg    | Error |
|---------|---------|-------|-------------------------|-----------------------------|-----------|----------|--------|--------|-------|
| MS-KEC  |         | 0     | 10/26/2004 04:30:29.252 | Message Sender End          | 417373401 |          |        | 0      | false |
| MP-KEC  |         | 0     | 10/26/2004 04:30:21.953 | Message Publisher End       | 417373309 |          |        | 0      | false |
| ES-KEC  |         | 0     | 10/26/2004 04:30:15.008 | Event Service End           | 417373226 |          |        | 0      | false |
| MS-KEC  | ed_mstr | 0     | 10/21/2004 08:34:35.162 | Subscriber Message Delivery | 22        | kecint92 |        | 134057 | false |
| MS-KEC  | ad_mstr | 0     | 10/21/2004 08:34:35.141 | QDoc Message Processing     | 33        | kecint92 |        | 134057 | false |
| MS-KEC  | ed_mstr | 0     | 10/21/2004 08:34:35.128 | Subscriber Message Delivery | 22        | kecint92 |        | 134565 | false |
| MS-KEC  | ad_mstr | 0     | 10/21/2004 08:34:25.100 | QDoc Message Processing     | 52        | kecint92 |        | 134565 | false |
| MS-KEC  | ad_mstr | 0     | 10/21/2004 08:34:25.100 | Subscriber Message Delivery | 22        | kecint92 |        | 134565 | false |

The system returns 50 records. If more than 50 records exist, use the next and previous buttons to display the next group of 50 records. Use the scroll bar to scroll up and down within a group of 50 records. Click Refresh to find new records created since the initial screen display.

Use the Filter button to toggle the display of the filter criteria. See “Filtering View Output” on page 113.

**Note** Logs and alerts remain in the qxodb database indefinitely until they are cleared by running the archive routine. For details see “Data Archive” on page 63.

## Additional Logs

For further troubleshooting, review the logs located in *QX0srvInstallDir\logs*. The log naming convention for the various services is *session-<numeric-instance-segment>-<service name>.log*. For example, an event service named ES1 may have two agents, Inst001 and Inst002. The log files would be in 001-ES1.log and 002-ES1.log.

There are no subscriber logs. Troubleshooting subscriber problems should be done on the subscriber side.

To control log detail, you can edit your start-sess.sh or start-sess.bat file. Open the file in a text editor, locate the LOGLEVEL entry, and change the logging level as desired:

- 0 Only level 0 messages and one required level 1 message displays.
- 1 Level 0 and 1 messages display.
- 2 Level 0, 1, and 2 messages display.

By default this value is set to 0. This is the recommended setting. If you are having trouble debugging an issue, you can change the logging level to display additional errors and messages.

The AppServer broker and server logs, if set up as described during installation, will be named `QX0Session.broker.log` and `QX0Session.server.log`, respectively. Refer to *QAD QXtend Installation Guide*.



# QXtend Outbound Tools

The following material describes QXtend Outbound (QXO) tools.

***Introduction***    **122**

Describes different tools in QXO.

***Mass Rowid Synchronization Tool***    **122**

Explains how to use the mass rowid synchronization tool.

***Session Control Tool***    **123**

Explains how to use the session control tool with details on the 32-bit startup option.

## Introduction

Various tools are provided with QXO that are used with the QXO application. These tools are run from the command line. Ensure that you adapt the tools in your environment before you run them.

QXO has the following tools:

- Mass Rowid Synchronization Tool
- Session Control Tool

## Mass Rowid Synchronization Tool

From time to time, you probably need to perform Progress database dump and load procedures for various maintenance-related reasons. The dump and load procedures change the assigned rowids in the QAD Enterprise Applications database; it means that the rowids are no longer synchronized with the original rowids stored in the QXO database. This reassignment of rowids results in erroneous messages being generated by QXO.

**Note** Use this tool only if your source application type is set to use rowids as the identifier (see Figure 2.1 on page 25). Do not run this tool for source applications that use OIDs.

To correct the rowid mismatch and resolve this issue, after performing a Progress database dump and load, run the QXO mass rowid synchronization utility, which is located in the `<qxo>src/tools` directory.

This utility iterates through the records in the Event Message section table of `qxodb` and queries the QAD Enterprise Applications database to determine if the rowids match. If there is a mismatch, the utility synchronizes the Event Message section record rowid to that of the QAD Enterprise Applications rowid.

The utility comprises the following files:

- Startup script (`start.msinc`)
- Mass rowid sync program (`rowid-msync.p`)

You run the synchronization utility from the command line. Before running the utility, Edit `start.msinc` to specify the following:

- DLC: Progress home directory
- QXOSRV: QXO server directory
- SRCAPP: QXO source application to synchronize
- PROFILELIST: Optional list of profiles to synchronize. If not specified, it synchronizes all the profiles.

The utility creates a log file `rowidsync<time>.log` in the `<qxo>src/tools` directory. If the variable `DEBUG` is set to `true` in the script `start.msinc`, then it creates an additional debug file `rowidsync<time>.debug` in the `<qxo>src/tools` directory.

The log file has an entry for the first record and for multiples of 100,000 records. You can check this log file periodically to see the progress of the utility.

After the utility finishes, it gives a summary report on:

- Raw Messages Converted



- Message Sections Converted
- Message Sections Unavailable
- Message Locks Converted
- Published Messages Converted
- Subscriber Messages Converted
- Completed in <time in minutes and seconds>

## Session Control Tool

You can start or stop QXO services—for example, either all services or a particular service such as the Event Service or the Message Publisher—from the command line by using the session control tool. Using this tool you can shut down services cleanly as part of a scheduled backup process, and then start them again once the qxodb server is running.

**Note** You can also start and stop services from the QXO Dashboard; for details see “Viewing Specific Services” on page 105.

The `sess-control.sh` file is located in the `scripts` directory; the `control.p` file is located in the `src` directory.

**Note** The `sess-control.sh` file contains settings for environment variables and database connections. This file is configured according to the information you provide during installation. However, you can manually edit this file to modify these settings as required.

To operate services, enter the following at the command line:

```
./sess-control.sh {QUERY|START|STOP|SUSPEND|RESUME} [ALL] [RESUME_SUB]
```

```
./sess-control.sh {QUERY|START|STOP|SUSPEND|RESUME} SERVICES  
[RESUME_SUB]
```

```
./sess-control.sh {QUERY|START|STOP|SUSPEND|RESUME} ES [event service  
code]
```

```
./sess-control.sh {QUERY|START|STOP|SUSPEND|RESUME} MP [message  
publisher code]
```

```
./sess-control.sh {QUERY|START|STOP|SUSPEND|RESUME} MS [message sender  
code] [RESUME_SUB]
```

```
./sess-control.sh {QUERY|SUSPEND|RESUME} SA [source application code]
```

```
./sess-control.sh {QUERY|RESUME} SB [subscriber code]
```

```
./sess-control.sh {START|STOP} EM
```

**Note** Use this to start and stop the e-mail service.

```
./sess-control.sh {START|STOP} AR
```

**Note** Use this to start and stop the archive service.

Where {QUERY|START|STOP|SUSPEND|RESUME} is the command you want to execute.

**Example** To start all services, enter the following:

```
./sess-control.sh START ALL
```

To stop the archive service, enter the following:

```
./sess-control.sh STOP AR
```

To suspend an event service named ES1, enter the following:

```
./sess-control.sh SUSPEND ES ES1
```

To resume a message publisher service named MP1, enter the following:

```
./sess-control.sh RESUME MP MP1
```

**Note** If the script is going to be called from a cron job, remove the line tail -f \$QXODIR/logs/\$1.log from the end of the script.

### 32-bit Startup Option

In the QXO start-sess.sh file, a new parameter can be appended to the -param entries to indicate that QXO can process rowids as 32-bit. This optional parameter looks like the follows:

```
-param "$1", $LOGLEVEL, yes
-param "$1", $LOGLEVEL, no
```

The default is no, so it can be omitted.

QXO runs on version 10.1B, which processes rowids as 64-bit; earlier versions of Progress send rowids as 32-bit.

By default, QXO converts all incoming 32-bit rowids to 64-bit. However, for the users upgrading from QXO versions older than version 1.4, run a conversion routine to convert all rowids stored in the database to 64-bits.

Because this conversion can take a long time to complete, especially when the QXO system has been operational for a long time. This parameter setting is provided as a workaround until a suitable time is found to perform the conversion and/or archive the old data.

It is a system-wide setting, so if a QAD Enterprise Applications system was using 64-bit rowids and QXO was processing them as 32-bit, erroneous results may arise.



# Using the QXtend Message Monitor

The following material covers the QXtend Message Monitor.

**Note** The QXtend Message Monitor is available only in the .NET user interface.

## ***QXtend Message Monitor*** 126

Explains how to use the QXtend Message Monitor with details on the profile message summary, Subscriber Messages tab, Subscriber Responses tab, and Subscriber Message Details.

## QXtend Message Monitor

Profile messages are generated by QXO and delivered to external subscribers. The QXtend Message Monitor allows you to track these outbound profile messages, as well as the response messages that are returned from subscribers. You can view the complete lifecycle of profile messages through QXtend—from publication and delivery through to response.


A profile message is created for each profile that is registered against a business object. Response messages are generated by the destination application and returned to QXtend Outbound.

You can use the QXtend Message Monitor to view:

- A summary of profile messages delivered to subscribers
- Details of subscriber messages, including delivery status
- Details of subscriber responses arising from message processing
- Raw XML data for messages, requests, and responses

The information displayed in the tables can be filtered using various criteria to make it easier to understand the data displayed. Profile messages can be filtered by date and time; subscriber, source application, source domain, target domain, or unique identifier (OID or rowid); and delivery status. Profile messages can also be grouped by profile type. For details of filtering and grouping data in tables, see the section “General UI Functions” on page 17.

**Fig. 9.1**  
QXtend Message Monitor

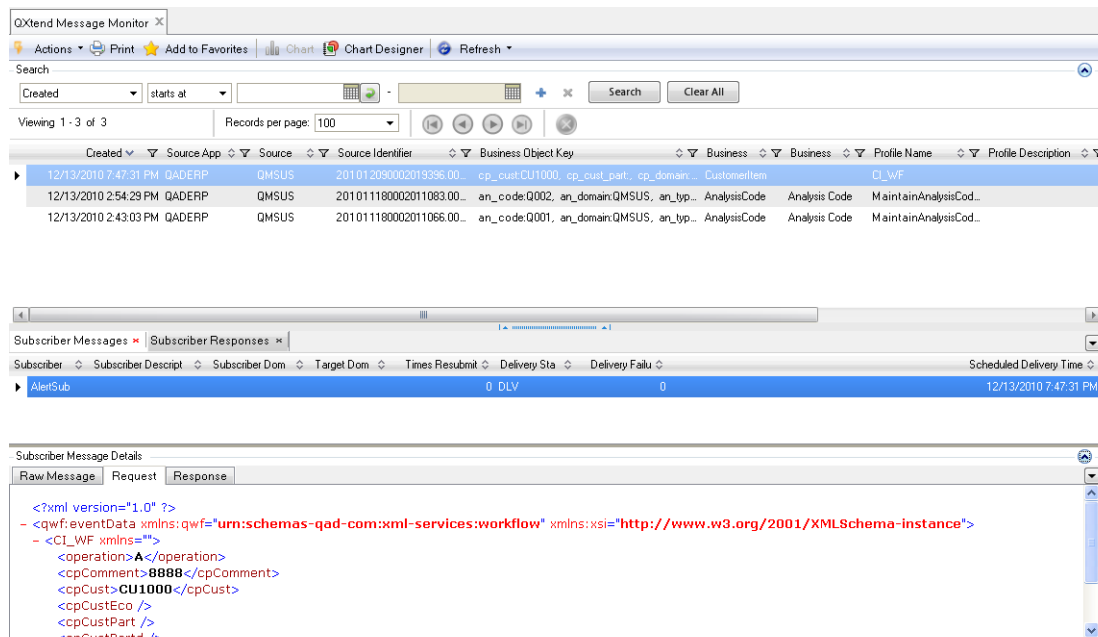

The Outbound Message Monitor contains the following:

- Profile message summary
- Subscriber Messages tab
- Subscriber Responses tab
- Subscriber Message Details area

## Profile Message Summary

The profile message summary, located at the top of the QXtend Message Monitor screen, describes profile messages that have been delivered to subscribers. Clicking a profile message causes the associated subscriber messages and subscriber responses to display in the relevant tabs.

A single profile message may have one or multiple related subscriber messages. If a subscriber message is delivered successfully on first submission, only one subscriber response exists for that message. If delivery is unsuccessful, a message may have multiple subscriber responses describing the processing errors.

**Fig. 9.2**  
Profile Message Summary

| Created       | Source App | Source Domain | Source Identifier   | Business Object Key                                 | Business Object | Business Object Key |
|---------------|------------|---------------|---------------------|-----------------------------------------------------|-----------------|---------------------|
| 4/7/2008 7:38 | qad2007    | QP            | 0x000000000000161db | abs_domain:QP, abs_id:s00000114, abs_shipfrom:10000 | Shipper         |                     |
| 4/7/2008 7:38 | qad2007    | QP            | 0x000000000000161db | abs_domain:QP, abs_id:s00000114, abs_shipfrom:10000 | Shipper         |                     |
| 4/7/2008 7:38 | qad2007    | QP            | 0x000000000000161db | abs_domain:QP, abs_id:s00000114, abs_shipfrom:10000 | Shipper         |                     |
| 4/7/2008 7:38 | qad2007    | QP            | 0x000000000000161db | abs_domain:QP, abs_id:s00000114, abs_shipfrom:10000 | Shipper         |                     |

**Source Domain.** The domain in the source application that was the source for the event message.

**Source Rowid.** The unique identifier (OID or rowid) of the application database record updated by the event.

**Business Object Key.** For non-DDP business objects, the business object keys are always the primary fields defined in the top-level data object (DO).

For DDP business objects, the business object keys are based on the primary fields defined in one of the top-level data objects:

- If the primary DO has a primary field defined, use the primary DO.
- If the primary DO has no primary field defined, use the first DO that has a primary field defined.
- If there is not a primary field defined in any top-level DO, the business object key is blank.

**Business Object.** The QXtend business object associated with the event message.

**Profile Type.** The application type of the subscriber for which the profile message is intended. For details on profile types, see “Modifying Profiles” on page 95.

## Subscriber Messages Tab

The Subscriber Messages tab shows response messages received from the subscriber. Response messages are only received from subscribers if File Directory Service, Web Service, or QAD BMP is used as the communication method.

The `mpt_msg_subs_resp` table in the QXtend database stores the response XML and processing result. The `mpt_msg_subs_excp` table stores any exceptions raised on the related response message.

**Fig. 9.3**  
Subscriber Messages Tab

| Subscriber | Subscriber Description | Subscriber Domain | Target Domain | Times Resubmit | Delivery Status | Delivery Failure | Scheduled Delivery Time |
|------------|------------------------|-------------------|---------------|----------------|-----------------|------------------|-------------------------|
| SUB1       |                        |                   |               | 0              | PEND            | 0                | 4/7/2008 7:38:33 AM     |

**Subscriber Domain.** Specifies the domain in the source application from which the subscriber solely wants to receive event messages. Event messages originating from other domains are ignored.

**Delivery Status.** The delivery status of the profile message as reported by the receiving application.

**APPERR.** Destination Application Error. An application error has occurred in the destination application (QAD Enterprise Applications, for example).

**DLV.** Message Delivered Successfully to Subscriber. Response should show success for a DataSync profile type as it was successfully delivered to a Web service subscriber.

For a subscriber using file directory service delivery the response will be:

```
<QdocResponse>No Response XML Available</QdocResponse>
```

because no parsing of the response has been performed. The DLV status here means the message was successfully written to the target directory on the file system.

**HOLD.** The message not been sent and is being held up by a previous message (for the same rowid) that has an error status. The message that is in error needs to be corrected before the next message can be sent.

**PEND.** Pending Message. No response has been generated yet as the message is waiting to be sent.

**SOAPERR.** SOAP Fault Generated by QXI. Generated by the QXI Web service. The most common SOAPERR is:

```
<number>QdocException005</number>
<description>QDoc is not supported</description>
<severity>error</severity>
```

**SNDERR.** Infrastructure Errors. An infrastructure error exists in the subscriber. This error may occur if there was an internal server error or no response was received from the Web service, indicating there was a problem communicating with the service.

**SUP.** Subscriber Message Not Sent, Superseded by Later Profile Message. No response is generated because the message was superseded by a later message.

**WAITACK.** The message has been sent to the subscriber and is waiting for acknowledgement from the subscriber.

**WRN.** Warning Exceptions Received. A warning has been returned from the destination application. For example:

```
A record was in use by another user: aud_det in use by mfg,25 on pali505 3. Wait or press
CTRL-C to stop. (121)
```

**Delivery Failures.** The number of times the profile message failed to be delivered successfully to the subscriber.


## Resubmitting or Deleting Requests

Right-click a subscriber message in the Subscriber Messages tab to resubmit or delete the QDoc. You can choose:

- Resubmit Request to resubmit the selected subscriber message.
- Resubmit All Requests to resubmit the profile message to all related subscribers
- Delete Request to delete the selected subscriber message.
- Delete All Requests to delete all subscriber messages.

**Note** Messages are resubmitted according to the sending option defined for the subscriber. Messages for subscribers using the Send Immediately option are resubmitted immediately. Messages for subscribers using the Use Delivery Schedule option are resubmitted at the next scheduled delivery time.

**Fig. 9.4**  
Resubmit Menu

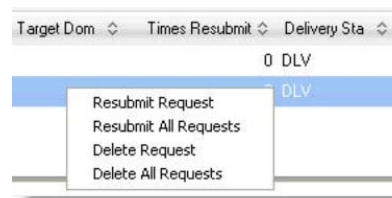

You can only resubmit a QDoc that has previously been delivered. If a superseded message is selected for resubmission, the latest version of the message is resubmitted to the subscriber. You cannot resubmit a pending message.

During resubmission the profile message and subscriber detail records are locked to prevent another process from trying to resubmit the same QDoc message.

An alert indicates whether message resubmission was successful or unsuccessful.

## Subscriber Responses Tab

The Subscriber Responses tab shows message responses returned from the subscriber. A message that is delivered successfully will have only one response. A message that has resubmitted can have potentially multiple subscriber responses indicating why delivery failed. You can expand subscriber responses for messages that have multiple errors.

**Fig. 9.5**  
Subscriber Responses Tab

| Created            | Delivery Status | Alert Severity | Alert Message                                                                                                                              |
|--------------------|-----------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 11/8/2006, SOAPERR | ERR             | ERR            | A QDoc with profile 'Item Synchronization', being delivered to subscriber 'DEMO2' returned an error. See the response details in QXO fo... |
| 11/8/2006, SOAPERR | ERR             | ERR            | A QDoc with profile 'Item Synchronization', being delivered to subscriber 'DEMO2' returned an error. See the response details in QXO fo... |

**Alert Severity.** The severity of the exception. Possible values are ERR, WRN, or MES (indicating successful delivery).

**Alert Message.** Descriptive text for the alert message. This alert text cannot be changed.


**Number.** This column displays only when a subscriber response is expanded. Contains the QXI exception code related to the error. For details about exception codes, see page 383.

**Context.** This column displays only when a subscriber response is expanded. Indicates the frame or field within QAD Enterprise Applications where QXtend Inbound failed during message processing.

## Subscriber Message Details

The Subscriber Message Details tab displays an XML code representation of the raw message event, subscriber message, or subscriber response. Here the Subscriber Message Details tab displays the raw message XML of a profile message request.

**Fig. 9.6**  
Subscriber Message Details

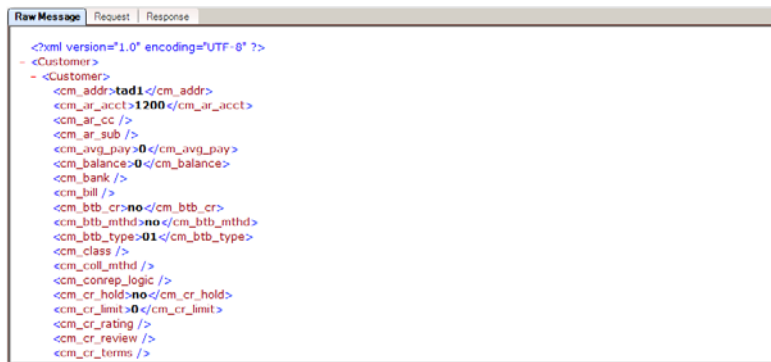

Click a tab to view the XML code. The XML is retrieved from the database when a message detail tab is selected. You can also expand and contract the Subscriber Message Details tab as required.

**Raw Message.** Displays the latest version of the data that has been extracted for a specific business object, represented as an event message. Only the current version of this information is stored in the QXO database.

**Request.** The profile message delivered to the subscriber.

**Response.** The data sent in response to a profile message. No XML response data is available for subscribers that use the file directory service method of delivery.

# QXtend Query Service

This chapter describes the Query Service in QXtend Outbound, which enables calling applications to access data within a QAD application, without replicating the data.

***Introduction***    **132**

Describes the functions of the Query Service.

***Query Service API***    **132**

Illustrates the Query Service API.

***Query Service Setup***    **133**

Explains how to use the Query Service to call the API, including direct connection setup, progress AppServer Setup, and web service setup, with details on deploying the query API.

## Introduction

The Query Service is a QXO service that provides a data interface between QAD products, and between QAD products and external systems, without the need to connect to an application database.

The Query Service is a service interface API and can be called using a native Progress call, a Progress appserver call, or an XML Web service (QXI) call. When called, the Query Service connects to the source application database, extracts the required data, packages the data, and returns it to the calling application. The data can be returned as either XML or as a ProDataSet.

The Query Service enables the calling application to access data within a QAD application without replicating the data to the calling application. For example, the calling application can use the Query Service to access country codes stored in QAD EE without connecting directly to the database or copying the data. The connection is fast and in real time, and the calling application does not require knowledge of the source. The QXO event service and event publisher processes access the data, without updating the QXO database.

QXI is not required for the Query Service unless you want to issue XML requests. When you make an XML Web service call to the Query Service, QXI receives the request and calls the Query Service in QXO to process it.


You can use the Query Service to:

- Access data in other QAD applications for lookups and validation. This facility removes the need to replicate data into the product module.
- Allow an external application to access data stored in a QAD application. This facility could be used to validate data from an external application before it is sent to the QAD application, reducing potential errors when interfacing between products.

## Query Service API

The Query Service is an SI API that is called by using a native Progress call, a Progress appserver call, or an XML Web service (QXI) call. The API is serviced by the Query Service engine, Business Object Manager, and Profile Manager.

**Fig. 10.1**  
Query Service API

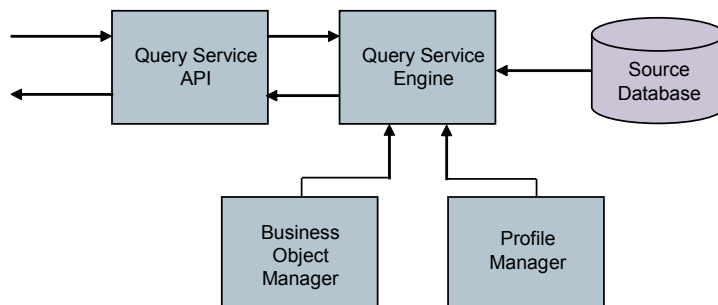



The Business Object Manager and Profile Manager create the business object and profile datasets. The Query Service engine connects to the source application database, extracts the data, and returns it to the calling application as a profile dataset.

**Note** If a business object is domain-enabled, the domain must be passed in the request. The domain code is a session context parameter and does not have to be included in the query filter.

When accessing the API, the calling application can specify filter conditions that control the data returned by the Query Service. These are defined as a single-character expression or string, and the data can only be filtered using the primary table in the business object. When using XML (QXI) to call the Query Service, the filter is a node in the request XML. When using a direct API call, a field in a temporary table is passed as a parameter.

Use a native Progress program called `com/qad/qxtend/si/QueryService.p` to access the Query Service API. The internal procedure is called `querySourceApplication`. It takes a static dataset as an input parameter and a dataset-handle as an output parameter.

The input dataset contains the definition of the Query Service request. The temporary table in the data set is defined as follows:

**Table 10.1**  
Input Dataset for a Query Service Request

| Property Name     | Description                                                                                                                                                                                                 |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SourceApplication | The name of the source application defined in QXtend Outbound. It contains the connection information for the database that is the source of the query data.                                                |
| Profile           | The name of the profile (or business object) defined in QXtend Outbound that defines the format of the response.                                                                                            |
| Filter            | The filter to apply to the profile (or business object) to return a subset of data from the database. This must be a valid Progress ABL WHERE clause.                                                       |
| MaxRows           | The maximum number of records to return. If set to zero, the Query Service will return all data that matches the filter.                                                                                    |
| IgnoreBOFilter    | If set to TRUE, only the filter provided in the Query Service request will be used. If set to FALSE, the filter defined on the business object is added to the filter defined in the Query Service request. |
| IgnoreInnerJoin   | If set to TRUE, any inner join contained in the business object is ignored.                                                                                                                                 |

The API first validates the input data, and then calls the Query Service engine to process the request.

## Query Service Setup

The Query Service provides the following methods for calling the API:

- Direct connection
- Progress appserver connection
- Web service

## Direct Connection Setup

When calling the Query Service using a direct connection, you must connect the Progress session to the QXO database. In addition, ensure that the QXO runtime directory is included in the PROPATH.

### Example

```
/* Query Service Direct Connection Example */
define variable goQueryServiceEngine as class com.qad.qxtend.qxo.QueryServiceEngine.
define variable hResponse as handle no-undo.
{com/qad/qxtend/qxo/dsQueryServiceRequest.i}
{com/qad/qxtend/qxo/ttException.i}

goQueryServiceEngine = new com.qad.qxtend.qxo.QueryServiceEngine().

create QueryServiceRequest.
assign
  QueryServiceRequest.SourceApplication = "ERP32"
  QueryServiceRequest.Profile = "Customer"
  QueryServiceRequest.Filter = "cm_addr >= '0100' and cm_addr <= '100'"
  QueryServiceRequest.MaxRows = 2.

goQueryServiceEngine:querySourceApplication
  (input dataset dsQueryServiceRequest by-reference,
   input "QP", /* Domain */
   output dataset-handle hResponse).

if goQueryServiceEngine:hasExceptions() then do:
  goQueryServiceEngine:getAllExceptions(output table ttException).
  for each ttException:
    message ttException.cDescription view-as alert-box.
  end.
end.
else do:
  hResponse:write-xml("file","qs.xml",true).
end.

delete object goQueryServiceEngine.
```

In the example, QXtend is connecting to a source application called ERP32, the profile is called Customer, a filter is defined, and the requests can return a maximum of two records. The result of the Query Service is returned in the dataset-handle, hResponse. The dataset is then serialized to the file qs.xml.

If you want to analyze the data extracted, parse the dataset dynamically.

## Progress AppServer Setup

### Configuring the AppServer

For details on configuring the AppServer see “Configuring the AppServer” on page 148.

### Defining the Service Interface Code

To call the Query Service using the Progress appserver, you must define the Service Interface code in the PROPATH, as shown here:

### Example

```
/* Query Service AppServer Connection Example */

define variable hResponse as handle no-undo.
```



```

define variable hServer      as handle no-undo.
define variable lConnected as logical no-undo.

{com/qad/qxtend/qxo/dsQueryServiceRequest.i}
{dscontxt.i}
{dsexcptn.i}
{com/qad/qra/si/dsNull.i}

create server hServer.
lConnected = hServer:connect("-AppService qxosi_AS -H natelly -S 5162","", "").
if not lConnected then do:
  message "Error connecting to AppServer" view-as alert-box.
  return.
end.

run createContext(input "QAD",
                  input "programName",
                  input "com/qad/qxtend/si/QueryService.p").

run createContext(input "QAD",
                  input "domain",
                  input "QP").

run createContext(input "QAD",
                  input "methodName",
                  input "querySourceApplication").

create QueryServiceRequest.
assign
  QueryServiceRequest.SourceApplication = "qad2007"
  QueryServiceRequest.Profile = "Customer"
  QueryServiceRequest.Filter = "cm_addr >= '0100' and cm_addr <= '100'"
  QueryServiceRequest.MaxRows = 2.

run com/qad/qra/si/RPCRequestService.p on server hServer
  (input-output dataset dsSessionContext,
   output dataset dsExceptions,
   input dataset dsQueryServiceRequest by-reference,
   input-output dataset dsNullInOut,
   output dataset-handle hResponse).

if can-find(first temp_err_msg) then do:
  for each temp_err_msg:
    message temp_err_msg.tt_msg_desc view-as alert-box.
  end.
end.
else do:
  hResponse:write-xml("file", "qs.xml", true).
end.

hServer:disconnect().
delete object hServer.

procedure createContext:
  define input parameter propQual as character no-undo.
  define input parameter propName as character no-undo.
  define input parameter propVal  as character no-undo.

  create ttContext.
  assign ttContext.propertyQualifier = propQual
         ttContext.propertyName      = propName
         ttContext.propertyValue     = propVal.

end procedure.

```

The system populates the Context temporary table with the values required for the Service Interface.


## Web Service Setup

### Connection Pool

To call the Query Service Web service using QXI, you must create an adapter to connect to the Progress appserver.

Create the adapter by configuring a connection pool for an SI API, as shown in Figure 10.2. See “QXI Connection Pool Manager” on page 213 for details on connection pools.

**Fig. 10.2**  
Configuration Settings

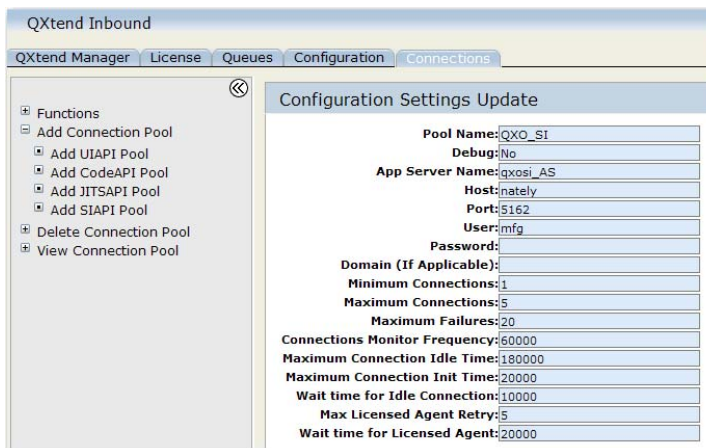


You must also create a corresponding receiver for the connection pool. See “Inbound Receivers” on page 190 for details on receivers.

## Deploying the Query API

You publish the Query Service API for the selected profile to a receiver in QXI by using the Deploy Query button in QXtend Outbound. After establishing a connection to the QXI server, you select a receiver, deploy the API, and then verify the deployment has been successful.


- 1 In QXtend Outbound select the Profiles tab.
- 2 Select the profile you want from the Profiles node in the application menu.
- 3 Click the Deploy Query button located at the top-right corner of the Profile window.

**Fig. 10.3**  
Deploy Query Button

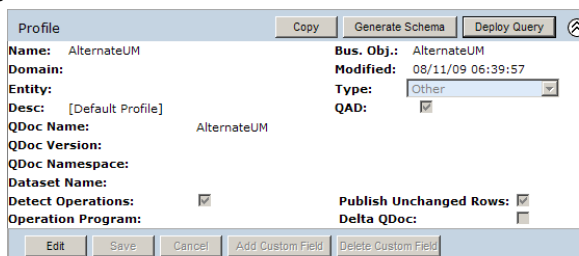

#### 4 The QXI Server Location window displays.

**Fig. 10.4**  
QXI Server Location

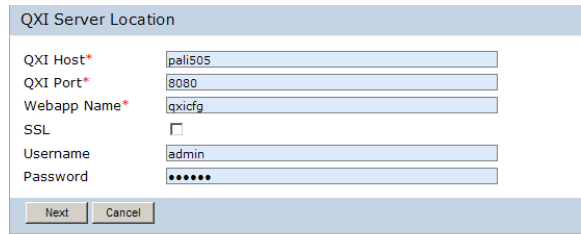


The QXI Server Location dialog box contains the following fields and controls:

- QXI Host\***: Text field with value "pali505"
- QXI Port\***: Text field with value "8080"
- Webapp Name\***: Text field with value "qxiefg"
- SSL**: Check box, currently unchecked
- Username**: Text field with value "admin"
- Password**: Password field with masked characters "\*\*\*\*\*"
- Next** and **Cancel** buttons at the bottom.

- 1 Provide the host and port information for the QXI server. You also need to specify the Webapp name.
- 2 If using Secure Socket Protocol https encryption, select the SSL check box.  
**Note** If SSL is selected, then QXI Host must include domain name of the host.
- 3 Enter user login credentials and then click Next.  
**Note** The system assumes the same user login credentials as for QXtend Outbound. The Receivers screen displays the receivers for the Outbound module in QXI.
- 4 Select the receiver or receivers to which you want to deploy the query API, and then click Deploy.
- 5 You are returned to the Profiles screen. A system message displays the status of the deployment.

**Fig. 10.5**  
Deployment Status Message

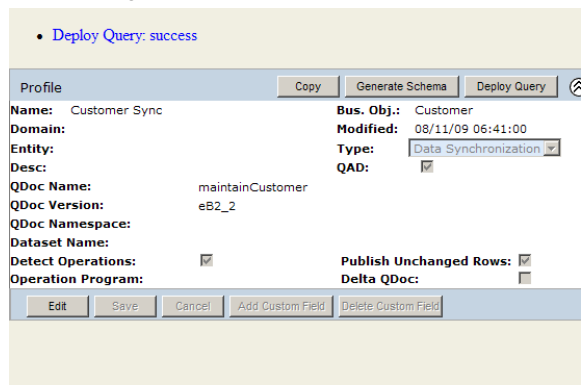

The Deployment Status Message dialog box displays the following information:

- Header**: • Deploy Query: success
- Buttons**: Copy, Generate Schema, Deploy Query
- Profile**: Customer Sync
- Domain**: Customer
- Entity**: Customer
- Desc**: Customer
- QDoc Name**: maintainCustomer
- QDoc Version**: eB2\_2
- QDoc Namespace**: eB2\_2
- Dataset Name**: eB2\_2
- Detect Operations**: ☒
- Operation Program**: eB2\_2
- Bus. Obj.:** Customer
- Modified:** 08/11/09 06:41:00
- Type:** Data Synchronization
- QAD:** ☒
- Publish Unchanged Rows:** ☒
- Delta QDoc:** ☐
- Buttons**: Edit, Save, Cancel, Add Custom Field, Delete Custom Field



# QXtend Interaction with Financials

This chapter describes configuration required for QXtend to receive business object event data from QAD EE Financials.

## ***Introduction 140***

Explains how QXtend interacts with QAD EE Financials.

## ***Financials to QXtend Outbound Setup 140***

Describes financials even setup, configuring the connection pool and schema (QXI), and direct data publish setup in QXO.

## Introduction

QXtend can accept and publish raw business object event data from the QAD EE Financials module, eliminating the need to extract data from the Financials database. Financials can use QXtend to:

- Replicate financial data, including configuration and transactional data, between separate instances of Financials.
- Replicate financial data between Financials and a third-party financial application.

Financials business objects employ DDP and are passed directly from the source to the QXODB database in QXO. From the QXODB database they are processed by the message publisher.

The Financials raw business object event data is saved in an XML file and passed directly to QXO using an event message API; the resulting QDoc is published without the need for any further processing.

Financials posts data to QXtend using event publishing—a form of DDP—which lets you publish a message when a particular business event occurs within Financials. The message is sent to a messaging bus, which then routes the message to a specific destination.

Event publishing is typically used to notify an external resource that a certain condition has occurred within Financials. For reasons of dependency, transaction integrity, and speed, the Financials application has a buffer queue that is used within the running transaction to prepare messages before they are sent out. This also ensures that no events are lost during system down-time and that no disruption of service occurs.

Setup is required in both QXtend and Financials to enable data to be replicated between the two applications.

## Financials to QXtend Outbound Setup

Financials uses Event publishing to notify QXtend that it has published business objects that must be replicated. Event publishing has three components:

- **Event Destination**  
Use Event Destination to define the name of the event and the type of messages it will contain. This points to the Progress AppServer instance for QXtend.
- **Event Configuration**  
Use Event Configuration to activate the publishing mechanism, configure which components and status transitions will trigger events (for example, supplier invoice creation), and indicate the destination queue of the event.
- **Event Daemon**  
The Event daemon reads records in its queue and sends them to the corresponding broker.

**Note** See *QAD System Administration User Guide* for details on the event daemon and event publishing.



## Financials Event Setup

This section describes how to configure Financials to publish events to QAD QXtend.

- 1 Set the Application ID in System Maintain (36.24.3.1). The application ID value should be the same as the source application name configured in QXO.

**Fig. 11.1**  
System Maintain (36.24.3.1)

- 2 Configure the Event Daemon using Event Daemon Configure (36.14.16.16.1). Otherwise, the Event Daemon cannot be started.

**Fig. 11.2**  
Event Daemon Configure

- 3 Record the location of the QXtend AppServer in Event Destination Create (36.14.16.14.1). The AppServer protocol depends on the connection between the AppServer and the connection pool. See Table 11.1 for the protocols.

**Table 11.1**  
AppServer Protocols

| Direct Connection | Secure Connection | AppServer Protocol                                          |
|-------------------|-------------------|-------------------------------------------------------------|
| No                | No                | AppServer://<host name>:<NameServer port>/<AppServer name>  |
| Yes               | No                | AppServerDC://<host name>:<AppServer port>/<AppServer name> |

|     |     |                                                              |
|-----|-----|--------------------------------------------------------------|
| No  | Yes | AppServerS://<host name>:<NameServer port>/<AppServer name>  |
| Yes | Yes | AppServerDCS://<host name>:<AppServer port>/<AppServer name> |

**Note** For details on configuring the AppServer see Chapter 12, “Setting Up the Service Interface AppServer,” on page 147.

- 4 In the AppServer Procedure field of Event Destination Create, specify the `RPCRequestService.p` procedure. This is the general service interface dispatcher.

**Fig. 11.3**  
Event Destination Create (36.14.16.14.1)

- 5 In Event Configuration Create (36.14.16.15.1), select the component and then select the Publish Any Update check box.


**Note** If the workspace has changed, an Event Configuration record must be created for the new workspace.

- 6 Specify the destination previously created in the Destination field.

**Fig. 11.4**  
Event Configuration Create (36.14.16.15.1)

- 7 Start the Event daemon using Event Daemon Start (36.14.16.16.4).
- 8 Change a record on an existing supplier invoice using Supplier Invoice Modify in Financials.
- 9 Open the Event Daemon Monitor to view the event generated in Financials when you modified the supplier invoice.

**Fig. 11.5**  
Event Daemon Monitor (36.14.16.16.2)

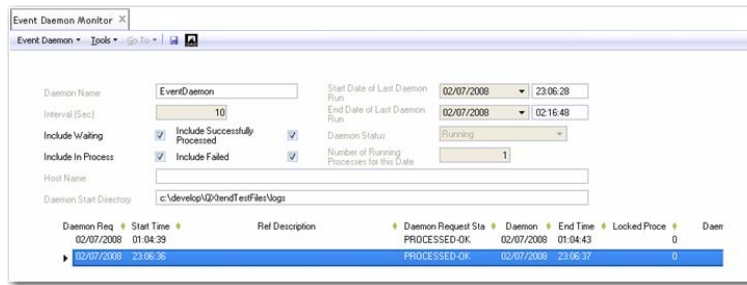

**10** Open Supplier Delete (28.1.1.9) and delete a supplier record.

**11** Open Event Daemon Monitor.

Create, modify, and delete activities can generate a published event from Financials.

## Configuring the Connection Pool and Schema (QXI)


**Note** You configure the connection pool and schema in QXI.

- 1 Create a connection pool for the FIN API adapter that connects to the QXtend appserver. See Chapter 17, “QXI Connection Pool Manager,” for details.
- 2 Load the XML schema. The XML schemas are stored in the location specified in the following directory on the appserver:

c:\<installdir>\qadfin\components\progress\xml\\*.xsd.

- a Rename the file with the QDoc version appended to the file name.

**Fig. 11.6**  
Adding the Schema

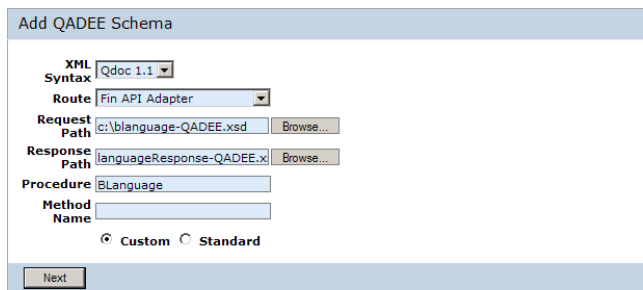

- b Enter the following values for the schema:

XML Syntax: QDoc 1.1.

Route: FIN API Adapter.

Request Path: The location of the schema file from Financials.

Response Path: Blank, or specify a response schema.

Procedure: Enter the name of the Financials component; for example, BLanguage.

See “QDoc Schemas” on page 199 for details on adding schemas.

- 3 Register the API with the receiver. See “Adding a Schema to an Existing Receiver” on page 193 for details.

**Fig. 11.7**  
Custom Schema

| QdocName  | XML Syntax | Version | Route           | Procedure   | Event               |
|-----------|------------|---------|-----------------|-------------|---------------------|
| blanguage | Qdoc 1.1   | 2008    | FIN API Adapter | blanguage.p | blanguage-FIN_1.xml |

## Direct Data Publish Setup in QXO

- 1 On the Business Objects tab, select the source application type you want to create a new DDP business object for. Click New and then click Yes on the New Business Object pop-up box to create a DDP business object.
- 2 Create a business object by loading the Supplier Invoice schema.

**Fig. 11.8**  
Load Schema

The schema is loaded.


**Fig. 11.9**  
Loaded Schema

QXtend creates the default profile automatically.

**Fig. 11.10**  
Default Profile


### 3 Create a Message Publisher for DDP.

**Fig. 11.11**  
Message Publisher

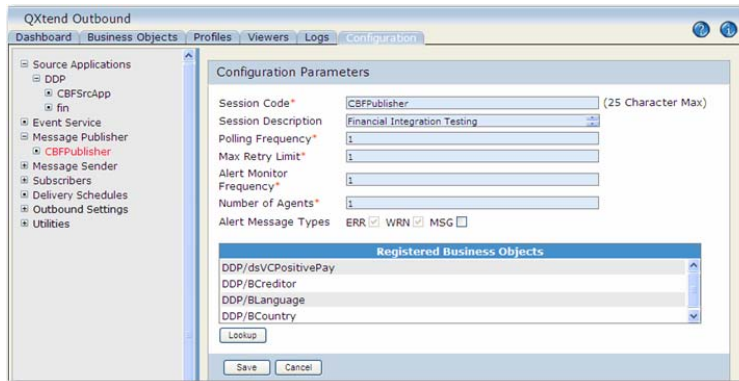

### 4 In the Subscribers Configuration Parameters screen, create a message subscriber for DDP.


**Fig. 11.12**  
Subscribers Configuration Parameters

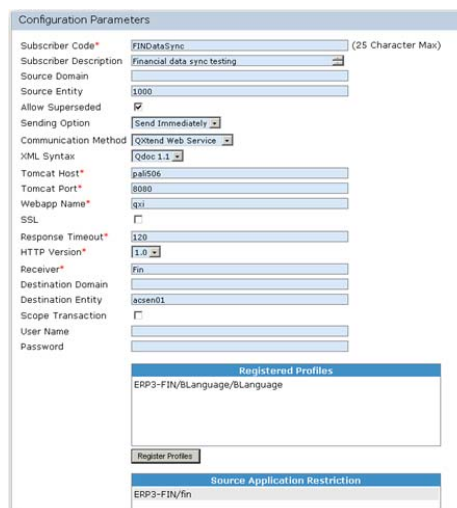

**Note** Register the profile and source application created.


### 5 In the Message Sender screen of the Configuration tab, create a sender.

**Fig. 11.13**  
Message Sender Configuration Parameters

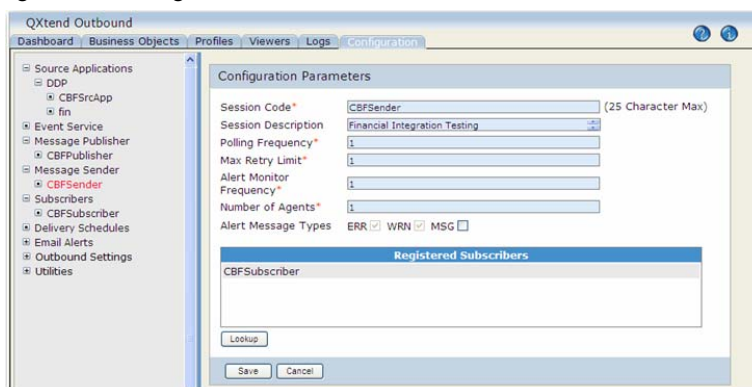

- 6 In the Services screen in the Dashboard tab, click the Stop All button and then click the Start All button.

**Fig. 11.14**  
Services

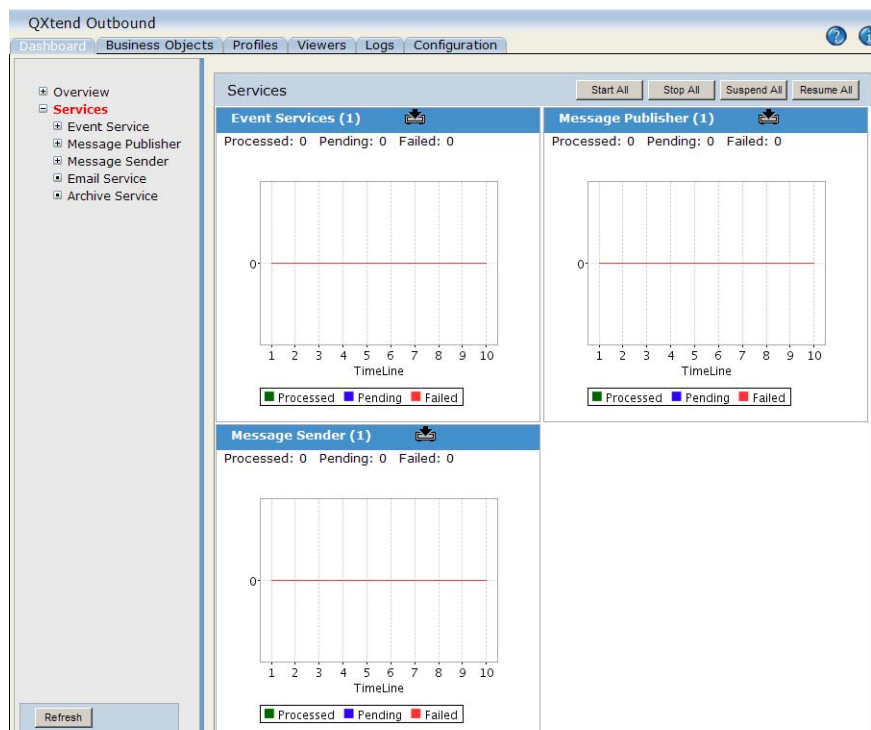

# Setting Up the Service Interface AppServer

This chapter describes how to configure the service interface AppServer, which is used for both the Query Service and direct data publish.

## ***Introduction 148***

Explains how the AppServer is used.

## ***Configuring the AppServer 148***

Explains how to configure the AppServer with ubroker.properties and with configuration dialog boxes.

## Introduction

The AppServer is used for both the Query Service and direct data publish. The service interface AppServer is configured during the installation of QAD QXtend. By default the name of the AppServer is `qxosi_AS`, but this name may have been changed during installation; check the `ubroker.properties` entry for the AppServer.

**Note** If the AppServer has not been configured, see “Configuring the AppServer” for details.

## Configuring the AppServer

To configure the AppServer you can use two methods—the result is the same.

- Directly edit the `ubroker.properties` entry for the AppServer.
- Use dialog boxes to populate the `ubroker.properties` entry with the correct values.

### ubroker.properties

You can configure the AppServer by editing the `ubroker.properties` entry. The following is an example of the `ubroker.properties` entry required for the AppServer:


```
[UBroker.AS.qxosi_AS]
appserviceNameList=qxosi_AS
autoStart=1
brokerLogFile=<QX0 Install Dir>/logs/qxosi_AS.broker.log
controllingNameServer=NS1
initialSrvrInstance=1
maxSrvrInstance=5
minSrvrInstance=1
operatingMode=Stateless
portNumber=10001
PROPATH=<QX0 Install Dir>/runtime:<QX0 Install Dir>
registerNameServer=1
registrationMode=Register-IP
srvrLogFile=<QX0 Install Dir>/logs/qxosi_AS.server.log
srvrStartupParam=-db qxodb -S qxodb-service -ld qxodb -H host
srvrStartupProc=com/qad/qxtend/si/AppServerStart.r
uuid=11d1def534ea1be0:e48e1b:11833ce3369:-8000
workDir=<QX0 Install Dir>
```

## Configuration Dialog Boxes

Follow these instructions to configure the AppServer by using configuration dialog boxes.

- 1 In the properties for the Direct Data Publish AppServer, record the path to the working directory for QXtend Outbound.


**Fig. 12.1**  
Broker Properties

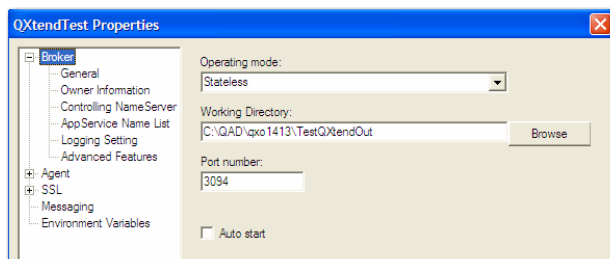




- 2 Verify the NameServer with which the AppServer registers. This normally defaults to NS1.

**Fig. 12.2**  
Controlling NameServer Properties

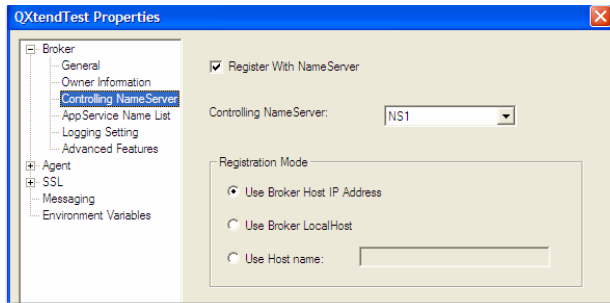


- 3 Verify the name of the DDP AppServer.

**Fig. 12.3**  
Broker AppService Name List Properties

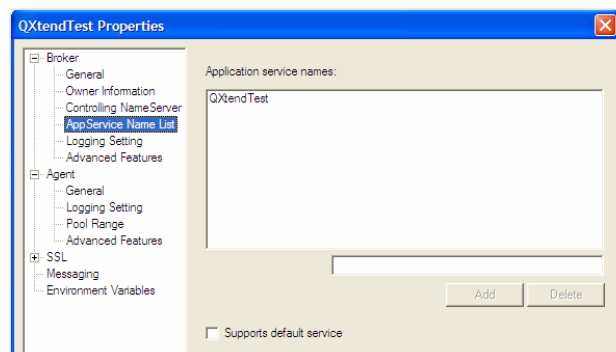


- 4 In the Broker Logging properties, specify the broker log filename and set the broker logging settings as required. The default settings may be suitable.

**Fig. 12.4**  
Broker Logging Setting Properties

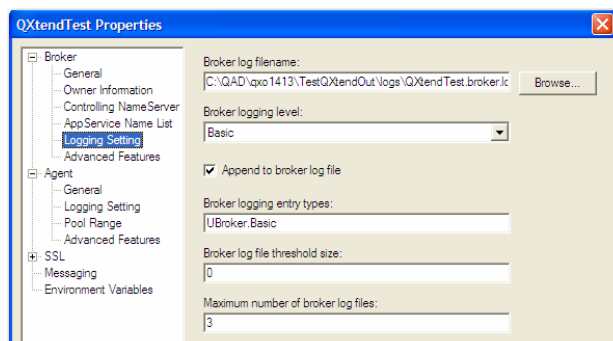


- 5 In Agent General Properties, define the PROPATH of the DDP AppServer.

**Fig. 12.5**  
Agent General Properties

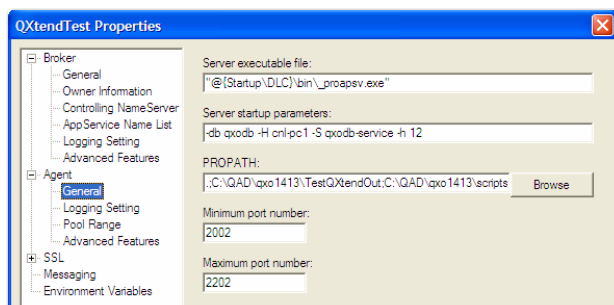


- 6** In the Agent Logging Setting properties, specify the agent log filename and set the agent logging settings as required. The default settings may be suitable.

**Fig. 12.6**  
Agent Logging Setting Properties

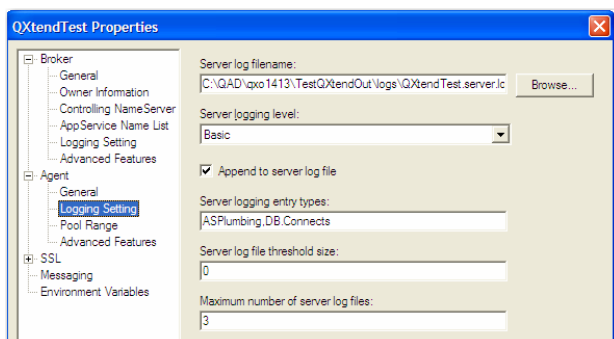

- 7** In the Agent Advanced Features properties, define the startup program for the DDP AppServer.

**Fig. 12.7**  
Agent Advanced Features Properties

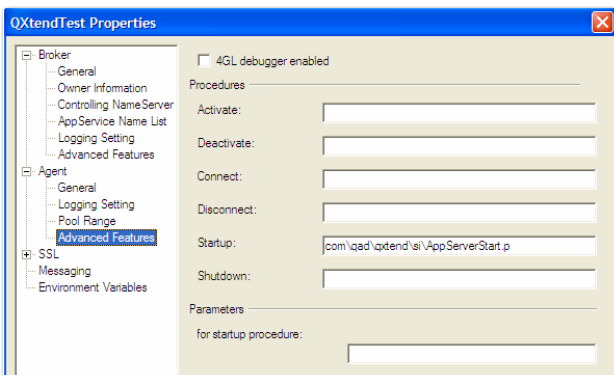

## Section 2

# QAD QXtend Inbound

This book assumes most general implementation scenarios for integrating different instances of QAD Enterprise Applications and integrating QAD Enterprise Applications with external applications using QXtend. For less common and product-specific integration processes, such as setting up QXtend to work with QAD Mobile Field Service and Configuring QXtend to process non-SOAP-compliant QDocs to communicate with external applications, such as QAD Business Process Management (BPM), see relevant user documentation for detailed implementation steps.

This section contains information on implementing and using QAD QXtend Inbound (QXI).

### ***QXtend Inbound Overview*** 153

Gives an overview of the QXtend Inbound (QXI) environment.

### ***Configuring and Using QXtend Inbound*** 161

Gives an overview of launching, using, and administering QXI.

### ***QXtend Inbound Queue Manager*** 173

Gives an overview of using the QXI Queue Manager.

### ***QXtend Inbound Configuration Manager*** 189

Gives an overview of inbound receivers, QDoc schemas, and QXI e-mail alerts.

### ***QXI Connection Pool Manager*** 213

Explains how to use the QXI Connection Pool Manager.

### ***QGen*** 227

Describes how to use QGen to generate QDoc schema and event files.

### ***QXtend Inbound Pre- and Postprocessors*** 247

Describes how to use QXI pre- and postprocessors to validate requests or verify complete QDocs.

### ***Configuring the Progress AppServer*** 253

Gives an overview of the setup required for using service interface and QAD JIT Sequencing APIs with QXI.

### ***QXtend Inbound with QAD Q/LinQ*** 259

Explains how to implement and use QAD QXI.



## QXtend Inbound Overview

This section provides an overview of the QXtend Inbound (QXI) environment.

### ***QXtend Inbound Overview    154***

Gives an overview of QXI with details on direct API programs, QDocs, custom QDocs, transforming non-standard XML documents, WSDL documents for web service clients, and QXtend code page support.

### ***Supported QXtend Integrations    160***

Explains which integrations are supported by QXI.

## QXtend Inbound Overview


QXI is a component of the QAD QXtend interoperability framework. This framework provides a standardized data interface between QAD products, and between QAD products and external systems. The interface is a Web services-based, SOAP-compliant, XML framework, enabling complete platform-independent access to QAD Enterprise Applications business functionality. See “Glossary” on page 441 for definitions of terms and abbreviations.

The framework consists of:

- QXI, which imports SOAP-compliant XML QDocs from external applications into QAD Enterprise Applications and other QAD applications such as QAD Production Scheduler.
- QAD QXtend Outbound (QXO), which exports user-configurable business objects as XML QDocs out of QAD products such as QAD Enterprise Applications.

QXI delivers inbound data to menu-level programs in QAD Enterprise Applications eB and above. The inbound data is in the form of XML data documents, called QDocs, delivered in a proprietary XML format. QXI also has security mechanisms in place to ensure that only authorized personnel can update data to menu-level programs. Prior to all data processing, the system checks whether the user has access rights to corresponding menus in QAD Enterprise Applications. If the user does not have access rights to the menu, an error is displayed. Figure 13.1 illustrates the QXI system architecture.

**Fig. 13.1**  
Basic QXI System Architecture

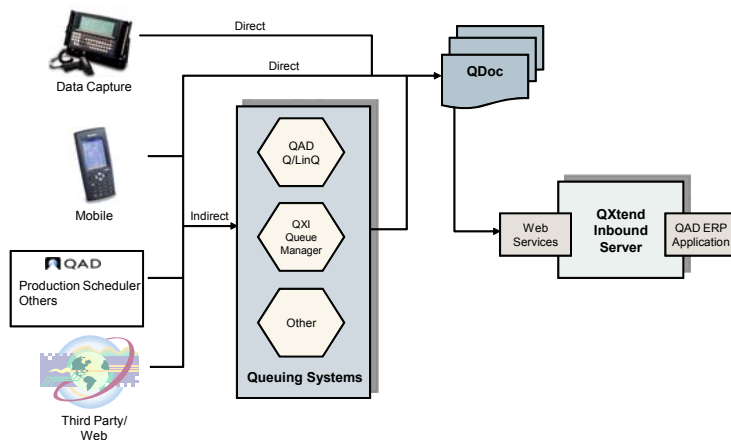

As shown in Figure 13.1, incoming documents—called requests—can be generated directly from data capture tools such as barcode readers; mobile devices; other QAD products, QAD Production Scheduler, or QAD EDI ECommerce; and from any third-party application that can generate XML.


The data is formatted as SOAP-compliant XML documents using QDoc templates in XML schema format. These documents are fed directly to QXI. Alternatively, you can queue the documents using a number of queue management interfaces, including the QXI Queue Manager and the QAD Q/LinQ product. See Chapter 21, “QXtend Inbound with QAD Q/LinQ,” on page 259 for more details.

In addition, you can queue XML documents that do not meet QXI standards, and call the QXI transformation engine to apply custom XSLT style sheet transformations to the document. The transformation engine outputs a valid QDoc request. See “QXI Transformation Engine” on page 176 for more details.

QXI accepts the XML QDoc requests as Web service calls as shown in Figure 13.2. Optionally, you can send the incoming QDocs through the QXI preprocessor to validate the incoming data, eliminating incorrect QDocs. You can also create postprocessing programs to validate response data. See Chapter 19, “QXtend Inbound Pre- and Postprocessors,” on page 247 for details.

For all QDocs, the QXI server validates the user ID and password from the SOAP envelope if you have configured it to do so. It then extracts the QAD Enterprise Applications data from the SOAP envelope, repackages the data in a transaction container, and then sends the data to an QAD Enterprise Applications session, called a receiver, through the UI adapter or service interface adapter.

**Fig. 13.2**  
Server Internals

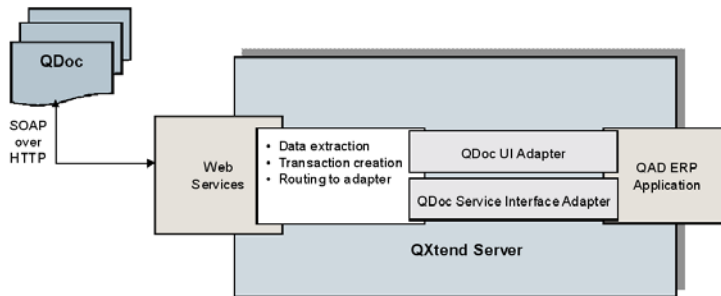

When QAD Enterprise Applications receives the data from the UI adapter, it enters it through a telnet user session with a menu-level business function. The data is validated against all database, menu-level, and program validations, and all database triggers are fired.

Once the data has been input, the adapter generates a response document that is returned through QXI in the same transaction container that delivered the request. The response document provides a success or failure notification. The failure notification can contain warnings and errors. The response document can also contain data from QAD Enterprise Applications such as the primary data key value and additional error information, such as Java trace data or pre- or postprocessing errors.

## Direct API Programs

The direct service interface APIs enable the transfer of data between one instance of the QAD Enterprise Applications Financials module and another instance, or between Financials and external systems.

The inbound data format for service interface APIs is XML documents in QAD-proprietary format.

**Note** To use service interface APIs you must set up a Progress AppServer. See Chapter 20, “Configuring the Progress AppServer,” on page 253 for additional information on AppServer setup.

## QDocs

Each inbound XML QDoc request results in an XML QDoc response. Each QDoc references the QAD Enterprise Applications session and version and the target QAD Enterprise Applications application program. A QDoc can contain one or more records for that calling program, but cannot call other programs in QAD Enterprise Applications. See Chapter 24, “QDoc Structure Reference,” on page 299 for examples of QDoc files.

Most incoming QDoc requests are sent to QAD Enterprise Applications over a telnet session. The target calling program is launched and the data from the QDoc passed down field-by-field just as if a user were entering the data. If data is missing for a non-mandatory field, the session skips through the field, always matching data input with the correct field in the calling program interface.

To make this screen-driven entry possible, each QDoc has a matching XML schema and events documents stored on your QXI drive.

**Important** There are QDocs pre-delivered with QXtend Inbound. Some of the QDocs only cover the basic flows of the corresponding program. It could happen that a QDoc is missing certain flows or fields. QXtend provides the tool to update QDocs. See Chapter 18, “QGen,” on page 227 for information about how to use the tool.

### QDoc XML Schemas

Many standard XML schemas are shipped with QXtend. Depending on the QDoc syntax specification being used, the way in which schemas are used by QDocs differs. Refer to the appropriate section for the relevant QDoc schema syntax specification.

#### QDoc XML Schemas (1.1)

Each supported QDoc request and its QAD Enterprise Applications calling program is associated with an XML schema file. See Chapter 25, “QDoc Specifications and Standards,” on page 309 for details.

The XML schema for a calling program such as Sales Order Maintenance (`sosomt.p`) contains all possible data entry fields in the calling program. It also includes the information required to start data iterations, which are repetitive entry sequences such as sales order lines. For information on schema exceptions, see “QDoc Exceptions” on page 396.

For example, the schema document for `sosomt.p` in QAD EE and QAD SE is named `maintainSalesOrder-2008_2.xsd`. and contains calling procedure as well as detailed field information.

Each QDoc response also has an XML schema file. It is named similarly to the request QDoc schema, but includes `response` in the name. For `sosomt.p` in QAD EE and QAD SE, the response schema file is named `maintainSalesOrderResponse-2008_2.xsd`. This file contains procedure information as well as a list of primary key fields for each iteration. You can edit the schema as required to filter out or add QAD Enterprise Applications field values that will be included in the response document.

For additional information on configuring response document contents, see “QDoc Response Data” on page 162.





## QDoc XML Schemas (1.0)

**Important** Schemas using the 1.0 specification are supported for backward compatibility only. Where possible, you should use the 1.1 schemas, since these are WSI-compliant.

In most cases, two XML schema files are associated with each supported QDoc request and its QAD Enterprise Applications calling program when using the 1.0 specification.

The XML schemas for Sales Order Maintenance (`sosomt.p`) contain all possible data entry fields in the calling program and information required for data iterations. For example, the schema documents for `sosomt.p` in eB2 are:

- `maintainSalesOrder-eB2_1.xsd`
- `salesOrderType-eB2_1.xsd`

The first file is the base schema file, and contains calling procedure information. The second file, the type file, contains the detailed field listing.

Two XML schema files are also provided for each QDoc response. They are named similarly to the request QDoc schemas, but include response in the name. For `sosomt.p` in eB2, the response schema files are:

- `maintainSalesOrderResponse-eB2_1.xsd`
- `salesOrderResponseType-eB2_1.xsd`

The first file is the base schema file, and contains calling procedure information. The second file, the type file, contains a list of primary key fields for each iteration. Editing the type file enables you to filter out or add QAD Enterprise Applications field values that will be included in the response document.

## QDoc Events Documents

The QDoc—if using the user interface API—also needs information on how to navigate in an QAD Enterprise Applications screen. By default, the QDoc sends data and moves to the next field. However, it needs to know, given the field location, when to accept an iteration—as for multiple sales order lines within a single sales order—and when to allow a deletion. These screen actions are called events and are stored in a version-specific directory for each calling program in an events document named by default after the calling program. The default events document for `sosomt.p` is `sosomt-ERP3_2.xml`. The base events documents are also available on the QAD Web site. For information on event exceptions and errors, see “Event Exceptions” on page 387.

You can create additional events files to support multiple processing scenarios within the same calling program such as for implementations that use European Accounting for some, but not all, transactions. Multiple events files can also be used to test processing paths to improve performance.

## Custom QDocs

You can create QDoc XML schema and events documents for programs you have created or customized using a tool called QGen that ships with QXI. QGen creates schema files for request and response documents, as well as an events file. See Chapter 18, “QGen,” on page 227.

To create the supporting files, you launch an QAD Enterprise Applications QGen session and run the calling program you want to create QDocs for. When it is running, you start the QGen mapping functionality. You then navigate through each field in the program. For each field, a pop-up dialog displays, letting you enter schema and events information for the field. When you have completed the mapping for the program, you save the QGen map and turn off the mapper.

From the same calling program, you then open the QGen menu and load the mapping data. You then enter the QDoc name—for example, `maintainCustomData`—select the schema standard to use, and generate the documents.

To create QDocs for customized QAD Enterprise Applications programs, you simply reload the existing mapping program for the original calling program. You can then resave it under a new name—`sosomt.p` to `xxsosomt.p`—and then map the new or modified fields in the program.

## Transforming Non-Standard XML Documents

Typically, the QXI Queue Manager expects all incoming documents to be in proprietary QDoc format. The Queue Manager can add a valid SOAP envelope if one is missing. It can also accept non-standard XML documents and transform them into QDocs with a valid SOAP envelope using the QXI transformation engine. See “QXI Transformation Engine” on page 176 for details.

The transformation engine is triggered when an XML document arrives with an extension other than `.req`. Any non-QDoc XML document is picked up by the transformation engine. Depending on the file extension, an XSLT style sheet is applied to the document to generate a valid QDoc, a SOAP envelope is added, and the new QDoc is sent to the correct Queue Manager directory with an `.req` extension.

The transformation engine ensures all the linkages between directories, file names, and processing flows. Individual companies must provide their own XSLT style sheet transformations for the transformation engine to use.


## QDoc Authentication

When QXI receives a QDoc, it performs a series of authentication checks before processing the QDoc using the following rules:

- If Require Authentication is set to true for the receiver, authentication credentials (Session ID or username/password) must be provided in the QDoc.
- The Session ID is checked prior to username/password. If the Session ID is valid, QXI will reuse the session to process the QDoc.
- The Shutdown Session flag is checked at the end of QDoc processing. By default, it is false. If it is set to true, QXI shuts down the session at the end of QDoc processing.
- Username/password in the connection pool is used only when Require Authentication is false and no username/password or valid session ID is provided in the QDoc.
- These rules apply to all types of APIs (UIAPI, SIAPI, and FinAPI).

The following diagram illustrates the QDoc authentication process.

**Fig. 13.3**  
QDoc Authentication

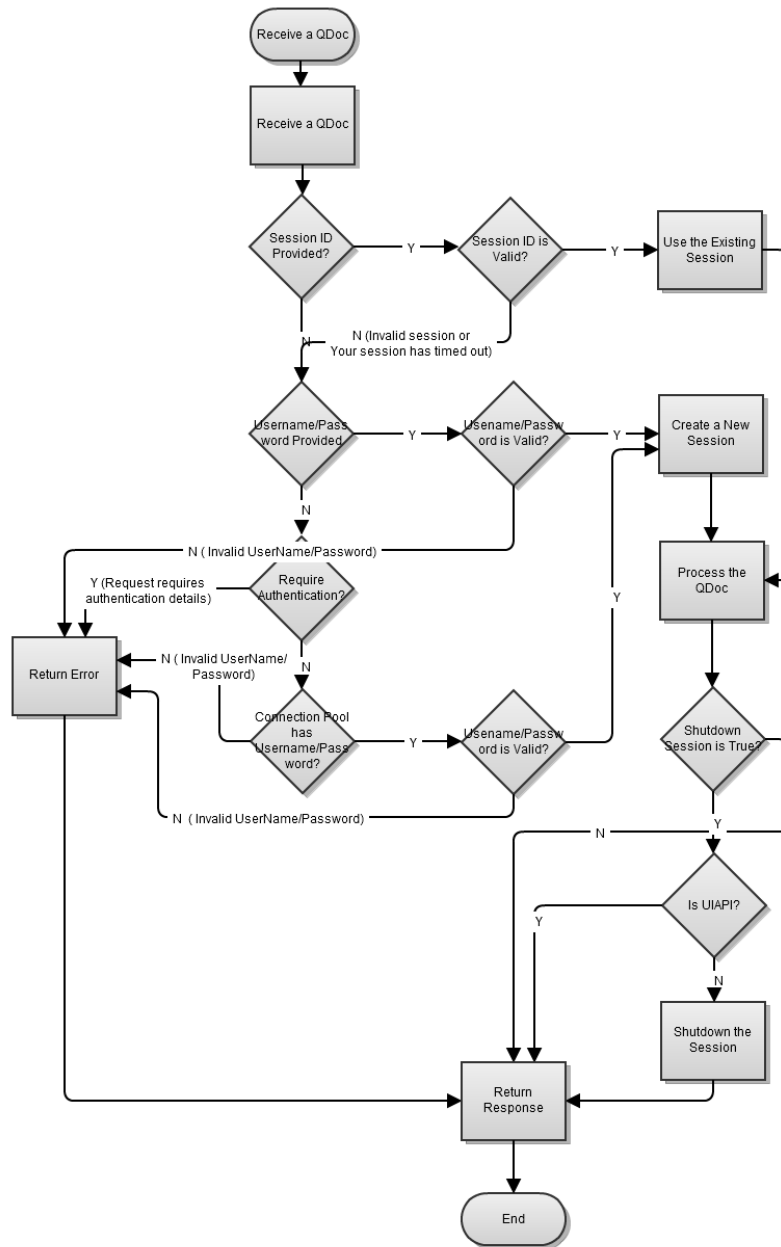

## WSDL Document for Web Service Clients

In order to directly call QXI as a Web service, a client component must be developed that is capable of calling QXI using the SOAP and HTTP protocols. Web clients can be written in many programming languages, but most are developed with the help of software development tools or frameworks that generate much of the low-level code responsible for managing the details of SOAP and HTTP communications. To generate the code, most Web service tools require a WSDL document.

WSDL is a proposed standard intended to describe precisely all the technical information needed by an external process to call the interface of a specific Web service—its supported methods or operations, the parameter names and data types required by the operations, the network ports where the Web service listens for requests, and so on.

You can generate WSDL files from the QXI Receiver configuration page (for details see “Inbound Receivers” on page 190). For every WSDL file it will include request and response schema files. So before using the WSDL file, make sure the WSDL file—and the request and response schemas files—are in the same directory.

## QXtend Code Page Support

QXI supports the use of multiple code pages across the products linked by QXtend. The products involved are Progress, Java, QXI, and QAD Enterprise Applications. Each has an entry in the `dtencode.dat` file shipped with QXI. This file is located in *QXtendInstallDir*.

## Supported QXtend Integrations

QXI is either required or available for certain QAD products. These include QAD Production Scheduler and QAD Mobile Field Service.

For each of these products, use *QAD QXtend Installation Guide* to install QXI, then refer to the appropriate section in the guides for these products to complete the specific configuration requirements for QXI.

# Configuring and Using QXtend Inbound

The following material provides an overview of launching, using, and administering QXtend Inbound (QXI).

## ***Introduction 162***

Explains the functions of the QXtend Manager, the Configuration Manager, and the Queue Manager.

## ***QDoc Response Data 162***

Lists default warnings and errors, explains how to include Java trace information and QAD Enterprise Application field values, and addresses performance considerations.

## ***Starting QXtend Manager 165***

Explains how to start QXtend Manager.

## ***Logging 166***

Discusses the report levels for logs, qdocinfo.log, queue.log, connectionPools.log, qdocinstall.log, outbound-ui.log, transformationEngine.log, transformationengineRequests.log, and transformationEngine.debug.

## ***Testing QXI Processes 169***

Discusses the Process Request, Create Empty QDoc, Verify QDoc Supported, Verify Receiver, and UI Adapter Connection Test.

## ***Suspending and Resuming Processing 170***

Explains how to suspend and resume processing.

## ***Controlling Data Resending 171***

Explains how to enable or disable data resending.

## ***Securing Password in QDocs 171***

Explains how to enable the request QDocs to use encoded passwords to access the target application.

## ***Handling European Decimal Format 171***

Explains how to handle the decimal values in European format in the QDocs.

## ***Hiding Data in QDoc Response and Log Files 172***

Explains how to hide data from displaying the actual value in QDoc Response and log files.

## Introduction

QXI provides an interface called the QXtend Manager to complete administrative tasks for QXI. The QXtend Manager consists of a Configuration Manager, a Connection Pool Manager, and an optional Queue Manager and other functions. The additional functions include restarting the server, viewing the install log, running programs in the QXI test suite, and suspending/resuming QXI.

Use the Configuration Manager to manage your QDoc schemas, to create and modify your QAD Enterprise Applications receivers, and to allocate QDoc schemas to the receivers. Use the Connection Pool Manager to create, view, and control the available telnet and appserver connections to your QAD Enterprise Applications sessions.

An additional interface that is not a required component of QXI is the Queue Manager. This tool provides a QDoc queuing service, creating request and response directories for each external application that is sending QDoc requests. The request QDocs are picked up from a specified request directory; the response QDocs are returned by the Queue Manager to a specified response directory where the external application picks them up. See Chapter 15, “QXtend Inbound Queue Manager,” on page 173.

## QDoc Response Data

By default, QDoc response documents contain success and failure information. They can also contain additional warnings and errors, Java trace information, and primary key and other field values from QAD Enterprise Applications.

For additional information on specific exceptions included in response QDocs, see Chapter 29.

### Default Warnings and Errors

Additional warnings and errors are:

- Notifications from preprocessing and postprocessing programs
- Occurrences of unused fields in QAD Enterprise Applications
- Occurrences of unused iterations in QAD Enterprise Applications
- Occurrences of over-length field data in QAD Enterprise Applications

### Preprocessing and Postprocessing Messages

The content of the preprocessing and postprocessing messages is up to the programmer writing the programs.

For details on how to make the correct calls to add these messages to the response, see “Warnings and Errors” on page 250.

### Messages for Unused Fields

In some cases, fields may exist in a QDoc that are never used during the processing of that QDoc. For example, if a field node exists in the QDoc that is not part of the schema or is misspelled, it is not matched with a field in QAD Enterprise Applications and remains unused during the



processing of that QDoc. This information is added to the response QDoc as a warning regardless of the `suppressResponseDetail` setting. For details, see “Include QAD Enterprise Applications Field Values” on page 164). The response message is:

```
Field was unused, see context for details.
```

### Messages for Unused Iterations

In some cases, entire iterations in a QDoc are never used during the processing of that QDoc. For example, a control program disables the display of a frame but an iteration with fields for that frame is included in the QDoc. Since that frame is never visited during the processing of the QDoc, a warning displays in the response QDoc regardless of the `suppressResponseDetail` setting. For details, see “Include QAD Enterprise Applications Field Values” on page 164).

```
Iterations were unused, see context for details.
```

For both unused fields and unused iterations, if the QDoc is deleting a record and if additional fields or iterations are in the QDoc, these are noted by messages in the response QDoc also. It is usually the case that only a smaller subset of fields is needed to delete a record, but users may not always remove the unnecessary fields or iterations from the schema files.

### Controlling Messages for Unused Fields and Iterations

You can control the display of messages arising from unused fields and iterations in response QDocs by using the `excludeUnusedWarnings` node. By default, the display of these messages is suppressed.

To include messages for unused fields and iterations in the response documents, edit the `qxtendconfig.xml` file located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`. Locate and set the following node to `false`; for example:

```
boolean excludeUnusedWarnings = "false"
```

### Messages for Field Length

Occurrences where the input data from the QDoc is too long for the input field in QAD Enterprise Applications cause either a warning or error message, depending on whether the field is a primary key. If it is a primary key, an error is returned. Otherwise, the following warning shows:

```
Data submitted to QAD Enterprise Applications was too long for the QAD
Enterprise Applications field size.
```

### Include Java Trace Information

You can include Java trace information in the response documents to debug processes. To do so, edit the `qxtendconfig.xml` file located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`. In it, locate the node containing:

```
boolean excludeTraces = "true"
```

To include the Java trace information, change it to:

```
boolean excludeTraces = "false"
```

## Include QAD Enterprise Applications Field Values

By default, the QDoc response document contains the primary key values from each iteration (for example, sales order number and sales order line item values). If using the 1.0 syntax specification, you can edit the response type schema to eliminate or add field values you want to see. For the 1.1 syntax specification, edit the response schema.

However, by default, no values are returned in the response document. To have values returned, edit the specific QDoc according to the syntax specification in use.

In the 1.0 syntax specification, locate the setting `suppressResponseDetail = "true"` in the body of the document and change it to `suppressResponseDetail = "false"`.

In the 1.1 syntax specification, locate the `suppressResponseDetail` node in the `ReferenceParameters` section of the SOAP header:

```
<suppressResponseDetail xmlns="urn:schemas-qad-com:xml-
services:common">true</suppressResponseDetail>
```

and change the value of the node to false:

```
<suppressResponseDetail xmlns="urn:schemas-qad-com:xml-
services:common">false</suppressResponseDetail>
```

For the 1.0 syntax version, to control which field values are returned, create a copy of the response type schema file (`salesOrderResponseType-eB2_1.xsd` for `sosomt.p`) for the specific response document and edit it. (For the 1.1 syntax version, create a copy of the response schema.) Comment out the fields you do not want to see in the response document, and add in any fields you want to add, then save it as a custom schema file. You then assign the response schema file to the master schema lists where it can be assigned to a specific receiver. See “Adding a Schema to the Master Lists” on page 202 for steps.

**Note** To add fields not already referenced in the response schema, you can copy them from either the request type schema (for the 1.0 syntax) or from the request schema (for the 1.1 syntax).

To enable the response communication in QXI, edit the `qxtendconfig.xml` file:

- 1 Open `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf/qxtendconfig.xml`.
- 2 Locate the `messageServletURL` attribute within the `<general-config>` node.
- 3 Enter the correct host and port values to communicate with the QXI server.

```
<messageServletURL label="Message Servlet URL" value="http:
//<host>:<port>/<QXI webapp>/MessageReceiverServlet"/>
```

- 4 Save and close the file.

## Get Locked User ID

When processing a QDoc, if the database record is locked by another user for a certain duration, the transaction fails and an error message is displayed to indicate the locking. However, when ODBC security is activated on the database, user name is not included in the error message. `getLockedUserName` is provided in `qxtendconfig.xml` for QXtend to retrieve the user name in this situation.



In the `qxtendconfig.xml` file located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`, locate the node containing:

```
getLockedUserName = "false"
```

To allow the system to get the locked user ID if the user ID is blank, change it to:

```
getLockedUserName = "true"
```

## Include Unique ID in Response QDocs

You can use the node `includeUniqueIdInQdoc` in the `qxtendconfig.xml` file to control whether the QXtend ID is added to the session context of response as `uniqueID`. Locate the `qxtendconfig.xml` file in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`.

To include the QXtend ID in the session context of the response QDocs, change the node to:

```
includeUniqueIdInQdoc = "true"
```

QXtend ID is a unique ID assigned to each QDoc by QXtend. It is recorded in `qdocRequests.log`, `qdocResponses.log`, and `qdocSummary.log`. With the QXtend ID available in the response QDoc, you can easily locate it in the log files.

## Performance Considerations

Adding fields to the response QDoc schemas may have an impact on performance. In addition, performance may be impacted by the fields contained in the schema file by default.

The fields in the QAD-generated response schemas contain all key data for that API, that is, all primary fields for all iterations. These fields are all typically updated during a QXI update. However, including additional non-primary key fields requires QXI to navigate to these fields. This can impact performance if the field is not always updated, or when it requires additional navigation steps to reach the field in QAD Enterprise Applications.

**Example** The sales order response schema is modified to include the Remarks field. However, the request QDoc does not update the Remarks frame. However, QXI still navigates through all necessary frames until the Remarks field is found and the data returned.

This may also be an issue in some standard schemas when a particular iteration is not being updated but the data values are being returned because the response schema requires it.

## Starting QXtend Manager


Before starting the QXtend Manager, start Tomcat and your target QAD Enterprise Applications sessions. Then open a browser and enter the following URL:

```
http://<hostname>:<tomcat_port>/<QXI webapp>/
```

Replace `<hostname>` with the machine name where Tomcat is installed. Replace `<tomcat_port>` with the Tomcat port number.

The QXtend Manager opens.

**Fig. 14.1**  
QXtend Manager

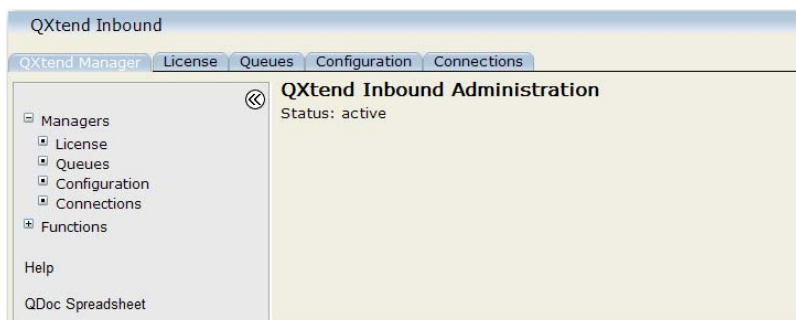

Access the Queue Manager, Configuration Manager, or Connection Pool Manager either in the menu bar or under Managers. You can also refresh the QXtend Manager interface from the menu bar.

The QXtend Manager functions are:

**Restart Server.** This shuts down QXI and restarts it, using the Tomcat restart link.

**Install Log.** This displays `qdocInstall.log`. The log is updated each time the QXI Web application is started, stopped, or reloaded. The log is stored in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/logs`

**Test Harness.** The test harness provides an interface you can use to run through the entire request-response process using sample QDocs.

**Suspend.** Shuts down the QXtend services to allow an administrative update, such as configuration changes.

**Resume.** Restores QXI services following administrative changes.

## Logging

Logging is facilitated by the Apache Jakarta Project Log4j infrastructure. This means that log statements are in the code; their output can be configured in an external XML file. In QXI, this file is called `qxtenlogging.xml` and is located in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`

All log files are created and stored by default in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/logs`

Unless otherwise described, do not change the details for these logs, except where they are stored or the reporting levels. It may be useful to move these files to the backup storage, or to delete them, once the records are no longer required.

Information on how to edit these files is beyond the scope of this document; further information can be found on the Log4j Web site:

<http://jakarta.apache.org/log4j/docs/index.html>

## Log Report Levels

Reporting levels for the QXI logs are:

- Error – error messages only
- Warning – error and warning messages only
- Info – error, warning, and info messages only
- Debug – all messages

These reporting levels can be set for each of the logs in `qxtendlogging.xml`.

The logs created in QXI are:

- `alert.log`
- `connectionPools.log`
- `licenceManager.log`
- `qdocInfo.log`
- `qdocRequests.log`
- `qdocResponses.log`
- `queue.log`
- `qdocInstall.log`
- `outbound-ui.log`
- `qdocSummary.log`
- `transformationEngine.log`
- `transformationengineRequests.log`
- `transformationengineResponses.log`
- `transformationEngine.debug`

The first three logs provide backup data for the QDocs going through the server. The logs are either rolled over daily with the date appended to the previous file; for example:

```
qdocInfo.2005-05-29.log
```

Or they are rolled over based on log size. See the following descriptions for details by log.

### qdocInfo.log

The `qdocInfo` log contains an entry for each QDoc received and the document return status. If the return status is an error, the entire QDoc response is entered in the log. A sample non-error entry:

```
2003-05-30 19:51:26,308 INFO qdocLogger.info [1054320686308]
[-]API Request Received
```

The message line components are ISO format date (2005-05-30), ISO format time (19:51:26, 308), reporting level (INFO), logger (`qdocLogger.info`), unique message ID (1054320686308), QDoc ID, and message (API Request Received).

The other two QDoc logs—`qdocRequests.log` and `qdocResponses.log`—list the complete QDocs sent to the server and response QDocs respectively. The format is the same as for `qdocInfo.log`.

These files are rolled over daily.

### queue.log

This logs activities in the Queue Manager, listing all files it finds in the requests directory. It also lists file name changes—for example, req -> req\_wrk -> ok/err. This file rolls over daily.

### connectionPools.log

This logs connection pool details such as number of connections, changes in connection status, and so on. This rolls over daily.

### qdocInstall.log

This log is updated with details when the QXI Webapp is started, stopped, or reloading, listing components and whether they initiated or terminated successfully.

This log has a maximum of five files (current + four previous), with a sequence number. The file is rolled over based on log size, which is currently set to 500K; for example, qdocInstall.log.1.

Once the maximum number of files has been created, QXI reuses the existing files. You do not need to delete these files since they always take up finite storage space.

### outbound-ui.log

This log lists all errors that have occurred during the running of QXI; it is intended mostly as a developer's log. This log has a maximum of five files (current + four previous), with a sequence number, such as outbound-ui.log.1. The file is rolled over based on log size—currently set to 1000K. Once the maximum number of files is created, the log reuses existing files.

### qdocSummary.log

QXI writes the following QDoc request/response information to this log file:

- Request: Trx Id, Process ID, QDoc Type, Requesting System, Request Date, Request Time, QAD User ID, Trx Type
- Response: Trx Id, Process ID, QDoc Type, Requesting System, Request Date, Request Time, QAD User ID, Trx Type, Result, Error Message

### transformationEngine.log

This log file contains information about key steps in the transformation, namely creating managers. It contains error information when a problem occurs. When set to debug, it shows detailed transformation steps. For details, see “QXI Transformation Engine” on page 176.

### transformationengineRequests.log

This log maintains a listing of all requests processed by the transformation engine as well as the document contents.

## transformationengineRequests.log

This log maintains a listing of all responses processed by the transformation engine as well as the document contents.

## transformationEngine.debug

This log contains all debug messages raised during request processing in the transformation engine. This log requires that developers creating transformation engine style sheets add debug messages to their code that are then output to this file.

## Testing QXI Processes

QXI provides a tool set for testing QXI processes.

### Process Request

This option lets you test the installation and configuration of QXI. A valid QDoc wrapped in a SOAP envelope can be placed into the /requests directory under one of the receivers set up in QXI; for example:

```
TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/receivers/<receiverName>/requests
```

In the Process Request test page, enter the file name and the receiver name where you placed the test request. The request is submitted to QXI for processing and the response QDoc is displayed in a graphical format. View the response XML by choosing the View Details button.

**Note** The Process Request option supports QDocs in both the 1.1 and 1.0 syntax specifications. A one-time configuration during install determines which QDoc standard to use when displaying the QDoc. For details see *QAD QXtend Installation Guide*.

### Create Empty QDoc

This option creates a sample QDoc based on an XML schema you specify. The schema must be one that is supported by QXI. The schema is parsed and all possible entries from the QDoc schema are created in the sample QDoc. The sample QDoc shows the way to represent all of the possible data structures in the QDoc. The generated QDoc shows the structure and content of the QDoc that needs to be sent to QXI. The generated schema also contains a valid SOAP envelope.

**Note** For UI API schemas, this option drops the parent key from the child iteration. The created QDoc contains only those fields that need updating on the screen.

### Verify QDoc Supported

This option checks the standard and custom deployment descriptor files to see if a specified QDoc, QDoc version, and receiver are supported for a specified schema.

### Verify Receiver

This option checks the qdocReceivers.xml file to see if the specified receiver has been set up.

## UI Adapter Connection Test

This option lets you test the UI adapter connection by entering a receiver. It avoids having to create QDocs that contain dummy data.

**Note** The UI Adapter Connection Test function can only display a summary of a QDoc response for QDocs that use the 1.1 syntax specification.


In the Receiver field, enter the name of the QAD Enterprise Applications session you want to connect to—QAD SE, for example. If you employ a user ID and password to connect to the target QAD Enterprise Applications instance, complete the fields in the Requestor Details section; otherwise, this information is optional. A message displays stating whether the QDoc was successful.

## Suspending and Resuming Processing

To avoid processing errors, QAD recommends that you suspend QXI processing before modifying schemas, receivers, connections, and other QXI configuration or XML components.

When you initiate an update of one of these QXI components, a warning displays and gives you options for proceeding.

**Fig. 14.2**  
Suspension Options Prior to a Schema Update

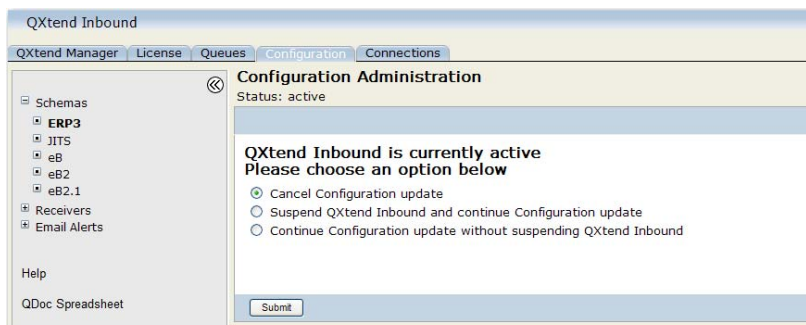

If you choose to cancel the configuration, you return to the previous screen. If you choose to continue without suspending QXI, QDoc requests and responses continue to be processed while you make changes. This course of action may be acceptable if you are modifying new or obsolete configurations not related to any current requests.

If you choose to suspend processing, all current QDocs will complete their processing, and all new QDoc requests fails with an error message returned in the SOAP envelope. These requests must be resent after QXI has resumed.

You can also choose Suspend from the QXI Administration page.

## Resume QXtend

To resume processing, choose Resume from the QXI Administration page.

## Controlling Data Resending

When QXtend receives a Communication Failure exception from the AppServer during a QDoc transaction, QXI attempts to resend the QDoc, by default. The resending action is controlled by the node `resendData` in the `qxtendconfig.xml` file located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`.

**Note** Resending QDocs results in a duplicate transaction if a Progress Memory Violation error occurs on the AppServer after the transaction has been committed.

To disable data resending, locate the following node in the `qxtendconfig.xml` file:

```
resendData = "true"
```

Change it to:

```
resendData = "false"
```

**Note** Setting this parameter to false causes a QDoc transaction to fail if the AppServer has been restarted with the Connection Pool not restarted.

## Securing Password in QDocs

The node `encodedPasswords` in the `qxtendconfig.xml` file specifies whether the request QDocs use encoded passwords to access the target QAD Enterprise Applications.

By default, this value is set to `false`, and the passwords used in the QDocs are unencoded. If you want to secure the password in QDocs, open the `qxtendconfig.xml` file from `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf` and set the `encodedPasswords` value to `true`.

When the value is set to `true`, if you use unencoded passwords, the request will be rejected. If you do not specify the user name and the password and Require Authentication is not checked for the receiver, the request is processed using the user name and the password set in the connection pool settings.

## Handling European Decimal Format

By default, QXtend Inbound expects a dot (.) as the decimal separator for decimal values in QDocs. If another decimal separator is used, use the session context property `decimalSeparator` to specify the decimal separator. In this way, QXtend Inbound can process the QDocs correctly.

For example, in many European countries, a comma (,) is used as the decimal separator. “120,45” in European format means “120.45” in US format. In this case, make sure that the following properties exist in the session context:

```
<urn:ttContext>
  <urn:propertyQualifier>QAD</urn:propertyQualifier>
  <urn:propertyName>decimalSeparator</urn:propertyName>
  <urn:propertyValue>,</urn:propertyValue>
</urn:ttContext>
```

## Hiding Data in QDoc Response and Log Files

The `hideFields` property in the session context provides the ability to hide data in the QDoc Response and log files. When some fields are defined with `hideFields` in the request QDoc, the corresponding values in the response QDocs and log files (`qdocRequests.log` and `qdocResponses.log`) are displayed as asterisks.

**Example** You want to hide the values for the Salary and Bonus fields in the response QDoc.

Define the parameters in the request QDoc as follows:

```
<qcom:ttContext>
  <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
  <qcom:propertyName>hideFields</qcom:propertyName>
  <qcom:propertyValue>Salary,Bonus</qcom:propertyValue>
</qcom:ttContext>
.....
<tEmployeeData>
  <EmployeeName>ABC</EmployeeName>
  <DateOfBirth>1980-02-16</DateOfBirth>
  <Salary>100,000</Salary>
  <Bonus>10,000</Bonus>
.....
</tEmployeeData>
```

In the response QDoc, the values for the two specified fields are replaced with asterisks. See the following response:

```
<ns1:tEmployeeData>
  <ns1:EmployeeName>ABC</ns1:EmployeeName>
  <ns1:DateOfBirth>1980-02-16</ns1:DateOfBirth>
  <ns1:Salary>*****</ns1:Salary>
  <ns1:Bonus>*****</ns1:Bonus>
.....
</ns1:tEmployeeData>
```



# QXtend Inbound Queue Manager

The following material provides an overview of using the QXtend Inbound (QXI) Queue Manager.

## ***Introduction***    **174**

Explains the Queue Manager, with details on multi-threaded and single-threaded queues.

## ***Initializing the Queue Manager***    **175**

Explains how to use the Queue Manager with details on the Queue Manager directory structure, and Queue Manager logs.

## ***QXI Transformation Engine***    **176**

Explains how to use the QXI transformation engine, create an XSLT mapping specification, create a request parser, and modify QXtend configuration files.

## ***Starting the Queue Manager***    **179**

Explains how to use the Queue Manager Main Menu.

## ***Using the Queue Manager***    **179**

Explains how to view individual queues and edit failed submissions.

## ***Queue Manager Functions***    **183**

Explains how to stop or restart queues, add a queue, or modify a queue.

## Introduction

The Queue Manager is an optional interface that allows you to accept QDoc request documents from external applications into a directory structure, to modify and manage requests and queues if necessary, and to return QDoc response documents to the external applications. The QXtend Inbound (QXI) transformation engine is a container for custom style sheet conversions for non-QDoc XML messages.

The Queue Manager is accessed through the QXtend Manager interface, but is not a required or default component of QXI. QXI accepts API requests directly as HTTP post requests in SOAP-compliant XML format, or can accept the documents from a queuing application such as IBM MQSeries, or from the QXtend Queue Manager. You can also use QAD Q/LinQ for a more robust queuing and administrative application.

See Chapter 21, “QXtend Inbound with QAD Q/LinQ,” on page 259.

Queuing applications provide queues for incoming and outgoing documents or messages, ensuring delivery and synchronous responses.

In the case of the Queue Manager, requests arrive from external systems to a specified directory. The requests must be in XML format and be named with a `.req` extension. (The Queue Manager can add a SOAP envelope if necessary.)

**Note** The Queue Manager supports both the QDoc 1.1 and 1.0 syntax specifications, and the SOAP 1.1 standard.

Non-standard XML requests can also be received by queues set up to allow them. These are XML documents added to the queue that do not have a `.req` extension. In this case, the document is passed to the transformation engine. The engine applies a custom XSLT style sheet based on the extension of the file and creates a standard QDoc request. It places this request in a standard queue directory where it is processed normally. For details, see “QXtend Inbound Queue Manager” on page 173.

The Queue Manager polls the request directory, picks up new requests, renames them with a `.req_wrk` extension, and sends them to QXI where they are sent to the defined receiver. A response document container is created at the same time; messages, requested fields, errors, and so on are written to the response during QDoc processing.

Once processing is complete, responses are placed in a response queue for the external application. Responses use the following extensions:

- `ok`. The QDoc processed correctly.
- `.wrn`. The QDoc processed but encountered warnings.
- `.err`. The QDoc request failed.

Once a response document is created in the `\response` directory, the `.req_wrk` request is moved to the response directory and renamed with a `.req` extension again.

If the Queue Manager does not receive a response for some reason, the `.req_wrk` request is moved to the external application `systems_failure` directory.

## Multi-Threaded and Single-Threaded Queues

Multi-threading QDoc queues allows a higher throughput and better performance. However, in multi-threaded queues where QDocs have a sequential dependency, it is possible for a dependent QDoc to start processing before the initial QDoc has finished. Therefore, queues are defined with thread sizes to allow you to create multi-threaded queues for QDocs without dependencies; single-threaded queues for QDocs with dependencies. See “Thread Settings” on page 186.

## Initializing the Queue Manager

In order to use the Queue Manager, complete the following steps:

- 1 Open `environmentmanager.xml` in:  
`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`  
 Instructions for initializing the Queue Manager also appear in the file.  
 For information on queue errors, see “Queue Exceptions” on page 391.
- 2 Locate the commented section in the `<managers>` node.
- 3 Uncomment the `manager class` node following the in-line comments; delete the `<!--` and `-->` symbols.
- 4 Replace the `param` value with the full path to the top-level Queue Manager directory. You can use any directory structure you choose, on any connected network machine; however, if the full path is not specified in `environmentmanager.xml`, the Queue Manager will not work correctly; for example:  

```
<manager class="com.qad.qxtend.queue.directory.DirectoryManager" param="c:\Tomcat
5.5\webapps\<QXI webapp>\qxtendQueues"/>
```
- 5 Save the file.
- 6 Restart QXI in order for the changes to take effect.


**Important** It may be necessary to stop and restart Tomcat before the Queue Manager displays.

## Queue Manager Directory Structure

The default Queue Manager directory structure is located under:

`TOMCAT_HOME/webapps/<QXI webapp>/qxtendQueues`

**Fig. 15.1**  
Queue Manager Sample Directory Structure

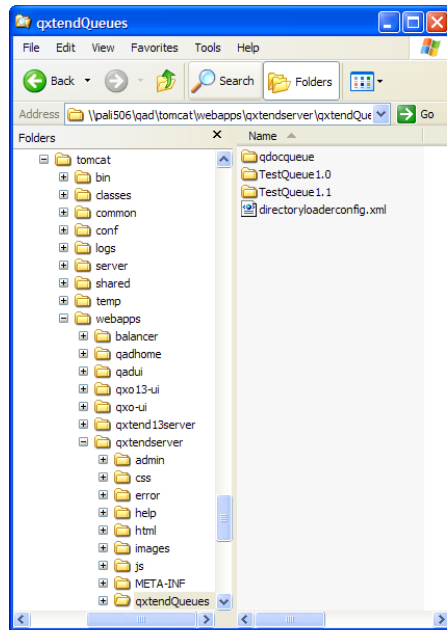

Underneath the base `qxtendQueues` directory are directories for each queue and two configuration files:

*directoryloaderconfig.xml*. This file contains global configuration details for Queue Manager. These are the location of the Queue Manager log file, `qdocDirectoryLoader.log`, and a definition of possible queue types.

Default values are set up in these files. You should not need to modify them.

## Queue Manager Logs

When the Queue Manager is launched, `qdocDirectoryLoader.log` is created in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/logs`

This log tracks the Queue Manager and queues over a progression of reporting levels—error, warning, info, and debug.

The error level is controlled by modifying the level value for the logger name `directoryloader` in `qxtendlogging.xml`. See “Log Report Levels” on page 167 for information on reporting levels.

## QXI Transformation Engine

The transformation engine allows QXI to accept non-QDoc XML files and apply an XSLT mapping specification to them to convert them to standard QDoc requests. Non-QDoc XML files are proprietary-format XML documents that are not in correct QDoc request format and that have a file extension other than `.req`.

The transformation engine polls for these documents in a queue that has been set up to allow non-standard XML documents. When one arrives, the transformation engine sends it to a Web service that extracts the message body, parses the data, and then transforms the data to a standard QDoc request. The transformation engine then creates a valid SOAP envelope for the document and outputs a QDoc request to the requests queue.

The engine also outputs an XML response document. This document will have an extension of `.mapok` or `.maperr` depending on the success or failure of the transformation processing. The original request document is also placed in this directory with an extension of `.prp_req`, where `prp` is the proprietary file extension.

The following sections provide instructions for creating a transformation queue for your proprietary-format XML documents.

## Create an XSLT Mapping Specification

For a given proprietary XML document such as `syncCustomer.prp`, where `.prp` is the proprietary file extension, identify the target QDoc. Using the schemas for that QDoc, create an XSLT mapping specification to follow during transformation of a `.prp` file to the `.req` QDoc format. Store the mapping specification in:

```
TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/mappingSpecs
```

Although the file name can be anything, the mapping specification file name could include the document standard, a version number, the document type, and the destination; for example:

```
prpxml-001-synccust-eB2qdoc.xsl
```

In this case, `prpxml` is the document standard, `001` denotes the first version of the file, `synccust` is the document type, and `eB2qdoc` is the destination. The document standard is a value you create and assign for reference purposes in QXI configuration files.

## Creating a Request Parser

If your incoming XML document is in a proprietary format, the document type and version are required to determine the transformation stylesheet. The request parser extracts this. Because the location of these values in each proprietary file format differs, a new request parser is required.

To create a new request parser, follow these steps:

- 1 Create the following directory:  

```
WEB-INF/classes/com/qad/qxtend/queue/transformation
```

This directory is required for the system to find your modified code before the QAD-supplied code.
- 2 Edit the existing request parser program to put in your own parsing code:  

```
WEB-INF/RequestParser.java
```
- 3 Compile your `RequestParser.java` program into `RequestParser.class`.
- 4 Copy `RequestParser.class` into the directory created in step 1.
- 5 Modify it for your proprietary file format.

- 6 To configure the new request parser, add an entry to `requestparsermanager.xml` as shown in “requestparsermanager.xml Changes” on page 178.
- 7 Add the file extension mapping to the document standard used by the new request parser in `directoryloaderconfig.xml` as shown in “directoryloaderconfig.xml Changes” on page 178.

## Modifying QXtend Configuration Files

The transformation engine relies on several QXI configuration files in order to call the correct transformation for the correct files. You must make minor modifications in an XML or text editor to the following files:

- `directoryloaderconfig.xml`
- `requestparsermanager.xml`
- `transformationmanager.xml`

### directoryloaderconfig.xml Changes

In `directoryloaderconfig.xml`, add the new document standard:

```
<directoryloaderConfig>
...
  <documentStandards
    <documentStandard extension="prp">PRPXML
    </documentStandard>
  </documentStandards>
...
</directoryloaderConfig>
```

### requestparsermanager.xml Changes

Add the document standard to `requestparsermanager.xml`:

```
<requestParserManager>
  <requestParsers>
    <requestParser>
      <parserType>PRPXML</parserType>
      <parserClass>com.qad.common.queue.transformation.
        PRPXMLRequestParser</parserClass>
    </requestParser>
  </requestParsers>
</requestParserManager>
```

### transformationmanager.xml Changes

Add the document standard as a `contentTypeMap` and the mapping specification including the mapping specification file name to `transformationManager.xml`:

```
<transformationManager>
  <transformers>
    <transformer>
      <transformerType>XML</transformerType>
      <transformerClass>com.qad.common.queue.
        transformation.XMLTransformer</transformerClass>
    </transformer>
  </transformers>
  <contentTypeMaps>
    <contentTypeMap documentStandard=PRPXML</contentTypeMap>
```

```

</contentTypeMaps>
<mappingSpecifications>
  <mappingSpecification
    receiver="eb2"
    documentStandard="PRPXML"
    documentType="syncCustomer"
    documentVersion="001">prpxml-001-synccust-
    eB2qdoc.xsl</mappingSpecification>
</mappingSpecifications>
</transformers>
</transformationManager>

```

This completes the configuration of the Queue Manager to accept non-standard XML documents. Test the new configuration thoroughly.


## Starting the Queue Manager

Access the Queue Manager through the QXtend Manager at:

`http://<hostname>:<tomcat_port>/<QXI_webapp>/`

This assumes Tomcat and the target QAD Enterprise Applications instances are running.

**Fig. 15.2**  
Queue Manager Main Menu

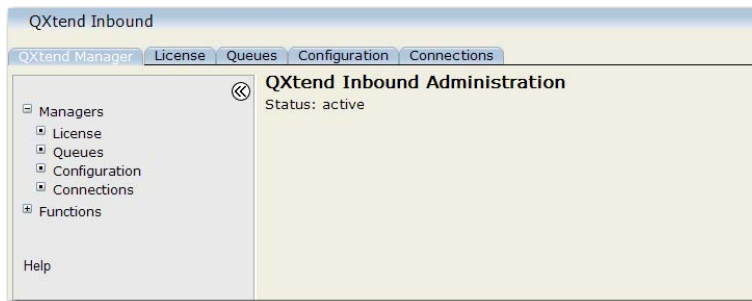

From the main Queue Manager page, you can access individual queues, update or add queues, restart queues, and stop all queues.

## Using the Queue Manager

In addition to configuring queues, you can stop or restart queues, view requests and responses in a queue, sort and filter those views, delete requests or responses, and you can edit and resubmit a failed request.

### View Individual Queues

When you choose a queue name under Queues on the left-hand menu, or select a queue in the Functions|Update Queues screen, the contents of the queue display. The queue document list is color coded.

- Red lines are documents that returned an error.
- Blue are successful documents.
- Grey are in process.

By default, 100 records are shown. Use the scrollbar on the queue to view the full 100 documents. You also can set the number of documents displayed using the Records settings at the bottom of the screen.

**Fig. 15.3**

Set Number of Documents in Queue to Display

The screenshot shows the 'Queue Administration' window with the status 'active'. Below the title bar, there is a search bar with a 'Request' dropdown, a 'Filter' button, and a 'Show All' button. The main area contains a table with the following columns: Request, Req Date, Response, Map Requests, Map Responses, and Status. The table has two rows: one for 'maintainGC1' with a 'Success' status, and one for 'maintainGC2' with an 'Error' status. The 'maintainGC2' row is highlighted in red. At the bottom of the window, there are checkboxes for 'Select All' and buttons for 'Delete', 'Resubmit', and 'Refresh'.

| Request                              | Req Date            | Response    | Map Requests | Map Responses | Status  |
|--------------------------------------|---------------------|-------------|--------------|---------------|---------|
| <input type="checkbox"/> maintainGC1 | 2010-07-29 22:41:59 | maintainGC1 |              |               | Success |
| <input type="checkbox"/> maintainGC2 | 2010-07-29 22:42:36 | maintainGC2 |              |               | Error   |

Enter the starting and ending record number and choose Go to update the display. Entering 1 and 10 displays the first 10 records; entering 25 and 50 displays records 25 through 50.

## Sorting

You can sort a queue by choosing the sort column name. Click once to sort in ascending order. Click again to sort descending.

## Filtering

You can filter the queue by entering any criteria text in the field above the table. You then select the document type from the drop-down list. Choose Filter to select those queues that include the text and document type. The filtered result is case sensitive.

**Example** Enter *test* and select Warnings. Then choose Filter. This displays a list of the warnings present in all queues that contain test in the name.

Choose Show All to display all queues again.

**Note** To maintain the best possible performance, filter and sort options do not refresh the data; they filter data already displayed. To refresh the data with changes to the server, choose Refresh prior to sorting or filtering.

## Deleting


Error, Warning, and Success status documents have a selection box next to them. You can choose in the box to select a document and then choose Delete to remove it from the queue.



## Resubmitting

You can select and resubmit failed QDocs directly using the Resubmit button in Queue Administration. You can also first edit a failed QDoc to correct any errors in the document and then resubmit it in the Edit QDoc Request screen. See “Edit Failed Submissions” on page 182.

**Fig. 15.4**  
Error and Success Documents in Queue

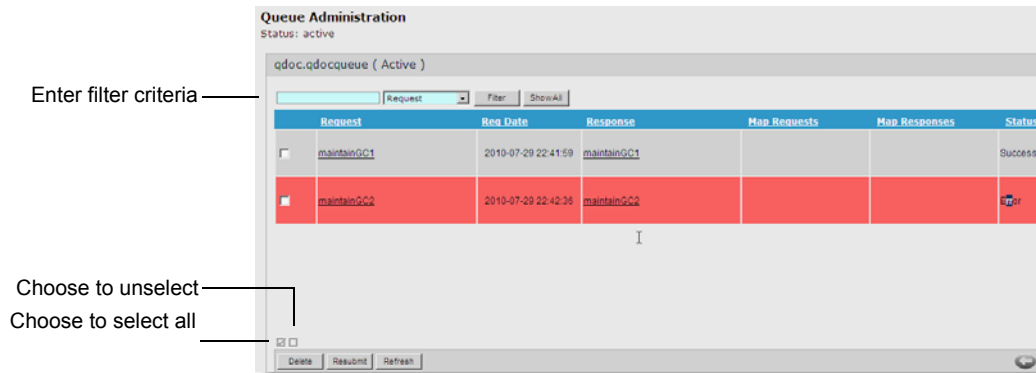


In the lower left-hand corner above the Delete button are select-all and select-none symbols. Choose the select-all symbol—the box with a checkmark inside—to select all documents in the queue; choose the empty box to unselect all documents.

## Viewing Documents


For any request or response document, choose the document name in the queue display to view the document. A summary screen displays.

**Fig. 15.5**  
Summary View of a Request Document

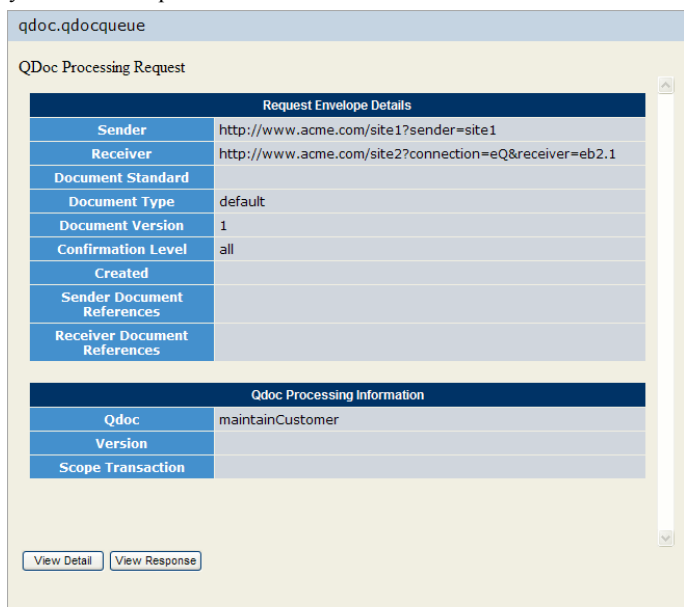

Choose View Detail to view the XML content of the document.

**Fig. 15.6**  
Detail View (XML) of Response Document

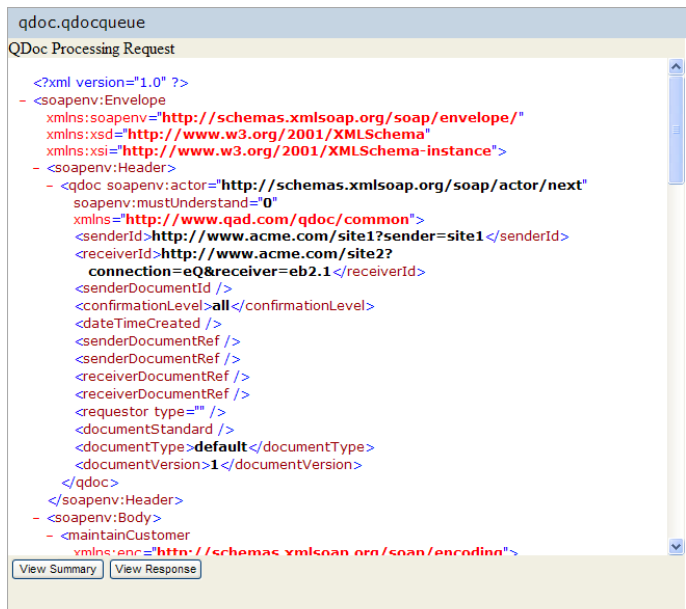


## Edit Failed Submissions

If you are viewing a request document with an Error status, you can display the document in an editing window. You can edit the XML and resubmit the document to the queue.


- 1 Select either the request or response document name in the queue. The summary view opens.

**Fig. 15.7**  
Summary View of an Error Status QDoc

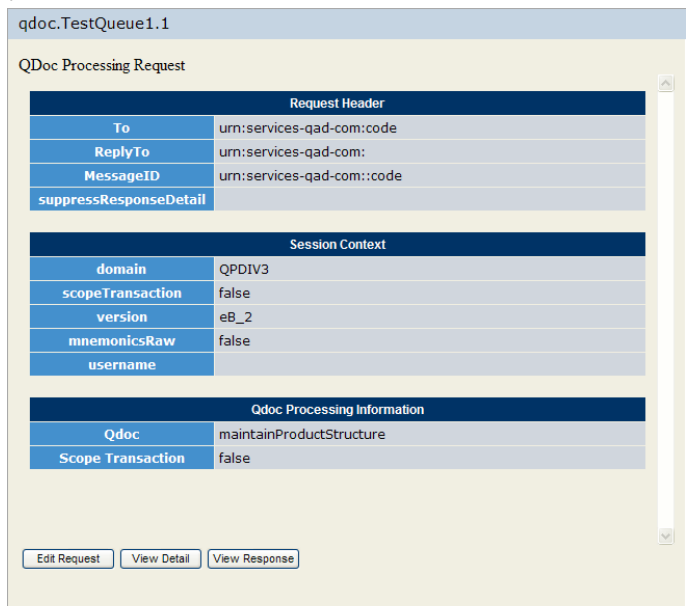

- 2 Choose Edit Request to open the XML editor.

**Fig. 15.8**  
XML Editor for Error Status QDocs

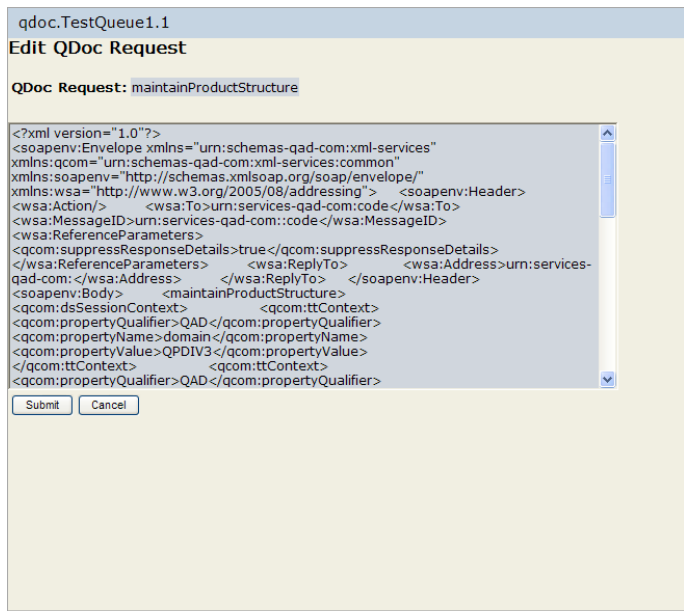


- 3 Select the QDoc text and make changes to the QDoc as required.
- 4 Choose Submit. The message “Request re-submitted successfully” displays. The document is immediately updated in the queue. Review the related response document for further error checking.

## Queue Manager Functions

From any screen in the Queue Manager, you can select Functions on the left-hand menu. The functions are:


- Update queues
- Restart all queues
- Stop all queues
- Add a queue
- Modify a queue

**Fig. 15.9**  
Queue Manager Functions Menu

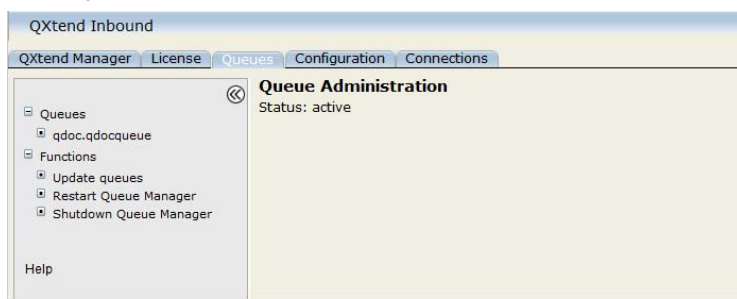

When you select Update Queues under the Functions menu, a list of existing queues displays. You can filter and sort this list as described under “Sorting” and “Filtering” on page 180.

**Fig. 15.10**  
Update Queue

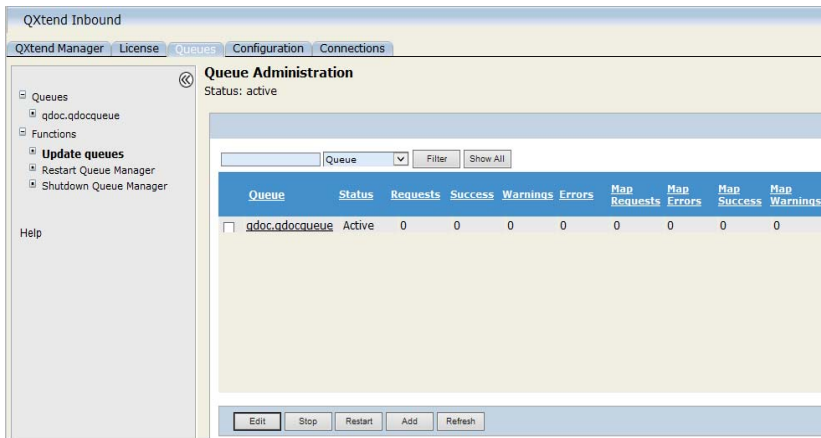


## Stop or Restart Queues

- 1 To stop or restart one or more queues, choose the checkbox next to the queue names you want to stop or restart.
- 2 Choose Stop to stop the selected queues; choose Restart to shut down and restart them.

## Add a Queue

- 1 To add a queue, choose Add. The Add Queue screen displays.

**Fig. 15.11**  
Add a Queue

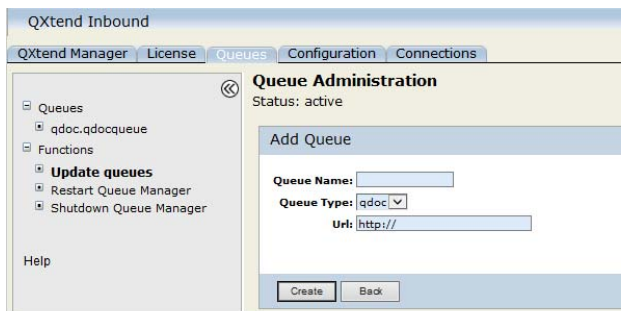

- 2 Enter the following:

**Queue Name.** You can enter any name here. The final queue name will be *<queue type>.<your queue name>*. So if you enter testQ here, the queue name becomes qdoc.testQ.

**Queue Type.** Queue types identify the type of requests on the queue. QXI contains one queue type, qdoc.

**URL.** URL (Universal Resource Locator) is the location of the QXI Web Services component.

Choose Create. The queue is created with a default configuration. The Edit Configuration page displays to enable you to edit the configuration.

**Fig. 15.12**  
Edit Queue (QDoc 1.0)

Edit configuration

**Configuration for qdoc.qdocqueue**

**Queue Settings**

Queue Type:

XML Syntax:

URL:

Transformation Queue: ☐

Transformation URL:

Add Envelope: ☐

Frequency:

Pause Queue on Error: ☐

Number of Records per Page:

**Thread Settings**

Initial Size:

Maximum Size:

Web Service Timeout:

Retry Wait Time:

Max Retry Limit:

**Envelope Settings**

Sender ID:

Receiver ID:

Requestor ID:

Requestor Password:

**Fig. 15.13**  
Edit Queue (QDoc 1.1)

Edit configuration

**Configuration for qdoc.qdocqueue**

**Queue Settings**

Queue Type:

XML Syntax:

URL:

Transformation Queue: ☐

Transformation URL:

Add Envelope: ☐

Frequency:

Pause Queue on Error: ☐

Number of Records per Page:

**Thread Settings**

Initial Size:

Maximum Size:

Web Service Timeout:

Retry Wait Time:

Max Retry Limit:

**Envelope Settings**

Receiver:

Sender:

Suppress Response Detail: ☒

## Queue Settings

Update the fields using the details that follow:

**Queue Type.** Queue types identify the type of requests on the queue. QXI contains one queue type, qdoc.

**XML Syntax.** Select the XML syntax specification to use for the queue: Qdoc 1.0 or Qdoc 1.1. Only required if the Add Envelope check box is selected.

**URL.** URL is the location of the QXI Web Services component.

**Transformation Queue.** Determines whether this queue accepts non-standard XML documents for transformation.

**Transformation URL.** URL is the location of the QXI Web Services component for the transformation engine.

**Add Envelope.** All incoming requests must include a valid SOAP envelope. If the incoming requests do not have a SOAP envelope, set this to true and the Queue Manager adds a SOAP envelope to each incoming message before sending it to QXI. If Add Envelope is checked, enter values for Envelope Settings as well.

**Frequency.** In milliseconds, set the interval at which to poll the queue.

**Pause Queue on Error.** Specify how Queue Manager handles queues when encountering errors.

Yes: Queue Manager stops on any error. When restarted, Queue Manager resumes processing the QDoc that paused the queue.

No: When error occurs, Queue Manager proceeds to the next QDoc without pausing the queue.

**Number of Records per Page.** Specify the number of records that are displayed per page. The default value is 100.

## Thread Settings

Use the Thread Settings to configure the queue as either a single or multi-threaded queue.

**Initial Size.** The starting number of threads. Set to 1 for single threaded queues. Set the size to at least 2 for multi-threaded queues.

**Maximum Size.** The maximum number of threads (or QDocs) that can be processed at one time. One thread is the equivalent of one QAD Enterprise Applications user.

**Web Service Timeout.** The time-out in milliseconds for attempts to send QDocs to the QXI Web service.

**Retry Wait Time.** Interval in milliseconds between attempts if the Web service call fails.

**Max Retry Limit.** The maximum number of times Queue Manager will try to send a request QDoc before it stops trying. This allows enough time for web services to get up and running.

## Envelope Settings

If the Add Envelope option is selected you must provide appropriate envelope settings. These options change depending on the XML syntax version that is selected. Depending on the settings, the correct SOAP envelope is created.

Use the following setting if the XML syntax is 1.1.

*Receiver.* This identifies the QDoc recipient, which is by definition an QAD Enterprise Applications instance. Enter the name of a receiver defined in the QXI system.

*Sender.* This identifies the QDoc source application. It is defined as a URL so that future QAD product releases can more easily use Internet-based industry standards for organizational identification.

Most of the URL is not yet used; however, at a minimum the Sender must include the sender parameter. To uniquely identify a sender, add a sender designation such as site:

`sender=site1`

*Suppress Response Detail.* Specify whether to set the `suppressResponseDetail` attribute of QDoc requests to true or false for the queue.

Yes: `suppressResponseDetail` is set to true.

No: `suppressResponseDetail` is set to false.

For detailed information and the effects of the `suppressResponseDetail` attribute, see “`suppressResponseDetail`” on page 322.

Use the following settings if the XML syntax is 1.0.

*Sender ID.* This identifies the QDoc source application. It is defined as a URL so that future QAD product releases can more easily use Internet-based industry standards for organizational identification.

Most of the URL is not yet used; however, at a minimum the Sender ID must include the sender parameter. To uniquely identify a sender, add a sender designation such as site:

`sender=site1`

*Receiver ID.* The receiver is defined as a URL. At a minimum the Receiver ID must include the receiver parameter. To uniquely identify a receiver, add an QAD Enterprise Applications instance designation:

`receiver=eB2_Prod`

*Requestor ID.* The requestor ID is the user log-in from the requestor application. The requestor ID and password in a QDoc request are validated against the values stored for the queue. If the validation fails, the QDoc is returned with a SOAP error.

*Requestor Password.* The requestor password is the user password from the requestor application. The requestor password is validated along with the user ID.

When the queue setup is complete, choose Submit. The message “Queue Config saved successfully” displays.

## Modify a Queue

- 1 To update a queue configuration, select the checkbox next to the queue you want to edit.
- 2 Choose Edit. The Edit Configuration screen displays. Make changes as described in step 2 under “Add a Queue” on page 184.
- 3 When the queue setup is complete, choose Submit. The message “Queue Config saved successfully” displays.

## Queue Manager Scripts

This script makes use of GNU sed and GNU wget so that it works on most flavors of UNIX, including HP-UX and AIX. So before running this script, please install the GNU sed and GNU wget, which are freeware downloads available from <http://ftp.gnu.org/gnu/>. Once both sed and gnu are installed, copy the executables (sed and wget) from the directory you installed (default /usr/local/bin) to this scripts directory to make sure the GNU versions of the programs are running and not the native OS ones.

In addition to managing queues through Queue Manager in the administrative UI, you can also use the queue manager script to start, stop, restart, and shut down queues, as well as query the queue status:

```
queue-control.sh -Operation [Queue]
```

Where *Queue* is the connection queue name.

| Operation | Description            |
|-----------|------------------------|
| h         | Print the script help  |
| q         | Query the queue status |
| r         | Restart the queue      |
| s         | Start the queue        |
| x         | Stop the queue         |
| t         | Shut down the queue    |

**Example** Use the following command to stop the queue named qdoc.MyQueue:

```
./queue-control.sh -r qdoc.MyQueue
```



# QXtend Inbound Configuration Manager

The QXtend Inbound (QXI) Configuration Manager provides a toolset to manage standard QAD and custom schemas and the QAD Enterprise Applications receivers.

## ***Introduction    190***

Explains how to use the Configuration Manager.

## ***Inbound Receivers    190***

Explains how to add inbound receivers, add a schema to an existing receiver, remove a schema from an existing receiver, generate WSDLs for a receiver/API, and delete a receiver.

## ***QDoc Schemas    199***

Explains how to use the Schemas option to maintain multiple events files, view QDocs by QAD Enterprise Applications version, add a schema to the master list, modify a schema configuration, and delete a custom schema configuration.

## ***QXI E-mail Alerts    205***

Explains how to configure e-mail settings, manage alert recipients, and use alert groups.

## Introduction

The Configuration Manager provides an interface to manage QDoc schemas, create and modify QAD Enterprise Applications receivers, and allocate QDoc schemas to the receivers.

Access the Configuration Manager through the QXtend Manager at:

`http://<hostname>:<tomcat_port>/<QXI_webapp>/`

For details about schemas see “QDoc Schemas” on page 301.


This assumes Tomcat and the target QAD Enterprise Applications instances are running.

The Configuration Manager is launched from the QXI interface and lets you manage your master list of available QDoc schemas and set up and configure your QAD Enterprise Applications receivers.

For information on configuration errors, see “Configuration Exceptions” on page 404.

**Fig. 16.1**

Configuration Manager Interface

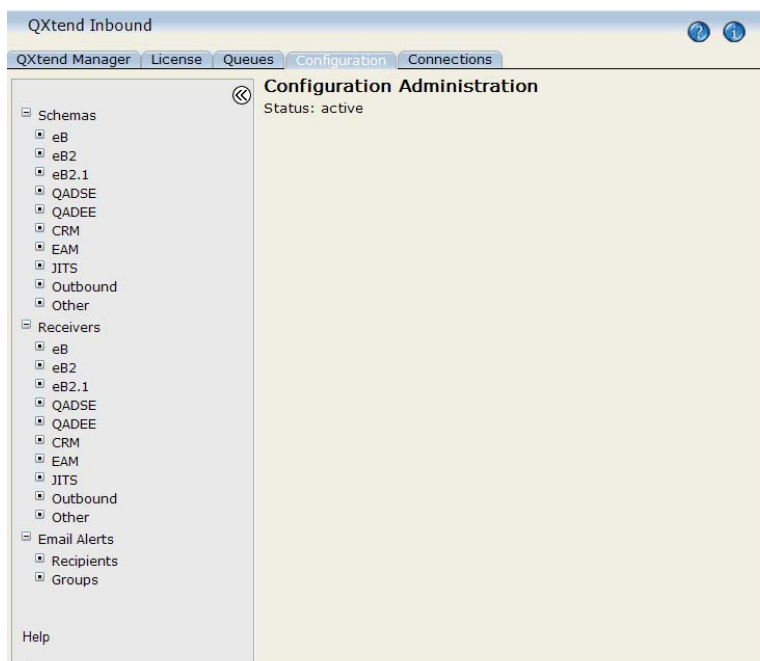

## Inbound Receivers

Receivers are named QAD Enterprise Applications instances. You can define a single QAD Enterprise Applications instance for all your inbound QDocs, or multiple receivers to support test and training databases, multiple QAD Enterprise Applications versions, or multiple databases.

In the Configuration Manager, you can:


- Add receivers.
- View a list of receivers.
- Add standard or custom schemas to receivers.

- Remove standard or custom schemas from receivers.
- Create WSDLs for a receiver/API combination.
- Delete receivers.

## Adding Inbound Receivers

- 1 In the Configuration Manager, choose Receivers|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. Other products also might display on this menu.
- 2 The currently available receivers display for that version.

**Fig. 16.2**  
Receiver View in Configuration Manager

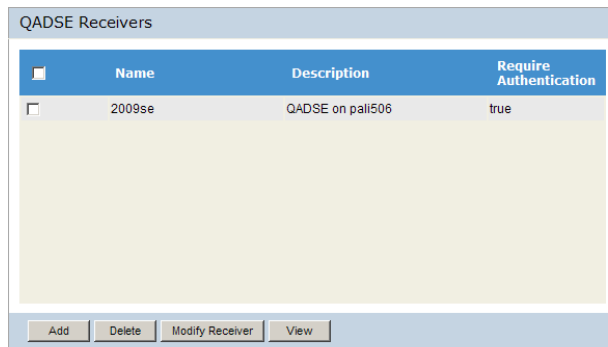


|                          | Name   | Description     | Require Authentication |
|--------------------------|--------|-----------------|------------------------|
| <input type="checkbox"/> | 2009se | QADSE on pal506 | true                   |

Buttons: Add, Delete, Modify Receiver, View

- 3 To add a receiver, click Add. If QXI is active, the suspend options display. Choose a suspend option to cancel the add or continue. The Add Receiver screen displays.
- 4 Enter a name for the receiver.

**Fig. 16.3**  
Add Receiver

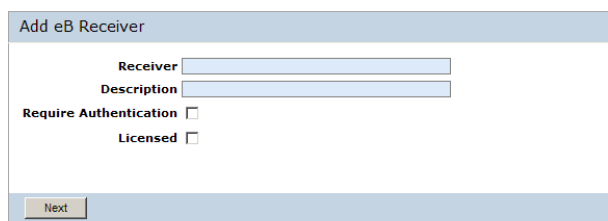

Add eB Receiver

Receiver

Description

Require Authentication ☐

Licensed ☐

Next

- 5 Select the Require Authentication check box to indicate that this receiver requires all QDocs to contain authentication information.

In previous versions QXI used the system-wide UseQDocRequestor setting. For each receiver in the system, you can specify that every QDoc that is for a receiver must contain authentication credentials consisting of a username and password, or a session ID.

For details about UseQDocRequestor see “Requestor Element” on page 336.

For information about QDoc authentication, see “QDoc Authentication” on page 158.

- 6 Select the Licensed check box to indicate whether the receiver will be processing requests that require a licensed agent.

- 7 If the schema is for eB2.1 or later, you can define a list of domain codes for the new receiver. The License Manager will reject any non-free or charged message/QDoc for an undefined domain.

See “QAD QXtend Licensing” on page 267 for details on licensing.

**Fig. 16.4**

Naming a Receiver

Add QADSE Receiver

Receiver

Description

Require Authentication ☐

Licensed Domains

Next

- 8 Choose Next. The list of available QDoc APIs displays.

**Fig. 16.5**

Adding QDoc APIs to a New Receiver

qxt193a

Standard APIs  QdocName ☐ Show 1.0 Qdocs Filter Show All

| QdocName                                          | XML Syntax | Version | Route                        | Procedure          | Event |
|---------------------------------------------------|------------|---------|------------------------------|--------------------|-------|
| <input type="checkbox"/> allocateSalesOrder       | Qdoc 1.1   | eB_2    | UI API Adapter sosoal.p      | sosoal-eB_2.xml    |       |
| <input type="checkbox"/> confirmShipper           | Qdoc 1.1   | eB2_2   | UI API Adapter rcsols.p      | rcsols-eB2_2.xml   |       |
| <input type="checkbox"/> copyItemMaster           | Qdoc 1.1   | eB21_3  | SI API Adapter com/qad/mfagr |                    |       |
| <input type="checkbox"/> createAuthorizationUsage | Qdoc 1.1   | eB2_2   | UI API Adapter socnuac3.p    | socnuac3-eB2_2.xml |       |
| <input type="checkbox"/> createSequenceUsage      | Qdoc 1.1   | eB2_2   | UI API Adapter socnuac5.p    | socnuac5-eB2_2.xml |       |
| <input type="checkbox"/> deleteCustomerShipTo     | Qdoc 1.1   | eB_2    | UI API Adapter adstmdt.p     | adstmdt-eB_2.xml   |       |

Custom APIs  QdocName ☐ Show 1.0 Qdocs Filter Show All

| QdocName                                       | XML Syntax | Version | Route                        | Procedure          | Event |
|------------------------------------------------|------------|---------|------------------------------|--------------------|-------|
| <input type="checkbox"/> myCustomerItem        | Qdoc 1.1   | DIM01   | SI API Adapter ppcibmt.p     |                    |       |
| <input type="checkbox"/> printSalesOrder       | Qdoc 1.1   | eB2_1   | UI API Adapter sosorp05.p    | sosorp05-eB2_1.xml |       |
| <input type="checkbox"/> queryCustomer         | Qdoc 1.1   | eB21_1  | SI API Adapter com/qad/qxten |                    |       |
| <input type="checkbox"/> queryItem             | Qdoc 1.1   | eB21_1  | SI API Adapter com/qad/qxten |                    |       |
| <input type="checkbox"/> queryProductStructure | Qdoc 1.1   | eB21_1  | SI API Adapter com/qad/qxten |                    |       |
| <input type="checkbox"/> querySalesOrder       | Qdoc 1.1   | eB21_1  | SI API Adapter com/qad/qxten |                    |       |

Back Done

- 9 Select from the available lists of standard and custom QDocs by clicking the QDocs you want.
- 10 Choose Done to make the assignment. A confirmation screen displays.

**Note** A receiver must be associated with an API that uses the SI API adapter route in order to receive business objects that employ DDP. The service interface adapter API is used by the DDP API to input data into the target application.

If you suspended QXI in step 3, you are given the option of resuming it. If you choose to do so, QXI services are restored and a confirmation message displays.

**Fig. 16.6**  
QDocs Added to a New Receiver



- 11 To exit the add new receiver confirmation screen or the resume QXI services confirmation, choose any other menu option in the QXtend Manager interface.

### Adding a Schema to an Existing Receiver

- 1 In the Configuration Manager, choose Receivers|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. Other products also might display on this menu. The currently available receivers for that version display. See “QDoc Schemas” on page 199.
- 2 Select the receiver to which you want to add a schema by clicking its box and then click Modify.
- 3 Select the appropriate Suspend option if QXI is active and then click Submit.
- 4 The Modify <application> Receiver dialog displays, which allows you to change description, authentication, and licensed domains attributes.
- 5 Make any required changes and then click Next. A list displays of the standard and custom APIs that are currently supported by the receiver. Click Next.

**Note** To view schemas that use the 1.0 specification, select the Show 1.0 QDocs check box. By default, this screen only displays schemas that use the 1.1 specification.

**Fig. 16.7**  
Adding a QDoc to an Existing Receiver

The screenshot shows a window titled "qad2008 - Currently Supported API's". It has two sections: "Standard APIs" and "Custom APIs". Each section has a search bar, a "QdocName" dropdown, a "Show 1.0 Qdocs" checkbox, and "Filter" and "Show All" buttons. Below each search bar is a table with columns: QdocName, XMLSyntax, Version, Route, Procedure, and Event.

| QdocName                                          | XMLSyntax | Version | Route          | Procedure      | Event              |
|---------------------------------------------------|-----------|---------|----------------|----------------|--------------------|
| <input type="checkbox"/> allocateSalesOrder       | Qdoc 1.1  | eB_2    | UI API Adapter | sosoa.p        | sosoa-eB_2.xml     |
| <input type="checkbox"/> confirmShipper           | Qdoc 1.1  | eB2_2   | UI API Adapter | rcsois.p       | rcsois-eB2_2.xml   |
| <input type="checkbox"/> copyItemMaster           | Qdoc 1.1  | eB21_3  | SI API Adapter | com/qad/mfgpro |                    |
| <input type="checkbox"/> createAuthorizationUsage | Qdoc 1.1  | eB2_2   | UI API Adapter | socnuac3.p     | socnuac3-eB2_2.xml |
| <input type="checkbox"/> createSequenceUsage      | Qdoc 1.1  | eB2_2   | UI API Adapter | socnuac5.p     | socnuac5-eB2_2.xml |
| <input type="checkbox"/> deleteCustomerShipTo     | Qdoc 1.1  | eB_2    | UI API Adapter | adstmd.p       | adstmd-eB_2.xml    |

| QdocName                                  | XMLSyntax | Version | Route          | Procedure | Event             |
|-------------------------------------------|-----------|---------|----------------|-----------|-------------------|
| <input type="checkbox"/> maintainProdLine | Qdoc 1.1  | eB21_1  | UI API Adapter | splnmt.p  | splnmt-eB21_1.xml |

At the bottom of the window are buttons: "Add QDoc", "Remove QDoc", "Generate WSDL", and "Back".

- 6 Select the schema or schemas to add to the receiver.
- 7 A confirmation displays. If you suspended QXI in step 2, you are given the option of resuming it. If you choose to do so, QXI services are restored and a confirmation message displays.

**Fig. 16.8**  
QDocs Added to an Existing Receiver

The screenshot shows a window titled "Configuration Administration" with a status "active". A message box says "Qdocs successfully added to production\_main". Below this is a section titled "Standard API Support" with a list of items:

- createAuthorizationUsage-eB2\_2
- createSequenceUsage-eB2\_2

- 8 To exit the confirmation screen or the resume QXI services confirmation, choose any other menu option in the QXtend Manager interface.

## Removing a Schema from an Existing Receiver

- 1 In the Configuration Manager, choose Receivers|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. Other products also might display on this menu. The currently available receivers display.
- 2 Select the receiver from which you want to remove a schema by clicking its box and then click Modify.
- 3 Select the appropriate Suspend option if QXI is active and then click Submit.
- 4 The Modify <application> Receiver dialog displays, which allows you to change description, authentication, and licensed domains attributes.
- 5 Make any required changes and then click Next. A list displays of the standard and custom APIs that are currently supported by the receiver. Click Next.

- 6 Select the QDocs to remove from the receiver by selecting the associated check boxes. Click Remove QDoc.
- 7 A confirmation screen displays. If you suspended QXI in step 3, you are given the option of resuming it. If you do so, QXI services are restored and a confirmation message displays.
- 8 To exit the remove schema confirmation screen or the resume QXI services confirmation, choose any other menu option in the QXtend Manager interface.

## Generating WSDLs for a Receiver/API

You can generate a WSDL for an API—or set of APIs—for a given receiver/API combination for APIs that use the 1.1 syntax specification. For each API selected, one WSDL is generated along with the associated request schema and response schema.

When you generate WSDL for a set of APIs, the WSDLs are returned as a compressed archive in a QdocWebService.zip file bundled with the associated .xsd files. The .zip file can be saved to a user-defined location on the client. When you generate a WSDL for a single API, the resultant compressed .zip file uses the same name as the API name.

A sample empty Qdoc is available for each API in WSDL generation.


- 1 In the Configuration Manager, choose Receivers|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. Other products also might display on this menu. The currently available receivers for that version display. See “QDoc Schemas” on page 199.
- 2 Select the receiver to generate a WSDL for by selecting its check box and then click Modify.
- 3 Choose the appropriate Suspend option if QXI is active. Click Submit.
- 4 The Modify <application> Receiver dialog displays, which allows you to change description, authentication, and licensed domains attributes. Make any required changes and then click Next.
- 5 A list displays of the standard and custom APIs that are currently supported by the receiver.
- 6 Select the APIs for which you want to generate a WSDL. You can select any combination of standard APIs, custom APIs, or both.

**Note** If you select a standard QDoc and a custom QDoc with identical name during WSDL generation, QXI generates a WSDL file and a sample QDoc from the custom QDoc, and writes an error message in an exclusion file explaining the situation.

- 7 Click Generate WSDL. Note the following:
  - If no API is selected, a warning message appears when you click Generate WSDL. Exit the message box and select an API.
  - If you select only one API, you are presented with three options:
    - Backward compatible: Specify whether or not to generate a backward-compatible WSDL that can be used with an older version of an API
    - Separate schema file: Choose whether or not to embed selected schemas into WSDL files or create separate schema files


- Use SOAP headers: Choose whether or not to include the SOAP header in the WSDL file. Select this option for most implementation scenarios; clear this option only when you are configuring QXI to process QDoc requests without SOAP headers from non-SOAP-compatible external applications such as QAD Business Process Management (BPM).

**Fig. 16.9**  
WSDL Generation Options for a Single API

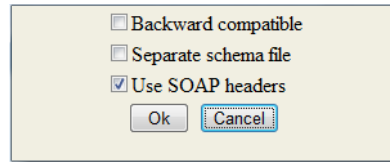


- If you select multiple APIs, you are presented with an additional option, Use Single WSDL, to choose whether to combine all the APIs in a single WSDL file or generate separate files for each API. The Backward Compatible option is only enabled when you choose not to combine them in a single WSDL file.

**Fig. 16.10**  
WSDL Generation Options for Multiple APIs

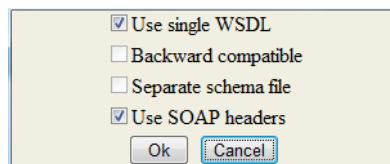

8 The WSDL is generated and a File Download box displays.

**Fig. 16.11**  
File Download

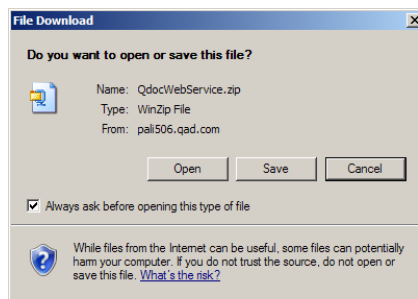

9 Navigate to where you want to download the file and click Save. The .zip file is saved to the selected location.

The .zip file contains the following files:

- QdocWebService.wsdl - If combining multiple WSDLs, this file contains all selected API operations.
- [API Name] - [API version].wsdl - If not combining all WSDLs or if just selecting one API, the file contains a WSDL file for every API.



- `[API Name] - [API version].xsd` - This file contains as many request schema files as there were API operations that were not excluded. These are refactored schemas, not those stored on the QXI server, so that they all work when imported into the same XML namespace.
- `[API Name]Response - [API Version].xsd` - As many response schema files as there are request schemas with a corresponding response schema. The WSDL will specify that the response schema is the same as the request schema, if no response schema can be found.
- `exclusions.txt` - A text file containing a list of all the selected APIs that were not included in the WSDL and the reason they were not included. Reasons for exclusion may include the following:
  - The API is not for QDoc version 1.1.
  - A request schema file could not be found.
  - A different version of an API of the same name has already been added (WSDLs can only have one operation with a given name). The first operation that was added will be included.
  - An error occurred when trying to add an operation for the API to the WSDL.
  - A schema did not validate for the reason given.
- `[API Name] - [API version] - Sample.xml` - This is a sample QDoc file.

## Accessing WSDLs

There are three ways you can access WSDL files:

- Download WSDLs to local and open them immediately after generation  
See “Generating WSDLs for a Receiver/API” on page 195.
- Access WSDLs directly through WSDL URLs

For each supported API of a receiver, QXI provides a URL through which you can directly access its corresponding WSDL file on the fly, also with the option to include or exclude the SOAP header.

The WSDL URL without SOAP header can be directly exposed to QAD BPM and other applications for integration purposes. It provides the most efficient way for QAD BPM to access and consume WSDL documents that define the services it will use as part of the business process being developed in its development environment.

- Access WSDLs by navigating the WSDL access pages

QXI provides you with modules, receivers, and APIs screens that let you easily browse, locate, and access all available WSDL URLs. A bread crumb trail is displayed on each screen to tell you where you are in the hierarchy and let you navigate to a higher-level screen.

- Modules screen (`http://<hostname>:<tomcat_port>/<QXI_webapp>/wsdl`): Lists all the supported modules from which you can drill down to the Receivers screen. This is the main WSDL entry page.

**Fig. 16.12**  
Modules Screen

| Modules                  |                                     |
|--------------------------|-------------------------------------|
| Module                   | Description                         |
| <a href="#">eB</a>       | MFG/PRO eB                          |
| <a href="#">eB2</a>      | MFG/PRO eB2                         |
| <a href="#">eB2.1</a>    | MFG/PRO eB2.1                       |
| <a href="#">QADSE</a>    | QAD Standard Edition                |
| <a href="#">QADEE</a>    | QAD Enterprise Edition              |
| <a href="#">CRM</a>      | Customer Relationship Management    |
| <a href="#">EAM</a>      | Enterprise Asset Management         |
| <a href="#">JITS</a>     | Just-In-Time Sequencing             |
| <a href="#">Outbound</a> | QXtend Outbound (for query service) |
| <a href="#">Other</a>    | Other                               |

- Receivers screen ([http://<hostname>:<tomcat\\_port>/<QXIwebapp>/wsdl/ModuleName](http://<hostname>:<tomcat_port>/<QXIwebapp>/wsdl/ModuleName)): Lists all the available receivers of a specified module from which you can drill down to the APIs screen.

**Fig. 16.13**  
Receivers Screen

| Modules > QADEE > Receivers |             |
|-----------------------------|-------------|
| Receiver Name               | Description |
| <a href="#">QADEE</a>       |             |
| <a href="#">QADERP</a>      |             |
| <a href="#">QADERP_1</a>    | For BPM     |

- APIs screen ([http://<hostname>:<tomcat\\_port>/<QXIwebapp>/wsdl/ModuleName/ReceiverName](http://<hostname>:<tomcat_port>/<QXIwebapp>/wsdl/ModuleName/ReceiverName)): Lists all the supported APIs, including System APIs, of a specified receiver from which you can access WSDL URLs. In the Use SOAP Headers column, click Yes to access WSDL file with SOAP header and No to access WSDL file without SOAP header.

Currently, only QDoc 1.1 is supported on this screen.

**Fig. 16.14**  
APIs Screen

| Modules > QADEE > QADERP > APIs |         |                  |
|---------------------------------|---------|------------------|
| QdocName                        | Version | Use SOAP Headers |
| All APIs                        |         | Yes / No         |
| authenticate                    | ERP3_1  | Yes / No         |
| bbusinessrelation               | ERP3_1  | Yes / No         |
| checkMenuSecurity               | ERP3_1  | Yes / No         |
| checkUserActivity               | ERP3_1  | Yes / No         |
| createQADMessage                | ERP3_1  | Yes / No         |
| getBusinessFieldLabel           | ERP3_1  | Yes / No         |
| getLockedUser                   | ERP3_1  | Yes / No         |
| getQdocFieldLabel               | eB21_1  | Yes / No         |
| logout                          | ERP3_1  | Yes / No         |
| maintainQualityOrder            | ERP3_1  | Yes / No         |
| maintainQualityOrderResults     | ERP3_1  | Yes / No         |

You can configure Tomcat security settings to control access to each of the Modules, Receivers, and APIs screens.

## Deleting a Receiver

- 1 In the Configuration Manager, choose Receivers|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. Other products also might display on this menu. The currently available receivers display.
- 2 Select the receiver you want to delete by clicking in the box next to it. Choose Delete.
- 3 You are asked, “Are you sure you want to delete the receiver?” Choose OK.
- 4 You are asked, “Are all files within the receiver closed?” This should be true if no documents are in transit for the receiver. Choose OK. If QXI is active, the suspend options display. Choose a suspend option to cancel the add or continue.
- 5 A confirmation screen displays. The deleted receiver is backed up to:  
`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/deletedReceivers`
- 6 If you suspended QXI services in step 4, you have the option of resuming QXtend Manager at this point. If you choose to do this, QXI returns to the active state and a confirmation displays.
- 7 To exit the delete receiver confirmation screen or the resume QXI services confirmation, choose any other menu option in the QXtend Manager interface.

## QDoc Schemas

The Schemas option controls your master list of QDoc schemas. This option displays a list of available schemas in the global descriptor files located in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/descriptors/<mfgpro-version>`

The `qadQdocs.xml` file in this directory contains a list of all standard QDoc APIs for the specific QAD Enterprise Applications version. The `implementationQdocs.xml` file contains the list of all custom QDocs added through the Configuration Manager for the QAD Enterprise Applications version.

You can view, filter, and sort the lists of both standard and custom QDocs.

## Multiple Events Files

You can also maintain multiple events files for a given schema. By default, events files are named like the QAD Enterprise Applications program name (omitting the `.p` extension) appended with the QDoc version and an `.xml` extension. For example, the menu-level program `sosomt.p` would have a default events file of `sosomt-ERP3_2.xml`.

You can create multiple events files to support different paths through a program, as for example, when a site is using advanced pricing for some orders and not for others.

The ability to use different events files can also help you identify and correct performance problems for a given menu-level program.

## Viewing QDocs by QAD Enterprise Applications Version

- 1 In the Configuration Manager, choose Schemas|<application>, where <application> is eB, eB2, eB2.1, QADSE, or QADEE. The master list of all available standard and custom schemas displays.

**Fig. 16.15**  
Schema View in Configuration Manager

| QADSE Standard Schemas   |            |         |                |                   |                    |
|--------------------------|------------|---------|----------------|-------------------|--------------------|
| QdocName                 | XML Syntax | Version | Route          | Procedure         | Event              |
| allocateSalesOrder       | Qdoc 1.1   | eB_2    | UI API Adapter | sosol.p           | sosol-eB_2.xml     |
| confirmShipper           | Qdoc 1.1   | eB2_2   | UI API Adapter | rcsols.p          | rcsols-eB2_2.xml   |
| copyItemMaster           | Qdoc 1.1   | eB21_3  | SI API Adapter | com/qad/qdmgprola |                    |
| createAuthorizationUsage | Qdoc 1.1   | eB2_2   | UI API Adapter | socnuac3.p        | socnuac3-eB2_2.xml |
| createSequenceUsage      | Qdoc 1.1   | eB2_2   | UI API Adapter | socnuac5.p        | socnuac5-eB2_2.xml |
| deleteCustomerShipTo     | Qdoc 1.1   | eB_2    | UI API Adapter | adstmdt.p         | adstmdt-eB_2.xml   |

| QADSE Custom Schemas                               |            |         |                |                 |                    |
|----------------------------------------------------|------------|---------|----------------|-----------------|--------------------|
| QdocName                                           | XML Syntax | Version | Route          | Procedure       | Event              |
| <input checked="" type="checkbox"/> myCustomerItem | Qdoc 1.1   | DIM01   | SI API Adapter | ppcbmt.p        |                    |
| <input type="checkbox"/> printSalesOrder           | Qdoc 1.1   | eB2_1   | UI API Adapter | sosorp05.p      | sosorp05-eB2_1.xml |
| <input type="checkbox"/> queryCustomer             | Qdoc 1.1   | eB21_1  | SI API Adapter | com/qad/qdendhs |                    |
| <input type="checkbox"/> queryItem                 | Qdoc 1.1   | eB21_1  | SI API Adapter | com/qad/qdendhs |                    |
| <input type="checkbox"/> queryProductStructure     | Qdoc 1.1   | eB21_1  | SI API Adapter | com/qad/qdendhs |                    |
| <input type="checkbox"/> querySalesOrder           | Qdoc 1.1   | eB21_1  | SI API Adapter | com/qad/qdendhs |                    |

**Note** To view schemas that use the 1.0 specification, select the Show 1.0 QDocs check box. By default, this screen only displays schemas that use the 1.1 specification.

- To limit the schema list by a text string criteria—such as all QDocs that contain “soso” in the procedure name—enter the text string in the field above the list and select the column to filter from the drop-down list.

**Fig. 16.16**  
Entering Filter Criteria for Schemas

QADSE Standard Schemas    ☐ Show 1.0 Qdocs

| QdocName                 | XMLSyntax | Version | Route          | Procedure        | Event   |
|--------------------------|-----------|---------|----------------|------------------|---------|
| allocateSalesOrder       | Qdoc 1.1  | eB2_2   | UI API Adapter | sosoa.p          | sosoa-  |
| confirmShipper           | Qdoc 1.1  | eB2_2   | UI API Adapter | rcsois.p         | rcsois- |
| copyItemMaster           | Qdoc 1.1  | eB2_2   | UI API Adapter | com/qad/mfgpro/a |         |
| createAuthorizationUsage | Qdoc 1.1  | eB2_2   | UI API Adapter | socnuac3.p       | socnuac |
| createSequenceUsage      | Qdoc 1.1  | eB2_2   | UI API Adapter | socnuac5.p       | socnuac |
| deleteCustomerShipTo     | Qdoc 1.1  | eB2_2   | UI API Adapter | adstmd.p         | adstmd  |

- Choose Filter to see the results. Choose Show All to clear the filter and view all documents.

**Fig. 16.17**  
Filtered Schema Results

QADSE Standard Schemas    ☐ Show 1.0 Qdocs

| QdocName                  | XMLSyntax | Version | Route          | Procedure  |
|---------------------------|-----------|---------|----------------|------------|
| allocateSalesOrder        | Qdoc 1.1  | eB2_2   | UI API Adapter | sosoa.p    |
| maintainSalesOrder        | Qdoc 1.1  | eB2_2   | UI API Adapter | sosomt.p   |
| maintainSalesOrderControl | Qdoc 1.1  | eB21_1  | UI API Adapter | sosopm.p   |
| printShippingLabels       | Qdoc 1.1  | eB2_2   | UI API Adapter | sosorp14.p |
| salesOrderControl         | Qdoc 1.1  | eB21_1  | UI API Adapter | sosopm.p   |
| shipSalesOrder            | Qdoc 1.1  | eB2_2   | UI API Adapter | sosois.p   |

- To sort the contents of the schema list, click the column name of the column you want to sort by. The first time you click, the list is sorted in ascending order by the selected column. The second time you click the same column, the sort is in descending order.

**Fig. 16.18**  
Sorting Schemas

QADSE Standard Schemas    ☐ Show 1.0 Qdocs

| QdocName                  | XMLSyntax | Version | Route          | Procedure  |
|---------------------------|-----------|---------|----------------|------------|
| shipSalesOrder            | Qdoc 1.1  | eB2_2   | UI API Adapter | sosois.p   |
| salesOrderControl         | Qdoc 1.1  | eB21_1  | UI API Adapter | sosopm.p   |
| printShippingLabels       | Qdoc 1.1  | eB2_2   | UI API Adapter | sosorp14.p |
| maintainSalesOrderControl | Qdoc 1.1  | eB21_1  | UI API Adapter | sosopm.p   |
| maintainSalesOrder        | Qdoc 1.1  | eB2_2   | UI API Adapter | sosomt.p   |
| allocateSalesOrder        | Qdoc 1.1  | eB2_2   | UI API Adapter | sosoa.p    |

- To exit the schema view, choose any other menu option in the QXtend Manager interface.

## Viewing Detailed Information About QAD-Supplied Standard QDocs

You can view detailed reference information about all QAD-supplied standard QDocs in an Excel spreadsheet accessible from the Configuration Manager.

To access the spreadsheet, under the Configuration tab, click the QDoc Spreadsheet link beneath Help in the lower part of the tree view pane. The QDoc spreadsheet elaborates on all standard QDocs for all QAD Enterprise Application versions, allowing you to compare one version of QDoc against another for differences. You can also sort and filter data in the spreadsheet to easily view the QDoc information you want.

## Adding a Schema to the Master Lists

Schemas are the QDoc schemas and events files generated using QGen.

For information on QGen, see Chapter 18, “QGen,” on page 227.

QAD ships standard QDoc APIs. Additional standard QDocs may be made available on the QAD Web site at:

<http://support.qad.com/>

You can add schemas using either the 1.1 or 1.0 QDoc syntax. You specify a request type or response type for the schema only if using the 1.0 syntax specification.

You also can generate schemas and events files for customized or custom Progress programs.

When you add the schemas through the Configuration Manager, new standard QAD schemas are added to:

```
TOMCAT_HOME/webapps/<QXI webapp>/
WEB-INF/schemas/<mfgpro-version>/
```

Custom schemas are added to:

```
TOMCAT_HOME/webapps/<QXI webapp>/
WEB-INF/schemas/<mfgpro-version>/custom
```

When adding new QDocs, you can select which receivers to add them to, and the new QDocs are available to be added to any new receiver you create in the future.

You can add or modify QDocs, or overwrite existing QDocs. You can also delete custom QDocs.

- 1 To add a schema, choose Schemas|<mfgpro-version>. The master list of all available standard and custom schemas displays.
- 2 Click Add and then select the appropriate Suspend option if QXI is active. The Add Schema screen displays.

**Fig. 16.19**  
Adding a Schema

**Configuration Administration**  
Status: active

Add eB2.1 Schema

XML Syntax: Qdoc 1.0

Route: UI API Adapter

Request Path:  Browse...

Request Type Path:  Browse...

Response Path:  Browse...

Response Type Path:  Browse...

Events Path:  Browse...

Procedure:

☒ Custom ☐ Standard

Next

- 3 Enter the following information:

**XML Syntax.** Specify the XML syntax version to use for the schema.

**Route.** Indicate the name of the adapter for this QDoc—UI API or service interface API.

**Request Path.** Specify the full path to the base request schema that is to be uploaded to the standard or custom schema directory in Tomcat; for example:

downloads/shipSalesOrder-eB\_1.xsd

**Request Type Path.** (QDoc 1.0 syntax only). Specify the full path to the request type schema, typically the same path as for the base schema; for example:

downloads/shipSalesOrderType-eB\_1.xsd

**Response Path.** Optional. This path and file name are required only when you want to specify a response schema. Enter the path to the response schema that is to be uploaded to the standard or custom schema directory in Tomcat; for example:

downloads/shipSalesOrderResponse-eB\_1.xsd

**Response Type Path.** (QDoc 1.0 syntax only). Optional. This path and file name are required only when you want to specify a response type schema. Enter the path to the base response type schema that is to be uploaded to the standard or custom schema directory in Tomcat; for example:

downloads/shipSalesOrderResponseType-eB\_1.xsd

**Events Path.** Specify the full path and file name of the events file. This is the location where the events for the schema are saved, usually with the same name as the QAD Enterprise Applications source procedure, but with an .xml extension. The default path is:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/events/mfgpro_version`

To use a different version of the events file, specify the path to it here; for example:


`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/events/eb2/downloads/sosois-eB2_1.xml`

**Procedure.** Specify the target procedure name in QAD Enterprise Applications, such as `customProgram.p` or `sosois.p`.

Choose the Custom radio button to install a custom QDoc, or the Standard button to install a standard QDoc.


- 4 Choose Next. If the QDoc already exists, you are given the option to overwrite the existing QDoc. If you overwrite, you continue and the Add Receiver Support page displays. If you do not overwrite, you are returned to step 2 and must re-enter the information.

**Fig. 16.20**  
Adding a Schema to Existing Receivers

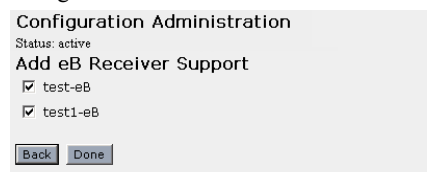

- 5 If you want to add the new schema to receivers, select the receivers you want to add the new schema to and choose Done. A confirmation message displays.
- 6 If you suspended QXI services in step 2, you are given the option to resume. If you do so, QXI services resume and a confirmation message displays.

**Fig. 16.21**  
Confirming a Schema Addition

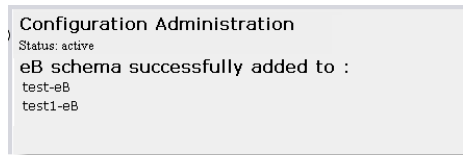


- 7 To exit the add schema or the resume QXI services confirmation screens, choose any other menu option in the QXtend Manager interface.

## Modifying a Schema Configuration

Once a schema has been added, you can modify a limited set of attributes.

- 1 To modify a schema configuration, choose Schemas|<mfqpro-version>. The master list of all available standard and custom schemas displays.
- 2 Select the schema you want to modify and choose Modify and then choose the appropriate Suspend option if QXI is active. The Modify Schema page displays.

**Fig. 16.22**  
Modify a Schema Configuration

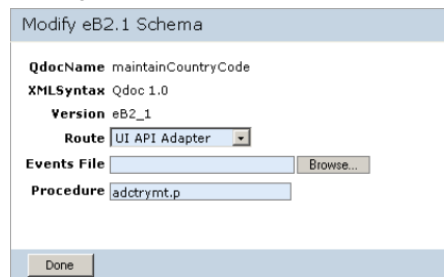

- 3 Update Route, Events File, or Procedure and choose Done. A confirmation message displays.
- 4 If you suspended QXI services in step 2, you are given the option to resume. If you do so, QXI services resume and a confirmation message displays.
- 5 To exit the modify schema or the resume QXI services confirmation screens, choose any other menu option in the QXtend Manager interface.

## Delete a Custom Schema Configuration

You can delete a custom schema from the master list. It is removed from the appropriate `implementationQdocs.xml`. The associated events file is also deleted. You cannot delete standard QAD schemas.

- 1 To delete a custom schema configuration, choose Schemas|<mfqpro-version>. The master list of all available standard and custom schemas displays.
- 2 Select the custom schema you want to delete and choose Delete and then choose the appropriate Suspend option if QXI is active.
- 3 You are asked to confirm. Choose OK. A confirmation displays.



- 4 If you suspended QXI services in step 2, you are given the option to resume. If you do so, QXI services resume and a confirmation message displays.
- 5 To exit the delete custom schema or the resume QXI services confirmation screens, choose any other menu option in the QXtend Manager interface.

## QXI E-mail Alerts

The e-mail alerts feature allows specified recipients to receive e-mail alerts that are raised by QXI for events relating to specific receivers, domains, and APIs.

Alerts in QXI are generated by two types of events:

- Default (system) alerts, which are triggered by QXI at a stage in processing that does not yet involve a specific receiver, domain, or API. Default alerts may arise due to situations such as unused fields in QAD Enterprise Applications, or if a QDoc request is not well-formed—for example, there may be a missing requestor node.

**Note** For details on default warnings and errors, see the section “Default Warnings and Errors” on page 162.

- Processing alerts, which are triggered by processes involved in handling QDocs. For example, processing alerts may arise due to the faulty configuration of a receiver.

System alerts and default alerts are typically used by system administrators to facilitate troubleshooting.

Using the e-mail alert feature in QXI you can register recipients and receivers to an alert group, domains to a group/receiver, and APIs to a group/receiver/domain. This flexibility allows e-mail alerts to be distributed to recipients to fulfill various notification purposes:

- Receiver registration provides the ability to receive alerts for specific QAD Enterprise Applications instances. For example, alerts can be distributed for events that only occur within QAD SE.
- Domain registration provides the ability to receive alerts for specific sites or geographical locations. Alerts can be distributed to personnel with responsibility for different areas or regions of an organization.
- API registration provides the ability to receive alerts for a specific business area—certain APIs might be associated with sales orders, for example. Alerts can be distributed to personnel within a sales order administration group.

Similar e-mail alert functionality—tailored to event and QDoc processing—is available in QXO.

In the QXI Configuration Manager you can:

- Configure e-mail settings.
- Manage alert recipients.
- Manage alert groups.

## Configuring E-mail Settings

Use the Email Configuration Parameters screen to configure e-mail settings. You can validate your e-mail setup by clicking the Verify button. The process for configuring e-mail settings in QXI is the same as that in QXO.

**Note** Before configuring e-mail settings, ensure that access is available to the SMTP server.

- 1 Click the Configuration tab.
- 2 Click the Email Alerts node in the left-hand tree view. If it was not already displayed, the Email Configuration Parameters screen displays.

**Fig. 16.23**  
Email Configuration Parameters

- 3 Enter the following values as required.

**SMTP Server.** Specify the address of the SMTP server used to deliver the alerts. This field is required.

**Port Number.** Specify the port number used to access the SMTP server. This field is required.

**Email From.** Specify the address to use as the “From:” in the header of the e-mail message. This field is required.

**Authentication.** Select this option if the SMTP server to be used requires authentication. When this check box is selected, the User Name and Password fields display.

**User Name.** If authentication is required, specify a user name.

**Password.** If authentication is required, specify a user password.

**Active.** Select this option to activate e-mail alerts. No e-mail alerts will be distributed unless this option is selected.

**Verify.** Click to validate the SMTP configuration settings. The Recipient dialog displays.

**Fig. 16.24**  
Recipient

Enter an e-mail address in the Recipient field and click OK. If the SMTP server is available and can be communicated with, a success message is sent to the specified address and a message appears on the Recipient dialog. If the setup is incorrect—or if the SMTP server cannot be communicated with—an error message displays. You can view logs for e-mail alerts in:


```
<QXI webapp>/WEB-INF/logs/alert.log
```

## Managing Alert Recipients

Use the Register Users screen to view the e-mail recipients currently defined in QXI. You also can add or delete recipients using this screen.

- 1 Click the Configuration tab.
- 2 Choose Email Alerts|Recipients to view the currently defined recipients.

**Fig. 16.25**  
Register Users

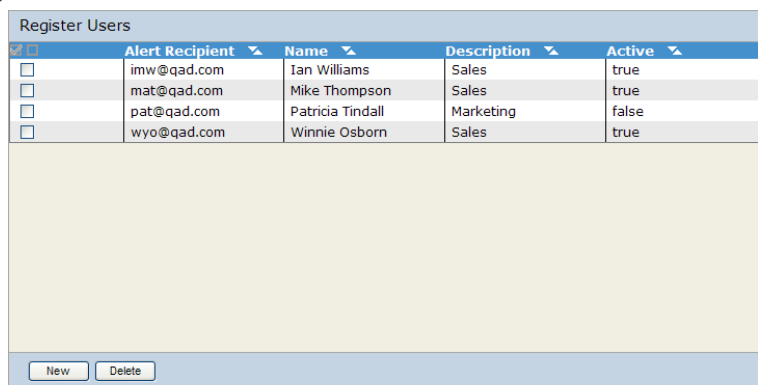

|                          | Alert Recipient | Name             | Description | Active |
|--------------------------|-----------------|------------------|-------------|--------|
| <input type="checkbox"/> | imw@qad.com     | Ian Williams     | Sales       | true   |
| <input type="checkbox"/> | mat@qad.com     | Mike Thompson    | Sales       | true   |
| <input type="checkbox"/> | pat@qad.com     | Patricia Tindall | Marketing   | false  |
| <input type="checkbox"/> | wyo@qad.com     | Winnie Osborn    | Sales       | true   |

New Delete

## Add an Alert Recipient

- 1 Click New on the Register Users screen to display the Email User Parameters screen.

**Fig. 16.26**  
E-mail User Parameters



Email User Parameters

Alert Recipient \*

Name

Description

Active ☒

Save Cancel

- 2 Enter the following values as required.

**Alert Recipient.** Specify the e-mail address of the alert recipient. This field is required.

**Name.** Specify the name of the alert recipient.

**Description.** Enter a brief description as needed.

**Active.** Select this option to activate e-mail alerts for the recipient.

- 3 Click Save to save the new recipient.

## Alert Groups

Use the Register Alert Groups screen to view the alert groups currently defined in QXI and the number of members in each group. You also can add or delete alert groups using this screen.


Managing an alert group consists of:

- Adding an alert group
- Registering recipients
- Setting the Catch All Messages option
- Registering receiver, domains, and APIs

## Viewing Alert Groups

- 1 Click the Configuration tab.
- 2 Choose Email Alerts|Groups to view the currently defined alert groups.

**Fig. 16.27**  
Register Alert Groups

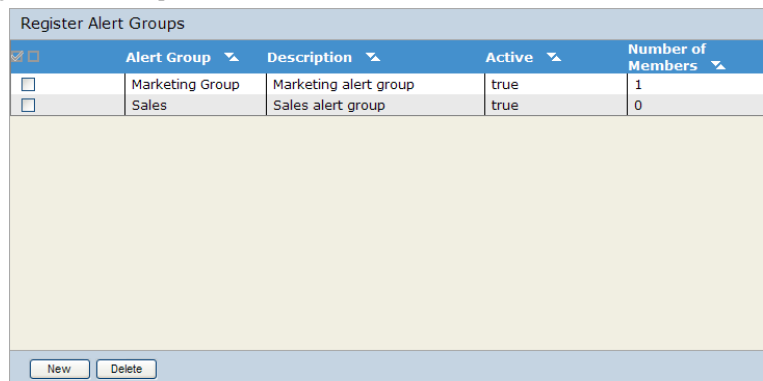

| <input checked="" type="checkbox"/> | Alert Group     | Description           | Active | Number of Members |
|-------------------------------------|-----------------|-----------------------|--------|-------------------|
| <input type="checkbox"/>            | Marketing Group | Marketing alert group | true   | 1                 |
| <input type="checkbox"/>            | Sales           | Sales alert group     | true   | 0                 |

New Delete

## Adding an Alert Group

- 1 Click New on the Register Alert Groups screen. The Group Configuration Parameters screen displays.

**Fig. 16.28**  
Group Configuration Parameters

- 2 Enter the following values as required.

**Alert Group.** Specify a name for the alert group. This field is required.

**Description.** Enter a brief description as needed.

**Active.** Select this option to activate e-mail alerts for the alert group.

**Message Configuration.** Specify whether to use the default message configuration or a custom message configuration.

**Default.** The message will use the description stored in `qxtendalertconfig.xml` located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/emailAlerts/`

**Custom.** The message will use the subject and body you provide. Selecting this option causes the Email Subject, Email Body, and Attachments fields to display.

**E-mail Subject.** Enter a brief subject description as needed (for custom message configuration only); for example:

A QXtend alert has been triggered.

**E-mail Body.** Enter the text to use to precede the error message and attachments (for custom message configuration only). For example:


There has been a raised alert from QXtend. This event was triggered automatically and the following message has been recorded:

**Attachments.** Select the Request and/or Response check boxes to include the request and/or response as an attachment in the body of the e-mail alert (for custom message configuration only).

### Registering Recipients to a Group

- 1 Click Recipients Lookup to register the alert recipients to the alert group. The Register Email Addresses lookup displays. Click the arrow next to Filter to populate the Available Recipients list. Use the Add and Remove buttons to update the lists.

**Fig. 16.29**  
Register Email Addresses

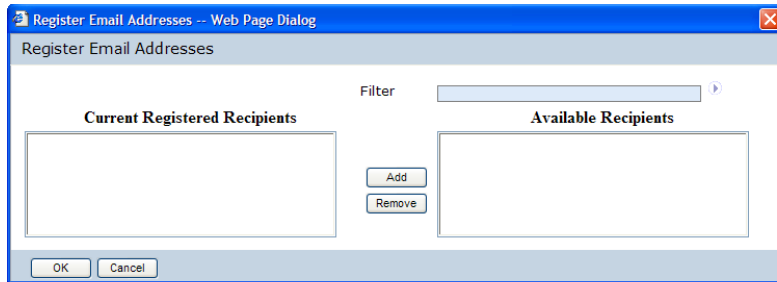

- 2 Click OK to save and exit the Register Email Addresses lookup.

### Specifying Which Alerts to Generate

If you want to send to alert group recipients all e-mail alerts that are generated for all receivers, domains, and APIs defined in the system, select the Catch All Messages option. Selecting this option can save you time setting up your e-mail alert groups—receivers, domains, and APIs do not have to be registered individually when this option is selected.


If you select this option, specify the severity of the exceptions—ERR, WRN, or MES—that will generate an e-mail alert. Click Save to save your alert group configuration.

Otherwise leave this option clear to specify the receivers, domains, and APIs that you want to generate e-mail alerts.

### Registering Receivers to a Group

- 1 Select the Receive alerts for all receivers option to cause e-mail alerts to be generated for all receivers. If you select this option, specify the severity of the exceptions that will generate an e-mail alert, click Save, and then go to step 2 to specify domains. Otherwise leave this option clear to specify which receivers should generate e-mail alerts in step 2.
- 2 Click Receivers Lookup to select the receivers to register. The Register Receivers lookup displays. Click the arrow next to Filter to populate the Available Registered Receivers list. Use the Add and Remove buttons to update the lists.

**Fig. 16.30**  
Register Receivers

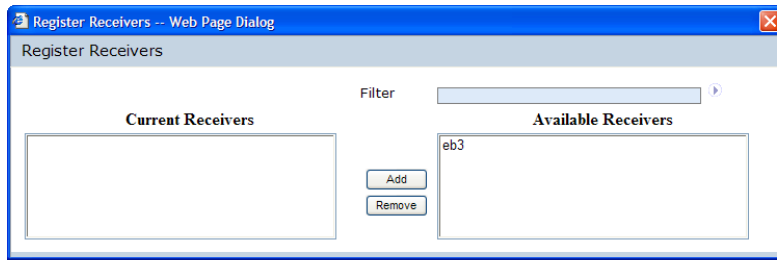

- 3 Click OK to save and exit the Register Receivers lookup.
- 4 For each receiver, indicate the severity of the exceptions that will generate an e-mail alert.  
**Note** The default message types are ERR and WRN.
- 5 Click Save to refresh the left-hand tree menu.

### Registering Domains to a Group/Receiver

- 1 In the left-hand tree menu click a receiver in a group/receiver hierarchy.
- 2 Select the Receive alerts for all domains option to receive alerts for all domains for the specified receivers. If you select this option, specify the severity of the exceptions that will generate an e-mail alert, click Save, then go to step 2 to specify APIs.

Otherwise leave this option clear to specify which domains should generate e-mail alerts in step 3.

**Note** When creating a new domain, the default message types are the same as the associated receiver. So, for example, if the MES check box is not selected for the receiver, the MES check box for domains is disabled. The same applies when registering APIs.

- 3 Click New to register domains to the group/receiver. The Domain Configuration Parameters dialog displays. Specify a domain name and click Save.

**Fig. 16.31**  
Register Domains



- 4 Click Save to save the group/receiver/domain configuration.
- 5 Click Save to refresh the left-hand tree menu.


### Register APIs to a Group/Receiver/Domain

- 1 In the left-hand tree menu click a domain in a group/receiver/domain hierarchy.
- 2 Select the Receive alerts for all APIs option to receive alerts for all APIs for the group/receiver/domain. Otherwise leave this option clear to specify which APIs should generate e-mail alerts in step 3.

**Note** When creating a new API, the default message types are the same as the associated receiver.

- 3 Click Lookup to register specific APIs to the group/receiver/domain. The Register APIs lookup displays. Click the arrow next to Filter to populate the Available APIs list. Use the Add and Remove buttons to update the lists.

**Fig. 16.32**  
Register APIs

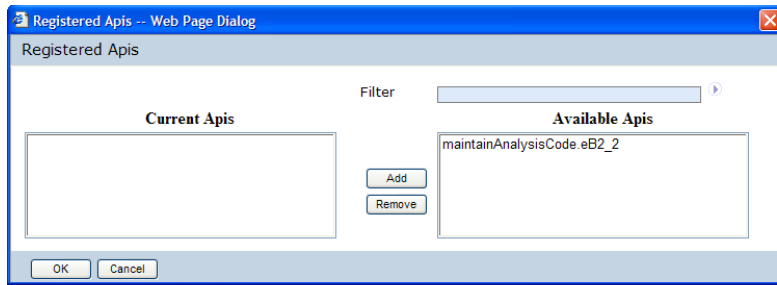

- 4 Click OK to save and exit the Register APIs lookup.
- 5 Click Save to save the alert group.



# QXI Connection Pool Manager

The Connection Pool Manager controls the telnet connections between QXtend Inbound (QXI) and your QAD Enterprise Applications sessions.

## ***Introduction 214***

Explains how to use the Connection Pool Manager.

## ***Starting the Connection Pool Manager 215***

Explains how to start the Connection Pool Manager and view the connection pool log.

## ***Configuring Connection Pools 216***

Explains how to add or delete a connection pool.

## ***Connection Pool Administration 222***

Describes connection pool statuses, explains how to view connection pools, manage connection pools, and manage user sessions.

## Introduction

The Connection Pool Manager controls telnet connection pools between QXI and your QAD Enterprise Applications and other application sessions. Each connection pool is identified by the type of user it serves—UI API, JITSAPI, SIAPI, or FinAPI—and by a pool name, the host machine and port, and a system user.

Each connection pool consists of a minimum and maximum number of connections, and supports several timeout checkpoints. When QXI starts, the active connection pools are started automatically. A pool with a minimum of five and a maximum of 15 connections automatically creates the first five connections and keeps them idle awaiting connection requests from the identified user.

When a request arrives, one of the five connections is handed to the requester. That connection moves from the idle state to allocated and then to busy. The Connection Pool Manager then initializes another connection so that, as long as possible within the maximum, there are always five open connections available to incoming requests.

Each incoming QXI request specifies a receiver—a specific QAD Enterprise Applications instance. You define one API connection pool for each receiver—the pool name is the same as the receiver name. As requests arrive, the receiver is matched with the appropriate connection pool, and a connection is assigned for the transmission of a QDoc.

Use the Connection Pool Manager to:

- Add and configure a new QXI connection pool.
- View, close, restart, modify, or delete a connection pool.
- View and manage current connections by state.
- View and manage current user sessions.

## Starting the Connection Pool Manager

Before using the Connection Pool Manager, create connection pools for each QXI receiver.

For information on Connection Pool errors, see “Connection Exceptions” on page 390.

Typically, you access the Connection Pool Manager through the QXtend Manager at:

```
http://<hostname>:<tomcat_port>/<QXI_webapp>/
```

You can also access the Connection Pool Manager directly at:


```
http://<hostname>:<tomcat_port>/<QXI_webapp>/ConnectionManager.html/
```

Both methods assume that Tomcat and the target QAD Enterprise Applications instances are running.

Launch the Connection Pool Manager from the QXtend Manager interface. It lets you restart and stop the manager itself, create and configure connection pools, and manage user sessions. The operations to control the Connection Pool Manager itself are launching, closing, and restarting the Connection Pool Manager, and viewing the Connection Pool Manager log.

- 1 In QXtend Manager, choose Managers|Connections. The Connection Pool Manager displays.
- 2 Choose the Functions menu. The Connection Pool Manager administrative options display.

**Fig. 17.1**  
Connection Pool Manager Admin Functions Menu

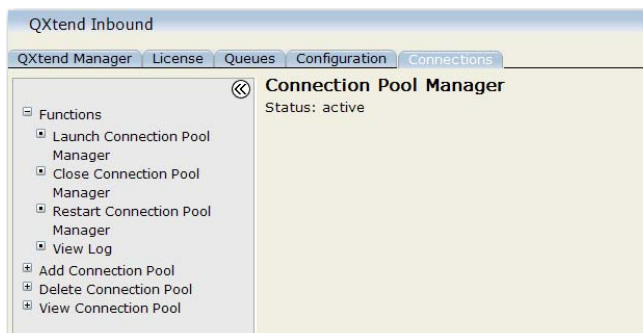

- 3 Choose the following menu options to accomplish administrative tasks:

*Launch Connection Pool Manager.* This option starts the Connection Pool Manager after a close command.

*Close Connection Pool Manager.* This option closes all connection pools (not the Manager). All open connections and connection pools are closed; the Connection Pool Manager remains open.

*Restart Connection Pool Manager.* This option closes all connection pools and restarts the Connection Pool Manager.

*View Log.* This option displays the Connection Pool Manager log. See the next section for full details.

## Viewing the Connection Pool Log

When a connection pool is launched, `connectionPools.log` is created in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/logs`

This log tracks the Connection Pool Manager and connection pools over a progression of reporting levels—error, warning, info, and debug.


The error level is controlled by modifying the level value for the logger name `connectionPool` in `qxtendlogging.xml`. By default, the level is set to Info. See “Log Report Levels” on page 167 for information on reporting levels.

To view the connection pool log in Connection Pool Manager:

- 1 From the Connection Pool Manager Functions menu, choose View Log. The log displays.

**Fig. 17.2**

View Connection Pool Log

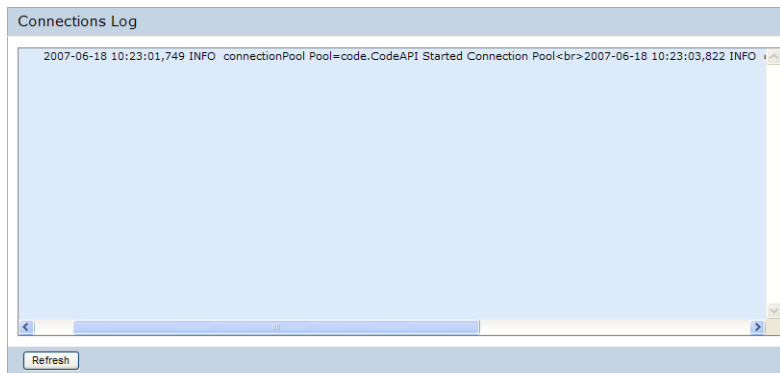

- 2 Scroll down to view the most recent entries.

## Configuring Connection Pools

Before accepting any user requests from QXI, configure the necessary connection pools. You can configure the connection pools in the Connection Pool Manager.

### Adding a Connection Pool

You add new connection pools in the Connection Pool Manager by the type of user the pool is going to support. The options are UI API, JITSAPI, SIAPI, or FinAPI. You name each pool with the receiver name of the target QAD Enterprise Applications instance and identify the pool by host machine and port. You then create a startup script for the pool telnet session, and enter the pool parameters.

When you create or modify a connection pool, it is created or modified in your `connectionManagerConfig.xml` file. The default version of this file is located in:

`TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf/defaults`


The server-specific version is stored one level up in the `/conf` directory.

**Warning** Do not manually modify the `connectionManagerConfig.xml` file. Change it only through the interface.

## Adding a UI API Pool

- 1 In the Connection Pool Manager, choose Add Connection Pool. The available user types display.

**Fig. 17.3**  
Connection Pool Manager

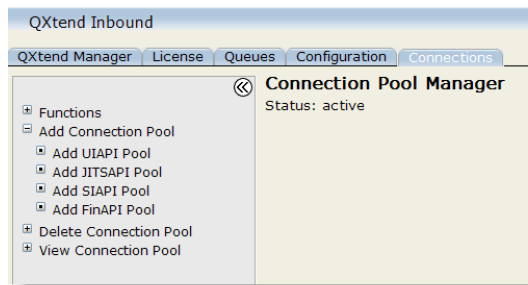

- 2 Choose Add UIAPI Pool. The Configuration Settings Update form displays. Use the following field descriptions to create a connection pool configuration.

**Fig. 17.4**  
Add a UI API Connection

Configuration Settings Update

Pool Name:

Host:

Protocol:

Port:

Server Startup Script:

Server Startup Password:

SSH Private Key File:

SSH Private Key Password:

Minimum Connections:

Maximum Connections:

Maximum Failures:

Connections Monitor Frequency:

Wait time for Idle Connection:

Max Licensed Agent Retry:

Wait time for Licensed Agent:

Connection Timeout:

Processing Timeout:

Message Timeout:

Processing Message Timeout:

Initializing Timeout:

Stop On Pause:

Operating System Win32/NT:

Progress Controller Program:

NT Delay:

Connection Setup User ID:

Connection Setup Password:

Domain (If Applicable):

**Pool Name.** The pool name must match the receiver name for QXI API pools. The pool name displays in the view and delete connection pool menus.

**Host.** Enter the machine name or IP address of the telnet or SSH server.

**Protocol.** Specify the protocol for the connection. The available options are Telnet and SSH.

**Port.** Enter the port number for the server. By default, the port of Telnet server is 23; the port of SSH server is 22.

**Server Startup Script.** Enter the startup script for the telnet session. Specify the telnet server log-in prompts and the responses to these prompts separated with the pipe symbol (|). The standard order is: loginPrompt|userid|passwordPrompt|\$PASSWORD|osPrompt| startScript. For example:

```
login: |QXtend|Password: |password|$|exec ./qma.QXprod
```

See “Creating Telnet Log-In Scripts” on page 352.

For Oracle implementations, modify the qma script.

See “Progress/Oracle Calling Program” on page 356.

**Server Startup Password.** Specify the password for the telnet session startup script (maximum 20 characters). The password is encrypted on entry. The startup script substitutes the encrypted password for the \$PASSWORD reference. Leave this field empty for SSH protocol, only if using SSH Public Key Authentication.

**SSH Private Key File.** Specify the location and name of the SSH Private Key file on the Tomcat server; for example, /home/demo/.ssh/demo\_rsa. This field is enabled only when the Protocol is set to SSH. For information on how to create the public and private key pair, see “SSH Reference” on page 429.

**SSH Private Key Password.** If the SSH private key is encrypted with a password, enter the password. This field is enabled only when Protocol is set to SSH.

**Minimum Connections.** Enter the minimum number of open connections that the Connection Pool Manager can maintain. During startup, the Connection Pool Manager opens this number of connections. As connections are used, it continues to open more so that this number of open connections is maintained, until it reaches the value specified for Maximum Connections.

In general, keep this number as low as effectively possible; for example, 3 on faster systems. On slower systems, increase the number to reduce startup time on new requests.

**Maximum Connections.** Enter the maximum number of open connections that the system can allow. The Connection Pool Manager can not open any more connections than the specified connections.

**Important** On Windows systems, set this field to 2 or more to ensure successful connections.

**Maximum Failures.** Enter how many times the Connection Pool Manager attempts to restart an unsuccessful connection. This number is reset when a successful connection is made. You can also reset it by using the Reset Failed Init Count command on the Connection Pool Functions menu.

**Connections Monitor Frequency.** Enter, in milliseconds, the interval for checking all connections. The default value is 180000 (3 minutes). The system monitors all connections in all states and closes the time-out connections.

**Wait Time for Idle Connection.** When a connection is requested from the Connection Pool Manager, this timeout specifies the maximum wait for the connection. The maximum number of connections may have been reached, or new connections may be in the initializing state. The default value is 20000 (20 seconds).

*Max Licensed Agent Retry.* Specify the number of times the system attempts to reserve a licensed agent before returning an exception.

*Wait Time for Licensed Agent.* Specify the number of milliseconds that the system waits for a licensed agent.

See “QAD QXtend Licensing” on page 267 for details on licensing.

*Connection Timeout.* Enter, in milliseconds, how long an HTML session can remain inactive before the Connection Pool Manager closes it. The default value is 1800000 (30 minutes).

*Processing Timeout.* Enter, in milliseconds, how long a connection can be in processing mode. Processing mode indicates a locked or busy screen. The default value is 3600000 (60 minutes). Connection Pool Manager closes locked or busy connections that exceed this time.

*Message Timeout.* Enter the interval, in milliseconds, for Connection Pool Manager to wait for a general messaging reply from the telnet server. The default value is 10000 (10 seconds).

*Processing Message Timeout.* Enter the interval, in milliseconds, for Connection Pool Manager to wait for reply from the telnet server when a connection is in processing mode. The default value is 6666 (6.6 seconds).

*Initializing Timeout.* Enter the interval, in milliseconds, for Connection Pool Manager to wait for a telnet session to successfully initialize. The default value is 180000 (3 minutes).

*Stop on Pause.* For QXI, set it to Pause. It prevents a transaction from failing when a “Press Spacebar” message is displayed in the target QAD Enterprise Applications session.

*Operating System Win32/NT.* Select this option if the Progress telnet sessions are executing on a computer with a Windows operating system. Otherwise, do not select it.

*Progress Controller Program.* Enter `mfww01b.p` for UI API pools.

*NT Delay.* Ignore this field for QXI connection pools.

*Connection Setup User ID.* This field and the next two are the parameters required to connect to the target QAD Enterprise Applications instance. Enter the valid QAD Enterprise Applications user ID.

*Connection Setup Password.* Enter the password for the QAD Enterprise Applications user ID (maximum 20 characters). The password is encrypted on entry.

*Domain.* Enter the valid QAD Enterprise Applications domain if the target instance has domains implemented. Domains were introduced in QAD Enterprise Applications version 2.1.

- 3 On completion, choose Save. The new connection pool is started automatically and is added to the list of connection pools in the Connection Pool Manager interface.

## Adding a JITSAPI, SIAPI, or FinAPI Pool

The JITSAPI, SIAPI, and FinAPI pools are slightly different than the XML-based pools for the UI API. You identify the Progress AppServer and the user ID and password for the AppServer. Several values covered for the UI API pools are not required for SIAPI pools. Ensure that you also enter a session type for Progress Dynamics for JITSAPI pools.

- 1 In the Connection Pool Manager, choose Add Connection Pool. The available connection pool types display beneath the Add Connection Pool selection.
- 2 Choose Add JITSAPI Pool or Add SIAPI Pool as needed. The Configuration Settings Update form displays. Use the following field descriptions to create a connection pool configuration.

**Fig. 17.5**  
Add a SIAPI Pool

Configuration Settings Update - QADERP.SIAPI

Debug: No

Connection Protocol: AppServerDC

App Server Name: as-qxtsi

Host: ymifri0005.qad.com

Public Key Location:

Port: 22164

State Free: ☐

User: mfg

Password: .....

Domain (If Applicable):

Minimum Connections: 1

Maximum Connections: 5

Maximum Failures: 20

Connections Monitor Frequency: 60000

Maximum Connection Idle Time: 180000

Maximum Connection Init Time: 20000

Wait time for Idle Connection: 10000

Max Licensed Agent Retry: 5

Wait time for Licensed Agent: 20000

Save Cancel

**Debug.** If debug is set to Yes, debug information is written to the AppServer log file. If set to No, no AppServer logging occurs.

**Connection Protocol.** Select the Appserver Connection Protocol from this list. Valid values are:

- AppServer
- AppServerS
- AppServerDC
- AppServerDCS

This configuration is available for SIAPI and FinAPI Connection Pool types.

**App Server Name.** Enter the name given to the AppServer in the `ubroker.properties` file. You can configure this field when creating the AppServer settings. See Chapter 20, “Configuring the Progress AppServer,” on page 253.

**Host.** Enter the machine name or IP address of the machine where the Progress AppServer is installed and running.

**Public Key Location.** Specify the directory containing the public key. This field is enabled only when App Server Secure Connect is selected. For information on how to create the public key, see “SSL-Enabled AppServer Reference” on page 433.



**Port.** Enter the port number for the AppServer or the NameServer, depending on your App Server Direct Connect setting. If you selected the App Server Direct Connect option, enter the port number for the AppServer; otherwise, enter the port number for the NameServer that is controlling the AppServer instance. In that case, the connection is requested from the NameServer and it assigns the AppServer to the connection.

**State Free.** Specify in which operating mode the connection pool can connect to AppServer.

Yes: The connection pool can only connect to AppServer when operatingMode is State-free.

No: The connection pool can only connect to AppServer when operatingMode is Stateless.

**User.** Enter the QAD Enterprise Applications user name.

**Password.** Enter the QAD Enterprise Applications user's password, encrypted on entry.

**Domain.** For a SIAPI pool, enter the valid QAD Enterprise Applications domain if the target instance has domains implemented. This field does not apply to JITSAPI pools.

**Session Type.** This value displays only in the QAD JIT Sequencing API connection pool configuration. See *QAD JIT Sequencing Installation Guide* for details. Set it to dynamics session type to enable a Progress Dynamics session.

**Minimum Connections.** Enter the minimum number of open connections that the Connection Pool Manager can maintain. During startup, the Connection Pool Manager opens this number of connections. As connections are used, it continues to open more so that this number of open connections is maintained, until it reaches the value specified for Maximum Connections.

In general, keep this number as low as effectively possible; for example, 3 on faster systems. On slower systems, increase the number to reduce startup time on new requests.

**Maximum Connections.** Enter the maximum number of open connections that the system can have. The Connection Pool Manager cannot open any more connections than the specified number.

**Maximum Failures.** Enter how many times the Connection Pool Manager attempts to start a connection. This number is reset when a successful connection is made. You can also reset it by using the Reset Failed Init Count command on the Connection Pool Function menu.

**Connections Monitor Frequency.** Enter, in milliseconds, the interval for checking all connections. The default value is 180000 (3 minutes). It monitors all connections in all states and closes the time-out connection.

**Maximum Connection Idle Time.** Enter, in milliseconds, the maximum time a 4GL connection can remain idle.

**Maximum Connection Init Time.** Enter, in milliseconds, the maximum time a 4GL connection can be initializing.

**Wait Time for Idle Connection.** Enter, in milliseconds, how long the Connection Pool Manager waits for an initializing connection to become idle before an error is generated. The default value is 20000 (20 seconds).


- 3 On completion, choose Save. The new connection pool is started automatically and is added to the list of connection pools in the Connection Pool Manager interface.

## Delete a Connection Pool

You can delete the obsolete connection pools.

- 1 In the Connection Pool Manager, choose Delete Connection Pool. The available connection pool types display beneath the Delete Connection Pool selection.
- 2 Select the pool to delete. A confirmation warning displays.

**Fig. 17.6**  
Connection Pool Deletion Warning



- 3 Choose OK to delete the connection pool.

## Connection Pool Administration

Once connection pools have been created and started, the system administrator can access and manage the connection pools, individual connections within the pools, and user sessions. This section covers:

- Connection pool states
- Viewing connection pools
- Managing connection pools
- Managing user sessions

### Connection Pool States

Each connection has one of the following statuses:

*Initializing.* A connection is just starting and is not yet available for use.

*Idle.* The connection is active and available for the next user request.

*Busy.* The connection is currently executing a user request.

*Pause.* The connection is waiting for a response from the user; for example, the system prompts the user to press the space bar to continue.

*Processing.* The connection is actively updating the Progress database; database records are locked.

*Force Disconnect.* It is a temporary state that occurs when the administrator closes an initializing connection.


*Disconnected.* It is a temporary state that occurs when idle connections are closed.

## Viewing Connection Pools

You can choose to view connections by status or view all connections.

- 1 In the Connection Pool Manager, choose View Connection Pool if it is not already expanded. The available connection pools display beneath View Connection Pool.

**Fig. 17.7**  
View All Connection Pools

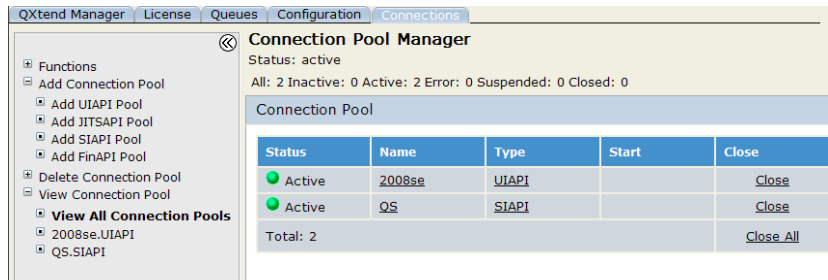


- 2 Choose an individual connection pool name from the View Connection Pool list to manage a specific pool.
- 3 For pools in the Processing state, a View link displays in the Close column. Use this feature when processing has stalled. Click View to see the telnet session. Any error or wait-state message displays in the lower portion of the telnet screen.

## Managing a Connection Pool

Once you select a specific connection pool, the menu options displayed are for the selected connection pool.

**Fig. 17.8**  
Connection Pool Menus

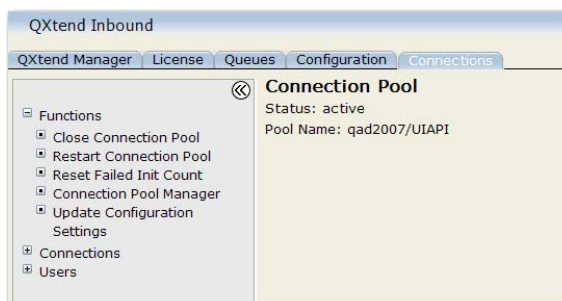

The following options are available from the Functions menu:

**Close Connection Pool.** Closes all connections in the current pool, ending all connections regardless of state or status. You can use Restart Connection Pool to start them up again.

**Restart Connection Pool.** Closes all the open connections in the current pool, and starts the minimum number of connections as defined in the configuration settings for the pool.

**Reset Failed Init Count.** The failed initialization count is the number of times the server has attempted to launch a connection unsuccessfully. The number is automatically reset when a successful connection is made.

**Connection Pool Manager.** Closes the individual Connection Pool interface and returns you to the Connection Pool Manager.

**Update Configuration Settings.** Opens the configuration settings for the pool. The only difference is that the pool name is not available for editing.

Choose the Connections menu to view the pool of active connections. See “Connection Pool States” on page 222 for information on the individual states. You can view the connections in the following categories:

**All.** Displays all connections. It is the only view that displays Disconnected and ForceDisconnect statuses.

**Busy.** Displays connections with Busy, Pause, or Processing status.

**Idle.** Displays all idle connections.

**Initializing.** Displays initializing connections.

Choose Refresh to update the screen display. Choose the Close link to close unneeded connections.

## Manage User Sessions

Choose Users to view currently logged in users. Choose a user ID to see information related to that user. Figure 17.9 shows an example of a connection pool in which there are no busy sessions (Busy: 0), no idle sessions (Idle: 0), and one user session initializing (Initializing: 1).

**Fig. 17.9**  
Monitoring Users

| Status | ID | Process ID | User ID | Device | Max Connections | Program | User Connected Time | View  | Close |
|--------|----|------------|---------|--------|-----------------|---------|---------------------|-------|-------|
| Idle   | 25 | 0          | mfg     |        | 0               | null    |                     | Start | Close |

**Note** When QDocs are being processed, the user is the one defined in the server startup parameters in the Configuration Settings Update page in the Connection Pool Manager. The IP address is that of the server machine where the QDocs were loaded into the queue for processing.

Choose Refresh to update the screen display. Choose the Close link to close a user session. For example, you can click Close to close a connection if a user has locked a database record and left the session running.

## Debugging Your QDocs

Using the Start link you can debug your QDocs. Choose Start to view the telnet window for the connection being used to import data from a QDoc when that QDoc is being processed. If there is an error in the QDoc, the scrolling of the QDoc on the telnet window halts at the location of the error. When finished testing your connections, choose the Stop link, which displays next to the Start link.

**Important** Since telnet windows for connections use system resources, close any telnet windows not in use.

## Viewing Multiple Telnet Windows

Each <ConnectionPool> section has its own base port. By default the port value is set to 15000 for every connection pool.

```
<snoopingPort label="Snooping Base Port" uiconfig="false" value="15000"/>
```

To view multiple telnet windows—and to avoid network port conflicts while doing so—set the base port to different values for each connection pool in `connectionManagerConfig.xml`.

**Note** The telnet port that each process agent uses is a combination of the base port and agent ID. For example, for agent ID 2 in this connection pool, the network port used is 15002.

## Connection Pool Manager Scripts

This script uses GNU sed and GNU wget so that it works on most flavors of UNIX, including HP-UX and AIX. So before running this script, install the GNU sed and GNU wget, which are freeware downloads available from <http://ftp.gnu.org/gnu/>. Once both sed and wget are installed, copy the executables (sed and wget) from the directory you installed (default `/usr/local/bin`) to this scripts directory to make sure that the GNU versions of the programs are running and not the native OS ones.

In addition to managing connection pools through Connection Pool Manager in the administrative UI, you can also use the connection pool manager script to start, stop, restart, and shut down connection pools, as well as query the connection pool status:

```
conn-control.sh -Operation [Pool] [Type]
```

Where *Pool* is the connection pool name and *Type* is the connection pool type, which is mandatory when *Pool* is used.

| Operation | Description                      |
|-----------|----------------------------------|
| h         | Print the script help            |
| q         | Query the connection pool status |
| r         | Restart connection pools         |
| s         | Start connection pools           |
| x         | Stop connection pools            |

**Example** Use the following command to stop the connection pool named QADQXO with type SIAP:

```
./conn-control.sh -x QADQXO SIAP
```



## Chapter 18

# QGen

This section describes how to use QGen to generate QDoc schema and events files.

### ***Introduction***    **228**

Discusses program structure and terminology, QGen files, and generating native APIs.

### ***Starting QGen***    **232**

Explains how to start QGen with a startup script.

### ***Mapping a Program for Regular UIAPI Interface Programs***    **232**

Explains how to map a program, map first entry events, map iterations, and map comments.

### ***Map Comments***    **238**

Explains how to save, load, change mode to Update, change mode to Run Through, New Run Through, and generate docs.

### ***Troubleshooting QGen***    **245**

Explains how to troubleshoot QGen.

## Introduction

QGen runs in the background of specially configured QAD Enterprise Applications character sessions to generate QDoc schema and events files for menu-level programs in QAD Enterprise Applications. The user initiates QGen from within the QAD Enterprise Applications session and logs field and iteration information. QGen stores this information as a master data file (.dat) for the calling procedure. A generate process converts these to the schema and events files.

In general, QGen is used to map custom programs or QAD Enterprise Applications programs that do not have released QDoc schemas and events files. You can also use QGen to modify the standard QAD QDoc schemas and events files by loading the standard .dat file and running through the menu-level program again. See “Load” on page 241 for details.

In addition, you can use the native API framework available from QGen to modify QAD Enterprise Applications character programs; for details see “Generating Native APIs” on page 230.

The standard QGen process is:

- 1** Launch an QAD Enterprise Applications QGen session.
- 2** Map a program:
  - a** Open the QAD Enterprise Applications program.
  - b** Launch QGen.
  - c** Map individual fields and iterations.
  - d** Save your work.
- 3** Generate the QDoc schemas and events file.

In addition, QGen enables you to:

- Modify individual field information after mapping is complete.
- Save partially mapped programs and reopen them later.
- Discard program maps and restart the mapping process.
- Add schema that was changed with one of the following:
  - .NET using configured/simplified screens
  - ICT (Integrated Customization Toolkit)
  - Native API programs
  - The SI-API function





## Program Structure and Terminology

QGen follows the QAD Enterprise Applications interface to identify fields and navigation options. For the purposes of creating a QGen data (.dat) file, the different QGen options are based on the type of field you are currently mapping.

As you proceed through an QAD Enterprise Applications program, you encounter the following types of fields:

*Primary Key.* The field that QAD Enterprise Applications uses to locate or create the unique records required during this pass through the program. For Sales Order Maintenance, for example, this is the sales order number and the sales order line numbers. If you are not sure about the primary key for a program, it is usually the active field or fields available when you first enter the program or iteration frame; this is not necessarily the fields in the first frame.

The primary key is used to determine which fields are populated in the response document; only the fields defined as primary keys appear in the response schema.

*Delete Field.* A delete field is any field, usually all grouped in a single frame, from which you can delete the current record. These fields are easily identified: the status line at the bottom of the QAD Enterprise Applications screen displays F5=Delete as an available function key.

*Mandatory.* Yes indicates the field must have a value.

*First Entry Event.* A first entry event is one that controls which branch of a program you descend. Usually, these fields have default values and are not accessed directly during an update; instead they are accessed by pressing F4. For example, the single/multiple line option in Sales Order Maintenance is accessed by pressing F4 from the sales order line field.

*Choose Event.* A choose event is a field in a selection list.

*Iteration.* An iteration is a repetition of a grouping of data, such as lines on a sales order. For QGen, an iteration is identified as a field that QGen returns to for a second pass-through. For sales order lines, this is the sales order line number. When QGen returns to this field the second time, it displays an iteration frame where you can name the iteration.

## QGen Files

The QGen tool is installed as part of the QAD QXtend installation. During installation, only standard QGen master data (.dat) files that support the current QAD Enterprise Applications release are deployed. If a .dat file does not match the screen (usually because of screen customization), you can use QGen to remap the screen and save the customized .dat file without overwriting the standard one.

When you install QXtend, the installer now copies the QGen .dat files for the current release of QAD Enterprise Applications to this location:

```
<QXtend adapter>/tools/datFiles/standard/
```

When you modify the .dat files and do not specify a directory when saving them, customized .dat files are always saved to the <QXtend adapter>/tools/datFiles/ directory, leaving the standard .dat files intact.

When you load .dat files without specifying a directory, the system first looks for the files under `<Qxtend_adapter>/tools/datFiles/`. If the files cannot be found under this directory, the system then loads the standard .dat files under `<Qxtend_adapter>/tools/datFiles/standard/`.

## Generating Native APIs

By using the native API framework you can run standard QAD Enterprise Applications character programs on an AppServer and receive input from a dataset rather than from the user interface. In addition, the framework allows you to run character programs that have been customized using the QAD Integrated Customization Toolkit (ICT) or the .NET UI.

**Note** For details on customizing functions using the .NET UI, see *QAD .NET UI Administration Guide*.

The .NET UI allows you to configure a screen to suit your requirements by disabling fields, setting default values, and so. If the modified function is supported by a native API, that function can be used in native API mode with the identical business logic. For example, if a QDoc contains a value for a field that has been disabled in the customized function, the value for the field will not be set in the API.

**Note** For a list of functions that are supported by native APIs, see “Native APIs” on page 254.

Since configurable screens are configured by role, the system uses the role associated with the user ID specified within the QDoc.

## .NET Customization

The .NET UI supports the following customizations:

- Disabled fields. These are supported by ensuring that the field in the request is always set to the unknown value so that the API determines what the value will be.
- Default values. These values are supported by ensuring that in the case of an Add operation, if the request field is unknown, the default value is put in its place.
- Required fields. These fields are supported by ensuring that the field in the request, if it is a character data type, is not set to blank. A post-processing step ensures that after the API has executed, required fields in the database are also not set to blank.
- Validation. Field validation is supported by allowing the customization class to validate a field and its value however it chooses.
- User fields. These fields are in the same database table as the other fields in the request, but are not part of the static API dataset. User fields are supported by copying the value from the request to the database as a post-processing step.

**Note** The post-processing step is an internal process rather than an operation that can be physically performed. This means there may be some limitations to your customizations.

**Example** You have a customization using ICT that updates pt\_\_chr01 in frame A and runs a program when frame A finishes that uses the value the user entered in pt\_\_chr01 to set another value. The additional fields are updated as a post-processing step outside of the API execution, and in the above scenario the value of pt\_\_chr01 may not be set when the custom program is executed.

- New fields. These fields are supported by allowing the customization class to get and set the value of the new fields.

**Important** For the API to work correctly with .NET customizations—as well as ICT customizations—the .NET UI and/or ICT programs must be specified in the PROPATH of the session running the API.

## ICT Customization

The ICT supports the same customizations as .NET except required fields and custom navigation. In addition it supports the following customizations:

- Shadow tables
- Program modification using tags

**Note** Any external program that is executed by the ICT process must also be modified to work in API mode.

Some ICT customizations are based on ENTRY, LEAVE, and GO triggers. Since these triggers never occur in API mode, customizations involving custom program execution is performed as part of the post-process step. One problem that may arise is that these triggers can be frame and field based, and if the field appears in more than one frame then it is possible to run a different program depending on the frame it is in. This situation will have to be managed in the custom program itself.

## Native API Process Flow

Creating and using native APIs consists of several steps:

- 1 Customize your character program(s) as required using either .NET UI or ICT.
- 2 Configure the `controllers.xml` and `customizations.xml` files as required. See the “Setting Up Customization” on page 231.
- 3 If additional fields have been added to a function, a new schema *must* be generated for the role. Upload the new schema files to the QXI server or to a file.
- 4 Specify the .NET UI and/or ICT programs in the PROPATH of the session running the API.

## Setting Up Customization

If you are changing the response schema file name, you must edit the `controllers.xml` file. Also, if you do not want to have customizations turned on, you must edit the `customization.xml` file. Both of these files are located in the `qxtendadapter/config` folder.

`controllers.xml`

The `controllers.xml` file lists all available native APIs. Each API to be used must specify the name of the API (for example, `maintainMasterComment`), the name of the customization class, the name of the request schema and response schema (both optional), and API program name, as in the following example:

```

<?xml version="1.0"?>
<controllers>
  <controller>
    <apiName>maintainMasterComment</apiName>
    <className>com.qad.mfgpro.api.MasterCommentController
    </className>
    <requestSchema>maintainMasterComment-ERP3_1.xsd</requestSchema>
    <responseSchema>maintainMasterCommentResponse-ERP3_1.xsd</responseSchema>
    <apiProgram>gpcmtt.p</apiProgram>
  </controller>
  <controller>
    <apiName>maintainItemSitePlanning</apiName>
    <className>com.qad.mfgpro.api.ItemSitePlanningController
    </className>
    <requestSchema>maintainItemSitePlanning-ERP3_3.xsd</requestSchema>
    <responseSchema>maintainItemSitePlanningResponse-ERP3_3.xsd</responseSchema>
    <apiProgram>pppsmt02.p</apiProgram>
  </controller>
  ...
  ...
</controllers>

```

#### customizations.xml

Each type of customization must be defined in `customizations.xml`, as in the following example:

```

<?xml version="1.0" encoding="UTF-8"?>
<customizations>
  <customization>
    <name>.Net UI Customizations</name>
    <class>com.qad.mfgpro.api.UICustomization</class>
  </customization>
  <customization>
    <name>ICT Customizations</name>
    <class>com.qad.mfgpro.api.ICTCustomization</class>
  </customization>
</customizations>

```

where `name` is the name of the customization and `class` is the name of the class for the customization. If customizations will not be used, these can be commented out.

**Note** Commenting out ICT customizations that are not required will marginally improve system performance.

## Starting QGen

To start QGen, run script `<qxtend adapter>/scripts/client.qgen` on Unix or `clientqgen.bat` on Windows.

This starts an QAD Enterprise Applications session with QGen running in the background.

**Important** Use this QAD Enterprise Applications session only to generate QDocs, not to enter data.

## Mapping a Program for Regular UIAPI Interface Programs

- 1 Navigate to the program in QAD Enterprise Applications that you want to generate QDocs for.
- 2 In the first field, press Ctrl+W. A message, Auto pop-up enabled, displays.



**Fig. 18.1**

Pressing Ctrl+W in a QGen Session

| sosomt.p b+ 7.1.1 Sales Order Maintenance 06/25/07              |                  |                                |                 |
|-----------------------------------------------------------------|------------------|--------------------------------|-----------------|
| Order: _____                                                    | Sold-To: _____   | Bill To: _____                 | Ship-To: _____  |
| Sold-To _____                                                   |                  | Ship-To _____                  |                 |
| Order Date: _____                                               | Line Pricing: No | Confirmed: No                  |                 |
| Required Date: _____                                            | Manual: _____    | Currency: _____                | Language: _____ |
| Promise Date: _____                                             | Site: _____      | Taxable: No                    |                 |
| Due Date: _____                                                 | Channel: _____   | Fixed Price: No                |                 |
| Perform Date: _____                                             | Project: _____   | Credit Terms: _____            |                 |
| Pricing Date: _____                                             |                  | Credit Terms Interest %: _____ |                 |
| Purchase Order: _____                                           |                  | Reprice: No                    |                 |
| Remarks: _____                                                  |                  | Entered By: _____              |                 |
| Auto pop-up enabled                                             |                  |                                |                 |
| F1=Go 2=Hlp 3=Ins 4=End 6=Mnu 7=Rcl 8=Clr 9=Prev 10=Next 11=Buf |                  |                                |                 |

- 3 Enter data in the first field or select an existing record to edit and press Enter to move to the next field.

**Important** You must press Enter on each field in the program to launch the automatic pop-up for each field. If you press Go to move from a field, you may move to the next frame and the remaining fields in the previous frame are not mapped.

The Field Info pop-up displays. For each field, enter the required values.

**Fig. 18.2**

Field Info Pop-Up

| sosomt.p b+ 7.1.1 Sales Order Maintenance 09/05/10 |                                      |                               |                 |
|----------------------------------------------------|--------------------------------------|-------------------------------|-----------------|
| Order: 10004                                       | Sold-To: CU2500                      | Bill To: CU2500               | Ship-To: CU2500 |
| So _____                                           |                                      | To _____                      |                 |
| Rosy's Bike Shop                                   | Field Info                           | rd 433                        |                 |
| North Brand Boul                                   | Label: Bill To                       | CA CA91203                    |                 |
| Glendale                                           | Node Name: soBill                    |                               |                 |
| UNITED STATES                                      | Unique ID: soBill#0:a021             |                               |                 |
|                                                    | Primary Key: <u>yes</u>              | es 02/28/08                   |                 |
|                                                    | Delete Field: <u>no</u>              | SD Language: us               |                 |
| Order Date: 0                                      | Mandatory: <u>yes</u>                | o                             |                 |
| Required Date: 0                                   | First Entry Event: <u>no</u>         | d Price: Yes                  |                 |
| Promise Date: 0                                    | Choose Event: <u>no</u>              | t Terms: 30D                  |                 |
| Due Date: 0                                        | Action To Proceed: <u>Return</u> [V] | Site: US-W-S                  |                 |
| Perform Date: 0                                    |                                      | Credit Terms Interest %: 0.00 |                 |
| Pricing Date: 02/28/08                             | Org Inv: _____                       | Reprice/Edit: No              |                 |
| Purchase Order: _____                              |                                      |                               |                 |
| Remarks: _____                                     |                                      |                               |                 |

**Label.** The label value is the field label that displays on the QAD Enterprise Applications screen. This is not available for editing.

**Node Name.** This is the field name displayed in humpback notation to conform to XML standards. For example, so\_nbr is displayed as soNbr. This is not available for editing. Underscores are removed from the node names.

**Unique ID.** This is an alphanumeric value generated during mapping of a field. It is used to distinguish between different fields in a program that use the same node name. This is not available for editing.

**Primary Key.** A Yes in this field designates this field as one of the primary keys of the parent or child records. For more on iterations, see “Map Iterations” on page 235.

For UI APIs, set this to Yes on any field that you want to include in the response schema.

**Delete Field.** If you can delete a record when the cursor is in this field—for example if the F5=Delete option displays in the program status line—set this to Yes. Set this to Yes for all fields in a frame that allow a deletion. Otherwise, accept the default of No.

**Mandatory.** Yes indicates the field must have a value.

**First Entry Event.** Set this field to Yes if a special action is required the first time the field is encountered in an incoming QDoc request. These are usually fields that have navigation consequences, such as the Line Format (S/M) field in Sales Order Maintenance (7.1.1) that controls whether the sales order lines will be entered line-by-line or in multi-line mode.

**Choose Event.** The default value is No. Change this to Yes if the field is a field in a selection list.

**Action to proceed.** Press the down arrow to open the drop-down list on this field and select the key required to leave the current field and move to the next field.

- 4 Press Go to save and exit the pop-up data. The system message Updated: *<field name>* displays at the bottom of the screen.
- 5 If First Entry Event for the field is set to Yes, the First Entry Event pop-up displays. Otherwise, you move to the next field.
- 6 If you move to the next field, enter data and press Enter. The Field Info pop-up displays for this field. By default, the key you used to exit the field is used for the Action to Proceed value.

## Map First Entry Events

A first entry event occurs at a branching point in a program, usually prior to starting an iteration. Typically the field is accessed by pressing F4 from the first field of an iteration.

**Fig. 18.3**  
First Entry Event Field Definition

sosomt.p b+ 7.1.1 Sales Order Maintenance 06/26/07

Order: S018201 Sold-To: 0100 Ln Format S/M: Single

| Ln | Item Number | Label: ?                                             | Field Info | t | Net Price |
|----|-------------|------------------------------------------------------|------------|---|-----------|
| 1  |             | Node Name: pMsgConfirm<br>Unique ID: pMsgConfirm#0:1 |            | 0 | 0.00      |

Desc: Primary Key: no  
 Loc: 8 Delete Field: no  
 Cost: First Entry Event: yes  
 Lot/Serial: Choose Event: no  
 Qty Allocated: Action To Proceed: return [V]  
 Qty Picked:  
 Qty Shipped: Perform Date:  
 Qty to Invoice: Pricing Date:  
 Salesperson 1: Multiple: No  
 Commission 1: Category: Fixed Price: No Comments: No

s Int:  
 Type:  
 rsion:  
 Fcst: No  
 Detail Alloc: No  
 Taxable: No  
 Freight List:  
 Fixed Price: No Comments: No

- 1 When you leave a first entry event field, the Field Info pop-up displays. Enter Yes for First Entry Event and press Go. The First Entry Event Info pop-up displays.

Fig. 18.4

First Entry Event Info Pop-Up

sosomt.p b+ 7.1.1 Sales Order Maintenance 06/26/07

Order: S018201 Sold-To: 0100 Ln Format S/M: Single

| Ln | Item Number | Qty Ordered | UM | List Price | Discount | Net Price |
|----|-------------|-------------|----|------------|----------|-----------|
| 1  |             | 0.0         |    | 0.00       | 0.0      | 0.00      |

**First Entry Event Info**

Pre Key: f4 [V]  
 Send Value: Single  
 Post Key: [V]

Desc:  
 Loc: Site:  
 Cost:  
 Lot/Serial:  
 Qty Allocated:  
 Qty Picked:  
 Qty Shipped:  
 Qty to Invoice:  
 Salesperson 1:  
 Commission 1:

Requi  
 Promi f4  
 Due D f1  
 Perform D return  
 Pricing D tab  
 Multi  
 Category:

edit Terms Int:  
 Ship Type:  
 UM Conversion:  
 Consume Fcst: No  
 Detail Alloc: No  
 Taxable: No  
 Freight List:  
 Fixed Price: No  
 Comments: No

- 2 Use the down arrow to open the available keystroke information. Press Enter to select a value, then press F4 to close the drop-down menu. Use the following information to enter field data:

**Pre Key.** By default, the F4 key appears because this is the typical key to access First Entry Event fields. Press the down arrow to open the drop-down list on this field and select a different key to access the First Entry Event field if necessary.

**Send Value.** Specify the value that must be entered in the First Entry Event field to follow the data entry path you want to use. For example, to set Line Format (S/M) in Sales Order Maintenance to Multi, enter `m` or `multi` in Send Value.

**Post Key.** This is the key required to leave the current field and move to the next field. The default is Return (the Enter key). Press the down arrow to open the drop-down list on this field and select a different key to exit the First Entry Event field if necessary.

- 3 Press Go to save and exit the pop-up.

## Map Iterations

When you come to a frame that repeats—lines in a sales order, items in a container, and so on—QGen recognizes this as an iteration. This means the QGen mapper maps the first field in the iteration twice.

To accomplish this, you navigate through the first field of the frame twice. The first time, enter data normally as described in “Mapping a Program for Regular UIAPI Interface Programs” on page 232. The second time through, make sure to return to the first field in the frame. QGen automatically recognizes the iteration.

One common iteration type is the Comments iteration. This does not need to be mapped because it is defined in the `commonTypes.dat` file. See “Starting QGen” on page 232.

At a Comments field, press Enter twice. The first Enter pops up the Field Info screen and captures the field information. The second detects the iteration. Enter `transComments` as the Iteration Name. Exit the Comments iteration by pressing F4 until you reach the next field, and continue through the remaining fields of the program.

## False Iterations

You will also encounter false iterations in QAD Enterprise Applications. These are fields that are entered into more than once, but that are not receiving new data. For example, when you leave the Consignment Location field in Sales Order Maintenance, several messages that require user input may display regarding the status of inventory in this location. After responding to the first message, the interface returns you to the field. QGen sees this as an iteration. In these instances, press F4 to leave the Iteration Info pop-up and continue with the next field in the program.

**Important** Each menu-level program is itself an iteration. When you return to the first field in a program—the sales order number field in Sales Order Maintenance—select the field again to allow QGen to detect the iteration. If you skip this step, an error occurs during QDoc generation.

## Hidden Iterations

In general, iterations are detected automatically by QGen. In some cases, such as when multiple values are allowed in a single frame, the iteration is not detected because you have not left the frame. In this case, you must open the Field Info pop-up on the first instance of the field to map the field. When you arrive back at the field after entering data, you must press Ctrl-F again to open the Iteration Info pop-up.

## Mapping an Iteration

In most cases when you enter an iterating field the second time, the Iteration Info pop-up displays automatically.

**Fig. 18.5**  
Iteration Info Pop-Up

sosomt.p b+ 7.1.1 Sales Order Maintenance 06/26/07

Order: S018201 Sold-To: 0100-R Ln Format S/M: Single

| Ln | Item Number | Qty Ordered | UM | List Price | Discount | Net Price |
|----|-------------|-------------|----|------------|----------|-----------|
| 4  | 9000        | 0.0         | EA | 0.00       | 0.0      | 0.00      |

**Iteration Info**

Iteration Name: S0LineEntry  
Action to Exit Iteration: f4 [V]

Desc: David's Item  
Loc: Sit  
USD Cost: 0.00  
Lot/Serial:  
Qty Allocated: 0.0  
Qty Picked: 0.0  
Qty Shipped: 0.0  
Qty to Invoice: 0.0  
Salesperson 1:  
Commission 1: 0.00%

Confirmed: Yes  
Required:  
Promised:  
Due Date: 06/26/03  
Perform Date:  
Pricing Date: 06/25/03  
Multiple: No  
Category:

Credit Terms Int: 0.00  
Ship Type:  
UM Conversion: 1.0000  
Consume Fcst: Yes  
Detail Alloc: No  
Taxable: No  
Freight List:  
Fixed Price: Yes  
Comments: No

Enter the following data:

**Iteration Name.** Enter a name for the iteration. This iteration name is the name that will appear in the QDoc. It must conform to the standard humback notation for QDocs; for example, maintainSalesOrder.

**Action to Exit Iteration.** Enter the key required to exit the iteration (usually F4). Use the down arrow to select an alternative value if necessary.

- 4 Press Go to exit the pop-up. Continue with Iteration? displays.



Fig. 18.6

Continue With Iteration Query

sosomt.p b\* 7.1.1 Sales Order Maintenance 06/26/07

Order: S018201 Sold-To: 0100-R Ln Format S/M: Single

| Ln | Item Number | Qty Ordered | UM | List Price | Discount | Net Price |
|----|-------------|-------------|----|------------|----------|-----------|
| 4  | 9000        | 0.0         | EA | 0.00       | 0.0      | 0.00      |

Desc: David's Item  
Loc: Site: 11

**Iteration Detected**  
[X] Continue with Iteration?

5 From the Iteration Detected pop-up, there are two courses of action:

- a Press spacebar to enter an X and press Go to continue through the iteration again. You can do this as many times as there are unique pathways in the iteration. This moves you to the second field of the iteration and you would continue through the fields until all iterations are mapped.

**Note** Fields that were mapped on the first pass through the program display the message “<fieldname> found in table” in the program message area. The Field Info pop-up does not display.

- b Press Go without selecting the continue option to exit the iteration. A message displays:

Please exit the iteration.

Press spacebar to select the message. Press Go to exit the iteration message. Move on to step 6.

6 Press the appropriate key, usually F4, to exit the first iteration field.

**Note** If the iteration is exited in a different way than you originally specified (Action to Exit Iteration was set to F4 but should be F4:F4), you can change it in Update Mode. See “Change Mode to Update” on page 241.

When you return to the first field in the program, remember to press Enter, as though you were going to go through the program again. The Iteration Info pop-up displays. Enter a name for the full program iteration.

Fig. 18.7

Complete Program Iteration

sosomt.p b\* 7.1.1 Sales Order Maintenance 06/26/07

Order: \_\_\_\_\_ Sold-To: \_\_\_\_\_ Bill To: \_\_\_\_\_ Ship-To: \_\_\_\_\_

\_\_\_\_\_ Sold-To \_\_\_\_\_ Ship-To \_\_\_\_\_

**Iteration Info**  
Iteration Name: SalesFullOrder  
Action to Exit Iteration: f4 [V]

To finish the mapping process, press Ctrl+W to disable the pop-ups.

## Map Comments

When you enter the Transaction Comments section, use the following process to map the screen:

- 1 Press Enter in the Master Reference field.

**Fig. 18.8**  
Transaction Comments

The screenshot shows a terminal window titled "Transaction Comments". At the top, it displays "Page: 1", "Master Reference: 04-0009", and "Language: \_\_\_\_". Below this, there is a "Type: \_\_\_\_" field. A "Field Info" dialog box is open, showing the following details: "Label: Master Referenc", "Node Name: cdRef", "Unique ID: cdRef#0:cmmt01021", "Primary Key: ☒", "Delete Field: no", "First Entry Event: no", "Choose Event: no", and "Action To Proceed: return [W]". At the bottom of the terminal window, a keyboard shortcut legend is visible: "F1=Go 2=Hlp 3=Ins 4=End 6=Mnu 7=Rcl 8=Clr 9=Prev 10=Next 11=Buf".

- 2 Continue to map the remaining fields.
- 3 When you are on the first line of the Comments, press F4 to return.
- 4 Press Enter on the Master Reference field again and QGen will detect this as an iteration.
- 5 Name the iteration transComment.

**Fig. 18.9**  
Iteration Name

The screenshot shows the same terminal window as Figure 18.8, but now the "Iteration Info" dialog box is open. It displays "Iteration Name: transComment" and "Action to Exit Iteration: f4". The "transComment" text is highlighted with a green cursor. The rest of the screen, including the "Master Reference: 04-0009" and the keyboard shortcut legend, remains the same.

- 6 Finish the iteration and complete the mapping process.
- 7 Save, generate, and load the QDoc schema into QXI.
- 8 Use the Test Harness to create an empty QDoc.
- 9 Edit the QDoc with data to submit. Ensure to include data in the comments section.
- 10 Submit the QDoc using the QXtend Test Harness or the queue.

## Mapping a Program for Regular Non-UIAPI Interface Programs

You do not need to manually map non-UIAPI programs field by field. Instead, you can use the ADAPTER: (x) SI API option under QGen/Generate Schema to map and generate the schema and place it in the receiver for you.

Use this tool for customized versions of CHUI screens to work with SI APIs, customizations made using ICT and .Net UI Configurable screens. Each customization is defined somewhere in the data. In the case of ICT, customizations are configured in the database; for the .Net UI, customizations are defined in the XML configuration file. Customizations are normally executed by session triggers, but the system replicates them in the background without relying on any UI triggers to fire them up.

When the user has added additional fields to the screen, there is a problem. The SI API requires that the XML that comes in matches the schema defined for that API. If you have added additional fields to the standard screen, you will get an error if the XML contains these new fields not present in the schema. Use QGen to create schemas for SI APIs. However, there is no need to go through the UI screen with QGen to define iterations and map each field.

- 1 Run a QGen client session script. Press Ctrl+O to open the Options Menu and choose Generate Docs; then press F1.
- 2 Choose the appropriate options.

*Adapter:* Select SI API.

*QDoc Name.* Enter the QDoc name; for example, enter maintainItemMaster for Item Maintenance (1.4.1).

*User.* Enter a user to apply the customization to. If you leave the field blank, the customization will apply to all users.

- 3 Enter appropriate information to connect to the QXI server.
- 4 Select a QAD Enterprise Applications version from which to get the receiver list.
- 5 Choose the SI API receiver name and press Continue.
- 6 The new schema is now uploaded directly to QXI and the receiver you identified earlier. When you create an empty QDoc, the new custom fields are available.
- 7 Add the .Net UI runtime directory to the PROPATH of the QGen client (where the configurable screens configuration file resides).
  - Edit *QXtendAdapter/script/client.qgen* and add “*mfgInstallDir/qadui/com/mfgpro*” to the PROPATH.
  - Add “*mfgInstallDir/qadui/com/mfgpro*” to the PROPATH of qadSI\_AS appserver.

For EE, add the following:

- For any custom or configurable programs, add “PROPATH = /qxiadapter, /mfgsvr/lib/qra.pl, /mfgsvr/bbi, /mfgsvr”.
- For configurable screens, add “*mfgInstallDir/qadui/com/mfgpro*” to the PROPATH of the .NET Progress code:

```
PROPATH = /qxiadapter, /mfgsvr/lib/qra.pl, /mfgsvr/bbi,/mfgsvr,/<custom or
configurable programs>,mfgInstallDir/qadui/com/mfgpro
```

ICT also has the facility to dynamically add new fields to the screen, and it will work for that too as long as ICT is in the PROPATH. ICT also allows you to execute additional programs that may have fields statically defined in them. In this case, you would need to modify the .p manually to conform to Native API standards and modify the schema yourself.

## Running QGen Options

At any time during an QAD Enterprise Applications QGen session, press Ctrl+O to open the QGen Options menu. The options are:

- Save
- Load
- Change Mode to Update
- Change Mode to Run Through
- New Run Through
- Generate Docs

### Save

This option saves the information that has been mapped during the session. You can save incomplete program run-throughs as well as completed ones.

**Fig. 18.10**  
QGen Options Menu on Save

The screenshot shows a QAD QGen session interface. At the top, it says 'sosomt.p b\*' and '7.1.1 Sales Order Maintenance' with a date '06/26/07'. Below this is a form with fields: 'Order: \_\_\_\_\_', 'Sold-To: 001', 'Bill To: \_\_\_\_\_', and 'Ship-To: \_\_\_\_\_'. There are also 'Sold-To' and 'Ship-To' labels with empty boxes. At the bottom, there are 'Order Date:' and 'Required Date:' labels, and a 'Language:' label with a dropdown menu showing 'o'. An 'Options Menu' is overlaid on the screen, listing the following options: (X) Save, ( ) Load, ( ) Change Mode to 'Update', ( ) Change Mode to 'Run Through', ( ) New Run Through, and ( ) Generate Docs.

- 1 Press spacebar to select Save if it is not already selected.
- 2 Press Go to save.
- 3 You are asked to enter the name of the QDoc. Use humpback notation; for example, SalesOrderEntry.

**Fig. 18.11**  
QDoc Save Frame

- 4 Press Go to save the QDoc information. The message “Finished saving data” displays. The QDoc information is stored in a .dat file—for example, SalesOrderEntry.dat—in the `<Qxtend adapter>/tools/datFiles/` directory. Any QAD-supplied standard QDoc files under `<Qxtend adapter>/tools/datFiles/standard/` remain intact.

## Load

To continue a previously incomplete mapping session, load a saved .dat file.

- 1 Arrow to Load and press spacebar.
- 2 Press Go to load the .dat file.
- 3 You are prompted to enter the name of the file; for example, SalesOrderEntry. The QDoc name is case sensitive and the .dat extension is not required. When you load .dat files without specifying a directory, the system first looks for the files under `<Qxtend adapter>/tools/datFiles/`. If the files cannot be found under this directory, the system then loads the standard .dat files under `<Qxtend adapter>/tools/datFiles/standard/`.
- 4 Press Go to load the document into the current QGen session. The message Finished loading data displays.
- 5 Open the QAD Enterprise Applications program the .dat file was created from.
- 6 Tab through the program fields. Each mapped field displays the message:  
`<fieldname> found in table.`  
 The Field Info pop-up displays automatically at the first unmapped field. See “Mapping a Program for Regular UIAPI Interface Programs” on page 232.
- 7 Select the Save option to save any changes (Ctrl+O, Save).

## Change Mode to Update

Use Update mode when you want to modify attributes of fields you have already mapped. This set of steps assumes you have a .dat file already loaded. In Update mode, the field order of the QAD Enterprise Applications menu-level program is ignored.

- 1 Arrow to Change Mode to Update and press spacebar.
- 2 Press Go to switch to Update mode.

- 3 Open the QAD Enterprise Applications program associated with the data map you want to update.
- 4 Tab through the program fields. When you reach a field you want to update, press Ctrl+F. The Field Info pop-up displays with the existing field information.
- 5 Modify the information and press Go to close and save the changes for the field.
- 6 After completing your updates, select the Save option to save any changes to the .dat file.

## Change Mode to Run Through

Run Through allows new field information to be mapped. Use this option to change back from Update mode.

- 1 Arrow to Change Mode to Run Through and press spacebar.
- 2 Press Go to switch to Run Through mode.
- 3 Map programs as described in “Mapping a Program for Regular UIAPI Interface Programs” on page 232.
- 4 Select the Save option to save your work.

## New Run Through

New Run Through deletes the existing session information and restarts the mapping process.

- 1 Arrow to New Run Through and press spacebar.
- 2 Press Go to start a new run through.
- 3 You are asked, “Are you sure you wish to reset?” Press spacebar to confirm and press Go. The session information is deleted.
- 4 Open the QAD Enterprise Applications program you want to remap and press Ctrl+W to start the mapping process.

## Generate Docs

This option generates a QDoc schema and events file from the program information that has been mapped and saved in a .dat file. You can specify which standard to use for the generated schema. The available options change according to which schema standard is specified.

**Note** If you intend to generate native APIs for configurable screens that have been customized using the .NET UI or ICT, see “Generating Native APIs” on page 230.

- 1 Arrow to Generate Docs and press spacebar.
- 2 Press Go to start the generation. The Generate Options frame displays.



**Fig. 18.12**  
Generate QDocs Pop-up

**3** Fill in the information using the field descriptions below:

**Adapter.** Select the adapter you want to use.

UI API: Select this option to use the UI API.

SI API: Select this option to use the SI API to generate service interface APIs for configurable screens. Only QAD 2009 SE, QAD 2009 EE and later versions have SI API.

**QDoc name.** Enter the QDoc name as saved in the QGen .dat file; for example, SalesOrderEntry.

**Note** If you select the SI API option and enter an invalid QDoc—that is, a non-SI API QDoc that has not been defined in the controllers.xml file—the system displays an error message.

**Procedure Name.** (1.1 schema standard and UI API only). Enter the name of the QAD Enterprise Applications program name plus a .p extension; for example, sosomt.p.

**User.** (1.1 schema standard and SI API only). Enter the name of the user for whom the customization is intended. If the field is left blank, the customization applies to all configurable screens that are associated with all roles.

**4** Do either of the following:

- To generate the schema and events to a file, select the File option. You must specify the results directory in which to store the generated schema and events files, the schema standard, and the schema version. Then select Generate QDocs to generate the files.
- To publish the APIs directly to the QXI server, select the QXI Server option, then continue to step 5.

**Note** QGen does not support publishing to QXI server if the Progress version is lower than 10.

**5** Specify the standard to use for the generated schema. The 1.1 specification is the default standard. (This option does not display if the SI API option is selected.)

**6** Specify the schema version to use; for example, eB2\_3 for the third version of the file in the eB2 release. The default value is eB\_1.

**7** Select Generate QDocs. The Connect to QXI Server screen displays.

**Fig. 18.13**  
Connect to QXI Server

**8** Complete the server connection fields.

**Note** The information in this screen persists in memory until QGen is closed.

**QXI Host.** Specify the hostname of the QXI server.

**QXI Port.** Specify the port number used to access the QXI server.

**QXI Webapp Name.** Specify the name of the Web service used to connect to the QXI server.

**SSL.** Select the field to use Secure Socket Protocol https encryption on messages to the QXI server.

**Note** If SSL is selected, then QXI Host must include domain name of the host.

**Username.** Specify the username login for the QXI server.

**Password.** Specify the password for the user.


**9** Select Continue. The Select a Module screen displays.

**Fig. 18.14**  
Select a Module

**10** Select the module to which you want to send the QDocs and then select Continue. The Select Receivers screen displays.




**Fig. 18.15**  
Select Receivers

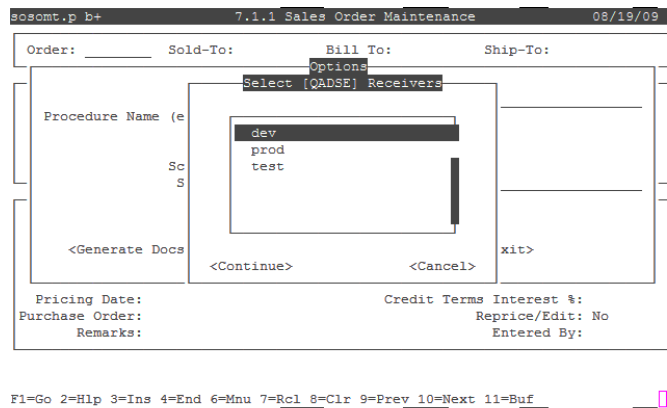

- 11** Select the receiver to which you want to send the QDocs and then select Continue. If the upload of QDocs is successful, the Upload QDoc to QXI Successful message displays.

**Fig. 18.16**  
Upload Successful

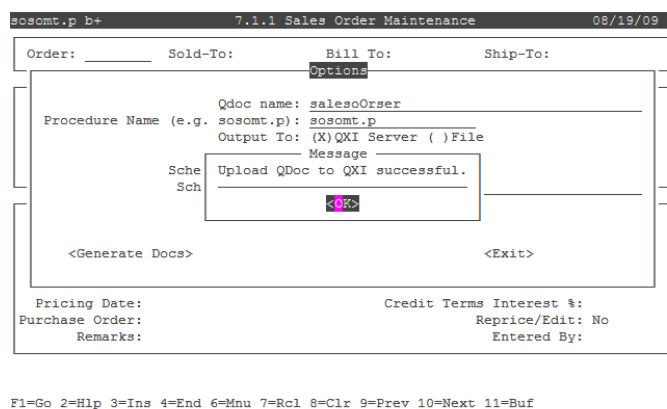

- 12** Select OK to exit.

## Troubleshooting QGen

This section documents some possible error conditions that can occur while using QGen and offers suggested resolutions.

**Problem:** The Automatic pop-up is enabled, but a pop-up is not displayed on exiting the field.

**Solution 1:** First ensure that the mode is Run Through and not Update.

**Solution 2:** If QGen is in Run Through mode, check if you are in the message area. This is the area at the bottom of the screen where messages pop up—the cursor is at a question requiring a Yes/No answer. If so, the Field Info pop-up does not display. Continue past the field in the message area. When the next field is reached, QGen displays a pop-up containing the field information for the field in the message area before displaying a pop-up containing information for the currently selected field.

Solution 3: If you are not in the message area, disable the automatic pop-up using Ctrl+W, then tab back to the field and use Ctrl+F to manually map the field.

Error message: Unable to create directory nnnn

This error occurs when the current user does not have permissions to create the specified directory.

Error message: The file "qdoc.dat" has no root node name

The first field in a program was not mapped as an iteration. When mapping a program, the first field in the program must be selected again and an iteration name entered. Exit the Generate Docs menu. Tab to the first field in the program and press Ctrl+F to map it.

# QXtend Inbound Pre- and Postprocessors

This section describes how to use the QAD QXtend Inbound (QXI) pre- and postprocessors to validate requests or verify complete QDocs.

## ***Introduction 248***

Introduces the QXI preprocessor and explains how to enable pre and postprocessing in QXtend.

## ***Updating Events Files 249***

Explains how to update events files.

## ***Creating Custom Pre- and Postprocessing Programs 249***

Explains how to create custom pre- and postprocessing programs with correct program structure, program naming and location, and discusses QDoc iterations, warnings and errors, and how to modify the QDoc iteration node.

## Introduction

The QXI preprocessor lets you call custom programs to validate or modify inbound QDocs prior to writing data to QAD Enterprise Applications. The preprocessor programs can eliminate QAD Enterprise Applications errors, filter required records, eliminate records based on unique sets of criteria, or add or remove data as required.

**Important** QAD discourages the practice of performing database updates using a preprocessor program due to the significant effects this can have upon system performance. If you decide to perform an update, the update will not be within the same transaction as the QDoc being processed. Consequently if the QDoc fails, the preprocessing transaction will be complete, but the QDoc processing will be incomplete. This situation can be avoided by setting the `scopeTransaction` attribute in the QDoc to `True` in order to scope the processing of the QDoc to a single transaction, but doing so can result in the performance issues mentioned.

The postprocessor is similar but is used to validate and modify the response document contents. One example is obtaining updated data from QAD Enterprise Applications, such as line item prices that changed after the initial data update from the QDoc request.

The method for implementing and using the QXtend pre- and postprocessors is:

- Enable pre- and postprocessing capability.
- Update the events files to reference the pre- or postprocessing program.
- Create the custom pre- or postprocessor program.

## Enabling Pre- and Postprocessing in QXtend

To initiate the ability to run pre- and postprocessing in QXtend, edit the `qxtendconfig.xml` file. If you have configured QXtend to enable field values in response documents, you should have already made this change. See “Include QAD Enterprise Applications Field Values” on page 164.

**1** Open `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf/qxtendconfig.xml`.

**2** Locate the `messageServletURL` attribute within the `<general-config>` node.

**3** Enter the correct host and port values to communicate with the QXtend server.

```
<messageServletURL label="Message Servlet URL" value="http:
//<host>:<port>/<QXI webapp>/MessageReceiverServlet"/>
```

**4** For AIX environments, set the `preprocessChunkSize` attribute to a smaller value—5000 is recommended. This setting helps solve the issue where oversized QDocs cannot be fully passed to a preprocessor in an AIX environment.

```
<preprocessChunkSize value="20000" label="Preprocess chunk size"/>
```

**5** Save and close the file.

## Updating Events Files

The events files in QXI are .xml files containing program-specific keystroke and navigation. Events files for each QDoc-supported program are shipped with the product or are generated by the QGen product. You can maintain multiple copies of the events files for each QAD Enterprise Applications program to support either different paths through a program, or to test incremental performance improvements in update paths.

These files must first be copied to the custom events directory; then a new event and the new program name must be added.

- 1 Copy the events file you want to modify to the custom directory. The following example is for sales orders. Copy from:

```
TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/events/eB2/sosomt-eB2_1.xml
```

to:

```
TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/events/eB2/custom/sosomte-B2_1.xml
```

- 2 Edit the events schema file to add a new IterationEvent. The event must have an attribute of either preprocess or postprocess. This attribute defines the custom program to call when the iteration event is encountered. Use the following code fragment showing a preprocessing program as a model:

```
<field uid="soNbr#0:a02" name="so_nbr" inheritevents="true">
  <IterationEvent iterationname="salesOrder" exititeration="f4" preprocess=
    "xxMyPreProg.p"/>
</field>
```

This sample runs xxMyPreProg.p before processing the QDoc.

An equivalent postprocessing program call would appear as follows:

```
<field uid="soNbr#0:a02" name="so_nbr" inheritevents="true">
  <IterationEvent iterationname="salesOrder" exititeration="f4" postprocess=
    "xxMyPostProg.p"/>
</field>
```

## Creating Custom Pre- and Postprocessing Programs

The custom pre- and postprocessing programs must be written in the Progress 4GL. The program you create is called from a Progress program named mfww01b.p. This Progress program has procedures that your program can call to limit your programming task to the validations you require.

### Program Structure

The program structure is as follows:

```
DEFINE INPUT PARAMETER pQDoc AS HANDLE NO-UNDO.
DEFINE INPUT PARAMETER pMessageLogger AS HANDLE NO-UNDO.
  /* Custom validation code goes here; */
  /* Log any warnings or errors.*/
RETURN ERROR.
```

## Program Naming and Location

Store the file in the standard custom code directories defined for QAD Enterprise Applications:

```
MFGPROInstallDir/us/xx/xxsosomt.p
```

This path should be included in your PROPATH, and should reflect the actual installation language if it is not US. The standard QAD naming convention for custom programs is to prefix the file name with xx. You may need to adjust the file name if customized programs already exist for the program—for example, change xxsosomt.p to xxsosoqx.p if xxsosomt.p already exists.

## QDoc Iterations

Iterations are steps through the data nodes, such as sales order lines, of a given inbound QDoc. These nodes and their contents are passed into the Progress calling program as an X-DOCUMENT. The input parameter pQDoc is a handle to the Progress X-DOCUMENT. The custom program can access the nodes within this X-DOCUMENT and carry out any validation required.

**Note** The custom program is not given access to all of the QDoc, only the current iteration node.

For example, a preprocessing program for SOLine iterates on each sales order line. In the sample portion of the QDoc below, the bold salesOrderLineDetail iteration is the current iteration when the event triggers for sales order line 1. When the event triggers for sales order line 2, the italic salesOrderLineDetail iteration is the current iteration. The following example has been edited for simplicity—lines where three periods appear (...) show where lines have been removed.

```
...
<salesOrder>
  <soNbr>dq10009</soNbr>
  <soCust>1012000</soCust>
  <soConsignment>no</soConsignment>
  <salesOrderLineDetail>
    <line>1</line>
    <sodPart>ALX001</sodPart>
    <sodtaxable1>no</sodtaxable1>
    <sodcmmts>no</sodcmmts>
  </salesOrderLineDetail>
  <salesOrderLineDetail>
    <line>2</line>
    <sodPart>ALX002</sodPart>
    <sodtaxable1>no</sodtaxable1>
    <sodcmmts>no</sodcmmts>
  </salesOrderLineDetail>
</salesOrder>
</maintainSalesOrder>
```

## Warnings and Errors

If an error occurs, the custom program must log the error using the logError procedure in mfww01b.p, then return Error to stop processing the QDoc. If an Error is returned, the next QDoc is selected and preprocessing is run on it. If there is a warning or the processing is successful, your program should return nothing.

You can log all warnings and errors that arise during pre- or postprocessing by calling the logWarning or logError subprocedures in mfww01b.p.



To log a warning message:

```
run logWarning in pMessageLogger (input "Warning: sales order S09945 not confirmed.").
```

To log an error message:

```
run logError in pMessageLogger (input "Error: sales order 9956 incorrect so_nbr  
format.").
```

Any messages logged using these methods appear in the response QDoc.

**Note** Logging an error does not stop the QDoc from processing; you must return Error to stop it from processing.

## Modify the QDoc Iteration Node

If your custom program modifies the QDoc iteration node that is passed down, the program must run the `updateXMLDocument` procedure provided in `mfww01b.p`. The `updateXMLDocument` procedure requires a handle to the new updated X-DOCUMENT as a parameter. Here is an example of how you would call the `updateXMLDocument` procedure:

```
run updateXMLDocument in pMessageLogger (pQDoc).
```

Calling `updateXMLDocument` as illustrated here ensures the iteration node that was sent to the preprocess program is updated with `pQDoc`.





# Configuring the Progress AppServer

This section provides information about the setup required for using service interface and QAD JIT Sequencing APIs with QAD QXtend Inbound (QXI).

## **Introduction 254**

Introduces the API system.

## **Native APIs 254**

Lists the programs and functions for which native APIs are provided with details on transaction comments in native APIs.

## **Windows Setup 255**

Explains how to set up in Windows OS.

## **Non-Windows OS Setup 255**

Explains how to set up in non-Windows OS, with details on the Progress AdminServer, Progress NameServer, parameter file setup, and Progress AppServer setup.

## **Modifying the PROPATH 257**

Explains how to modify the PROPATH.

## **Verifying the Implementation 258**

Explains how to verify the implementation with details on commands to start servers, commands to query servers, and commands to stop servers.

## Introduction

QXI relies on the Progress open client and AppServer for the available service interface APIs in order to process synchronous API requests.

## Native APIs

The UI API adapter is the primary method used by QXI to load data into QAD applications. However, UI API adapter performance may be unacceptable when processing high volumes of data or real-time transactions.

You can use native APIs to leverage the SI interface and significantly enhance the speed of data processing. Native APIs provide a set of development patterns that can be used to wrapper existing character screens and execute the underlying business logic independent of the user interface, resulting in faster processing. Bulk loads can be performed faster, which is particularly useful when processing large business objects such as Item and Product Structure.

**Note** Native APIs are available in the QAD QXtend 1.6 version; they are not available in earlier versions. For more information about native APIs—and using the native API framework—see “Generating Native APIs” on page 230.

In addition, using native APIs allows responses to be customized. Whereas QXI is responsible for populating the response when the UI API adapter is used—in addition to dictating the format of the response—using native APIs permits the target application to determine the appearance of the response.

Native APIs are provided for:

- Routing Maintenance
- Master Comment Maintenance
- Product Structure Maintenance
- Item Cost Maintenance
- Item Data Maintenance
- Item Inventory Data Maintenance
- Item Planning Maintenance
- Item Site Cost Maintenance
- Item Site Inventory Data Maintenance
- Item Site Planning Maintenance
- Item Copy
- Item Maintenance
- Available To Promise (ATP) Query
- Pricing What-If Query

The response schema definitions are located in the same directory as the native API code: `<QXtend Inbound adapter>/schemas`

In maintenance APIs, the response QDoc can contain any field or table that is within the request QDoc.



By default, all fields in the request are provided in the response.

In query APIs, the response by default will contain every available field. If the request XML does not contain a node that is available for the request, it will accept the default—it will not return a blank. The presence of an empty node can be explicitly stated by setting the node value to `xsi:nil="true"`.

Unlike the UI API adapter, native APIs validate the operation, so if the request tries to add a record that already exists in the database, it returns an error—the same applies for modify and remove operations.

## Transaction Comments in Native APIs

Any transaction comments in native APIs will be 0-based, so a `cmtSeq` value of 0 will show as Page 1 in QAD EA.

For the `maintainRouting` API, for the transaction comments part, the API will automatically increase `<cmtSeq>` and `<masterCmtSeq>` by 1, then process the request.

For example, the following content in the request xml will create a comment with page 1, and the content will be copied from master comment 1.

```
<ttRoutingComment>
<operation>A</operation>
<roRouting>Q012</roRouting>
<roOp>2</roOp>
<roStart>2009-01-31</roStart>

<cmtSeq>0</cmtSeq>
<cmtRef>Q001 comm</cmtRef>
<cmtLang>us</cmtLang>
<cmtType>AB</cmtType>
<cmtPrint></cmtPrint>
<masterCmtSeq>0</masterCmtSeq>
</ttRoutingComment>
```

## Windows Setup

If the AppServers are running on Windows, use the Progress Explorer tool to configure the NameServer and the AppServer instances. See “Progress NameServer Setup” on page 256 and “Progress AppServer Setup” on page 257 for details on configuring the NameServer and AppServer instance properties.

The AdminServer, NameServer, and AppServer can be started and stopped using the Progress Explorer tool; they can also be set to start automatically. All administration for the AppServer and the AdminServer can be done using the Progress Explorer tool.

## Non-Windows OS Setup

Configure the AppServer manually by editing scripts in the Progress install directory. The information in this section does not detail every possible setup scenario. For details on AdminServer, NameServer, and AppServer configuration, see the Progress documentation.

## Progress AdminServer Details

The Progress AdminServer is started using the `proadsv` script. The AdminServer uses the `<DLC>/AdminServerPlugins.dat` file to start the AdminServer by default. Default ports used for the AdminServer are:

- AdminServer Port: 20931
- AdminServer to Database Communication Port: 7834

These ports are the Progress defaults and can be set by passing startup parameters. See “Parameter File Setup” on page 256.

The port the AdminServer is running on is used when starting and stopping NameServer and AppServer connections. Consideration must be given to which ports are going to be used for implementation if the default ports are not available or acceptable.

## Progress NameServer Setup

The NameServers are configured in the `ubroker.properties` file. This file resides in the `DLC/properties` directory and contains all the configuration settings for all the NameServers and AppServers.

The following example shows how to set up a NameServer instance. A port must be allocated to each NameServer instance:

```
[NameServer.NS1]
  svrLogFile=<Log DIR>/NS1.ns.log
  environment=NS1
  autoStart=1
  portNumber=4091
  host=<qxtendhost>
```

Set up the properties in the `ubroker.properties` file for the NameServer that will control the QXI AppServers.

Verify NameServer settings by running:

```
$DLC/bin/nsconfig -f <property file> -i <NameServer>
```

Validate NameServer settings by running:

```
$DLC/bin/nsconfig -f <property file> -i <NameServer> -v
```

## Parameter File Setup

The AppServer connects to the QAD Enterprise Applications databases based on values defined in a parameter file. This parameter file is similar to those used when starting a normal QAD Enterprise Applications session with some minor differences.

The parameter file can contain any of the client startup parameters that are required. It should not contain a `-p` (startup procedure) because this is controlled by the AppServer settings. The following is an example of a parameter file that is connecting to remote database servers:

```
-db mfgprod -ld qaddb -H hp40 -S mfg-server -N TCP -trig triggers
-db admprod -ld qadadm -H hp40 -S adm-server -N TCP
-db helpprod -ld qadhelp -H hp40 -S help-server -N TCP
-d mdy -yy 1920 -Bt 350 -c 30 -D 100 -mmax 3000 -nb 200 -s 63
```

The following is an example of a parameter file that is connecting to local database servers:



```
-db /mfgpro/db/mfgprod -ld qaddb -znotrim -trig triggers
-db /mfgpro/db/hlpprod -ld qadhelp
-db /mfgpro/db/admprod -ld qadadm
-d mdy -yy 1920 -Bt 350 -c 30 -D 100 -mmax 3000 -nb 200 -s 63
```

## Progress AppServer Setup

The AppServers are also configured in the `ubroker.properties` file. By default, QXtend installer creates a Progress AppServer for SI API with the default name `qasi_AS`. The following details are just for reference in case you need to manually create the AppServer.

When creating a new AppServer outside of the Progress Explorer, a uuid (universal unique identifier) must be specified. The ID must be unique because the controlling NameServer uses it to identify the broker. To generate a uuid, use the following command:

```
$DLC/bin/genuuid
```

Copy the generated uuid into the `ubroker.properties` file.

The following sample shows how an AppServer definition in the `ubroker.properties` file would be configured for QXI. Bold type indicates settings that may require changes for the QXI AppServer setup.

```
#
# Sample properties for AppServer hosting QAD Enterprise Applications APIs.
# Most of these entries are shown for illustrative purposes only.
#
[UBroker.AS.siapi]
appserviceNameList=siapi
autoStart=1
brkrLoggingLevel=4
brokerLogFile=/qad/4gl/logs/siapi.broker.log
controllingNameServer=NS1
debuggerEnabled=1
operatingMode=Stateless
portNumber=7777
PROPATH=<QXIAdapter>, <QADApps>/lib/qra.pl, <QADApps>
srvrLogEntryTypes=ASPlumbing, DB.Connects
srvrLogFile=/qad/4gl/logs/siapi.server.log
srvrLoggingLevel=4
srvrStartupProc=mfaistrtr.p
uuid=268ba6b18f508f07:590042c1:1127391c8de:-8000
```

**Note** The `PROPATH` setting for the Financials module service interface depends on where this instance of the Financials module is installed. The `PROPATH` must specify the location of the QXI adapter directory at the start. The `PROPATH` must also contain an entry for `qra.pl`, the service interface library.

The `controllingNameServer` entry should point to the NameServer that was defined in the previous section. See “Progress NameServer Setup” on page 256.

For detailed information on setting up Progress AppServer, see *QAD QXtend Installation Guide*.

## Modifying the PROPATH

If the AppServer `PROPATH` is changed and the AdminServer is running, stopping and starting the AppServer is not sufficient to pick up the new `PROPATH`. You must restart the AppServer, NameServer, and AdminServer.

**Important** QXtend AppServers set up for JIT Sequencing must have *JITInstallDir/jpssrc/apiint/app* at the beginning of the PROPATH.

## Verifying the Implementation

Verify the settings for the AppServer by running the following command and checking the entries:

```
$DLC/bin/asconfig -f <property file> -i <NameServer>
```

Validate the AppServer settings by running:

```
$DLC/bin/asconfig -f <property file> -i <NameServer> -v
```

## Commands to Start Servers

Start the AdminServer on default ports:

```
proadsv -start
```

Start the AdminServer and specify the ports to use:

```
proadsv -start -port <AdminServer Port> -adminport <AdminServer to Database Port>
```

Start the NameServer:

```
nsman -port <AdminServer Port> -i <NameServer Name> -x
```

Start the AppServer:

```
asbman -port <AdminServer Port> -i <AppServer Name> -x
```

## Commands to Query Servers

Query the NameServer:

```
nsman -port <AdminServer Port> -i <NameServer Name> -q
```

Query the AppServer:

```
asbman -port <AdminServer Port> -i <AppServer Name> -q
```

## Commands to Stop Servers

Stop the AdminServer:

```
proadsv -stop
```

Stop the NameServer:

```
nsman -port <AdminServer Port> -i <NameServer Name> -e
```

Stop the AppServer:

```
asbman -port <AdminServer Port> -i <AppServer Name> -e
```

## QXtend Inbound with QAD Q/LinQ

This section provides information on using Q/LinQ with QXtend Inbound (QXI).

### **Overview 260**

Gives an overview of Q/LinQ and its uses in QXI.

### **Install and Configure Q/LinQ 260**

Explains how to install and configure Q/LinQ.

### **Define QXI URL 261**

Explains how to use Q/LinQ Control.

### **Define External Application Defaults 261**

Explains how to use Register External Application.

### **Set Up Import Specifications for QDocs 262**

Explains how to use Import Specification Maintenance.

### **Set Up for Acknowledgements 265**

Explains how to set up for acknowledgements.

## Overview

Q/LinQ is a tool set for building integrations with third-party or in-house applications for complex data exchange. It also provides infrastructure for administering and managing the data exchange between QAD Enterprise Applications and these external applications. See *External Interface Guide: QAD Q/LinQ* for details about installing and using Q/LinQ.

Q/LinQ and QXI provide overlapping features in terms of queuing messages to be processed as QAD Enterprise Applications transactions. However, the processing of data into QAD Enterprise Applications through QDocs is a more robust method than the more CIM-like user-interface-emulation approach generally used by earlier releases of Q/LinQ. If you have installed and configured Q/LinQ and now install QXI, you can use the services of QXtend to process messages received and managed by Q/LinQ through its processing API.

There are a number of reasons why you might want to use Q/LinQ and QXI together:

- 1 Q/LinQ does outbound processing, while QXtend is currently only available for inbound documents.
- 2 Q/LinQ has APIs to perform data mapping.
- 3 Q/LinQ has middleware communications capability and the associated feature of generating and processing confirmations.
- 4 Q/LinQ stores in-process documents in a database rather than externally as files. This approach provides enhanced data security and scalability and reduces the overall number of pieces that must be managed in the integration.

In addition, you can continue to process some Q/LinQ import documents using UI emulation, while redirecting processing responsibility to QXtend for others.

To process QDocs, you need to follow some special steps when you set up and configure Q/LinQ:

- 1 Install Q/LinQ based on standard installation instructions, giving special consideration to the setting in the `QqMomAdapter.ini` file that affects processing of QDocs.
- 2 Specify the location of the QXI server in Q/LinQ Control (36.8.24).
- 3 Define appropriate defaults in Register External Application (36.8.1.1).
- 4 Define import specifications for QDocs using Import Specification Maintenance (36.8.1.3).
- 5 Define import and export specifications for the acknowledgement documents passed between QAD Enterprise Applications and QXI.

## Install and Configure Q/LinQ

You should install and configure Q/LinQ using the instructions in *External Interface Guide: QAD Q/LinQ* in conjunction with the information related to the most current service pack for Q/LinQ. To use Q/LinQ with QXtend, you must have one of the following minimum release levels:

- eB Service Pack 7 or higher
- eB2 Service Pack 4 or higher
- eB2.1 or QAD Enterprise Applications 2008 Standard Edition, any version





- QAD Enterprise Applications 2008 Enterprise Edition

A section in the Q/LinQ MOM adapter initialization file (`QqMomAdapter.ini`) supports the use of Q/LinQ with QXI. The `[envelope usage]` section indicates for each supported Q/LinQ external application ID whether it uses a QDoc envelope for inbound and outbound communications. Setting this parameter to True indicates to Q/LinQ that it should remove the SOAP envelope before processing a document received from a specific application ID.

Table 21.1 lists the variable in the `[envelope usage]` section of the Q/LinQ MOM Adapter.

**Table 21.1**  
Envelope Section


| Variable               | Description                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <application ID value> | True if all messages received from and sent to the external application will use the QDoc envelope; otherwise, false. If omitted, false is assumed. |

Setting the value to false or omitting it causes the Q/LinQ MOM adapter to behave as it did before the introduction of QDocs.

## Define QXI URL

Specify the URL that identifies the location of QXtend in your system (maximum 70 characters) in Q/LinQ Control (36.8.24).

**Fig. 21.1**  
Q/LinQ Control (36.8.24), QXtend Webservice URL

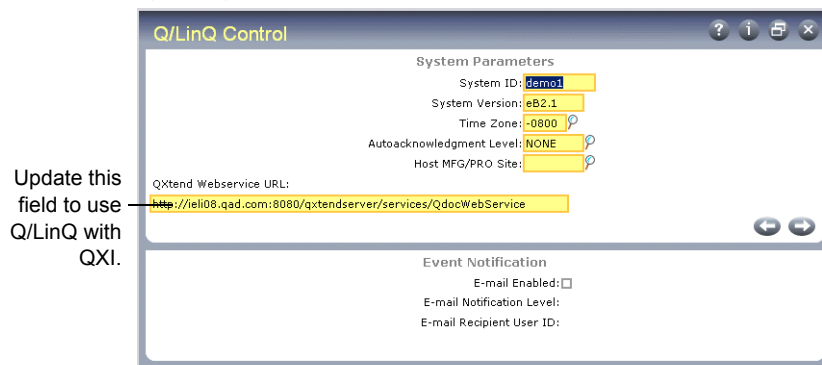


Q/LinQ uses this URL to locate the QXtend server when the import specification associated with a document indicates that it should be processed through QXtend.

## Define External Application Defaults

In Register External Application (36.8.1.1), enter the unique IDs you have decided upon for identifying specific connections. Settings in two frames affect the relationship between Q/LinQ and QXtend.

In the Default Data Mapping Parameters frame, review the setting for Document Standard for Import.


**Fig. 21.2**  
Register External Application (36.8.1.1), Default Data Mapping Parameters

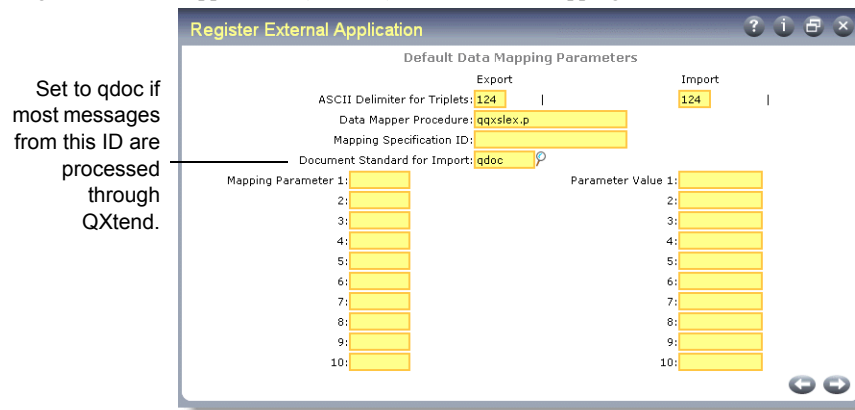

If most of the documents you are going to process using this connection will be mapped to QDocs, specify qdoc in this field. Q/LinQ uses this field to determine how to process a message when a specific import specification cannot be found.

In the Miscellaneous Defaults frame, set the appropriate value for Process Through QXtend.

**Fig. 21.3**  
Register External Application, Miscellaneous Defaults

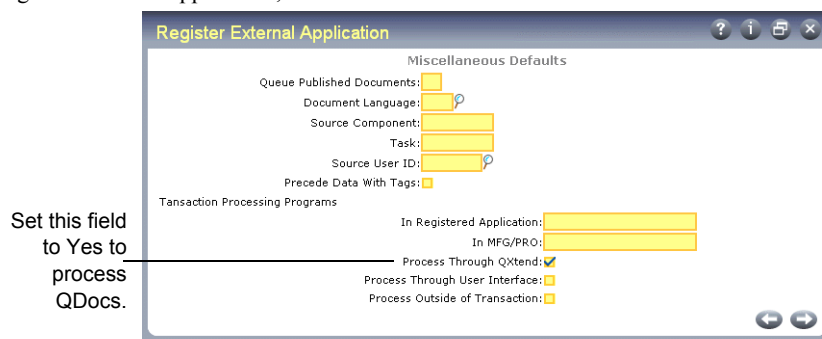

The value you set here defaults to the same field in Import Specification Maintenance when you define a new import specification for this application. If you plan to process most of the documents from this external application as QDocs, set this field to Yes.

## Set Up Import Specifications for QDocs

Use Import Specification Maintenance (36.8.1.3) to set document-specific parameter values for importing messages to be processed as QDocs.

Many fields in this program default from the values you specify in Register External Application.

## Matching Specifications to Documents

You can use up to five values to define an import specification: document standard, document type, document revision, application ID, and trading partner ID. The only required field is the document type. The system uses the following logic to find a specification to apply to a document:

- 1 It looks for one with an exact match for document standard, document type, document revision, application ID, and trading partner ID.
- 2 It looks for one with matching document standard, document type, document revision, application ID, and a blank trading partner ID.
- 3 It looks for one with matching document standard, document type, document revision, and blank application and trading partner IDs.

This lets you set up generic specifications that can apply to all documents of a certain type (and optional standard and revision) regardless of the particular application or trading partner associated with a document.

## Register Import Specifications

The key field in Import Specification Maintenance (36.8.1.3) related to QXtend is Process Through QXtend.

**Fig. 21.4**  
Import Specification Maintenance (36.8.1.3)

**Application ID.** Enter the name of an external application. Leave blank if you want this specification to apply to all documents of a certain type, standard, and revision without regard to the associated application.

**Document Standard.** Enter qdoc as the document standard to process documents through QXtend.

**Document Type.** Enter a user-defined name for the type of data that is being processed.

Document Revision and Trading Partner ID can be left blank. If they are used, Document Standard, Document Type, Document Revision, and Trading Partner ID must be a unique combination of values.

**Fig. 21.5**  
Import Specification Maintenance, Interface Control Parameters

Set this field to Yes to process QDocs.

In the Interface Control Parameters frame, set up incoming processing parameters.

**MFG/PRO Destination Procedure.** Leave this field blank to process the incoming document through QXtend. When Process Through QXtend is Yes, the system automatically invokes qqdocpr . p to process the imported document as a QDoc.

**Process Through QXtend.** Indicate if you want the documents associated with this import specification to be processed using QXI.

No: Documents are processed through user interface emulation or gateway programs.

Yes: Documents are processed as QDocs through QXI.

**Note** When this field is Yes, the document is treated as a QDoc regardless of the setting for Process Through User Interface.

**Process Through User Interface.** Enter Yes to invoke the destination procedure through the CIM Interface. When Process Through QXtend is Yes, this field is assumed to be No.

**Fig. 21.6**  
Import Specification Maintenance, Data Mapping Parameters

In the Data Mapping Parameters frame, enter the user-written mapping program that maps the input data to the QDoc XML format.

## Set Up for Acknowledgements

When you use Q/LinQ and QXtend together, QDoc confirmation documents can be sent between the two applications to acknowledge the receipt and processing of messages. Specific mapping procedures and XSLT stylesheets must be used to map these documents to the format required by the receiving application.

Use the values in Table 21.2 in the Data Mapping Parameters frame of Export Specification Maintenance (36.8.1.2) to map QDoc confirmations to the CONFIRM\_BOD format used by Q/LinQ.

**Table 21.2**

Mapping Values for Exporting Acknowledgements

BOD: CONFIRM\_BOD  
 XSLT Stylesheet (Mapping Specification ID): QdocToCoBo4e.xml  
 DTD File: 002\_confirm\_bod\_004.dtd  
 Data Mapper Procedure: qqxslex.p  
 Mapping Parameter 1: rawform  
 Parameter Value 1: xml

Use the values in Table 21.3 when setting up records in the Interface Control Parameters and Data Mapping Parameters frames of Import Specification Maintenance (36.8.1.3) to map Q/LinQ CONFIRM\_BOD messages to the XML QDoc format.

**Table 21.3**

Mapping Values for Importing Acknowledgements

BOD: CONFIRM\_BOD  
 XSLT Stylesheet (Mapping Specification ID): CoBo4iToQdoc.xml  
 DTD File: 002\_confirm\_bod\_004.dtd  
 Data Mapper Procedure: qqxslin.p  
 MFG/PRO Destination: qqprccnf.p  
 Process Through User Interface: No  
 Mapping Parameter 1: rawform  
 Parameter Value 1: xml



## Section 3

# QAD QXtend Licensing

This section contains information on implementing and using licensing in QXtend.

### ***Licensing***    **269**

Explains how to use the License Manager, license configuration, and agent and receiver statuses.





# Licensing

***Introduction* 270**

Explains how QXtend licensing works.

***Licensing Types* 270**

Discusses different types of licensing.

***License Manager* 271**

Discusses the License Manager flow.

***License Configuration* 272**

Explains how to use Connection Pool Settings, list domains, applications without domains, outbound licensing settings, and record license codes.

***Agent, Receiver, and Sender Statuses* 275**

Explains how the Licensed Agents and Licensed Receivers windows are used.

***Licensing Reports* 277**

Explains how to use the QXtend Inbound Usage report.

## Introduction

When QAD QXtend is first installed, the installation defaults to a QAD & Approved QAD Partner Free Use license. This license enables QAD QXtend to process data synchronization and QAD internal messages—including messages between QXO and QXI—free of charge. In order for QAD QXtend to communicate with other products, you must submit a license code issued by QAD.

QAD QXtend licensing is based on a hierarchy of the base module, receivers, senders, and agents. Each is individually priced. The base module requires a number of receivers and agents, and each agent is coupled with an additional receiver. The base module becomes available when you enter a valid license. The license encodes how many receivers and agents are available for each QAD QXtend installation, the type of license, and a unique code indicating the organization who owns the license.

Agents move data into and out of the system. They listen for requests to transmit data, gather the data to transmit, and deliver it to the receiver. In QXI, connection pools are assigned one or more processing threads. When the system processes a QDoc request, it uses an available connection pool agent. In QXO, Message Sender sessions are the processing agents. Each agent is licensed, and a limit encoded into the license ensures that the number of agents is not exceeded across the QAD QXtend installation. The number of receivers is not enforced.

## Licensing Types

There are four types of licensing:

- Type 1 – Standard
- Type 2 – Message-based
- Type 3 – Enterprise
- Type 4 – QAD & Approved QAD Partner Free Use

### Standard

Standard licensing limits the number of agents and receivers that can be used across QAD QXtend.

### Message-Based

This licensing type is based on the number of messages processed, where the customer has bought a certain amount of QXtend messages.

### Enterprise

Enterprise licensing allows unlimited receivers and agents. It is generally used in implementations where the total number of receivers exceeds 47 or the total number of agents exceeds 68.



## QAD & Approved QAD Partner Free Use

Under this default license type, no license code has been loaded. Any messages between QXO and QXI are carried free of charge regardless of whether the messages are data synchronization or not. In addition, messages between other QAD applications are carried free of charge using QAD QXtend QAD & Approved QAD Partner Free Use license. For example, QAD Production Scheduler uses QAD QXtend to update work orders. Partner applications also use QAD QXtend messaging free of charge.

For details regarding the free use of QXO, see “Free Use of QXO” on page 42.


## License Manager

QAD QXtend pricing and licensing is enforced using the License Manager Web service, which controls the release of receivers and agents. The License Manager enables you to limit the total number of licensed agents, monitor the release of licenses, and track the number of receivers in use. It is located within QXI and supports a single instance of QAD QXtend.

The License Manager enforces the agent limit encoded in the QAD QXtend license by tracking when agents are requested and when they are released. It retrieves the agent limit by decoding the agent count from the license string. This enforced limit ensures that the number of agents is not exceeded across a QAD QXtend installation.

When the License Manager is started, it creates a license pool for the current QAD QXtend instance. The license pool then creates a pool of agents, determined by the licensed agent count, and initializes them. Agents in the initialized state have been created, but are not yet assigned a processing task.

**Fig. 22.1**  
License Manager Flow

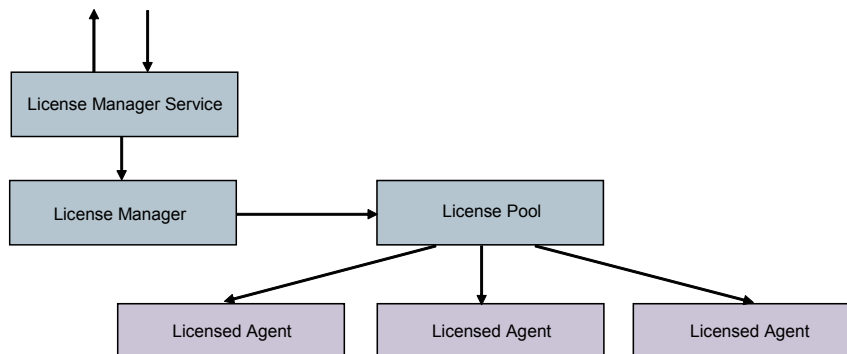

Each time a Message Sender service in QXO is started for an unregistered subscriber, the system makes a call to the License Manager to reserve an agent for the task. In QXI, connection pool agents process QDoc requests, and one or more processing threads are assigned to each connection pool.

Each time a QDoc is processed, a request for a licensed agent is sent to the License Manager. If there are no available agents, an exception is returned and processing stops. The system waits a predefined period for an available licensed agent. The waiting period is determined using a combination of the values in the Configurable Timeout and Maximum Retry fields in the Connection Pool window.

A licensed agent changes state from idle to busy when processing a task. When the task is complete, the agent becomes idle again and is available to process other tasks. This allows agents to be used freely across the QXI and QXO services.

A connection thread is an idle connection in the QXI connection pools or a Message Sender thread in QXO. Each time a connection thread is closed, the License Manager releases the agent from the reserved pool.

Changes to licenses, configurations, and license manager activities are logged in `licenceManager.log`.

## License Configuration

### Connection Pool Settings

The Connection Pool window enables you to specify the number of attempts the License Manager makes to reserve a licensed agent, and the period of time the License Manager waits for an available agent. If the License Manager cannot reserve an agent and has exceeded the number of retry attempts, QXI returns an exception.

**Fig. 22.2**  
Connection Pool Settings

Configuration Settings Update

Pool Name:

Host:

Protocol:

Port:

Server Startup Script:

Server Startup Password:

SSH Private Key File:

SSH Private Key Password:

Minimum Connections:

Maximum Connections:

Maximum Failures:

Connections Monitor Frequency:

Wait time for Idle Connection:

**Max Licensed Agent Retry:**

Wait time for Licensed Agent:

Connection Timeout:

Processing Timeout:

Message Timeout:

Processing Message Timeout:

Initializing Timeout:

Stop On Pause: ☐

Operating System Win32/NT: ☐

Progress Controller Program:

NT Delay:

Connection Setup User ID:

Connection Setup Password:

Domain (If Applicable):

Save Cancel

*Max Licensed Agent Retry.* Specify the number of times the system attempts to reserve a licensed agent before returning an exception.


*Wait Time for Licensed Agent.* Specify the number of milliseconds that the system waits for a licensed agent.

## List Domains

Use the Add Receiver window to assign a list of valid domain codes when you define a new receiver. The License Manager rejects any QDoc for an undefined domain.

**Fig. 22.3**

Add Receiver, Licensed Domains

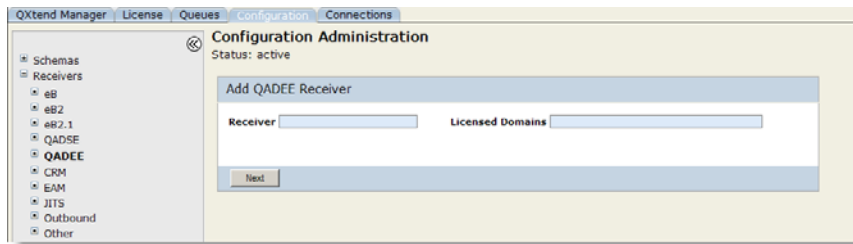

You can specify a comma-separated list of domains or a single domain. If you define a comma-separated list, the system converts the list into the appropriate XML format, and updates the `qdocReceivers.xml` file. If a receiver does not use domains, the `qdocReceivers.xml` file has a single domain entry that defaults to the receiver name.

**Note** If the domain is not specified in the request QDoc, then the default domain defined in the Connection Pool window is used. If a default domain is not specified on the connection pool, the request fails to process.


When you update the list of valid domains in the Add Receiver window, the receiver count is also updated in the License Manager.

## Applications without Domains

When adding receivers for eB and eB2, the Add Receivers window does not show a list of licensed domains. You must select the Licensed field to indicate whether the receiver will be processing requests that require a licensed agent.

**Fig. 22.4**

Add eB Receiver

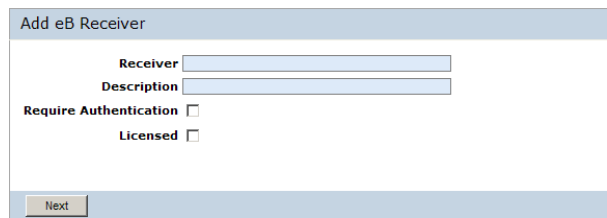


## Outbound Licensing Settings

Use the License Manager Details window in the Configuration tab to configure the License Manager for QXO. This enables you to record the location of QXI to ensure that the count of licensed agents and receivers is synchronized across QAD QXtend.

Each time you configure a subscriber (receiver) in QXO, the system sends a message to the License Manager.

**Fig. 22.5**  
License Manager Details

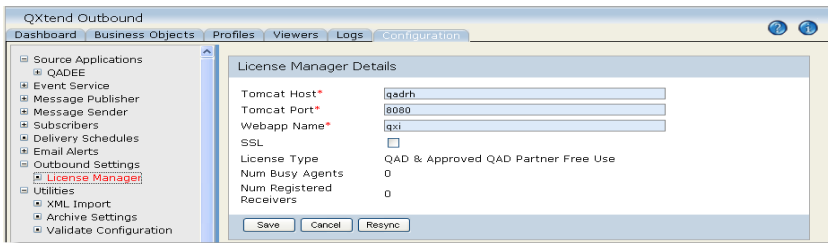

*Tomcat Host.* Specify the host name of the License Manager.

*Tomcat Port.* Specify the port where the License Manager resides.

*Webapp Name.* Specify the web application name of QXI.

*License Type.* Displays the type of license. The possible types are Standard, Message-based, Enterprise, and QAD & Approved QAD Partner Free Use.

*Number of Busy Agents.* Displays the number of busy agents in both Inbound and Outbound.


*Number of Registered Receivers.* Displays the number of registered receivers in both Inbound and Outbound.

## Record License Codes

When QAD QXtend is first installed, the installation defaults to a QAD & Approved QAD Partner Free Use license. This license only permits data synchronization and QAD internal messages to be processed. In order for QAD QXtend to communicate with other products, you must record a license code issued by QAD.

Use the License Administration window in QXI to submit a license code.

**Fig. 22.6**  
License Administration

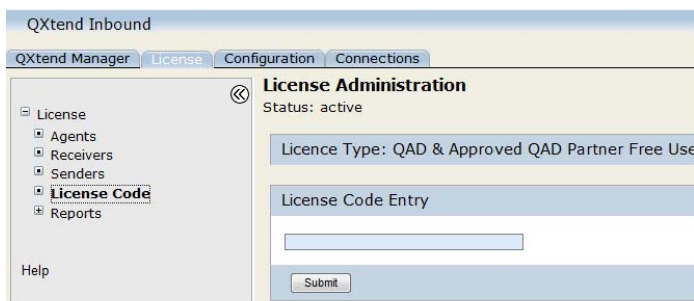

*License Type.* Displays the type of license.

*License Code Entry.* Enter the license code you received from QAD, and click Submit.

When you submit a new license code, the system validates it and updates the QXtend license type accordingly. If a license code has already been entered, the system overwrites it based on the new license code.


If a license file has already been entered, the system overwrites it and resets the License Manager's internal count information.

## Agent, Receiver, and Sender Statuses

### Licensed Agents

The Licensed Agents window tracks and displays the number of licensed agents, as defined in the license code. It also displays the number of agents that are currently used in processing, and the task assigned.

**Fig. 22.7**  
Licensed Agents

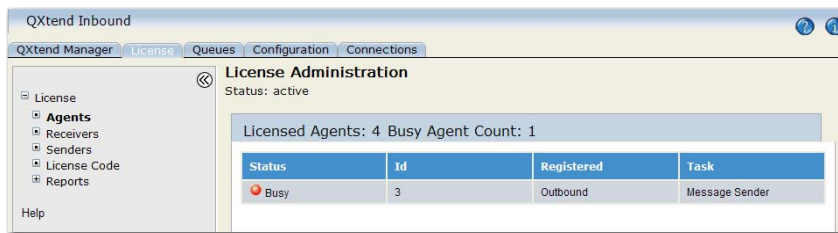

**Status.** Displays the status of the agent. For example, Busy or Idle.

**ID.** Displays the process ID of the agent.

**Registered.** Indicates where the agent is registered, QXI or QXO.


**Task.** If processing a message through QXI, the name of the QDoc currently being processed is displayed. If the agent is assigned to QXO, the task is the Message Sender, which indicates that the agent is currently occupied by a Message Sender service in QXO.

### Licensed Receivers

Use the Licensed Receivers window to display the total number of licensed receivers in both QXI and QXO, and to view the list of registered receivers.

**Note** When using the same Target URL, multiple Web Service subscribers with Subscriber Type set to External Application are considered as one licensed receiver.

**Fig. 22.8**  
Licensed Receivers

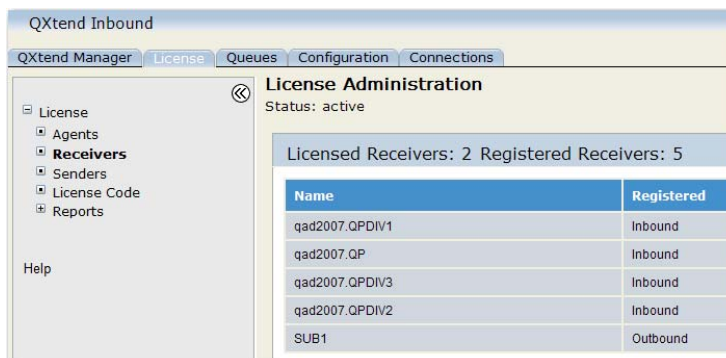


*Name.* Displays the name of the receiver.

*Registered.* Indicates where the agent is registered, QXI or QXO.

## Licensed Senders

Use the Licensed Senders window to view the current licensing information of all senders along with their license expiration dates, if any.

**Fig. 22.9**  
Licensed Senders

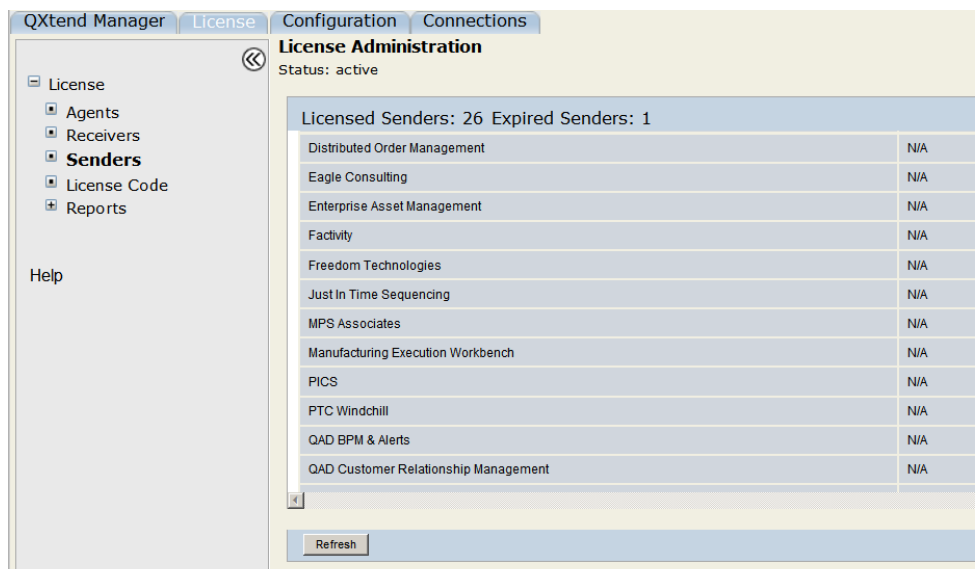

*Name.* Displays the name of the sender.

*Expiry Date.* Indicates when the license of the sender expires. Currently, only QAD Initial Data Load, which represents the license for QAD QXtend Excelsior, has an expiration date.



# Licensing Reports

## QXtend Inbound Usage Report

The QXtend Inbound Usage report displays the number of messages processed through QXI. The report indicates which messages originated from licensed applications and which are free QAD messages.

You can specify the time scope to view the usage report for a specific period.

**Fig. 22.10**  
Date Selector for QXtend Inbound Usage Report



**Fig. 22.11**  
QXtend Inbound Usage Report

The screenshot shows the 'QXtend Inbound Usage (From Date: 01/01/2013 - To Date: 12/31/2014)' report. The 'QAD Application Usage' table lists the following data:

| Sending Application ID       | Qdoc Name                | Messages Processed |
|------------------------------|--------------------------|--------------------|
| QAD BPM & Alerts             | authenticate             | 23                 |
| QAD BPM & Alerts             | createQADMessage         | 1                  |
| QAD BPM & Alerts             | logout                   | 17                 |
| QAD BPM & Alerts             | validateLicense          | 3                  |
| QAD Initial Data Load        | SOAPFault                | 29                 |
| QAD Initial Data Load        | getQdocFieldLabel        | 4                  |
| QAD Initial Data Load        | issueInventory           | 1                  |
| QAD Initial Data Load        | maintainItemData         | 289                |
| QAD Initial Data Load        | maintainPurchaseOrder    | 9                  |
| QAD Initial Data Load        | query/MaintainItemMaster | 3                  |
| QAD Initial Data Load        | receivePurchaseOrder     | 417                |
| QAD Initial Data Load        | recordCallActivity       | 4                  |
| Total QAD Messages Processed |                          | 800                |



## Configuration Data Transfer

This section contains information on data transfer between QXtend instances.

### ***Configuration Data Transfer***    **281**

Explains how to use command to transfer configuration data between QXtend instances.



# Configuration Data Transfer

This section contains information on transferring configuration components between QXtend instances.

**Overview** 282

**Exporting Configuration Data** 282

**Importing Configuration Data** 283

**Customizing Configuration Data Transfer** 285

**Data Mapping for Importing** 290

**Viewing Reports** 291

**Usage Scenario** 292

## Overview

To improve efficiency, you may need to transfer customized configuration data from one QXtend instance to another; for example, from the test system to the production system. You can export the configuration data from the source system to a bundle file and then import the configuration into the target system.

You can transfer:

- API schemas and Receiver APIs between QXtend Inbound instances
- Business objects (BO) and profiles, subscriber profiles, BO registrations with message publishers, and source application event type between QXtend Outbound instances

**Note** Before using this tool on a Linux system, ensure that you have installed Java 1.6 and specified the JAVA\_HOME directory in the configuration bundle scripts `qxicfgbundle.sh` and `qxocfgbundle.sh`.

## Exporting Configuration Data

The first step to transfer configuration data is to export the data from the source QXtend instance.

### Exporting Data from QXI

To export configuration data from QXI:

- 1 Locate the `qxicfgbundle.sh` (for Linux) or `qxicfgbundle.bat` (for Windows) file at `<TOMCAT_HOME>/webapps/<QXI webapp>/WEB-INF/scripts`.
- 2 Do one of the following to export APIs:
  - For exporting all schema and receiver APIs from the source system, run  
`./qxicfgbundle.sh -e [bundle_file]`
  - For exporting specific APIs from the source system, run  
`./qxicfgbundle.sh -e [bundle_file] -d [action_descriptor_file]`

**Example** If you want to export specific data to the `qxi_bundle.zip` using the descriptor file `receiver_qaderp.xml`, use the command:

```
./qxicfgbundle.sh -e qxi_bundle.zip -d receiver_qaderp.xml
```

For information on how to create an action descriptor file, see “Customizing Configuration Data Transfer” on page 285.

If it is the first time you have exported configuration data, this command creates the export folder and the import folder in the WEB-INF folder. The data in the source QXI are exported to the specified `.zip` file in the export folder. If you do not specify the bundle file name, the `.zip` file name is `qxiCfgBundle.zip`, by default. You can view the export result in the corresponding `.report.txt` file. For more information about report, see “Viewing Reports” on page 291.

**Note** The export action overwrites the existing `.zip` and `.report.txt` files that have identical names with the files to generate.

## Exporting Data from QXO

You can export the BOs and their associated profiles, source application event type, BO registrations with message publishers, and subscriber profiles to a bundle file. By using the action descriptor XML file, you can customize the export.

To export data from QXO:

- 1 Locate the `qxocfgbundle.sh` (for Linux) or `qxocfgbundle.bat` (for Windows) file at `<QXOServer_install_dir>/scripts`.
- 2 Do one of the following to export data:
  - For exporting all data, run
 

```
./qxocfgbundle.sh -e [bundle_file]
```
  - For exporting specific data, run
 

```
./qxocfgbundle.sh -e [bundle_file] -d [action_descriptor_file]
```

**Example** If you want to export data to `qxo_bundle.zip` using the descriptor file `bpm_config.xml`, use the command:

```
./qxocfgbundle.sh -e qxo_bundle.zip -d bpm_config.xml
```

For information on how to create an action descriptor file, see “Customizing Configuration Data Transfer” on page 285.

If it is the first time you have exported configuration data, this command creates the export folder and the import folder in the `qxoserver` folder. The BOs, profiles, or both are exported to the specified `.zip` file in the export folder. If you do not specify the bundle file name, the `.zip` file name is `qxocfgBundle.zip` by default. You can view the export result in the corresponding `.report.txt` file. For more information about reports, see “Viewing Reports” on page 291.

**Note** The export action overwrites the existing `.zip` and `.report.txt` files that have identical names with the files to generate.

## Importing Configuration Data

When you finish exporting the configuration components from the source system, the next step is to import them into your target system.

### Importing Data to QXI

To import configuration data to the target system:

- 1 Copy the bundle file that is exported from the source system and paste it to `<TOMCAT_HOME>/webapps/<QXI_webapp>/WEB-INF/import`.
- 2 Locate the `qxicfgbundle.sh` file at `<TOMCAT_HOME>/webapps/<QXI_webapp>/WEB-INF/scripts`.
- 3 Do one of the following to import data:
  - For importing all data from the bundle file, run
 

```
./qxicfgbundle.sh -i [bundle_file]
```

**Note** If a configuration item in the bundle file exists in the target system, the import will fail. In this case, use a descriptor file as stated in the next option.

- For importing specific data from the bundle file, run  

```
./qxifgbundle.sh -i [bundle_file] -d [action_descriptor_file]
```

For information on how to create an action descriptor file, see “Customizing Configuration Data Transfer” on page 285.
- If the receiver names in the sources system are different from the names in the target system, use a mapping file during importing and run  

```
./qxifgbundle.sh -i [bundle_file] -d [action_descriptor_file] -m [mapping_file]
```

For information on how to create a mapping file, see “Data Mapping for Importing” on page 290.

**Example** If you import data from the exported bundle `qxi_bundle.zip` using the descriptor file `receiver_qaderp.xml` and the mapping file `qxi_mapping.xml`, run  

```
./qxifgbundle.sh -i qxi_bundle.zip -d receiver_qaderp.xml -m qxi_mapping.xml
```

If you do not specify the bundle file name, the system looks for `qxiCfgBundle.zip` and imports data from it, if available.

## Importing Data to QXO

To import data to the target QXO:

- 1 Copy the bundle file that is exported from the source system and paste it to the `import` folder in `qxoserver`.
- 2 Locate the `qxocfgbundle.sh` file at `<QXOServer_install_dir>/scripts`.
- 3 Do one of the following to import data:
  - For importing all data from the bundle file, run  

```
./qxocfgbundle.sh -i [bundle_file]
```

**Note** If a configuration item in the bundle file exists in the target system, the import will fail. In this case, use a descriptor file as stated in the next option.

- For importing specific configuration items, run  

```
./qxocfgbundle.sh -i [bundle_file] -d [action_descriptor_file]
```

For information on how to create an action descriptor file, see “Customizing Configuration Data Transfer” on page 285.
- If the names of source application, message publishers, or subscribers in the sources system are different from the names in the target system, use a mapping file during importing and run  

```
./qxocfgbundle.sh -i [bundle_file] -d [action_descriptor_file] -m [mapping_file]
```

For information on how to create a mapping file, see “Data Mapping for Importing” on page 290.

**Example** If you import data from the exported bundle `qxo_bundle.zip` using the descriptor file `BO_profile_import.xml` and the mapping file `qxo_mapping.xml`, run  

```
./qxocfgbundle.sh -i qxo_bundle.zip -d BO_profile_import.xml -m qxo_mapping.xml
```

If you do not specify the bundle file name, the system looks for `qxoCfgBundle.zip` and import items from it, if available.



## Customizing Configuration Data Transfer

If you want to transfer some of the configuration data rather than all or you want to define system behavior in certain situations, define the action descriptor XML file before transferring. The descriptor XML file specifies which configuration components to export or import and the system response on the existing and non-existing data items. You can either create a descriptor file for exporting or importing data or generate one and edit it to define the rules.

### Creating a Descriptor File

Ensure that you create the descriptor file in the required structure as the following examples. For more examples, see “Defining Configuration Component Attributes” on page 288.

- For QXI export

```
<?xml version="1.0" ?>
<qxiCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="export" onNotExist="stop" />
  <module name="module_name">
    <apiSchemaCfg qdocName="qdoc_name" version="version" type="type"/>
    <apiSchemaCfg qdocName="qdoc_name" version="version" type="type"/>
    <receiver name="receiver_name">
      <receiverApiCfg qdocName="qdoc_name" version="version" type="type"/>
      <receiverApiCfg qdocName="qdoc_name" version="version" type="type"/>
    </receiver>
  </module>
  <module name="module_name">
    <receiver name="receiver_name">
      <receiverApiCfg qdocName="qdoc_name" version="version" type="type"/>
      <receiverApiCfg qdocName="qdoc_name" version="version" type="type"/>
    </receiver>
  </module>
</qxiCfgBundleActionDescriptor>
```

- For QXO export

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml version="1.0" ?>
<qxoCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="export" onNotExist="stop" />
  <sourceApplicationType name="srcApp_name">
    <businessObjectCfg name="BO_name">
      <profileCfg name="BO_profile_name" />
      <profileCfg name="BO_profile_name" />
    </businessObjectCfg>
  </sourceApplicationType>
  <subscriber code="subscriber_code">
```

```

        <subscriberProfileCfg sourceApplicationType="" businessObject="" profile="" />
        <subscriberProfileCfg sourceApplicationType="" businessObject="" profile="" />
    <messagePublisher sessionCode="session_code">
        <businessObjectRegistrationCfg sourceApplicationType="" businessObject="" />
        <businessObjectRegistrationCfg sourceApplicationType="" businessObject="" />
    </messagePublisher>
</qxioCfgBundleActionDescriptor>

```

The descriptor XML files for import and export have similar structure but with different values in the action node. For import, there is an `onExist` attribute defining the system response on the existing entities in the target system. For more information about system response, see “Defining System Response” on page 287.

- For export

```
<action name="export" onNotExist="stop" />
```

- For import

```
<action name="import" onNotExist="stop" onExist="stop"/>
```

## Generating a Descriptor File

To generate a descriptor file for exporting data:

- 1 Locate the `qxocfgbundle.sh` file at
  - `<TOMCAT_HOME>/webapps/<QXI webapp>/WEB-INF/scripts` for QXI.
  - `<QXOServer_install_dir>/scripts` for QXO.
- 2 Run the following command.
  - For QXI, run  
`./qxocfgbundle.sh -gd -d [action_descriptor_file]`
  - For QXO, run  
`./qxocfgbundle.sh -gd -d [action_descriptor_file]`

The descriptor file with the specified name is generated in the `export` folder. If you do not specify the descriptor file name, the descriptor file is named as `qxicfgBundle.export.xml` (for QXI) or `qxocfgBundle.export.xml` (for QXO).

**Example** If you want to generate a descriptor file named `qxo_export.xml`, use the command:  
`./qxocfgbundle.sh -gd -d qxo_export.xml`

- 3 Edit the generated file to scope the configuration components to export. For information on how to edit the descriptor file, see “Defining System Response” on page 287 and “Defining Configuration Component Attributes” on page 288.

To generate a descriptor file from a bundle file for importing data:

- 1 Put the bundle file that you want to generate a descriptor file from in
  - `<TOMCAT_HOME>/webapps/<QXI webapp>/WEB-INF/import` for QXI
  - `<QXOServer_install_dir>/import` for QXO
- 2 Locate the `qxocfgbundle.sh` file at

- `<TOMCAT_HOME>/webapps/<QXI webapp>/WEB-INF/scripts` for QXI
- `<QXOServer_install_dir>/scripts` for QXO

**3** Run the following command.

- For QXI, run  
`./qxifgbundle.sh -gd [bundle_file] -d [action_descriptor_file]`
- For QXO, run  
`./qxocfgbundle.sh -gd [bundle_file] -d [action_descriptor_file]`

The descriptor file with the specified name is generated in the import folder. If you do not specify the descriptor file name, the descriptor file uses the bundle file name but with `.xml` as the extension.

**Example** If you want to generate a descriptor file named `qxo_import.xml` from the bundle file `qxo_bundle.zip`, use the command:

```
./qxocfgbundle.sh -gd qxo_bundle.zip -d qxo_import.xml
```

If you do not specify a name for the descriptor file in the command, it is named as `qxo_bundle.xml`.

**4** Edit the generated file to scope the configuration components to import. For information on how to edit the descriptor file, see “Defining System Response” on page 287 and “Defining Configuration Component Attributes” on page 288.

## Defining System Response

In the descriptor XML file, `onNotExist` attribute controls the import and export process and `onExist` attribute controls the import process only. If you define these attributes in the action node, they work on all items that are specified in the descriptor file. However, they can be overridden by values defined at lower levels.

**Example** The attributes in the action node:

```
<action name="import" onNotExist="skip" onExist="skip" />
```

You can also use these attributes in the configuration item elements to define specific items. If you do not define the attributes on item level, the system follows the rules defined in the action node.

**Example** The attributes on item level:

```
<module name="QADEE">
  <apiSchemaCfg qdocName="bdomain" version="ERP3_1" type="standard" />
  <apiSchemaCfg qdocName="bvat" version="*" type="*" onExist="overwrite" />
  <apiSchemaCfg qdocName="maintainItemMaster" version="*" type="custom" />
  <apiSchemaCfg qdocName="bgl" version="*" type="*" onExist="overwrite" />
</module>
```

If you do not define the values either in the action node or in the configuration items lines, the system defaults the value for them as `stop`. For details on the attributes, see Table 23.1.

**Table 23.1**  
onNotExist and onExists Attributes

| Attribute  | Value     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| onNotExist | stop      | <ul style="list-style-type: none"> <li>For export process:<br/>If the specified item in the descriptor XML file does not exist in the source QXtend, the system stops the export process and records an error in the .report.txt file. It is the default option.</li> <li>For import process:<br/>If the specified item in the descriptor XML file does not exist in the bundled zip file, the system stops and rolls back the import process. An error is recorded in the .report.txt file. It is the default option.</li> </ul> |
|            | skip      | <ul style="list-style-type: none"> <li>For export process:<br/>If the specified item in the descriptor XML file does not exist in the source QXtend, the system skips this item and continues with the remaining items. A warning is recorded in the .report.txt file.</li> <li>For import process:<br/>If the specified item in the descriptor xml file does not exist in the bundled zip file, the system skips this item and continues with the remaining items. A warning is recorded in the .report.txt file.</li> </ul>     |
| onExist    | stop      | If the specified item exists in the target QXtend, the system stops and rolls back the import process and records an error in the .report.txt file. It is the default option.                                                                                                                                                                                                                                                                                                                                                     |
|            | skip      | If the specified item exists in the target QXtend, the system skips this item and continues with the remaining items. A warning is recorded in the .report.txt file.                                                                                                                                                                                                                                                                                                                                                              |
|            | overwrite | If the specified item exists in the target QXtend, the system overwrites the item in the target with the item in the bundle file. A warning is recorded in the .report.txt file.                                                                                                                                                                                                                                                                                                                                                  |
|            | merge     | If the specified item exists in the target QXO, the system merges the item in the target and the item in the bundle file. A warning is recorded in the .report.txt file.                                                                                                                                                                                                                                                                                                                                                          |

## Defining Configuration Component Attributes

In the descriptor XML file, you can specify which configuration components to export or import by defining the attributes. For example, you can define the attributes of API name, version, and type for API schemas to filter out the components that you need. For BOs, you can also define whether to export or import their profiles.

### Example

- Descriptor File for QXI Import:

```
<?xml version="1.0" ?>
<qxiCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="import" onNotExist="stop" onExist="stop">
    <bundleRestriction bundleId="3c98e02e-3bd6-423a-a2fb-12a29fb8b1d3"/>
  </action>
  <module name="QADEE">
    <apiSchemaCfg qdocName="allocateSalesOrder" version="eB_1" type="standard"/>
    <apiSchemaCfg qdocName="allocateSalesOrder" version="eB_2" type="standard"/>
    <apiSchemaCfg qdocName="authorizeKanban" version="ERP3_1" type="standard"/>
    <apiSchemaCfg qdocName="bbudgetgroup" version="ERP3_1" type="standard"/>
    <apiSchemaCfg qdocName="bbusinessrelation" version="ERP3_1" type="standard"/>
    <receiver name="QADERP">
      <receiverApiCfg qdocName="allocateSalesOrder" version="eB_2" type="standard"/>
      <receiverApiCfg qdocName="authorizeKanban" version="ERP3_1" type="standard"/>
      <receiverApiCfg qdocName="bbudgetgroup" version="ERP3_1" type="standard"/>
      <receiverApiCfg qdocName="bbusinessrelation" version="ERP3_1" type="standard"/>
    </receiver>
  </module>
</qxiCfgBundleActionDescriptor>
```

```
</qxiCfgBundleActionDescriptor>
```

- Descriptor File for QXO Export:

```
<?xml version="1.0" ?>
<qxoCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="export" onNotExist="stop">
    <bundleRestriction bundleId="d14d4b2d-32d8-2082-e311-2902cc84bccd"/>
  </action>
  <sourceApplicationType name="QADEE">
    <businessObjectCfg name="AlternateUM">
      <profileCfg name="AlternateUM"/>
      <profileCfg name="MaintainAlternateUM"/>
    </businessObjectCfg>
    <businessObjectCfg name="AnalysisCode">
      <profileCfg name="AnalysisCode"/>
      <profileCfg name="MaintainAnalysisCode"/>
    </businessObjectCfg>
    <sourceApplication code="QADERP">
      <databaseEventCfg tableName="abs_mstr"/>
      <databaseEventCfg tableName="absc_det"/>
      <databaseEventCfg tableName="absd_det"/>
    </sourceApplication>
  </sourceApplicationType>
  <subscriber code="FileDrop">
    <subscriberProfileCfg sourceApplicationType="QADEE" businessObject="AnalysisCode"
    profile="MaintainAnalysisCode"/>
    <subscriberProfileCfg sourceApplicationType="QADEE" businessObject="SalesOrder"
    profile="SalesOrder1"/>
  </subscriber>
  <messagePublisher sessionCode="MP1">
    <businessObjectRegistrationCfg sourceApplicationType="QADEE" businessObject=
    "AnalysisCode"/>
    <businessObjectRegistrationCfg sourceApplicationType="QADEE" businessObject=
    "SalesOrder"/>
  </messagePublisher>
</qxoCfgBundleActionDescriptor>
```

You can use wildcards (\*) to define the attributes in the descriptor file. Any of the following syntax is valid for defining attribute values of configuration components:

- name="\*"
- qdocName="\*SalesOrder\*"
- profile="Maintain\*Code"
- tableName="\*det"
- profile="\*Code\*Detail"

The following rules are used to determine the most specific match pattern:

- The concrete values without any wildcard characters are the most specific. For example, maintainCall is a more specific than any values with wildcard characters, such as maintain\*.
- The later the wildcard character appears, the more specific the value is. For example, shipperDelete\* is more specific than shipper\*.
- The values that have wildcard characters appended with additional characters are more specific than the same values without additional characters. For example, QADERPSales\*Line is more specific than QADERPSales\*.
- If there are multiple key fields in a configuration entity, the entity that has the more specific key field appearing earlier is more specific. For example, ReceiverApiCfg (QADEE, QADERP, queryItem, \*, \*) is more specific than ReceiverApiCfg (QADEE, QADERP, query\*, ERP3\_1, custom).

- If the configuration entities have parent entities, the system compares the values in order from the top parent entities to the child entities. For example, ReceiverApiCfg (QADEE, \*, \*, \*, \*) is more specific than ReceiverApiCfg (QAD\*, QADERP, queryItem, ERP3\_1, custom).

**Example** The user wants to add or replace the business objects starting with Sales and add any other new business objects. The following descriptor meets the requirements. Since "Sales\*" is more specific than "\*", when a BO starting with Sales exists in the target system, it will be replaced with the one in the bundle.

```
.....
<qxc:sourceApplicationType name="QADEE">
  <qxc:businessObjectCfg name="*" onExist="skip"/>
  <qxc:profileCfg name="*" />
  <qxc:businessObjectCfg name="Sales*" onExist="overwrite">
    <qxc:profileCfg name="Custom*" />
  </qxc:businessObjectCfg>
</qxc:sourceApplicationType>
.....
```

If an asterisk is part of the name of a configuration entity, you can use a tilde (~) to escape the asterisk. For example, if a subscriber is named FileDrop\* in your system, specify <subscriber code="FileDrop~\*"> in the descriptor file as shown in the following example. It defines that the subscribers named FileDrop\* will be exported or imported.

**Example**

```
.....
<sourceApplicationType name="QADEE">
  <sourceApplication code="QADERP1">
    <databaseEventCfg tableName="so_mstr" onExist="merge"/>
    <businessEventCfg name="*" object="so_mstr" onExist="merge"/>
  </sourceApplication>
  <subscriber code="FileDrop~*">
    <subscriberProfileCfg sourceApplicationType="*" businessObject="*" profile="*" />
  </subscriber>
  <messagePublisher sessionCode="MP*">
    <businessObjectRegistrationCfg sourceApplicationType="*" businessObject="BD*" />
  </messagePublisher>
.....
```

## Data Mapping for Importing

By using a mapping file, you can import the configuration components that have different names or codes in the source system from the target system. Data mapping supports the following entities:

- QXI receivers
- QXO source applications
- QXO subscribers
- QXO message publishers

Before importing data, you can either create a mapping file or generate one from an exported bundle file. A mapping file is an XML file with the extension of .mapping.xml. See the following examples for the structure of mapping files.

**Example**



- Structure for QXI mapping file

```
<?xml version="1.0" encoding="UTF-8"?>
<qxiCfgBundleActionMapping xmlns="urn:schemas-qad-com:qxtend-configuration">
  <receiverMapping module="QADEE" source="RVR1" target="RVR_A"/>
  <receiverMapping module="QADEE" source="RVR2" target="RVR_B"/>
</qxiCfgBundleActionMapping>
```

- Structure for QXO mapping file

```
<?xml version="1.0" encoding="UTF-8"?>
<qxoCfgBundleActionMapping xmlns="urn:schemas-qad-com:qxtend-configuration">
  <sourceApplicationMapping sourceApplicationType="QADEE" source="SA1" target="SA_A"/>
  <sourceApplicationMapping sourceApplicationType="QADEE" source="SA2" target="SA_B"/>
  <subscriberMapping source="SB1" target="SB_A"/>
  <subscriberMapping source="SB2" target="SB_B"/>
  <messagePublisherMapping source="MP1" target="MP_A"/>
  <messagePublisherMapping source="MP2" target="MP_B"/>
</qxoCfgBundleActionMapping>
```

## Generating a Mapping File

To generate a mapping file from an exported bundle file:

- 1 Copy the bundle file that you want to generate a mapping file from and paste it to
  - <TOMCAT\_HOME>/webapps/<QXI webapp>/WEB-INF/import for QXI
  - <QXOServer\_install\_dir>/import for QXO
- 2 Locate the qxocfgbundle.sh file at
  - <TOMCAT\_HOME>/webapps/<QXI webapp>/WEB-INF/scripts for QXI
  - <QXOServer\_install\_dir>/scripts for QXO
- 3 Run the following command.
  - For QXI, run  
./qxifgbundle.sh -gm [bundle\_file] -m [mapping\_file]
  - For QXO, run  
./qxocfgbundle.sh -gm [bundle\_file] -m [mapping\_file]

The mapping file with the specified name is generated in the import folder. If you do not specify the mapping file name, the process fails.

**Example** If you want to generate a mapping file named qxi\_mapping.xml for QXI import, use the command:

```
./qxifgbundle.sh -gm -m qxi_mapping.xml
```

## Defining the Mapping Rules

In the mapping file you created or generated, define the source attribute and the target attribute for the configuration entities you want to map. See the examples for mapping file structure on page 290.

## Viewing Reports

A report is created after the export or import process is finished. The report file is generated with the same name as the bundle file and with .report.txt as the extension. The report files show the detailed results of the export or import process. For importing, when the import process is

finished, the system validates the imported configuration entities. The validation results are also recorded in the import report file. If any of the following issues happens during validation, a warning message is reported:

- The imported API schema is not registered to a receiver.
- The imported business object is not registered to a message publisher.
- The imported business object, BO profile, or subscriber profile is listening to an event type that is inactive in the target system.
- The imported profile is not registered to a subscriber.
- The imported source application event type is active and not registered to an event service.
- The imported source application event type is active and has no BO, BO profile, or subscriber profile listening to it.

**Example** This is an example of a report for importing QXI configuration data.

```
3 configuration entities have been imported from bundle (ID = 222010f1-b698-46d7-b313-322b2f8683c7) file /tomcat/webapps/qxi_pilot/WEB-INF/test/qxi.zip
```

```
2 API schema(s) created:
```

```
  MODULE NAME, QDOC NAME, VERSION, TYPE
  Outbound, queryCustomerConsignmentCtrl, ERP3_1, custom
  Outbound, queryDebtorcreditEe1, ERP3_1, custom [WARNING]
```

```
1 receiver API registration(s) overwritten:
```

```
  MODULE NAME, RECEIVER NAME, QDOC NAME, VERSION, TYPE
  Outbound, QADQX0, queryCustomerConsignmentCtrl, ERP3_1, custom
```

```
1 receiver API registration(s) skipped because the entities do not exist in source:
```

```
  MODULE NAME, RECEIVER NAME, QDOC NAME, VERSION, TYPE
  QADEE, QADERPpilot, allocateSalesOrder, eB_2, standard
```

```
2 API schema(s) skipped because the entities already exist in target:
```

```
  MODULE NAME, QDOC NAME, VERSION, TYPE
  Outbound, queryCustomerConsignmentCtrl, ERP3_1, custom
  QADEE, allocateSalesOrder, eB_2, standard
```

```
[WARNING]
```

```
1 imported API schema(s) not registered to a receiver:
```

```
  MODULE NAME, QDOC NAME, VERSION, TYPE
  Outbound, queryDebtorcreditEe1, ERP3_1, custom
```

## Usage Scenario

This section uses an example to give a step-by-step illustration of how to finish a configuration data transfer task.

### Task Description

There are two QXtend systems: one is for test; the other is for production. User A has changed some configuration in the test system and finished testing. It is approved to deploy the production system with the configuration of the test system. To avoid manually configuring the production system, User A is going to transfer the configuration components from the test system to the production system.

The configuration components changed in the test system are as follows:

- Changed/added API schemas





| QDoc Name         | Version | Type     | Module Name |
|-------------------|---------|----------|-------------|
| bbusinessrelation | ERP3_1  | custom   | QADEE       |
| bcashgroup        | ERP3_1  | standard | QADEE       |
| bcdocument        | ERP3_1  | custom   | QADEE       |
| maintainECO       | ERP3_1  | standard | QADEE       |
| authorizeKanban   | ERP3_1  | custom   | QADEE       |


- Changed/added receiver APIs

| Receiver Name (Test) | Receiver Name (Production) | QDoc Name         | Version | Type     | Module name |
|----------------------|----------------------------|-------------------|---------|----------|-------------|
| QADERP               | ERP                        | bbusinessrelation | ERP3_1  | standard | QADEE       |
|                      |                            | bcashgroup        | ERP3_1  | standard | QADEE       |
|                      |                            | bcdocument        | ERP3_1  | custom   | QADEE       |
| QADCRM               | CRM                        | maintainUsers     | CRM_1   | custom   | CRM         |
|                      |                            | bdebtoenduser     | CRM_1   | custom   | CRM         |
|                      |                            | queryUsers        | CRM_1   | custom   | CRM         |

## Procedures

What User A needs to export are the changed and new API schemas and receiver APIs rather than all configuration entities. And, the names of the receivers are different in the source system from the target system. So, the descriptor file is needed to scope the data for export, and the mapping file is needed to map the receivers. Figure 23.1 shows the workflow for the scenario task.

**Fig. 23.1**  
Workflow for Scenario Task

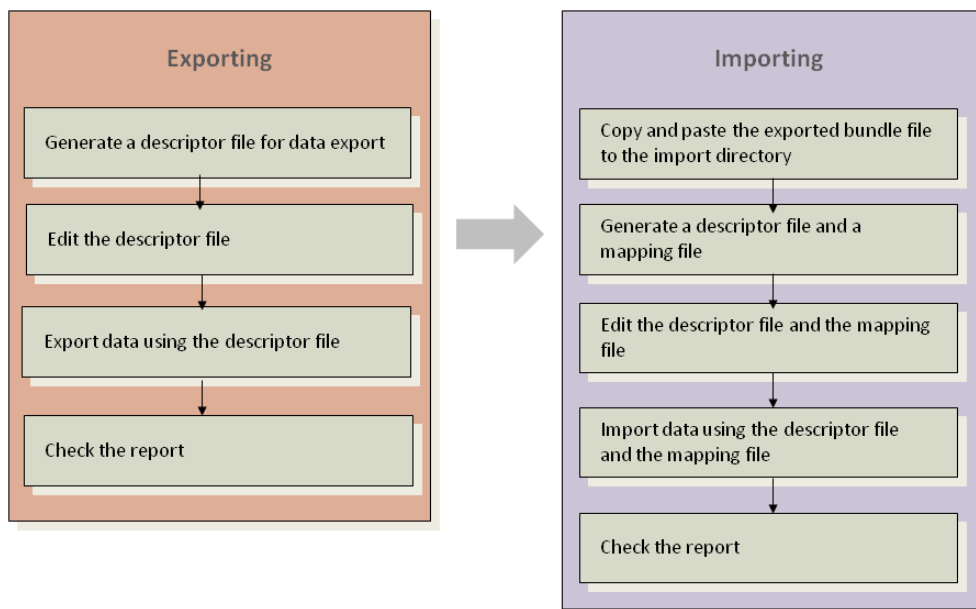

## Generating and Editing a Descriptor File

- 1 Log in to the test system and locate the `qxifgbundle.sh` at the `scripts` directory; for example, `/tomcat/webapps/qxi/WEB-INF/scripts`.

- 2 Generate a descriptor XML file named `qxi_export.xml` using the following command:

```
./qxifgbundle.sh -gd -d qxi_export.xml
```

The descriptor file is generated in the `export` directory; for example, `/tomcat/webapps/qxi/WEB-INF/export`.

- 3 Edit the generated file as the follows:

```
<?xml version="1.0" ?>
<qxiCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="export" onNotExist="stop" />
  <module name="QADEE">
    <apiSchemaCfg qdocName="bbusinessrelation" version="ERP3_1" type="custom"/>
    <apiSchemaCfg qdocName="bcdocument" version="ERP3_1" type="custom"/>
    <apiSchemaCfg qdocName="maintainECO" version="ERP3_1" type="standard"/>
    <apiSchemaCfg qdocName="authorizeKanban" version="ERP3_1" type="custom"/>
    <receiver name="QADERP">
      <receiverApiCfg qdocName="bbusinessrelation" version="ERP3_1" type="standard"/>
      <receiverApiCfg qdocName="bcashgroup" version="ERP3_1" type="standard"/>
      <receiverApiCfg qdocName="bcdocument" version="ERP3_1" type="standard"/>
    </receiver>
  </module>
  <module name="CRM">
    <receiver name="QADCRM">
      <receiverApiCfg qdocName="maintainUsers" version="CRM_1" type="custom"/>
      <receiverApiCfg qdocName="bdebtorenduser" version="CRM_1" type="custom"/>
      <receiverApiCfg qdocName="queryUsers" version="CRM_1" type="custom"/>
    </receiver>
  </module>
</qxiCfgBundleActionDescriptor>
```

- 4 Save the descriptor file.

## Exporting Data from QXI

- 1 On the test system, locate the `qxifgbundle.sh` from `/tomcat/webapps/qxi/WEB-INF/scripts`.
- 2 Execute the following command to export the data to the `qxi_bundle.zip` file using the descriptor file:

```
./qxifgbundle.sh -e qxi_bundle.zip -d qxi_export.xml
```

- 3 Go to `/tomcat/webapps/qxi/WEB-INF/export` and check the report `qxi_bundle.report.txt`.

The report for a successful export displays as follows:

```
11 configuration entities have been exported to bundle (ID: dbaf3865-0cff-48b5-84cf-cd56de5d2333) file
```

```
/tomcat/webapps/qxi/WEB-INF/export/qxi_bundle.zip

5 API schema(s) exported:
  MODULE NAME, QDOC NAME, VERSION, TYPE
  QADEE, authorizeKanban, ERP3_1, custom
  QADEE, bbusinessrelation, ERP3_1, custom
  QADEE, bcashgroup, ERP3_1, standard
  QADEE, bcdocument, ERP3_1, custom
  QADEE, maintainECO, ERP3_1, standard

6 receiver API registration(s) exported:
  MODULE NAME, RECEIVER NAME, QDOC NAME, VERSION, TYPE
  CRM, QADCRM, bdebtorenduser, CRM_1, custom
  CRM, QADCRM, maintainUsers, CRM_1, custom
  CRM, QADCRM, queryUsers, CRM_1, custom
  QADEE, QADERP, bbusinessrelation, ERP3_1, standard
  QADEE, QADERP, bcashgroup, ERP3_1, standard
  QADEE, QADERP, bcdocument, ERP3_1, standard
```

## Generating a Descriptor File and a Mapping File for Importing

For some reason, User A wants to import all the custom APIs that were exported instead of importing all. So, an action descriptor file is necessary. The receiver names in the test system are different from the names in the production system, which requires a mapping file.

- 1 On the test system, copy and paste the `qxi_bundle.zip` file to `/tomcat/webapps/qxi/WEB-INF/import`.
- 2 Locate the `qxifgbundle.sh` from `/tomcat/webapps/qxi/WEB-INF/scripts` and run the following command:

```
./qxifgbundle.sh -g qxi_bundle.zip -d qxi_import.xml -m qxi_mapping.xml
```

In the `import` folder, the files are generated with the specified names.

- 3 Open the action descriptor file and remove the entities with `type="custom"`. Or you can use wildcards to scope the entities as shown in the following descriptor file.

To enable the process to complete regardless of whether the entities exist in the source or target system, here, we set both the `onNotExist` value and the `onExist` value to `skip`. To make all custom APIs within the import scope, use wildcards to define all the `qdocName` and `version` values and specify `custom` as the `type` value.

```
<?xml version="1.0" ?>
<qxiCfgBundleActionDescriptor xmlns="urn:schemas-qad-com:qxtend-configuration">
  <action name="import" onNotExist="skip" onExist="skip">
    <bundleRestriction bundleId="dbaf3865-0cff-48b5-84cf-cd56de5d2333"/>
  </action>
  <module name="CRM">
    <receiver name="QADCRM">
      <receiverApiCfg qdocName="*" version="*" type="custom"/>
    </receiver>
  </module>
  <module name="QADEE">
    <apiSchemaCfg qdocName="*" version="*" type="custom"/>
    <receiver name="QADERP">
      <receiverApiCfg qdocName="*" version="*" type="custom"/>
    </receiver>
  </module>
</qxiCfgBundleActionDescriptor>
```

- 4 Open the mapping file and edit it as follows:

```
<?xml version="1.0" ?>
<qxiCfgBundleActionMapping xmlns="urn:schemas-qad-com:qxtend-configuration">
  <receiverMapping module="CRM" source="QADCRM" target="CRM"/>
  <receiverMapping module="QADEE" source="QADERP" target="ERP"/>
</qxiCfgBundleActionMapping>
```

## Importing Data

- 1 Run the following command:

```
./qxifgbundle.sh -i qxi_bundle.zip -d qxi_import.xml -m qxi_mapping.xml
```

- 2 Check the report `qxi_bundle.report.txt` in the import folder.

**Note** The report is named with the name of the bundle file.

The report can be as the follows:

```
6 configuration entities have been imported from bundle (ID: dbaf3865-0cff-48b5-84cf-cd56de5d2333) file
/tomcat/webapps/qxi/WEB-INF/import/qxi_bundle.zip
```

- 3 API schema(s) created:

```
MODULE NAME, QDOC NAME, VERSION, TYPE
QADEE, authorizeKanban, ERP3_1, custom [WARNING]
QADEE, bbusinessrelation, ERP3_1, custom [WARNING]
QADEE, bcdocument, ERP3_1, custom [WARNING]
```

- 3 receiver API registration(s) created:

```
MODULE NAME, RECEIVER NAME, QDOC NAME, VERSION, TYPE
CRM, CRM, bdebtorenduser, CRM_1, custom
CRM, CRM, maintainUsers, CRM_1, custom
CRM, CRM, queryUsers, CRM_1, custom
```

- 1 receiver API registration(s) skipped because the entities do not exist in source:

```
MODULE NAME, RECEIVER NAME, QDOC NAME, VERSION, TYPE
QADEE, QADERP, *, ERP3_1, custom
```

[WARNING]

- 3 imported API schema(s) not registered to a receiver

```
MODULE NAME, QDOC NAME, VERSION, TYPE
QADEE, authorizeKanban, ERP3_1, custom
QADEE, bbusinessrelation, ERP3_1, custom
QADEE, bcdocument, ERP3_1, custom
```

The report shows the results in detail and gives the warning messages generated through validation.

It warns that three API schemas that you imported are not registered to any receiver. If necessary, you can add them to the correct receivers to resolve the issue.

## Section 5

# Reference

This section provides reference information.

### ***QDoc Structure Reference***    **299**

Provides reference information about file structures.

### ***QDoc Specifications and Standards***    **309**

Describes the structure and content of QDocs supported by QAD QXI.

### ***Telnet Reference***    **351**

Provides information on telnet configuration and security.

### ***SAX Writer Reference***    **361**

Describes the Simple API for XML (SAX) Writer.

### ***DOM Builder Reference***    **371**

Describes the DOM Builder.

### ***QAD QXtend Exception Codes***    **383**

Provides descriptions of QXtend exception codes.

### ***QXO Entity Relationships and Tables Reference***    **413**

Provides entity relationships and tables reference.

### ***SSH Reference***    **429**

Describes how to create SSH key pair and set SSH for UIAPI connection pool in QXI.

### ***SSL-Enabled AppServer Reference***    **433**

Describes how to enable SSL on AppServers and the clients.



## QDoc Structure Reference

This section provides reference information about the structure of various files associated with a QDoc.

***Introduction* 300**

Describes QDocs.

***QDoc Data Files* 300**

Explains how QDoc data files are used.

***QDoc Schemas 1.0* 304**

Discusses different types of QDoc Schemas, including 1.1, how to map transaction comments, and 1.0.

***Events Files* 305**

Discusses and gives examples of different events files.





```
>>>, >>9.9<<<<<< "CHARACTER", "work2_list", "RETURN"
, yes, no, no, yes, "", "", "", yes, yes, "work2NetPrice#0:w091"
...
145000, "", 2, "None", "", "a", "ied_region", "iedRegion#0:a051", "iedRegion", "Region of
Origin/Dest", no, no, 0, "x(3)", "CHARACTER"
, "ied_det", "RETURN", yes, no, no, no, "", "", "", yes, yes, ""
146000, "", 2, "None", "", "a", "ied_port_transh", "iedPortTransh#0:a051", "iedPortTransh", "Po
rt of Transshipment", no, no, 0, "x(8)",
"CHARACTER", "ied_det", "RETURN", yes, no, no, no, "", "", "", yes, yes, ""
```

Each sequence number represents a field. The sequence numbers reflect the program hierarchy. The numbers ascend in increments of 1000 if the fields are in their own frames or require the Go key to proceed. At 4000, where a separate frame is encountered, the fields within the frame ascend in increments of 100. A frame encountered inside this frame would increment in 10's, and another inside that would increment in 1's.

The first entry (1000) includes a name (salesOrder), the iteration (1), and the identifier (Start/End Iteration). It also includes the key required to leave the iteration (F4).

Other entries do not include names until 58000. This is the standard Transaction Comments entry in QDoc specification 1.0. It starts and ends an iteration, and so is iteration number 2. The next entry, 5900, named salesOrderDetail, is also iteration 2. This is because the comments iteration is already complete by the time you reach this field. The allocationDetail iteration, 59100, and all the fields associated with it, is numbered iteration 3 because it occurs inside the salesOrderDetail iteration.

The other iterations in the program—features and configuredItemDetail—are shown. Then there is a break until the last two entries in the file.

## QDoc Schemas

QDoc schemas are a product of the QGen generate process.

**Note** The QDoc 1.1 schema differs from the 1.0 schema. This section contains information about both schemas. Refer to the appropriate section.

See Chapter 25, “QDoc Specifications and Standards,” on page 309 for details about how to name QDocs and the elements included in the schema files.

### QDoc Schema 1.1

For QDoc syntax specification 1.1 one schema is created. For the first version of maintainSalesOrder QDoc on QAD EE, this would be titled maintainSalesOrder-eB2\_2.xsd.

QGen combines the name of the QDoc with the target QAD Enterprise Applications version to create the file names.

### Flat Structure

Schemas defined in the 1.0 Qdoc standard use multiple levels of include and import elements to allow a level of abstraction and make it easier to read and analyze the schemas. Because Progress OpenEdge has problems importing some XML schemas in this format, Qdoc schemas in the 1.1 standard use a flat structure resulting in schemas being self-contained.

## Complex Types

In the 1.1 specification, the `complexContent` and `extension` elements have been removed. The `annotation` and `documentation` elements also have been removed due to a restriction in the number of annotations that can be read from a schema.

```
<complexType name={name}>
  <sequence>
    <element name={element name} type={type}/>
  </sequence>
</complexType>
```

## Keys and Relationships

In the 1.0 QDoc standard relationships between tables cannot be defined, only inferred. Primary keys for each iteration are stored in the `complexType` element.

To create datasets from XML schema, primary keys and relationships must be defined in the schema. Standard XML schema notation is defined as:

```
<unique name="PK_{complex type name}"/>
  <selector xpath="://{complex type name}"/>
  <field xpath="{primary key field name}"/>
</unique>
```

Multiple primary key fields are defined by adding more field elements. Relationships between tables are defined as:

```
<keyref name="{complex type name}" refer="qdoc:{unique name of parent}" prodata:nested=
"true">
  <selector xpath="://{child complex type name}"/>
  <field xpath="{common field name}"/>
</keyref>
```

The `name` attribute of `keyref` is only used by .NET when building datasets—OpenEdge does not require it.

To support relationships such as these, the primary key of the parent table must also be included in the child table. This is not the case with the 1.0 Qdoc standard.

## Transaction Comments

The XML schema for the transaction comments resides in `qdocCommon-eB_1.xsd`. With the 1.1 schemas having a flat structure, this file is no longer required to be accessible.

In 1.0 the iteration names for the transaction comments always started with `transComment`. To be able to create a dataset from a schema, for each iteration—equivalent to a table—the name must be unique. Therefore all node names of `transComment` now have a prefix of the parent table name. For example, transaction comments for the `<salesOrder>` node is now `<salesOrderTransComment>`.

## Session Context

In the QDoc 1.1 syntax specification, session context information is not included in the schema of each QDoc. This is due to a limitation when creating dataset schema from an XML schema that it cannot have a nested dataset.

Consequently the session context schema is excluded from the QDoc schema but included in the WSDL. Automated tools to generate datasets from XML schema to create QDocs using standard Progress features must take into account that the session context must be added separately.

dsSessionContext has the following structure:

```
<dsSessionContext>
  <ttContext>
    <propertyQualifier/>
    <propertyName/>
    <propertyValue/>
  </ttContext>
</dsSessionContext>
```

Application-specific parameters are now passed as part of the dsSessionContext structure. This structure includes the following attributes:


- domain. Domain has been moved to dsSessionContext as a property name of domain. Previously it was a parameter in the URL in the receiverId.
- scopeTransaction. This attribute has been added to dsSessionContext as a property name of scopeTransaction. For details see “scopeTransaction” on page 321.
- documentVersion. This attribute has been moved to dsSessionContext as a property name of version. Previously it was part of the root node. For details see “documentVersion” on page 340.
- mnemonicsRaw. This attribute has been added to dsSessionContext as a property name of mnemonicsRaw. For details see “mnemonicsRaw” on page 320.
- Requestor id. This attribute of requestor has been moved to dsSessionContext as a property name of username. For details see “Requestor Element” on page 336.
- Requestor password. This attribute of requestor has been moved to dsSessionContext as a property name of password. For details see “Requestor Element” on page 336.
- Arrays. For details see “Array Representation” on page 317.

**Note** For Service Interface APIs, the session context is returned to the caller. This helps to speed up processing, since the session context will contain the Session ID code, and this can be extracted from the response and re-used in subsequent requests. Username/password authentication is slightly slower than when providing a valid Session ID code in the request.

## Mapping Transactions Comments

When you enter the Transaction Comments section, use the following process to map the screen:

- 1 Press Enter in the Master Reference field.

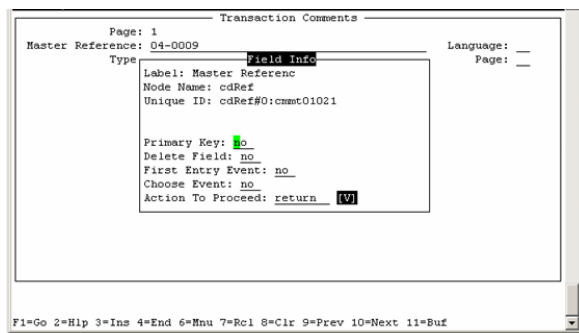

## QDoc Schemas 1.0

In QDoc syntax specification 1.0 two schemas are created, a base schema and a type schema. For the first version of maintainSalesOrder QDoc on eB, these would be titled:

- maintainSalesOrder-eB\_1.xsd
- salesOrderType-eB\_1.xsd

See Chapter 25, “QDoc Specifications and Standards,” on page 309 for details about how to name QDocs and the elements included in the schema files.

### Base QDoc Schema

The base QDoc schema primarily identifies the name and location of the type QDoc schema. An incoming QDoc is validated against this base schema for agreement with the existing QDoc schemas. The following is the entire base QDoc schema, maintainSalesOrder-eB\_1.xsd.

```
<?xml version="1.0" encoding="UTF-8" ?>
- <schema xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns:qdoc="http://www.qad.com/qdoc/eb"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  targetNamespace="http://www.qad.com/qdoc/eb"
  xml:lang="EN">
  <include schemaLocation="salesOrderType-eB_1.xsd" />
  - <element name="maintainSalesOrder">
    - <complexType>
      - <sequence>
        <element name="salesOrder" type="qdoc:SalesOrderType"
          minOccurs="1" maxOccurs="unbounded" />
      </sequence>
      <attributeGroup ref="qcom:commonAttributes" />
    </complexType>
  </element>
</schema>
```

### Type QDoc Schema

The type QDoc schema contains the program hierarchy and the field and data requirement details. Lines where three periods appear (...) show where lines have been removed for simplicity. A description of relevant document contents follows the file excerpt.

```
<?xml version="1.0" encoding="UTF-8" ?>
- <schema targetNamespace="http://www.qad.com/qdoc/eb"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  xmlns:qdoc="http://www.qad.com/qdoc/eb"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns="http://www.w3.org/2001/XMLSchema" xml:lang="EN">
  <include schemaLocation="qdocCommon-eB_1.xsd" />
  - <complexType name="SalesOrderType" qdoc:primaryKeys="soNbr">
    - <complexContent>
      - <extension base="qdoc:ApiTempTableType">
        - <sequence>
          <element name="operation" type="qdoc:OperationType" minOccurs="0" />
          <element name="soNbr" type="string" minOccurs="0">
            - <annotation>
              <documentation>Order</documentation>
            </annotation>
          </element>
          <element name="soCust" type="string" minOccurs="0">
            - <annotation>
              <documentation>Sold-To</documentation>
            </annotation>
          </element>
          ...
        </sequence>
      </extension>
    </complexContent>
  </complexType>
</schema>
```

Each element is a field in the target QAD Enterprise Applications program. No validation is required in the XML file because the validation in QAD Enterprise Applications remains active during a QDoc entry session.

## Events Files

Events files contain navigation requirements for a target QAD Enterprise Applications program and by default are named the same as the QAD Enterprise Applications procedure with a .xml extension. The sales order entry program in QAD Enterprise Applications is `sosomt.p`; the events file for Sales Order Maintenance is `sosomt-eB2_1.xml`.

### Events File Example (1.1)

The following is a partial `sosomt-eB2_1.xml` file in the QDoc 1.1 specification. Lines where three periods appear (...) show where lines have been removed for simplicity. A description of relevant document contents follows the file.

```
<?xml version="1.0" encoding="UTF-8" ?>
- <apicontroller xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation=
"http://ieli08.qad.com/apimodel/xmlenginexml/events/apicontroller.xsd">
  <program name="String" mfgprobase="String" delta-version="String" description=
  "String" default-operation="M" />
  - <iterations>
    - <field uid="soNbr#0:a021" name="so_nbr" inheritevents="true">
      <IterationEvent iterationname="salesOrder" exititeration="f4" />
    </field>
    - <field uid="cdRef#0:cmmt01021" name="cd_ref" inheritevents="true">
      <IterationEvent iterationname="salesOrderTransComment" exititeration="f4" />
    </field>
    ...
    - <field uid="iedLine#0:a051" name="ied_line" inheritevents="true">
      <IterationEvent iterationname="orderLineDetail" exititeration="f4" />
    </field>
  </iterations>
  - <operation action="R">
    - <events>
      - <field uid="soOrdDate#0:b0121" name="so_ord_date" inheritevents="false">
        <DeleteEvent promptfield="delYn#0:1" sendvalue="true" actionkey="return" />
      </field>
      ...
      - <field uid="sodlcRef#0:line_det0101" name="sodlc_ref" inheritevents="false">
        <DeleteEvent promptfield="delYn#0:1" sendvalue="true" actionkey="return" />
      </field>
    </events>
  </operation>
  - <operation action="A,M,S">
    - <events>
      - <field uid="line#0:c051" name="line" inheritevents="true">
        <FirstEntryEvent prekey="f4" sendvalue="true" postkey
        "return" />
      </field>
      - <field uid="work2Feature#0:w491" name="work2_feature" inheritevents="false">
        <ChooseEvent />
      </field>
      - <field uid="work2Comp#0:w091" name="work2_comp" inheritevents="false">
        <ChooseEvent />
      </field>
    </events>
  </operation>
  - <mappings>
    <field-map uid="soTaxc#0:set_tax1881" nodename="soTaxc1" />
    <field-map uid="soTaxable#0:set_tax1881" nodename="soTaxable1" />
    <field-map uid="pMsgConfirm#0:2" nodename="pMsgConfirm1" />
  </mappings>
</apicontroller>
```

```

    <field-map uid="pMsgConfirm#0_INTRANS:1" nodename="pMsgConfirm2" />
    <field-map uid="pMsgConfirm#0_INTRANS:2" nodename="pMsgConfirm3" />
    <field-map uid="sodSite#0:c_btb_site1551" nodename="sodSite1" />
    <field-map uid="sodTaxc#0:set_tax17131" nodename="sodTaxc1" />
    <field-map uid="sodTaxable#0:set_tax17131" nodename="sodTaxable1" />
    <field-map uid="pMsgConfirm#0_CONS2:2" nodename="pMsgConfirm1" />
    <field-map uid="pMsgConfirm#0_INTRANS2:1" nodename="pMsgConfirm2" />
    <field-map uid="pMsgConfirm#0_INTRANS2:2" nodename="pMsgConfirm3" />
  </mappings>
</apicontroller>

```

The first set of entries in the events file are the iterations. The first iteration starts on the field `so_nbr` for the iteration `salesOrder`. The second iteration is the transaction comments iteration in the same order as in the data file. In QDoc syntax specification 1.1 each transaction comment section—if a child of a different parent—has a different node name. Therefore the parent node is used as a prefix to `TransComment`; for example `salesOrderTransComment`. Each iteration is identified by QAD Enterprise Applications field, iteration name, and the key required to exit the iteration.

Following the iterations is the delete event and the first entry event fields. Delete fields require a field name, the value to send to confirm the deletion, and the key to complete the deletion.

The mappings section contains the mappings between the unique identifiers that are assigned by QGen and the node names. While the nodenames are editable, the field-map IDs are not.

## Events File Example (1.0)

The following is an entire `sosomt.xml` file in the QDoc 1.0 specification. A description of relevant document contents follows the file.

```

<?xml version="1.0" encoding="UTF-8" ?>
- <apicontroller xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="http://ieli08.qad.com/apimodel
    /xmlenginexml/events/apicontroller.xsd">
  <program name="String" mfgprobase="String" delta-version="String" description="String" default-
    operation="M" />
  - <iterations>
    - <field uid="soNbr#0:a02" name="so_nbr" inheritevents="true">
      <IterationEvent iterationname="salesOrder" exititeration="f4" />
    </field>
    - <field uid="cdRef#0:cmmt0102" name="cd_ref"
      inheritevents="true">
      <IterationEvent iterationname="transComment" exititeration="f4" />
    </field>
    - <field uid="line#0:c05" name="line" inheritevents="true">
      <IterationEvent iterationname="salesOrderLineDetail" exititeration="f4:f4" />
    </field>
    - <field uid="work2Comp#0:w09" name="work2_comp" inheritevents="true">
      <IterationEvent iterationname="configurationDetail" exititeration="f4:f4" />
    </field>
    - <field uid="ladLoc#0:alloc109" name="lad_loc" inheritevents="true">
      <IterationEvent iterationname="allocationDetail" exititeration="f4" />
    </field>
    - <field uid="cmtSeq#0:cmmt0102" name="cmt_seq" inheritevents="true">
      <IterationEvent iterationname="transComment" exititeration="f4" />
    </field>
    - <field uid="taxLine#0:b05" name="tax_line" inheritevents="true">
      <IterationEvent iterationname="taxDetail" exititeration="f4" />
    </field>
    - <field uid="iedLine#0:a05" name="ied_line" inheritevents="true">
      <IterationEvent iterationname="orderLineDetail" exititeration="f4" />
    </field>
  </iterations>
  - <operation action="R">
  - <events>
    - <field uid="soDueDate#0:b012" name="so_due_date" inheritevents="false">
      <DeleteEvent promptfield="delYn#0" sendvalue="y" actionkey="return" />
    </field>
    - <field uid="line#0:c05" name="line" inheritevents="true">
      <FirstEntryEvent prekey="f4" sendvalue="S" postkey="return" />
    </field>
  </events>
</operation>
- <operation action="A,M,S">
- <events>

```

```

- <field uid="line#0:c05" name="line" inheritevents="true">
  <FirstEntryEvent prekey="f4" sendvalue="S" postkey="return" />
</field>
</events>
</operation>
</apicontroller>

```

The first set of entries in the events file are the iterations. The first iteration starts on the field `so_nbr` for the iteration `salesOrder`. The second iteration is the transaction comments iteration in the same order as in the data file. Each iteration is identified by QAD Enterprise Applications field, iteration name, and the key required to exit the iteration.

Following the iterations is the delete event and the first entry event fields. Delete fields require a field name, the value to send to confirm the deletion, and the key to complete the deletion.





# QDoc Specifications and Standards

This section describes the structure and content of QDocs supported by QAD QXtend Inbound (QXI).

**Important** Users who want to build their own QDocs should follow these guidelines to conform as closely as possible to the design standards implemented by QAD.

## **QDoc Naming and Identification 310**

Discusses common QDoc Naming Conventions, common message envelopes, QDoc namespaces, and schema file names and versioning.

## **QDoc XML Elements 312**

Explains how business content can be expressed as elements, discusses denormalized data associations, common response data, errors prior to processing, primitive data type representations, default, empty, and null values, array representation, and element names.

## **QDoc XML Attributes 319**

Discusses xml:lang, version, mnemonicsRaw, scopeTransaction, logTransaction, transactionID, suppressResponseDetail, and common attribute groups.

## **QAD Enterprise Applications-Specific QDoc Syntax 323**

Discusses QDoc names, simple elements, complex elements, arrays, element order, required vs. optional elements, normalized vs. denormalized representation, CRUD QDocs, attributes, and QDoc extensions and customizations.

## **QDoc Examples 327**

Gives QDoc examples.

## **QDoc Message Envelope 335**

Discusses the QDoc message envelope, with details on header block content, SOAP compliance limitations, future extension and forward compatibility, examples, and SOAP faults.

## QDoc Naming and Identification

The material presented in this section assumes a working knowledge of basic XML syntax, XML namespaces, and XML schema. While many of the points pertain specifically to QAD Enterprise Applications, QAD plans to apply most of the same rules to QDocs used by other QAD application products in future releases of QAD QXtend.

**Note** In order to support the new service interface layer—as well as the adoption by Progress of XML notation in OpenEdge 10.1—significant revisions have been made to the QDoc syntax specification, resulting in a 1.1 specification. Most components in QAD QXtend—with the exception of the service interface API which supports only the 1.1 syntax—support both the 1.0 and 1.1 versions of the QDoc syntax. The information contained in this section applies to both QDoc standards, except where indicated.

### Common QDoc Naming Convention

Each QDoc name consists of an action (verb) followed by its object (noun) that best expresses the meaning of the QDoc. The name should be as similar as possible to the corresponding API method name, if any, that implements the business logic required for the QDoc.

**Important** The length of the name of a QDoc can be a maximum of 32 characters.

Table 25.1 describes QDoc naming conventions.

**Table 25.1**  
QDoc Name Suffixes

| QDoc Type    | Suffix   | Examples                   |
|--------------|----------|----------------------------|
| Request In   | -        | maintainSalesOrder         |
| Response Out | Response | maintainSalesOrderResponse |

The suffix for the Response Out type is assigned according to present WSDL message-naming conventions, where requests are customarily not suffixed and responses are customarily suffixed with the literal Response.

All QDoc names are written in mixed-case or camel-case notation for Java classes, in which the first letter of each token within a name is capitalized, while all other letters are lower-case.

In the case of QAD Enterprise Applications, the `maintain` verb is used for all create-read-update-delete (CRUD) type QDocs with the detailed action (add, modify, delete, sync, get) expressed in the body of the QDoc.

### Common Message Envelope

In order to route QDocs between applications, all QDocs should be wrapped inside a standard message envelope that describes the QDoc's source and destination, among other data of interest. Unlike the application-specific QDoc content with details that vary, the message envelope has a fixed, fully specified syntax that applies to all QDocs.

The envelope is designed to comply with the SOAP 1.0 and 1.1 standards, and to translate relatively easily into emerging industry messaging standards such as Java Message Service (JMS) and Electronic Business XML (ebXML). It can be used with non-QDoc documents and must be used with QDocs. See “QDoc Message Envelope” on page 335.



The design of the QDoc message envelope most likely will change in future releases, as SOAP envelope header standards are promulgated and adopted by the software industry. The QDoc envelope will evolve to comply with emerging Web-service standards.

## QDoc Namespaces

All QDoc and QDoc components are defined in some XML namespace, in order to clearly identify the QAD application product with which they are associated as well as prevent QDoc naming clashes across QAD products. The namespace URIs are abstract identifiers that do not dictate the URL, directory, or path names in which the QDoc files must reside.

All QAD-standard QAD Enterprise Applications QDocs use one of the following namespace URIs, depending on the QDoc syntax specification:

- QDoc 1.0 specification: `http://www.qad.com/qdoc/eb`
- QDoc 1.1 specification: `urn:schemas-qad-com:xml-services`

QDoc components common to all QAD products use one of the namespace URIs listed below. In particular, the QDoc message envelope and QDoc confirmation are defined in this namespace:

- QDoc 1.0 specification: `http://www.qad.com/qdoc/common`
- QDoc 1.1 specification: `urn:schemas-qad-com:xml-services:common`

Users building custom QDocs or extending QAD-defined QDocs must define their new XML elements and attributes inside a different namespace than the QAD namespaces to allow the unambiguous mixing of QAD- and user-defined syntax within the same QDoc. Separate namespaces also allow custom QDoc syntax to be validated using separate, user-specific XML schemas.

The standard QDoc namespace URI incorporates the URL of the QAD Web site (`http://www.qad.com`). For custom QDocs, you can use the simpler URN syntax, which is colon-delimited beginning with the `urn:` prefix as in the following examples:

```
urn:schemas-microsoft-com:xml-msdata
urn:schemas-progress-com:xml-prodata:0001
urn:schemas-qad-com:xml-services
```

The tokens between each colon are user-defined. The last token can be used as a version identifier, as in the second example above.

In QDoc specification 1.0 various predefined elements and attributes used across all QDoc types are defined in the namespaces and placed into a single XML schema file called `qdocCommon-<version>.xsd`. See “version” on page 320. These common XML schema files do not contain application objects, but only non-application data. The appropriate version is imported into every QAD Enterprise Applications QDoc XML schema.

In QDoc specification 1.1 versioning information is contained within the schema file name. See “Schema File Names and Versioning” for details.

## Schema File Names and Versioning

Versioning is handled differently depending on the syntax specification in use. Refer to the appropriate section.

### Versioning for 1.1 Schemas

The XML schema files defining each QDoc, both requests and responses, are named `<QDoc name><Response>-<version>.xsd`, where `<version>` is the value of the QDoc version attribute. See “version” on page 320. The Response component is appended on response documents only.

### Versioning for 1.0 Schemas

For all QAD products, it is expected that XML schemas will be required for each reusable data type, such as `SalesOrderType` or `PurchaseOrderLineType`, as well as for the QDocs themselves. Because the definitions of the data types will change over time, the XML schema files of the data types are versioned, with different versions of the same data type coexisting in different XML schema files. In fact, it is anticipated that most QDoc version changes will be driven by changes in the underlying data types.

The XML schema defining each version of a single QDoc, therefore, includes the XML schema files for the corresponding versions of its component data types. See “version” on page 320. To allow the data type schemas to be referenced by version, each XML schema file defining a data type is named `<data type>-<version>.xsd`, where `<version>` is assigned in exactly the same manner as for the QDocs.

As a general rule, whenever any common data type is revised and obtains a new version, all the QDocs and/or data types containing the revised type must also obtain a new version. This practice is exactly analogous to the propagation of engineering revisions from component item numbers through parent assemblies all the way up to the end product in an engineering or manufacturing bill of material. When a component part has its version incremented, so do all its parent items.

**Example** A `maintainSalesOrder` version `eB_1` QDoc might contain version `eB_1` of the two data types `SalesOrderType` and `SalesOrderLineType`. If fields specific to `eB2` are added to `SalesOrderLineType` that affect the QDoc, a version `eB2_1` of `SalesOrderLineType` will be created in XML schema file `SalesOrderLineType-eB2_1.xsd`. This new file will then be included in the new QDoc XML schema file `maintainSalesOrder-eB2_1.xsd`.

Moreover, if a QDoc request schema is revised resulting in a new version, a new version of the matching QDoc response schema is also created whether or not it has actually been changed, and vice versa. Thus, any QDoc response always has the same version as its corresponding QDoc request.

## QDoc XML Elements

This section describes how application data is represented in QDoc XML. The selected approach complies with the SOAP 1.0 and 1.1 encoding standards in order to allow the QDocs to be exposed as remote procedure call (RPC) Web services in later releases.

### Business Content Expressed as Elements

Following published guidelines within the XML standard and common practice, all application or business data within a QDoc is expressed as XML elements rather than attributes. Attributes are intended to represent metadata only—characteristics describing how the data in the XML document should be interpreted or processed, rather than application content. Moreover, the XML

schema standard on which QAD depends for syntactic validation of QDocs provides much richer typing and extensibility features (for example, ability to inherit data type characteristics by extension or by restriction) for elements than for attributes.

## Denormalized Data Associations

Many business objects require the representation of data relationships between multiple entities, not only a single entity. The most common such case is the header-detail pattern, where the lines are children with a many-to-one relationship to their parent header. This pattern is often extended to more than two levels; for example, sales order headers, lines, delivery schedules, taxes, and other special charges.

Such data can be represented in the form of normalized relational tables, with all associations between the entities embodied in their use of common keys; for example, an order number in the sales order line that references the associated header. It also possible to model relationships in a structured, unnormalized manner, where the child entities are explicitly contained by their respective parents with no need for common key fields.

Following common XML usage, QDocs represent parent-child relationships between entities in a structured manner, by making each instance of a child entity a component element inside a parent element. For example, a sales order is represented by a single sales order element that contains zero or more line elements, each of which in turn may contain other types of child elements.

## Common Response Data

As part of every outbound QDoc response, QDocs report the outcome of a request along with any exception conditions. Because of its inherent commonality, a single set of XML elements is specified for all QAD products.

Common response data in QDocs is handled differently depending on the version of the QDoc syntax specification in use.

### QDoc Specification 1.1

One required element, `result`, is included in all QDoc response documents as a single-level child under the root. This is a QAD-defined element used to contain the result.

The `dsExceptions` element occurs exactly once in response QDocs, and contains a variable number of `temp_err_msg` elements, which in turn contain the `tt_msg_*` fields. The exception node used in the QDoc syntax version 1.0 translates to the `temp_err_msg` node.

Each `temp_err_msg` includes the following elements:

- `tt_msg_nbr`: identifies the type of exception (required)
- `tt_msg_desc`: briefly describes the exception condition (required)
- `tt_msg_sev`: designates the severity of the exception—informational, warning, error (optional, default error)
- `tt_msg_field`: identifies the specific field in the request for which the exception was raised (optional, no default)

- `tt_msg_context`: identifies the context within the request, typically an element or row instance, in which the exception was raised (optional, no default)
- `tt_msg_data`: contains free-form trace information about the exception; this temp-table is also used inside QAD Enterprise Applications

**Note** OpenEdge errors trapped by the Service Interface are stored in this table along with application exceptions. OpenEdge errors can be identified by the OE- prefix prepended to the message number in the `tt_msg_nbr` field.

- `tt_msg_keys`: identifies application key values identifying the row associated with the exception
- `tt_msg_datetime`: identifies the date and time when the exception was raised
- `tt_msg_processed`: identifies whether or not the exception has been handled
- `tt_level`: identifies the level of the program stack in which the exception occurred
- `tt_msg_index`: identifies the unique sequential key within the table

### QDoc Specification 1.0

Two required elements are included in all QDoc response documents as single-level children under the root:

- `result`, a SOAP-standard element defined in the namespace <http://www.w3.org/2002/12/soap-rpc>
- `returnValue`, a QAD-defined element returning the value success, warning, or error

This is pessimistic rather than optimistic usage. In the case of a multi-part QDoc (for example, a `maintainSalesOrder` request that includes two sales orders), the `returnValue` element is set to error if any of the lines in either sales order fail for any reason.

The `result` element always has the value `returnValue`, as its only purpose within the SOAP 1.0 standard is to reference the element within the SOAP response that contains the return value of the QDoc. This indirect approach permits the standard `result` element to be completely defined within the `soap-rpc` namespace, while still permitting the application to return its own strongly typed value.

Zero or more `exception` elements are included in all QDoc response documents as single-level children under the root. Each `exception` includes the following elements of the type string:

- `number`: identifies the type of exception (required)
- `description`: briefly describes the exception condition (required)
- `severity`: designates the severity of the exception
- `field`: identifies the specific field in the request for which the exception was raised (optional, no default)
- `context`: identifies the context within the request, typically an element or row instance, in which the exception was raised (optional, no default)
- `trace`: a detailed trace of the method execution that raised the exception, typically a Java stack trace (optional, no default)

It is possible for a QDoc response to contain nothing inside the QDoc root element except one or more exception elements plus the result and returnValue elements. This would be the case for errors recognized before application processing of the QDoc has begun; for example, if the QDoc request's name-version is not supported or its XML content is not well formed.

A common ExceptionType for the exception element is defined and stored in the QDoc namespace and common XML schema files. See “QDoc Namespaces” on page 311. Its XML schema definition is shown in the following code sample.

```
<complexType name="ExceptionType">
  <annotation>
    <documentation>
      An exception message returned from a QDoc request by
      the QAD application.
    </documentation>
  </annotation>
  <sequence>
    <!-- number and description fields are required -->
    <element name="number" type="string"/>
    <element name="description" type="string"/>
    <element name="severity" minOccurs="0"
      default="error">
      <simpleType>
        <restriction base="string">
          <enumeration value="informational"/>
          <enumeration value="warning"/>
          <enumeration value="error"/>
        </restriction>
      </simpleType>
    </element>
    <element name="field" type="string" minOccurs="0"/>
    <element name="context" type="string" minOccurs="0"/>
    <element name="trace" type="string" minOccurs="0"/>
  </sequence>
</complexType>
```

A common ReturnValueType for the returnValue element is also defined and stored in the QDoc namespace and common XML schema files. Its XML schema definition is shown in the following code.

```
<simpleType name="ReturnValueType">
  <annotation>
    <documentation>
      The value returned by the QAD application.
    </documentation>
  </annotation>
  <restriction base="string">
    <enumeration value="success"/>
    <enumeration value="warning"/>
    <enumeration value="error"/>
  </restriction>
</simpleType>
```

## Errors Prior to Processing

Some QDoc requests cannot be processed due to syntax errors. For example, the QDoc may not be recognized because of a misspelled name; critical attributes of the QDoc required for application processing may be invalid; or the XML may be badly formed. In such cases, a normal response based on standard naming conventions is not suitable, as the identity and contents of the QDoc are being called into question.

Since QDocs are a SOAP-compliant solution, QDoc preprocessing errors are thrown back to the sender as SOAP faults. See “SOAP Faults” on page 345.



## Primitive Data Type Representations

All primitive data types used by QAD applications (character or string, integer, decimal, date, time, Boolean or logical) are represented in QDocs using the data type standards specified for XML schemas. The most interesting cases in this regard are dates, times, integers, and decimals.

- Dates are represented as YYYY-MM-DD (for example, 2003-04-22).
- Times are represented as HH:MM:SS+HH:MM (for example, 23:20:06+07:00 or 23:20:06-02:00), where the expression +HH:MM is the number of hours and minutes ahead or behind Universal Time (also called Greenwich Mean Time).
- The type `dateTime` is an XML-schema-defined type that is a combination of the date and time types as specified by ISO 8601. Its representation is the concatenated values of date and time separated by an upper-case T, in the format YYYY-MM-DDTHH:MM:SS+HH:MM. For example, 2003-04-22T23:20:06-08:00 would denote 11:20 pm Pacific Standard Time on April 22, 2003.
- Integers are represented normally, with an optional + or – sign preceding the digits.
- Decimals are represented with the period (.) as the decimal point and optionally the comma (,) as the thousands separator.

The application is responsible for managing the display formats used in different geographies; for example:

- Reversing the usage of the period and comma for quantities
- Modifying the sequence of the day-month-year components of dates

## Default, Empty, and Null Values

As a general rule, optional elements can be omitted from any QDoc if the requestor wants the target QAD application to use their default values. A particularly important special case of this rule is the modify or change operation of a CRUD request. If an element in a modify/change request is omitted, the QAD application presumes that the element's value should not be changed and retains its existing value. This approach has the major advantage of conciseness, as it permits the requestor to populate the QDoc request with only the content that is relevant and omit the rest.

However, this approach does raise the problem of ambiguity with respect to empty values. If an omitted element signifies that its default value should be used, how do you communicate a request inside a QDoc to blank out the element's value? In other words, how should an empty value be represented? The term empty instead of null is used in order to avoid confusion with the concept of a special null object/value, such as Java null or the Progress unknown value. Unlike the null value, empty values vary based on data type. For character fields empty would be a null string, for numbers the value zero, and for logicals the value false.

To distinguish between default and empty values in QDoc requests, a distinction is made in all QDocs between an omitted element and an empty-valued one. If an element is omitted, the QAD application uses its default value. If it is empty valued (that is, has the form `<element></element>` or `<element/>`), the application assumes that the element should be assigned the empty value appropriate for its type.



While XML schema allows null elements to be explicitly represented with a nil attribute, enabled by a nillable attribute in the respective elements' schema definition, use of this construct, and null values in general, is not supported by the QDoc schemas as a general rule. However, the nil and nillable attributes may be designated for use in special cases where QAD application processing requires null value input.

## Array Representation

The use of arrays in API methods and interoperability documents is generally not recommended, as they can be problematic to translate into some programming languages and often reflect a poor, unnormalized data model. Nevertheless, their use is sometimes necessary to preserve compatibility with legacy application code, if for no other reason. For such cases, you can use a standard approach for representing arrays inside QDocs.

Arrays are represented according to the SOAP encoding scheme in order to better support the automatic generation of Java client stubs from the WSDL files using non-QAD tools. Various QDoc-specific limitations are imposed in order to simplify the SOAP syntax by eliminating those features not required by any QAD applications.

QDoc arrays are elements that contain multiple occurrences of only one simple element. The element for the array as a whole is named according to the same conventions as other elements in the QDoc, based on QAD application usage.

Arrays of complex elements, multi-dimensional arrays, and arrays of arrays (jagged arrays) are not allowed in QDocs.

The approach used to represent arrays in QDocs differs depending on which QDoc specification is being used.

### QDoc Specification 1.1

In the QDoc 1.1 specification the array structure has been modified to improve the ability of applications from vendors such as Progress to recognize the syntax for arrays.

The array structure in QDoc specification version 1.1 has multiple entries of the node if it is an array. Indexing is achieved by the order in which it appears in the XML.

**Note** In the QDoc 1.1 specification, every entry of an array must be included in a QDoc in order to pass values. Partial or “sparse” arrays are not allowed. QDoc 1.0, which followed SOAP encoding rules, did not impose this constraint.

The QDoc 1.0 specification used the following structure for arrays:

```
<soSlspn enc:arraySize="4">
  <entry index="1">CD0</entry>
  <entry index="2">GDB</entry>
  <entry index="3">HDA</entry>
  <entry index="4">JP</entry>
</soSlspn>
```

The equivalent array in the QDoc 1.1 specification would look like this:

```
<soSlspn>CD0</soSlspn>
<soSlspn>GDB</soSlspn>
<soSlspn>HDA</soSlspn>
<soSlspn>JP</soSlspn>
```

**Note** The handling of arrays was updated in QDoc 1.1 to adopt literal encoding in place of the SOAP encoding standard used in QDoc 1.0. The reason for this was that SOAP encoding imposed extra complexity on XML schemas and WSDLs, and was not widely supported by XML tools in the industry.

### QDoc Specification 1.0

In QDoc specification 1.0 the single component element is named `entry` in all QDocs regardless of usage, with `entry` defined in the QDoc common namespace so as not to conflict with the name of any QAD application array. Every array described in a QDoc version 1.0 XML schema is declared as a restriction of the base type `enc:Array`. Every QDoc instance contains `itemType` and `arraySize` attributes associated with the following SOAP encoding namespace URI:

`http://www.w3.org/2002/12/soap-encoding`

The value of `itemType` can be any one of the following: `string`, `Boolean`, `decimal`, `int`, `date`, `time`, `anyType`. (`anyType` is the theoretical supertype of all other types, somewhat like `Object` in Java.) The value of `arraySize` is an integer denoting the maximum size or extent of the array, or the asterisk character (\*) if that value is not known.

Because SOAP 1.0 requires that arrays be included in their entirety (that is, no partial arrays), a means is needed to distinguish an array element that is being set to an empty value by a QDoc from one that is not being changed by the QDoc.

**Note** This is the same problem of specifying empty versus default values, except that in the case of arrays it is not possible to skip an empty element in order to designate that the default value should be used. See “Default, Empty, and Null Values” on page 316.

In order to resolve the problem, the QDoc-defined `entry` element has one required attribute `index` and one optional attribute `skip`, also defined in the QDoc common namespace. The `index` attribute identifies each entry of the array. The `skip` attribute indicates whether the entry should be skipped or defaulted if set to `true`. If the `skip` attribute is set to `true`, the content of its containing `entry` element is ignored.

Syntactically, the indexed entries of the array can appear in any order. However, by convention, they should always be sequenced in ascending index order. For example, the following QDoc fragment would represent a six-member numeric array called `orderQuantity` containing two empty, two skipped, and two non-empty elements.

```
<qdoc:orderQuantity
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  enc:itemType="xsi:decimal"
  enc:arraySize="6"
>
  <!-- Entries 1, 3 are set to empty and 4, 6 are skipped -->
  <qcom:entry index="1"/>
  <qcom:entry index="2">10.583</qcom:entry>
  <qcom:entry index="3"/>
  <qcom:entry index="4" skip="true"/>
  <qcom:entry index="5">22</qcom:entry>
  <qcom:entry index="6" skip="true">ignore!</qcom:entry>
</qdoc:orderQuantity>
```

The following is the XML schema definition for this fragment, defined using SOAP conventions:

```
<schema
  xmlns="http://www.w3.org/2001/XMLSchema"
```



```

xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
xmlns:qcom="http://www.qad.com/qdoc/common"
xmlns:qdoc="http://www.qad.com/qdoc/eb">
targetNamespace="http://www.qad.com/qdoc/eb"
xml:lang="EN"
>
<import namespace="http://www.w3.org/2002/12/soap-encoding"
  schemaLocation="soap-encoding.xsd"/>
<element name="orderQuantity">
  <complexType>
    <complexContent>
      <restriction base="enc:Array">
        <sequence>
          <element ref="qcom:entry"
            minOccurs="6" maxOccurs="6"/>
        </sequence>
        <attributeGroup ref="enc:arrayAttributes"/>
        <attributeGroup ref="enc:commonAttributes"/>
      </restriction>
    </complexContent>
  </complexType>
</element>
</schema>

```

The following is the XML schema fragment defining the entry element and its index and skip attributes in the QDoc common namespace:

```

<schema
  xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  targetNamespace="http://www.qad.com/qdoc/common"
  xml:lang="EN"
>
  <element name="entry">
    <complexType>
      <simpleContent>
        <extension base="anyType">
          <attribute name="index" type="positiveInteger"
            use="required"/>
          <attribute name="skip" type="boolean"/>
        </extension>
      </simpleContent>
    </complexType>
  </element>
</schema>

```

## Element Names

Except for the single root element that identifies the QDoc, a universal naming convention for QDoc elements that applies to all QAD products does not exist. Rather, product-specific conventions are used. See “Array Representation” on page 317.

## QDoc XML Attributes

All QDocs using the 1.0 syntax specification use the XML attributes described in this section.

**Note** Several items that were attributes in the QDoc 1.0 specification and described in this section—version, mnemonicsRaw, scopeTransaction—have been moved to the dsSessionContext structure in the QDoc 1.1 specification and are now elements. For details see “Session Context” on page 302. In addition, in the QDoc 1.1 specification the suppressResponseDetail attribute is a node in the ReferenceParameters section.

## xml:lang

This attribute is an XML standard, not QDoc-specific. It designates the national language of its associated element, using the two-letter language codes defined by the ISO 639 standard.

**Note** This attribute is not used in the QDoc 1.1 specification.

## version

This attribute is specific to QDocs. It identifies the version of a QDoc schema to which a particular instance of that QDoc conforms, and is required at the QDoc root element level. Its format is `<major product release>_<sequence>`, where `<major product release>` is the lowest major release of the QAD application product in which the QDoc is supported (for example, eB, eB2, QAD SE, or above for QAD EE), and `<sequence>` is an incremented sequence number within that release starting with 1. Any periods in the release name are removed.

**Example** The first version of an QAD Enterprise Applications QDoc that is developed to work with both the eB and eB2 releases would have the version eB\_1, for both eB and eB2 users. If this QDoc were later enhanced only for releases QAD SE and above, the new version would be called ERP3\_1, and could coexist with version eB\_1 if QAD decides to support both versions concurrently. If the same enhancement were later retrofit to eB and eB2, the new version for the eB and eB2 releases would be called eB\_2. Note that service packs are not treated as major releases for QDoc versioning purposes.

This versioning scheme allows multiple versions of the same QDoc to be supported concurrently for multiple product releases, while capturing in a natural way the relationships and compatibilities among the various QDoc versions and product releases.

For custom or user-extended QDocs, QAD suggests that custom version designators be assigned as suffixes to the QAD-supported versions on which they are based (for example, eB\_2\_ABC\_1 for the first customization developed by ABC Company). While all customized QDocs must be defined in a namespace different from QAD's in order to avoid name-version clashes, customer-specific version identifiers help highlight their custom nature. See "QDoc Namespaces" on page 311.

## mnemonicsRaw

This attribute is an optional Boolean for QDoc requests at the root element level that indicates whether during application processing the QDoc should send the language-specific mnemonic (if the value equals False), or whether the numeric code should be sent instead (value equals True).

Some options in QAD Enterprise Applications functions appear on screen using alphabetic codes or words. Internally, these options are controlled by numeric codes. You can change, add, and delete the mnemonics and labels associated with these codes using Language Detail Maintenance (36.4.3).

**Note** In the QDoc 1.1 specification this attribute has been moved to `dsSessionContext` and is an element. For details see "Session Context" on page 302.

## scopeTransaction

This attribute is an optional Boolean for QDoc requests at the root element level that indicates whether the processing of the QDoc should be scoped as a single transaction. In general, units of work scoped by the application programs that process QDocs vary based on the nature of the request, the input data, and decisions made by the application designers. The `scopeTransaction` attribute allows the requestor to override normal units of work and force a single-transaction scope for the request.

In distributed environments where the requesting and receiving application are running in different application server containers or different machines, controlling the transaction scope can be inconvenient or even impossible for the requestor of a remote service. This attribute provides a simple means of controlling the transaction scope remotely.

**Note** In the QDoc 1.1 specification this attribute has been moved to `dsSessionContext` and is an element.

## logTransaction

This attribute is an optional Boolean for QDoc requests at the root element level that indicates whether during application processing the QDoc should log the request internally for audit trail or recovery purposes. Because of the potential performance overhead associated with logging, requestors may want to avoid the cost of logging, particular in local integrations running in a stable, local network environment.

Logging is most important in distributed environments, where the QDoc application may be deployed across multiple application servers or machines using communication links that are less than 100% reliable. Even when an integration framework is receiving all QDoc requests, logging at this level may not be sufficient when the application is running as multiple components in separate environments. It may be necessary for the application to write log entries in order to protect against internal communication failures between the application component and the integration framework.

**Note** Because there is no equivalent of the `logtransaction` attribute in the QDoc 1.1 syntax specification, `logtransaction` has been removed from that version of the syntax.

## transactionID

This attribute is an optional string for QDoc requests at the root element level that designates a requestor-defined identifier. It is used only in conjunction with the `logTransaction` attribute. It is entirely requestor-defined, and does not have to be a unique key. The intent is to capture its value in any QDoc log entries, so that remote requestors can refer to an audit trail entry in case of internal communication failures.

**Note** Because there is no equivalent of the `transactionID` attribute in the QDoc 1.1 syntax specification, `transactionID` has been removed from that version of the syntax.

## suppressResponseDetail

This attribute is an optional string for QDoc requests at the root element level that indicates whether the business data of the QDoc response is needed, as opposed to only the exceptions raised during processing. It is provided as a performance-enhancing feature, when the requestor wants a request processed but does not need to know the results outside of the overall outcome and any exceptions encountered.

A primary example would be the processing of inbound QDocs into QAD Enterprise Applications through Q/LinQ or QAD EDI ECommerce. As both of these products perform their transaction processing asynchronously, they need only to log success/failure and exceptions thrown, from which they may (or may not) create separate outbound QDoc confirmation documents for the ultimate requestor. Given the verbose nature of XML in general, using this attribute could measurably improve performance and/or conserve network bandwidth.

Query requests would always set this attribute to false; otherwise, the QDoc response would not include the results of the query.

**Note** In the QDoc 1.1 specification the `suppressResponseDetail` attribute is a node in the SOAP header `ReferenceParameters` section:

```
<ns0:ReferenceParameters xmlns:ns0="http://www.w3.org/2005/08/addressing">
  <suppressResponseDetail xmlns="urn:schemas-qad-com:xml-services:common">
    true</suppressResponseDetail>
</ns0:ReferenceParameters>
```

## Common Attribute Group

In the QDoc 1.0 specification several attributes—`version`, `mnemonicsRaw`, `scopeTransaction`, `logTransaction`, `transactionId`, and `suppressResponseDetail`—are used in almost all QDocs. Hence, they are defined once as members of an XML attribute group defined in common XML schema files, and referenced in all relevant QDoc definitions. See “QDoc Namespaces” on page 311.

**Note** In the QDoc 1.1 specification several of these attributes have been moved to either the `dsSessionContext` structure or the SOAP header `ReferenceParameters` section; consequently there is no common attribute group in the QDoc 1.1 specification.

The following is the XML schema definition fragment for this group.

```
<import namespace="http://www.w3.org/XML/1998/namespace"
  schemaLocation="xml.xsd"/>
<attributeGroup name="qcom:commonAttributes">
  <attribute name="version" type="string"
    use="required"/>
  <attribute name="mnemonicsRaw" type="boolean"
    use="optional"/>
  <attribute name="scopeTransaction" type="boolean"
    use="optional"/>
  <attribute name="logTransaction" type="boolean"
    use="optional"/>
  <attribute name="transactionId" type="string"
    use="optional"/>
  <attribute name="suppressResponseDetail" type="boolean"
    use="optional"/>
  <attribute ref="xml:lang"/>
</attributeGroup>
```

## QAD Enterprise Applications-Specific QDoc Syntax

The XML-based content of all QAD Enterprise Applications QDoc requests and responses is mapped or bound at run-time to and from the native data structures of the UI, service interface, or QAD JIT Sequencing API responsible for processing. This section summarizes the fixed rules used to accomplish this binding.

If a data structure clash or mismatch is detected between the QDoc syntax and the service interface and QAD JIT Sequencing API signatures, a QDoc syntax error is thrown to the requestor and the request is not processed.

### QDoc Name

The QDoc name or root element maps to the name of the API method to be run, in the case of the service interface and QAD JIT Sequencing APIs. In the case of the UI APIs, it is used to determine the QAD Enterprise Applications online program to run.

### Simple Elements

Simple QDoc elements map to temp-table fields in the case of service interface and QAD JIT Sequencing APIs, or user input fields in the case of the UI APIs. Their names match the QAD Enterprise Applications names of the corresponding service interface and QAD JIT Sequencing API parameters, except that mixed-case or camel-case notation for Java classes is used in place of the underscore-delimited names common in QAD Enterprise Applications. That is, the underscore characters separating tokens within the QAD Enterprise Applications name are removed and the first letter of each token within the name is capitalized, while all other letters as well as the first letter are lower-case. For example, the QAD Enterprise Applications field `pt_prod_line` would be expressed as `ptProdLine` in the QDocs.

All arrays are presumed to contain simple elements. Each is mapped to a temp-table field with extent equal to the array's declared length.

Enumerated fields used across many QDocs (for example, the operation field used for CRUD processing in the service interface and QAD JIT Sequencing APIs) are defined in the common QDoc XML schema file for inclusion in all schemas.

### Complex Elements

Complex QDoc elements containing other elements, representing business data entities in QAD Enterprise Applications, map to iterating frames in the case of the UI APIs and temp-tables in the case of service interface and QAD JIT Sequencing APIs. Their names are natural business terms expressed in camel-case with no database-specific notation (for example, `pt_mstr` for item) or special prefixes/suffixes. For elements that are associated with temp-table parameters in the service interface and QAD JIT Sequencing API methods, the QDoc element name is identical to the temp-table name but without the `tt` prefix and with the first letter changed to lower-case. For example, the temp-table `ttPurchaseOrderDet` in the `maintainPurchaseOrder` API method would be expressed as `purchaseOrderDet` in the QDocs.



Just as the service interface and QAD JIT Sequencing API temp-tables make heavy use of common field lists (for example, the include files `mfaittxt.i`, `mfctit01.i`, and so on), so do their corresponding QDoc elements. XML schema supports an inheritance mechanism whereby types can be derived by extending other types by adding fields, analogous to subclassing in object-oriented programming languages.

Using this technique, an abstract base type `ApiTempTableType` is defined that includes all the fields common to all service interface and QAD JIT Sequencing API temp-tables. Reusable derived types such as `TransCommentType` are built from `ApiTempTableType` by extension, and in turn used to build more specific types such as `PurchaseOrderCmtType`. The type hierarchy is built by inspecting the present service interface and QAD JIT Sequencing API temp-table definitions and common field lists. The collections of common data are modeled as base types in the XML schema.

The following XML schema definition fragment is for the `ApiTempTableType`, as well as fragments of the `TransCommentType`, `PurchaseOrderCmtType`, and `OperationType` definitions. The `ApiTempTableType` definition is stored in the XML schema file for common QAD Enterprise Applications QDoc objects, while the derived types are stored in separate schema files. See “QDoc Namespaces” on page 311.

```
<complexType name="ApiTempTableType" abstract="true">
  <sequence>
    <!-- Common API temp-table fields from mfaittxt.i -->
    <element name="apiSequence" type="string"/>
    <element name="apiSuccess" type="boolean"/>
    <element name="apiExternalKey" type="string"/>
  </sequence>
</complexType>

<simpleType name="OperationType">
  <restriction base="string">
    <!-- Common Operation values from mfaiiocon.i -->
    <enumeration value="A"/> <!-- Add -->
    <enumeration value="M"/> <!-- Modify -->
    <enumeration value="R"/> <!-- Remove -->
    <enumeration value="U"/> <!-- Unmodified -->
    <enumeration value="S"/> <!-- Sync -->
    <enumeration value="G"/> <!-- Get -->
    <enumeration value="N"/> <!-- No-op -->
  </restriction>
</simpleType>

<complexType name="TransCommentType">
  <complexContent>
    <extension base="qdoc:ApiTempTableType">
      <sequence>
        <!-- Common Transaction Comment temp-table fields
             from mfctit01.i, mfctid01.i -->
        <element name="operation" type="qdoc:OperationType"
              minOccurs="0"/>
        <element name="seq" type="int" minOccurs="0"/>
        <element name="ref" type="string" minOccurs="0"/>
        <element name="type" type="string" minOccurs="0"/>
        <element name="lang" type="string" minOccurs="0"/>
        ...
      </sequence>
    </extension>
  </complexContent>
</complexType>

<complexType name="PurchaseOrderCmtType">
  <complexContent>
    <!-- No P.O.-specific fields to add to base Transaction
         Comments, but the type is still required in order
         to map easily to the corresponding API temp-table. -->
    <extension base="qdoc:TransCommentType"/>
  </complexContent>
</complexType>
```



```
</complexContent>
</complexType>
```

**Note** QDoc schemas in the 1.1 standard use a flat structure—there is no superschema.

## Arrays

Arrays are mapped to QAD Enterprise Applications fields with extents greater than 0. Only one-dimensional arrays that contain a single simple element type are allowed in QDocs. The name of the array maps to the QAD Enterprise Applications field name.

In the QDoc 1.1 specification the field name is repeated in sequential order in the XML to provide the indexing.

In the QDoc 1.0 specification the name of all array elements is `entry`, defined in the QDoc common namespace.

For details, see “Array Representation” on page 317.

## Element Order

In general, an XML schema allows the child elements under a given parent to be defined such that the element order is variable. Use of this feature would support QDoc syntax flexibility. However, it is not used for QAD Enterprise Applications QDocs because of the following constraints:

- All the complex elements corresponding to service interface and QAD JIT Sequencing API temp-tables are derived by extending the abstract base type `ApiTempTable`, in order to define all the standard boilerplate temp-table fields in one place. However, the current release of XML schema forces all fields defined in the base type to precede the fields defined in the derived type, thus constraining the element order. See “Complex Elements” on page 323.
- The QDocs intended for service interface and QAD JIT Sequencing API processing contain primarily multi-occurrence, complex child elements corresponding to the service interface and QAD JIT Sequencing API temp-tables. However, use of variable element order underneath a given parent is allowed only if all the children are single-occurrence elements.

## Required vs. Optional Elements

In general, XML schema allows the child elements under a given parent to be defined as required or optional through the `minOccurs` and `maxOccurs` attributes. The default is `minOccurs=1`, `maxOccurs=1`.

However, to make maintenance of the XML schema easier over time, virtually all QDoc elements are defined as optional (`minOccurs=0`). This approach also supports many common API scenarios in which a common data object is used in multiple API methods, but with context-specific validation that determines whether the elements are required or optional. It is the responsibility of the QAD Enterprise Applications application to throw exceptions if the requestor does not provide a required field using present QAD Enterprise Applications validation logic, rather than relying on XML schema syntax checking.

## Normalized vs. Denormalized Representation

In the case of service interface and QAD JIT Sequencing APIs, all temp-table parameters are expressed in normalized form, in which the relationship between parent and child temp-tables is represented only as a set of common key fields (foreign keys) that occur in both tables. That is, one temp-table is not contained in or structurally subordinate to the other. Rather, all appear as siblings in the API signature.

A complex QDoc element that contains another complex QDoc element (in denormalized fashion) is mapped to two separate temp-tables in the service interface and QAD JIT Sequencing APIs. In addition, all designated key fields appearing in the parent element are duplicated inside the child temp-table records with the same values as in their respective parent temp-table records. In other words, the normalized temp-table records contain foreign key values referencing their respective temp-table parent records, as with any normalized relational data structure.

In order to designate those simple QDoc elements (fields) inside a particular complex QDoc element (temp-tables) that constitutes the primary key, a special `primaryKeys` attribute is defined in the QDoc namespace for inclusion in all QDoc XML schema files. Its definition is stored in common XML schema files.

This attribute is used with all XML schema element definitions that are bound to service interface and QAD JIT Sequencing API temp-tables, so that the QDoc Request Handler can identify the parent-child and key relationships from the XML schema and properly normalize the resulting temp-tables. The following QDoc examples illustrate use of this attribute within QDocs.

The XML schema definition for the `primaryKeys` attribute is as follows.

```
<attribute name="primaryKeys" type="token">
  <annotation>
    <documentation>
      Lists the primary keys of the QDoc element for the
      purpose of normalizing its child elements into sibling
      data structures with fully unique keys.
      Used to map the unnormalized QDoc XML into a temp-table
      representation for the service interface APIs.
    </documentation>
  </annotation>
</attribute>
```

The UI APIs work natively with denormalized data structures, and do not require such transformation to normalize the QDoc elements.

## CRUD QDocs

QDocs that request basic create-read-update-delete (CRUD) maintenance against some QAD Enterprise Applications business object are very common. Because of their ubiquity, a single format is used for all of them along the lines of the signature standards defined for the service interface and QAD JIT Sequencing APIs.

- All QDocs requesting CRUD activity on an QAD Enterprise Applications entity are named using the verb `maintain` (for example, `maintainSalesOrder`, `maintainSupplier`). This terminology keeps the QDoc names relatively close to the QAD Enterprise Applications menu procedures whose functionality they incorporate.

- At the beginning of every complex XML element that denotes a business object to be maintained (for example `item`, `salesOrder`, `supplier`), an operation element describes the type of maintenance requested for the object. Allowed values are A (add), M (modify), D (delete), G (get), S (sync), N (no-op).
  - Sync indicates that the object should be added if not present in the database and modified if present, essentially the same way that QAD Enterprise Applications maintenance procedures currently work.
  - Add raises an error if the object already exists.
  - Modify raises an error if the object does not exist.
  - No-op is a special value signifying that the element should be skipped; it may be useful for cases in which the value of some QDoc element helps navigate to or access subsequent elements, but for which no processing is required.

Operation elements can exist at multiple levels within a QDoc, such as the order header, line, and transaction comment levels.

## Attributes

For QDocs in the 1.0 specification that are implemented by service interface and QAD JIT Sequencing APIs, the `scopeTransaction`, `logTransaction`, and `transactionId` attributes are mapped to the standard `scopeTrans`, `logTrans`, and `transId` parameters respectively. The `suppressResponseDetail` attribute has no counterpart in the service interface and QAD JIT Sequencing API call signatures.

For QDocs in the 1.1 specification, the `scopeTransaction` attribute has been moved to the `dsSessionContext` structure, and both the `logTransaction` and `transactionId` attributes have been removed.

## QDoc Extensions and Customizations

Because bindings between QDocs and QAD Enterprise Applications are based on a fixed set of rules, the only way to extend or modify a QDoc is to extend or modify:

- The QAD Enterprise Applications code that implements the QDoc, and
- The XML schema for the QDoc

The new/modified QDoc elements must follow the naming and format conventions described for standard QDoc content, but must be defined within a non-QAD namespace to distinguish them from QAD-standard syntax.

If the custom QDoc is to be processed using the QAD Enterprise Applications menu procedures (the UI APIs), an XML schema for the QDoc should be generated using the QGen tool. See Chapter 18, “QGen,” on page 227.

## QDoc Examples

This section contains examples of both the QDoc 1.1 specification and the 1.0 specification as indicated.

## QAD Enterprise Applications Inbound QDoc Request (1.1)

This is a sample QDoc request to maintain a sales order in QAD Enterprise Applications, based on the API method `maintainSalesOrder`. The QDoc message envelope is omitted, as it is described elsewhere. See “QDoc Message Envelope” on page 335.

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Body>
  <maintainSalesOrder>
    <qcom:dsSessionContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>domain</qcom:propertyName>
        <qcom:propertyValue />
      </qcom:ttContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>scopeTransaction</qcom:propertyName>
        <qcom:propertyValue>>false</qcom:propertyValue>
      </qcom:ttContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>version</qcom:propertyName>
        <qcom:propertyValue>eB2_2</qcom:propertyValue>
      </qcom:ttContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>mnemonicsRaw</qcom:propertyName>
        <qcom:propertyValue>>false</qcom:propertyValue>
      </qcom:ttContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>username</qcom:propertyName>
        <qcom:propertyValue />
      </qcom:ttContext>
      <qcom:ttContext>
        <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
        <qcom:propertyName>password</qcom:propertyName>
        <qcom:propertyValue />
      </qcom:ttContext>
    </qcom:dsSessionContext>
    <dsSalesOrder>
      <salesOrder>
        <operation>text</operation>
        <soNbr>S0987654</soNbr>
        <soCust>001</soCust>
        <soSlspn>CD0</soSlspn>
        <soSlspn>GDB</soSlspn>
        <soSlspn>HDA</soSlspn>
        <soSlspn>JP</soSlspn>
        <multSlspn>yes</multSlspn>
        <salesOrderTransComment>
          <operation>text</operation>
          <cmtCmmt>Line 1</cmtCmmt>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt/>
          <cmtCmmt>Line 10</cmtCmmt>
        </salesOrderTransComment>
        <salesOrderDetail>
          <operation>text</operation>
          <line>1</line>
          <sodPart>item6</sodPart>
          <sodQtyOrd>1</sodQtyOrd>
        </salesOrderDetail>
      </salesOrder>
    </dsSalesOrder>
  </maintainSalesOrder>
</soapenv:Body>
```

```

        <salesOrderDetail>
          <operation>text</operation>
          <line>2</line>
          <sodPart>10-15000</sodPart>
          <sodQtyOrd>1</sodQtyOrd>
        </salesOrderDetail>
      </salesOrder>
    </dsSalesOrder>
  </maintainSalesOrder>
</soapenv:Body>

```

## QAD Enterprise Applications QDoc Response (1.1)

This is a sample partial QDoc response based on the API method `maintainItemMaster`. The QDoc message envelope is omitted, as it is described elsewhere. See “QDoc Message Envelope” on page 335.

```

<soapenv:Body>
  <ns1:maintainItemMasterResponse xmlns="urn:schemas-qad-com:xml-services" xmlns:ns1=
    "urn:schemas-qad-com:xml-services">
    <ns1:result>error</ns1:result>
    <ns2:dsSessionContext xmlns:ns2="urn:schemas-qad-com:xml-services:common">
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>domain</ns2:propertyName>
        <ns2:propertyValue>QP</ns2:propertyValue>
      </ns2:ttContext>
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>scopeTransaction</ns2:propertyName>
        <ns2:propertyValue>>false</ns2:propertyValue>
      </ns2:ttContext>
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>version</ns2:propertyName>
        <ns2:propertyValue>eB2_2</ns2:propertyValue>
      </ns2:ttContext>
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>mnemonicsRaw</ns2:propertyName>
        <ns2:propertyValue>>true</ns2:propertyValue>
      </ns2:ttContext>
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>username</ns2:propertyName>
        <ns2:propertyValue />
      </ns2:ttContext>
      <ns2:ttContext>
        <ns2:propertyQualifier>QAD</ns2:propertyQualifier>
        <ns2:propertyName>password</ns2:propertyName>
        <ns2:propertyValue />
      </ns2:ttContext>
    </ns2:dsSessionContext>
    <ns2:dsExceptions xmlns:ns2="urn:schemas-qad-com:xml-services:common">
      <ns2:temp_err_msg>
        <ns2:tt_level />
        <ns2:tt_msg_context>itemMaster#1(ptPart-02-0001)
          field(ptDesc1)</ns2:tt_msg_context>
        <ns2:tt_msg_data />
        <ns2:tt_msg_datetime>2007-08-02T10:43:23+1000</ns2:tt_msg_datetime>
        <ns2:tt_msg_desc>Submitted data was truncated</ns2:tt_msg_desc>
        <ns2:tt_msg_field />
        <ns2:tt_msg_index>0</ns2:tt_msg_index>
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
      </ns2:temp_err_msg>
    </ns2:dsExceptions>
  </ns1:maintainItemMasterResponse>
</soapenv:Body>

```

```

        <ns2:tt_msg_nbr>MfgProWarningMessage</ns2:tt_msg_nbr>
        <ns2:tt_msg_processed>false</ns2:tt_msg_processed>
        <ns2:tt_msg_sev>warning</ns2:tt_msg_sev>
    </ns2:temp_err_msg>
    <ns2:temp_err_msg>
        <ns2:tt_level />
        <ns2:tt_msg_context>itemMaster#1(ptPart-02-0001)</ns2:tt_msg_context>
        <ns2:tt_msg_data />
        <ns2:tt_msg_datetime>2007-08-02T10:43:23+1000</ns2:tt_msg_datetime>
        <ns2:tt_msg_desc>ERROR: INVALID SITE. Please re-enter.</ns2:tt_msg_desc>
        <ns2:tt_msg_field />
        <ns2:tt_msg_index>0</ns2:tt_msg_index>
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_keys />
        <ns2:tt_msg_nbr>MfgProErrorMessage</ns2:tt_msg_nbr>
        <ns2:tt_msg_processed>false</ns2:tt_msg_processed>
    <ns2:tt_msg_sev>error</ns2:tt_msg_sev>
</ns2:temp_err_msg>
<ns2:temp_err_msg>
    <ns2:tt_level />
    <ns2:tt_msg_context>itemMaster#1(ptPart-02-0001)
    field(ptSite)</ns2:tt_msg_context>
    <ns2:tt_msg_data />
    <ns2:tt_msg_datetime>2007-08-02T10:43:23+1000</ns2:tt_msg_datetime>
    <ns2:tt_msg_desc>Error processing data. See Context for
    details.</ns2:tt_msg_desc>
    <ns2:tt_msg_field />
    <ns2:tt_msg_index>0</ns2:tt_msg_index>
    <ns2:tt_msg_keys />
    <ns2:tt_msg_keys />
    <ns2:tt_msg_keys />
    <ns2:tt_msg_keys />
    <ns2:tt_msg_keys />
    <ns2:tt_msg_nbr>EventExceptionex001</ns2:tt_msg_nbr>
    <ns2:tt_msg_processed>false</ns2:tt_msg_processed>
    <ns2:tt_msg_sev>error</ns2:tt_msg_sev>
</ns2:temp_err_msg>
</ns2:dsExceptions>
<ns1:dsItemMasterResponse>
    <ns1:itemMaster>
        <ns1:ptPart>02-0001</ns1:ptPart>
    </ns1:itemMaster>
</ns1:dsItemMasterResponse>
</ns1:maintainItemMasterResponse>
</soapenv:Body>

```

## QAD Enterprise Applications Inbound QDoc Request (1.0)

This is a sample partial QDoc request to maintain a purchase order in QAD Enterprise Applications, based on the API method `maintainPurchaseOrder`. The QDoc message envelope is omitted, as it is described elsewhere. See “QDoc Message Envelope” on page 335.

The examples assume that the earliest supported QAD Enterprise Applications release is eB.

```

<?xml version="1.0" encoding="UTF-8"?>
<maintainPurchaseOrder version="eB_1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns="http://www.qad.com/qdoc/eb"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  schemaLocation="http://www.qad.com/qdoc/eb/schemas"
  scopeTransaction="true"
  logTransaction="true"
  transactionId="abc123"

```



```

suppressResponseDetail="false"
xml:lang="EN"
>
<purchaseOrder>
  <operation>A</operation>
  <nbr>P01234</nbr>
  <vend>00000001</vend>
  <ordDate>2002-04-01</ordDate>

  <rmks>This is a test PO</rmks>
  <purchaseOrderCmt>
    <operation>A</operation>
    <seq>01</seq>
    <cmmt>Line 1 of comment!</cmmt>
  </purchaseOrderCmt>
  <purchaseOrderDet>
    <operation>A</operation>
    <line>01</line>
    <dueDate>2002-05-01</dueDate>
    <part>10-10000</part>
    <qtyOrd>50</qtyOrd>
  </purchaseOrderDet>
  <purchaseOrderDet>
    <operation>A</operation>
    <line>02</line>
    <dueDate>2002-06-01</dueDate>
    <part>10-15000</part>
    <qtyOrd>20</qtyOrd>
  </purchaseOrderDet>
</purchaseOrder>
</maintainPurchaseOrder>

```

The following XML schema describes the syntax of the preceding sample. The PurchaseOrderType definition is used in the QDoc request and is stored in a separate file and included in the top-level schema.

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- This schema would be stored in file
      maintainPurchaseOrder-1_0.xsd -->
<schema
  xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns:qdoc="http://www.qad.com/qdoc/eb"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  targetNamespace="http://www.qad.com/qdoc/eb"
  xml:lang="EN"
  >
  <!-- Include SOAP Encoding definitions,
        common QAD Enterprise Applications QDoc fields,
        purchase order definitions. -->
  <import namespace="http://www.w3.org/2002/12/soap-encoding"
    schemaLocation="soap-encoding.xsd"/>
  <include schemaLocation="qdocCommon-eB_99.xsd"/>
  <include schemaLocation="PurchaseOrderType-eB_1.xsd"/>
  <element name="maintainPurchaseOrder">
    <complexType>
      <attributeGroup ref="qcom:commonAttributes"/>
      <sequence>
        <element name="purchaseOrder"
          type="qdoc:PurchaseOrderType"
          minOccurs="0" maxOccurs="unbounded"/>
      </sequence>
    </complexType>
  </element>
</schema>

```

The following XML schema fragment defines PurchaseOrderType and PurchaseOrderDetType.

```

<!-- This schema would be stored in file

```

```

    PurchaseOrderType.xsd -->
<!-- Include SOAP Encoding definitions,
    common QAD Enterprise Applications QDoc fields,
    transaction comment types. -->
<import namespace="http://www.w3.org/2002/12/soap-encoding"
    schemaLocation="soap-encoding.xsd"/>
<import namespace="http://www.qad.com/qdoc/common"
    schemaLocation="qdocCommon-qad_1.xsd"/>
<include schemaLocation="qdocCommon-eB_99.xsd"/>
<include schemaLocation="TransCommentType-eB_1.xsd"/>

<!-- PurchaseOrderType extends the common ApiTempTableType
    in order to pick up the common temp-table fields -->
<!-- Primary key(s) of PurchaseOrderType are listed in
    qdoc:primaryKeys for use when normalizing the data -->
<complexType name="PurchaseOrderType" qdoc:primaryKeys="nbr">
    <complexContent>
        <extension base="qdoc:ApiTempTableType">
            <sequence>
                <!-- Note: OperationType is defined in the common
                    QDoc XML Schema file to allow the
                    enumerated Values "A" (add), "M" (modify),
                    "R" (remove), "U" (unmodified), and "S" (sync). -->
                <element name="operation"
                    type="qdoc:OperationType"
                    minOccurs="0"/>
                <element name="nbr" type="string" minOccurs="0"/>
                <element name="vend" type="string" minOccurs="0"/>
                ...
                <!-- Reuse common TransCommentType here -->
                <element name="purchaseOrderCmt"
                    type="qdoc:TransCommentType"
                    minOccurs="0" maxOccurs="unbounded"/>
                <element name="purchaseOrderDet"
                    type="qdoc:PurchaseOrderDetType"
                    minOccurs="0" maxOccurs="unbounded"/>
            </sequence>
        </extension>
    </complexContent>
</complexType>
...

<!-- PurchaseOrderDetType extends the common
    ApiTempTableType in order to pick up the common
    temp-table fields -->
<!-- Primary key(s) of PurchaseOrderDetType are listed in
    qdoc:primaryKeys for use when normalizing the data -->
<complexType name="PurchaseOrderDetType"
    qdoc:primaryKeys="line">
    <complexContent>
        <extension base="qdoc:ApiTempTableType">
            <sequence>
                <element name="operation" type="qdoc:OperationType"
                    minOccurs="0"/>
                <element name="line" type="int" minOccurs="0"/>
                ...
            </sequence>
        </extension>
    </complexContent>
</complexType>
...

```



## QAD Enterprise Applications QDoc Response (1.0)

This is a sample partial QDoc response to the preceding QDoc request based on the API method `maintainPurchaseOrderResponse`. In this example, as with most service interface and QAD JIT Sequencing API methods, the input data is echoed back as output with any changed or default values, as well as any exception messages at the bottom.

The QDoc message envelope is omitted, as it is described elsewhere. See “QDoc Message Envelope” on page 335. The examples presume that the earliest supported QAD Enterprise Applications release is eB.

```
<?xml version="1.0" encoding="UTF-8"?>
<maintainPurchaseOrderResponse version="eB_1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:enc="http://www.w3.org/2002/12/soap-encoding"
  xmlns:rpc="http://www.w3.org/2002/12/soap-rpc"
  xmlns="http://www.qad.com/qdoc/eb"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  schemaLocation="http://www.qad.com/qdoc/eb/schemas"
  xml:lang="EN"
>
  <rpc:result>returnValue</rpc:result>
  <returnValue>success</returnValue>
  <purchaseOrder>
    <nbr>P01234</nbr>
    <vend>000000001</vend>
    <ordDate>2002-04-01</ordDate>
    <rmks>This is a test PO</rmks>
    ...
    <purchaseOrderCmt>
      <seq>01</seq>
      ...
      <cmmt>Line 1 of comment!</cmmt>
    </purchaseOrderCmt>
    <purchaseOrderDet>
      <line>01</line>
      <dueDate>2002-05-01</dueDate>
      <part>10-10000</part>
      <qtyOrd>50</qtyOrd>
      ...
    </purchaseOrderDet>
    <purchaseOrderDet>
      <line>02</line>
      <dueDate>2002-06-01</dueDate>
      <part>10-15000</part>
      <qtyOrd>20</qtyOrd>
      ...
    </purchaseOrderDet>
  </purchaseOrder>
  <qcom:exception>
    <qcom:number>864</qcom:number>
    <qcom:description>SITE ADDRESS DOES NOT EXIST</qcom:description>
    <qcom:severity>error</qcom:severity>
    <qcom:field>site</qcom:field>
    <qcom:context>P01234</qcom:context>
  </qcom:exception>
</maintainPurchaseOrderResponse>
```

The following XML schema fragment describes the syntax of the previous sample. The `PurchaseOrderResponseType` definition is used in the QDoc response and is stored in a separate file and included in the top-level schema. This defaults to include primary fields and can be replaced by a user-defined file that contains user-defined fields.

```
<complexType name="PurchaseOrderResponseType">
  <sequence>
    <element name="nbr" type="string" minOccurs="0">
```

```

        <annotation>
          <documentation>Purchase Order</documentation>
        </annotation>
      </element>
      <element name="vend" type="string" minOccurs="0">
        <annotation>
          <documentation>Vendor</documentation>
        </annotation>
      </element>
      <element name="ordDate" type="string" minOccurs="0">
        <annotation>
          <documentation>Order Date</documentation>
        </annotation>
      </element>
      <element name="rmks" type="string" minOccurs="0">
        <annotation>
          <documentation>Remarks</documentation>
        </annotation>
      </element>
      <element name="purchaseOrderCmt" type="qdoc:PurchaseOrderCmtResponseType"
        minOccurs="0" maxOccurs="unbounded"/>
      <element name="purchaseOrderDet" type="qdoc:PurchaseOrderDetResponseType"
        minOccurs="0" maxOccurs="unbounded"/>
    </sequence>
  </complexType>
  <complexType name="PurchaseOrderCmtResponseType">
    <sequence>
      <element name="seq" type="string" minOccurs="0">
        <annotation>
          <documentation>Sequence</documentation>
        </annotation>
      </element>
      <element name="cmt" type="string" minOccurs="0">
        <annotation>
          <documentation>Trans Comment</documentation>
        </annotation>
      </element>
    </sequence>
  </complexType>
  <complexType name="PurchaseOrderDetResponseType">
    <sequence>
      <element name="line" type="integer" minOccurs="0">
        <annotation>
          <documentation>Ln</documentation>
        </annotation>
      </element>
      <element name="dueDate" type="integer" minOccurs="0">
        <annotation>
          <documentation>Due Date</documentation>
        </annotation>
      </element>
      <element name="part" type="integer" minOccurs="0">
        <annotation>
          <documentation>Part</documentation>
        </annotation>
      </element>
      <element name="qtyOrd" type="integer" minOccurs="0">
        <annotation>
          <documentation>Quantity Ordered</documentation>
        </annotation>
      </element>
    </sequence>
  </complexType>

```

## QDoc Message Envelope

Q/LinQ currently stores all control information regarding its export and import documents in non-XML data known as document control tags. While it is able to both export and import documents preceded by these tags, the tag format is non-XML and Q/LinQ-specific. These tags are not processed easily by XML-based tools such as XSLT stylesheets.

A standard, QAD-specific message envelope for use by QXtend as well as Q/LinQ is defined in this section using SOAP 1.0 syntax. It includes a minimal set of elements that must be understood by both Q/LinQ and QXtend, although additional product-specific elements can be added to it as needed in order to support interoperability with third parties. Its content is also loosely based on the envelopes/headers prescribed by the JMS, OAGIS, and ebXML specifications.

The present version of the QDoc envelope is likely to change significantly in future releases, as future XML-based messaging standards are published and adopted over time by the software industry.

While the QDoc message envelope is designed primarily to contain QDocs, it can also be used to contain any other type of document exported or imported by Q/LinQ such as OAGIS BODs. Its use is required for all QDocs.

### Envelope Syntax

Based on SOAP standards, all QDoc messages consist of the XML root element `Envelope` with two child elements, `Header` and `Body`. The `Body` element contains a single QDoc as described in the preceding sections as its only payload. The `Header` element consists of one or more header block elements named `qdoc` as described in the following section.

The `Envelope`, `Header`, and `Body` elements are defined and must be labeled using the following SOAP Envelope namespace URI:

```
http://schemas.xmlsoap.org/soap/envelope/
```

They may contain attributes, but these may be ignored.

### Header Block Content

This section describes the header block content of QDocs. The information in this section applies to both QDoc specification versions, except where indicated.

Each QDoc header block consists of a root element `QDoc` containing the elements described in this section. Header blocks may also contain several other attributes:

- In SOAP 1.0 the `role` attribute may have any legal URI as its value. In SOAP 1.1 this attribute is replaced with the `actor` attribute.
- In SOAP 1.0 the `mustUnderstand` attribute is Boolean. In SOAP 1.1 this attribute has a value of either 1 (true) or 0 (false). The absence of the `SOAP mustUnderstand` attribute is semantically equivalent to its presence with the value "0".

Both of these attributes are ignored on inbound QDocs.

- The `encodingStyle` attribute is a URI, and is set to the following value on all outbound QDoc header blocks:

```
http://www.w3.org/2002/12/26/soap-encoding
```

This attribute is not used in SOAP 1.1 QDocs.

While more than one header block inside a single message is syntactically allowed, in the case of inbound QDocs all QDoc headers after the first one are ignored. All outbound QDocs contain only a single QDoc header block.

### Requestor Element

**Note** The requestor element in SOAP 1.1 QDocs has been moved from the header block to `dsSessionContext` along with requestor password. For details see “Session Context” on page 302.

The requestor element can contain user ID and password attributes. If authentication credentials are provided in the QDoc, QXI will always use these credentials to verify the QDoc regardless of the setting of `useQDocRequestor`. This helps in situations where the application needs a detailed audit trail by user, but you do not want to require all QDocs to have authentication information in them.

You should note the following:

- If `useQDocRequestor` is set to false and user name and password nodes are specified in the QDoc, QXI will use them for authentication. If the nodes are not specified, QXI will use the user name/password combination in the connection pool setting for authentication. If you do not want Inbound to use the user name and password in QDoc, you have to remove the nodes from QDoc.
- If `useQDocRequestor` is set to true, QXI always uses the user name and password in the request QDoc.

**Note** In previous versions, QXI used the credentials in the QDoc only if `useQDocRequestor` was enabled; otherwise the credentials specified in the connection pool were used.

For XML syntax 1.1 QDocs, if the username and password should not be used in the request, the following nodes must be removed from QDoc:

```
<qcom:ttContext>
  <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
  <qcom:propertyName>username</qcom:propertyName>
  <qcom:propertyValue/>
</qcom:ttContext>
<qcom:ttContext>
  <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
  <qcom:propertyName>password</qcom:propertyName>
  <qcom:propertyValue/>
</qcom:ttContext>
```

For XML syntax 1.0 Qdocs, if the username and password should not be used in the request, the following nodes must be removed from QDoc:

```
<requestor/>
```

If the current request QDoc sent from a product has empty user name and password, these must be removed from the QDoc. If they are not removed, QXI will use them for authentication and return the error `Invalid Username and Password`.

This password is sent in text form, encrypted within the server, and is encrypted in any response QDocs.



The `requestor` element can be omitted from the header if the QXtend implementation does not require user ID and password.

**Note** At the receiver level you can specify that every QDoc that is for a receiver must have authentication information in it. For details see “Adding Inbound Receivers” on page 191.

### sessionId

**Note** The information in this section applies only to the QDoc 1.1 specification and QAD EE.

If a valid QAD Enterprise Application session ID is provided in the QDoc, the QDoc can pass authentication without having the username and password checked. The system also caches and reuses the session ID provided in the response QDoc to further speed up authentication and improve performance. If the session ID is no longer valid, the system checks the username and password.

For FinAPI connections, you can control whether the system caches the session ID. To do this, edit the `qxtendconfig.xml` file located in `TOMCAT_HOME/webapps/<QXI webapp>/WEB-INF/conf`. Locate the node containing:

```
cacheFinSession = "true"
```

When this node is set to `true`, the system caches the session ID per agent in the connection pool.

To allow the system not to cache the session ID, change this node to:

```
cacheFinSession = "false"
```

### senderId

**Note** In the QDoc 1.1 specification Web Services Addressing (WS-Addressing) is used and consequently there is no `senderId` (or `receive311rId`). The information in this section applies only to the 1.0 specification.

The `senderId` element identifies the sender of the QDoc or other document and is defined as a URI.

While most of the URI is not yet used, it must include the query parameter `sender` in order to identify the sending entity within a given installation. The syntax of the query parameters is similar to that commonly used with any URI, as in the following example:

```
http://anyBaseURI/path1/path2?sender=myCompany&...;
```

The ampersand character separating the query parameters must be written as `&amp;`; in order to pass XML well-formedness parsing rules.

In the case of outbound documents sent by Q/LinQ, `sender` is always equal to the Q/LinQ System ID (`@SYSID` tag) maintained in the Q/LinQ System Control table. This tag must have the same value as the configuration parameter used by the QDoc server to identify a given QAD Enterprise Applications database in a multi-database installation.

In the case of inbound documents, `sender` is stored in the Q/LinQ trading partner ID (`@TRADPTRID` tag) field. The trading partner ID identifies the external owner of the QAD Enterprise Applications object about which Q/LinQ is being notified.

**receiverId**

**Note** The `receiverId` element has been removed in the 1.1 QDoc specification. In QDoc specification 1.0 the receiver was passed as a parameter in the URL in the `receiverId` node. In QDoc specification 1.0 the receiver is now the third entry in the URN of the `To` node:

```
<ns0:To xmlns:ns0="http://www.w3.org/2005/08/addressing">urn:services-qad-  
com:QADSE</ns0:To>
```

**receiverId in QDoc Specification 1.0**

The `receiverId` element identifies the receiver of the QDoc or other document and is defined as a URI.

While most of the URI is not yet used, it must include the query parameters `connection` and `receiver` in order to identify the receiving entity within a given installation. The syntax of the query parameters is similar to that commonly used with any URI, as in the following example:

```
http://anyBaseURI/path1/path2?connection=yourQueue&receiver=  
yourCompany&...;
```

In addition, the URI can also include the optional query parameter `domain` in order to identify the receiving domain within the QAD Enterprise Applications database.

**Note** In the QDoc 1.1 specification the parameter `domain` has been moved from `receiverId` to `dsSessionContext` as a `propertyName` of `domain`. For details see “Session Context” on page 302.

The syntax of this query parameter is shown in the following example:

```
http://anyBaseURI/path1/path2?connection=yourQueue&receiver=  
yourCompany&domain=yourdomain&...;
```

If this optional parameter is omitted, the QDoc will use the domain that is specified in the `Domain` field in the Connection Pool Manager for that procedure. See “Configuring Connection Pools” on page 216.

In the case of outbound documents sent by Q/LinQ, the receiver is the Q/LinQ trading partner ID (`@TRADPTRID` tag) for which the export document was published. In many cases, this value corresponds to the external owner of the QAD Enterprise Applications data object that is the main subject of the document. The connection is the Q/LinQ application ID (`@APPID` tag) through which the document was sent.

In the case of Q/LinQ inbound documents, the receiver must be set to the Q/LinQ System ID (`@SYSID` tag) field maintained in the Q/LinQ System Control table, which in turn must be the same as the identifier used in the QDoc server to identify the target QAD Enterprise Applications database. However, it is ignored by the current version of Q/LinQ, as each Q/LinQ installation is associated with one and only one QAD Enterprise Applications database and cannot properly route documents to any other QAD Enterprise Applications database. The connection is defined by the sender, but is mapped by Q/LinQ to the Q/LinQ application ID (`@APPID` tag) through which the document is received.

### senderDocumentId

The `senderDocumentId` element is the sender's locally unique identifier for the QDoc, meaningful to the sender's messaging software but not necessarily to the source application. It is required and must be referenced in the `originalDocumentRef` field on QDoc confirmations so that the receiver of the confirmation—the sender of the original document—can unambiguously identify the document being confirmed.

The `senderDocumentId` element is the Q/LinQ internally assigned document ID. It is not significant outside of Q/LinQ, but it provides a potentially useful cross-reference back to the Q/LinQ database.

**Note** This element has been removed in the 1.1 QDoc specification. In this specification each message uses `MessageID` to convey the `MessageID` property:

```
<ns0:MessageID xmlns:ns0="http://www.w3.org/2005/08/addressing">urn:messages-qad-com::2007-02-08T14:10:11.424-08:00:QADSE:</ns0:MessageID>
```

### documentStandard

The `documentStandard` element is intended to identify the standard or specification, if any, to which the document conforms. This could be an externally published standard such as EDIFACT, OAGIS, ANSI X12, or UCCnet. It could also be an internal identifier for a proprietary grammar used at one particular installation, for those QAD application users who have defined standard business objects for use inside their enterprise.

The special value QDoc is reserved by QAD to designate QDocs. `documentStandard` is an optional element.

This element is exactly equivalent to the Q/LinQ document standard or `@DOCSTD` document control tag. As with Q/LinQ, the special value `cim` is reserved by QAD to designate documents that can be processed by the QAD Enterprise Applications CIM Interface or the UI-emulation mode of Q/LinQ.

**Note** In the QDoc 1.1 specification the `documentStandard` element has been moved into the SOAP header `ReferenceParameters` section.

### documentType

The `documentType` element identifies the type of document contained in the message payload (that is, the SOAP Body), and is used to route inbound documents to the appropriate handler for processing. It is semantically equivalent to a message type, action, or service designator. It is an optional element, and may be assigned a default value by the QAD Integration Framework based on the needs of the installation.

For QDocs, this element should be set to the name of the QDoc; for example, `maintainSalesOrder`.

This element is exactly equivalent to the Q/LinQ document type or `@DOCTYP` document control tag. For documents with a `documentStandard` of `cim`, it should be set to the name of the QAD Enterprise Applications program called to process the document.

**Note** In the QDoc 1.1 specification the `documentType` element has been moved into the SOAP header `ReferenceParameters` section.



### documentVersion

The `documentVersion` element qualifies the `documentType` with a version or revision designator that permits different variations of the same type of document to be distinguished for special handling. For documents conforming to an externally published standard, such as EDI, it is set to the version or revision level designator assigned by the published standard.

If `documentVersion` is omitted, it is presumed to designate the most current commercial or public version of the associated document type. When used with internal, less formal document grammars that do not use any form of version control, it would be omitted.

For QDocs, this element should be set to the version attribute of the QDoc; for example, `eB_1`.

This element is exactly equivalent to the Q/LinQ document revision or `@DOCREV` document control tag.

**Note** In the QDoc 1.1 specification the `documentVersion` element has been moved into the SOAP header `ReferenceParameters` section.

### confirmationLevel

The `confirmationLevel` element designates under what circumstances a QDoc Confirmation document is requested. Allowed values are `none`, `error`, or `all`.

This element has exactly the same meaning as the present Q/LinQ tag `@ACKLVLREQD`.

**Note** The `confirmationLevel` element has been removed in the QDoc 1.1 specification.

### dateTimeCreated

The `dateTimeCreated` element contains the date- and time-stamp for the creation of the document, expressed using the `DateTime` type prescribed by XML schema. For example, the following value would apply to a document created on July 1, 2002, at 9:00am Pacific Standard Time:

2002-07-01T09:00:00-0800

This element has exactly the same meaning as the present Q/LinQ tags `@DATECREATE`, `@TIMECREATE`, and `@TIMEZONE` in combination.

**Note** The `dateTimeCreated` element has been removed in the QDoc 1.1 specification.

### senderDocumentRef

The `senderDocumentRef` is a flexible-format, multi-occurrence string providing a reference back to the sending application. It is not necessarily unique and serves only to provide a meaningful reference for application end users, as opposed to the `senderDocumentId` used only for document matching purposes. Accordingly, it should be assigned to one or more values that represent the key fields of the application data objects most closely associated with the document.

For example, in the case of a sales order document it might contain the sales order number. In the case of inventory balances, it might contain the SKU number of the material as well as the identifier of the warehouse/facility in which the material is stored.





Q/LinQ populates only two occurrences of this field per document at most. If the corresponding QAD Enterprise Applications data object has a primary site code associated with it, as in the case of inventory, the first occurrence is set to the QAD Enterprise Applications site (@MFGPROSITE) tag and the second occurrence to the QAD Enterprise Applications key (@MFGPROKEY) tag. Otherwise, the first occurrence is set to the QAD Enterprise Applications key (@MFGPROKEY) tag.

**Note** The senderDocumentRef element has been removed in the QDoc 1.1 specification.

### receiverDocumentRef

The receiverDocumentRef is a flexible-format, multi-occurrence string providing a reference back to the receiving application. It is not necessarily unique and serves only to provide a meaningful reference for application end users. It is analogous to the senderDocumentRef field, and should be assigned to one or more values that represent the key fields of the application data objects most closely associated with the document.

In most cases, this field is omitted from the message envelope, as the sender application or messaging agent would not normally have a meaningful document reference expressed in terms of the receiver. However, it may be useful for follow-up messages in which two applications are engaged in a long-running dialog about data objects known to both. For example, QAD Enterprise Applications might use this field on a shipment notification to reference an external sales order number and line.

Q/LinQ expects only two occurrences of this field per document at most:

- If the corresponding QAD Enterprise Applications data object has a primary site code associated with it, as in the case of inventory, the first occurrence is assumed to be a site code and is stored in the QAD Enterprise Applications site (@MFGPROSITE) tag.
- The second occurrence is assumed to be some other key field and is stored in the QAD Enterprise Applications key (@MFGPROKEY) tag. Otherwise, the first occurrence is stored in the QAD Enterprise Applications key (@MFGPROKEY) tag.

**Note** The receiverDocumentRef element has been removed in the QDoc 1.1 specification.

## SOAP Compliance Limitations

The QDoc message envelope has the following limitations and qualifications:

- The QDoc solution supports document-style message exchange as opposed to SOAP RPC. In order to make support for SOAP RPC and related standards such as WSDL easier to implement in future releases, SOAP encoding rules are used to represent all QDoc data.

**Note** The above limitation applies to the QDoc 1.0 specification only. The QDoc 1.1 specification does not use SOAP encoding rules.

- All QDoc messages require a Header element, whereas SOAP considers this element optional.
- QAD applications ignore the role attribute on all SOAP 1.0 header blocks—or the actor attribute in SOAP 1.1 headers—acting as the ultimate SOAP receiver in all cases. In other words, a QAD application automatically plays all roles that appear in the SOAP message.
- QAD applications ignore the mustUnderstand attribute on all SOAP header blocks, assuming that it must understand and process every received QDoc. In other words, they always act as if mustUnderstand is set to true (for SOAP 1.0) or 1 (for SOAP 1.1).

- QAD applications cannot act as SOAP intermediaries, passing the QDoc to other SOAP nodes for processing. Rather, they process all inbound messages as the ultimate receiver.
- QAD applications process a received QDoc only once, regardless of the number of SOAP header blocks that may be included inside the Header element of the envelope.

## Future Extensions and Forward Compatibility

For QDocs using the 1.0 standard, the content of the QDoc envelope—while mostly SOAP compliant—is entirely QAD defined with no reference to external industry standards or specifications outside of SOAP. Qdocs using the 1.1 standard follow the Web Service Addressing (WSA) standard. As XML- and SOAP-based messaging standards mature, the QDoc envelope will evolve to address authentication, privacy, reliability, and work flow requirements among others.

## QDoc Envelope Examples

The following examples illustrates QDoc envelopes for both the 1.1 and 1.0 syntax specifications.

### Envelope Example (1.1)

```
<!-- Here is an inbound QDoc 1.1 request message envelope. -->
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns="urn:schemas-qad-com:xml-services" xmlns:qcom="urn:schemas-qad-com:xml-services:common" xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:wsa="http://www.w3.org/2005/08/addressing">
  <soapenv:Header>
    <wsa:Action />
    <wsa:To>urn:services-qad-com:eb21sp6</wsa:To>
    <wsa:MessageID>urn:services-qad-com:eb21sp6</wsa:MessageID>
    <wsa:ReferenceParameters>
      <qcom:suppressResponseDetail>true</qcom:suppressResponseDetail>
    </wsa:ReferenceParameters>
    <wsa:ReplyTo>
      <wsa:Address>urn:services-qad-com:</wsa:Address>
    </wsa:ReplyTo>
  </soapenv:Header>
  <soapenv:Body>
    <!-- The QDoc XML goes here -->
    <maintainSalesOrder>
      ...
    </maintainSalesOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

### Envelope Example (1.0)

```
<!-- Here is an inbound QDoc 1.0 request message envelope. -->
<env:Envelope xmlns:env="http://www.w3.org/2002/12/soap-envelope" xmlns:xsi=
"http://www.w3.org/2001/XMLSchema-instance">
  <env:Header>
    <!-- SOAP 'mustUnderstand' and 'role' attributes are ignored but may be present -->
    <QDoc xmlns="http://www.qad.com/qdoc/common" env:mustUnderstand="0" env:actor=
"http://schemas.xmlsoap.org/soap/actor/next">
      <senderId>http://www.acme.com/site1?sender=site1</senderId>
      <receiverId>http://www.acme.com/site2?connection=queue1&receiver=
db2</receiverId>
      <senderDocumentId>eq200000</senderDocumentId>
      <requestor id="user" password="apasswd" type="mfgpro"/>
      <!-- descriptor may be omitted if Q/LinQ is set up to expect QDocs -->
      <documentStandard>QDoc</documentStandard>
      <documentType> maintainSalesOrder</documentType>
      <documentVersion/>
      <confirmationLevel>all</confirmationLevel>
```

```

        <dateTimeCreated>2002-07-10T09:00:00-0800</dateTimeCreated>
        <senderDocumentRef>eqso5678</senderDocumentRef>
        <senderDocumentRef>1</senderDocumentRef>
    </QDoc>
</env:Header>
<env:Body>
    <!-- The QDoc XML goes here -->
    <maintainSalesOrder ...>
        ...
    </maintainSalesOrder>
</env:Body>
</env:Envelope>

```

### XML Schema for Envelope Header

Following is the unannotated XML 1.0 schema describing the syntax of the header block of the QDoc document envelope. It makes no distinction between export and import, so that exported Q/LinQ documents can be reprocessed as import documents with no XML syntax errors. The elements and attributes are defined in an envelope-specific namespace rather than the primary product-specific QDoc namespaces.

**Note** In the QDoc 1.1 specification there is no common schema; instead, each QDoc has its own schema. For details of changes to the XML schema in the 1.1 specification see “QDoc Schema 1.1” on page 301.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema targetNamespace="http://www.qad.com/qdoc/common" xmlns:qcom=
"http://www.qad.com/qdoc/common" xmlns="http://www.w3.org/2001/
XMLSchema" xmlns:soapenv="http://www.w3.org/2002/12/soap-envelope" xmlns:enc=
"http://www.w3.org/2002/12/soap-encoding" elementFormDefault="qualified" xml:lang="EN">
    <import namespace="http://www.w3.org/2002/12/soap-envelope" SchemaLocation="soap-
    envelope.xsd"/>
    <complexType name="QdocEnvelopeType">
        <sequence>
            <element name="senderId" type="anyURI"/>
            <element name="senderRef" type="string" minOccurs="0"/>
            <element name="receiverId" type="anyURI"/>
            <element name="receiverRef" type="string" minOccurs="0"/>
            <element name="senderDocumentId" type="string"/>
            <element name="documentStandard" type="string"/>
            <element name="documentType" type="string"/>
            <element name="documentVersion" type="string"/>
            <element name="confirmationLevel" default="none" minOccurs="0">
                <simpleType>
                    <restriction base="string">
                        <enumeration value="none"/>
                        <enumeration value="error"/>
                        <enumeration value="all"/>
                    </restriction>
                </simpleType>
            </element>
            <element name="dateTimeCreated" type="dateTime" minOccurs="0"/>
            <element name="senderDocumentRef" type="string" minOccurs="0" maxOccurs=
            "unbounded"/>
            <element name="receiverDocumentRef" type="string" minOccurs="0" maxOccurs=
            "unbounded"/>
            <element name="requestor" minOccurs="0" maxOccurs="unbounded">
                <complexType>
                    <attributeGroup ref="qcom:requestorAttributes"/>
                </complexType>
            </element>
            <any minOccurs="0" maxOccurs="unbounded"/>
        </sequence>
        <attribute ref="soapenv:encodingStyle"/>
        <attribute ref="soapenv:role"/>
        <attribute ref="soapenv:mustUnderstand"/>
    </anyAttribute/>

```

```

</complexType>
<element name="qdoc" type="qcom:QdocEnvelopeType"/>
<attributeGroup name="requestorAttributes">
  <attribute name="id" type="string" use="optional"/>
  <attribute name="type" type="string" use="optional"/>
  <attribute name="password" type="string" use="optional"/>
</attributeGroup>
<attributeGroup name="commonAttributes">
  <attribute name="version" type="string" use="required"/>
  <attribute name="scopeTransaction" type="boolean" use="optional"/>
  <attribute name="logTransaction" type="boolean" use="optional"/>
  <attribute name="transactionId" type="string" use="optional"/>
  <attribute name="suppressResponseDetail" type="boolean" use="optional"/>
  <attribute ref="xml:lang"/>
</attributeGroup>
<attributeGroup name="arrayEntryAttributes">
  <attribute name="index" type="positiveInteger" use="required"/>
  <attribute name="skip" type="boolean"/>
</attributeGroup>
<complexType name="EntryString">
  <simpleContent>
    <extension base="string">
      <attributeGroup ref="qcom:arrayEntryAttributes"/>
    </extension>
  </simpleContent>
</complexType>
<complexType name="EntryInteger">
  <simpleContent>
    <extension base="integer">
      <attributeGroup ref="qcom:arrayEntryAttributes"/>
    </extension>
  </simpleContent>
</complexType>
<complexType name="EntryDecimal">
  <simpleContent>
    <extension base="decimal">
      <attributeGroup ref="qcom:arrayEntryAttributes"/>
    </extension>
  </simpleContent>
</complexType>
<complexType name="EntryDate">
  <simpleContent>
    <extension base="date">
      <attributeGroup ref="qcom:arrayEntryAttributes"/>
    </extension>
  </simpleContent>
</complexType>
<complexType name="ExceptionType">
  <sequence>
    <element name="number" type="string"/>
    <element name="description" type="string"/>
    <element name="severity" default="error" minOccurs="0">
      <simpleType>
        <restriction base="string">
          <enumeration value="informational"/>
          <enumeration value="warning"/>
          <enumeration value="error"/>
        </restriction>
      </simpleType>
    </element>
    <element name="field" type="string" minOccurs="0"/>
    <element name="context" type="string" minOccurs="0"/>
    <element name="trace" type="string" minOccurs="0"/>
  </sequence>
</complexType>
<simpleType name="ReturnValueType">
  <restriction base="string">
    <enumeration value="success"/>
    <enumeration value="warning"/>
    <enumeration value="error"/>
  </restriction>
</simpleType>

```

```

<complexType name="QdocConfirmationType">
  <sequence>
    <element name="originalDocumentRef" type="qcom:QdocEnvelopeType"/>
    <element name="processingStage">
      <simpleType>
        <restriction base="string">
          <enumeration value="received"/>
          <enumeration value="accepted"/>
          <enumeration value="processed"/>
        </restriction>
      </simpleType>
    </element>
    <element name="processingOutcome">
      <simpleType>
        <restriction base="string">
          <enumeration value="error"/>
          <enumeration value="warning"/>
          <enumeration value="success"/>
        </restriction>
      </simpleType>
    </element>
    <element name="exception" type="qcom:ExceptionType" minOccurs="0" maxOccurs="unbounded"/>
    <element name="processingResults" minOccurs="0">
      <complexType>
        <sequence>
          <any processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
        </sequence>
      </complexType>
    </element>
  </sequence>
  <attributeGroup ref="qcom:commonAttributes"/>
</complexType>
</schema>

```

## SOAP Faults

As previously discussed, any errors detected in the preprocessing of an inbound QDoc are thrown to the sender as SOAP faults. SOAP faults are SOAP response messages that contain a single instance of the `Fault` element inside the SOAP body, with no other data content.

The purpose of SOAP faults is to describe a single fatal error to the sender of the original SOAP message using a standard syntax.

**Note** Aside from the commonality mentioned above, considerable differences exist in the way that SOAP faults are handled in SOAP 1.0 and SOAP 1.1. QXtend version 1.4 uses SOAP 1.1 syntax; QXtend version 1.3 and below use SOAP 1.0 syntax. Refer to the appropriate section for the version of QXtend being used.

### SOAP Faults in SOAP 1.1

The SOAP `Fault` element defines the following four subelements:

- **faultcode** (mandatory). The `faultcode` element is intended to allow software to provide a way to identify the fault. The `faultcode` value must be a qualified name; see page 347 for descriptions of `faultcode` names. SOAP defines the following SOAP fault codes covering basic SOAP faults:
  - **VersionMismatch**. For details see the section “SOAP Faults in SOAP 1.0” on page 347.
  - **MustUnderstand**. For details see the section “SOAP Faults in SOAP 1.0” on page 347.

- **Client**. Indicates that the message was not well-formed or that it did not contain the appropriate information in order to succeed. This fault code indicates that the message requires modification before being resent.
- **Server**. Indicates that the message was not processed because of errors—communication problems with servers, for example—not related to the contents of the message itself. The message might succeed if sent later.
- **faultstring** (mandatory). The **faultstring** element is intended to provide a human-readable explanation of the nature of the fault.
- **faultactor**. The **faultactor** element is intended to identify who caused the fault within the message path. It is similar to the SOAP actor attribute but instead indicates the source of the fault. The value of the **faultactor** attribute is a URI identifying the source. The **faultactor** element is not used as it is presumed that the QAD application is always the ultimate receiver of the SOAP message.
- **detail** (mandatory). The **detail** element is intended to carry application-specific error information related to the **Body** element. If the **detail** element is absent, this indicates that the fault is not related to processing of the **Body** element. This can be used to distinguish whether the **Body** element was processed or not in case of a fault situation.

Immediate child elements of the **detail** element are called detail entries. Each detail entry is encoded as an independent element within the detail element.

Other **Fault** subelements may be present provided they are namespace-qualified.

This partial example of an outbound QAD Enterprise Applications QDoc response contains a SOAP fault.

```
<!-- Here is an outbound QDoc response message envelope
containing a SOAP fault. -->
<?xml version="1.0" ?>
<soapenv:Envelope xmlns:soapenv= "http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa=
"http://www.w3.org/2005/08/addressing" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header>
    ...
  </soapenv:Header>
  <soapenv:Body>
    <!-- The SOAP fault follows, with no other QDoc content
    allowed -->
    <soapenv:Fault xmlns="http://schemas.xmlsoap.org/soap/envelope/">
      <soapenv:faultcode>Client.QdocVersionNotSupported
      </soapenv:faultcode>
      <soapenv:faultstring>QDoc is not supported</soapenv:faultstring>
      <soapenv:faultactor />
      <soapenv:detail>
        <ns1:dsExceptions xmlns:ns1="urn:schemas-qad-com:xml-services:common">
          <ns2:temp_err_msg xmlns:ns2="urn:schemas-qad-com:xml-services">
            <ns1:tt_msg_nbr>QdocException005</ns1:tt_msg_nbr>
            <ns1:tt_msg_desc>QDoc is not supported</ns1:tt_msg_desc>
            <ns1:tt_msg_sev>error</ns1:tt_msg_sev>
            <!-- field and context are not relevant to this type of error -->
            <ns1:tt_msg_field />
            <ns1:tt_msg_context />
            <ns1:tt_msg_data>QdocException: Qdoc Receiver is not recognized.
            The Receiver is not setup in the Qdoc Server instance at
            com.qad.qxtend.qdocs...
            ...
          </ns1:tt_msg_data>
          <ns1:tt_msg_keys />
          <ns1:tt_msg_keys />
          <ns1:tt_msg_keys />
          <ns1:tt_msg_keys />
        </ns1:dsExceptions>
      </soapenv:detail>
    </soapenv:Fault>
  </soapenv:Body>
</soapenv:Envelope>
```

```

        <ns1:tt_msg_keys />
        <ns1:tt_msg_keys />
        <ns1:tt_msg_datetime>2007-05-31T17:54:18+1000</ns1:tt_msg_datetime>
        <ns1:tt_msg_processed>false</ns1:tt_msg_processed>
        <ns1:tt_level />
        <ns1:tt_msg_index>0</ns1:tt_msg_index>
    </ns2:temp_err_msg>
</ns1:dsExceptions>
</soapenv:detail>
</soapenv:Fault>
</soapenv:Body>
</soapenv:Envelope>

```

## SOAP Faults in SOAP 1.0

The `Fault` element contains:

- Mandatory `Code` element
- Mandatory `Reason` element
- Optional `Node`, `Role`, and `Detail` elements

The `Code` element values for common errors, as well as related `Subcode` element values, are predefined in the SOAP 1.0 specification:

- **VersionMismatch**: The message envelope does not conform to the SOAP specification.
- **MustUnderstand**: A `Header` element was not understood even though the `SOAP mustUnderstand` attribute was set to true. This is not applicable to QDocs, as the `mustUnderstand` attribute is not used.
- **DataEncodingUnknown**: The `SOAP encodingStyle` attribute has a value other than: `http://www.w3.org/2002/12/soap-encoding`
- **Sender**: The QDoc was incorrectly formed by the sender in some fashion not covered by the other general error conditions, as further described by the `Subcode` element.
- **Receiver**: The QDoc could not be processed by the receiver for reasons other than its syntax or content, as further described by the `Subcode` element.

The following `Subcode` value elements are used with the `Sender` code to describe errors in the QDoc request syntax:

- **QDocNotWellFormed**: The QDoc body's XML content is not well formed and cannot be parsed.
- **QDocEnvelopeInvalid**: The QDoc's envelope does not have valid syntax, and the contained QDoc cannot be unwrapped.
- **QDocNotRecognized**: No QDoc with the given name is supported by the installation.
- **QDocSyntaxInvalid**: The QDoc is recognized and its XML content is well formed, but it does not have valid syntax with respect to its XML schema. For example, the wrong input parameters are provided.
- **QDocReceiverNotRecognized**: The `receiver` attribute of the QDoc message envelope was not recognized; therefore, the QDoc cannot be processed.
- **QDocVersionNotSupported**: No QDoc is supported by the installation with the given combination of `name`, `version`, and `receiver` attributes.

The following `Subcode` value element is used with the `Receiver` code to describe errors in the QAD application responsible for processing the QDoc request:



- **QDocApplicationNotAvailable**: The QAD application responsible for processing the QDoc request is not available. For example, the QAD Enterprise Applications database server is not running, or the QDoc server is not able to communicate with Progress clients or AppServers.

The **Detail** element of a QDoc SOAP Fault contains one or more exception elements of the type **ExceptionType** describing the nature of the preprocessing problem. In all such exceptions, the number element is blank, severity is error, and description contains an error message describing the problem. The possible error messages consist of text equivalent to the QDoc-specific Subcode values listed here.

The SOAP Reason element is set to the value of the description element of exception, essentially the text of the error message that would be displayed to a human user. The SOAP Node and Role elements are not needed or used, as it is presumed that the QAD application is always the ultimate receiver of the SOAP message.

The following XML schema fragment defines the QAD-specific Subcodes.

```
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:qcom="http://www.qad.com/qdoc/common"
  targetNamespace="http://www.qad.com/qdoc/common">
  <element name="soapFaultSubcodeValue">
    <simpleType>
      <restriction base="QName">
        <enumeration value="qcom:qdocNotWellFormed"/>
        <enumeration value="qcom:qdocEnvelopeInvalid"/>
        <enumeration value="qcom:qdocNotRecognized"/>
        <enumeration value="qcom:qdocSyntaxInvalid"/>
        <enumeration value="qcom:qdocReceiverNotRecognized"/>
        <enumeration value="qcom:qdocVersionNotSupported"/>
        <enumeration
          value="qcom:qdocApplicationNotAvailable"/>
      </restriction>
    </simpleType>
  </element>
</schema>
```

This partial example of an outbound QAD Enterprise Applications QDoc response contains a SOAP fault.

```
<!-- Here is an outbound QDoc response message envelope
  containing a SOAP fault. -->
<?xml version="1.0" encoding="UTF-8"?>
<env:Envelope
  xmlns:env="http://www.w3.org/2002/12/soap-envelope"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <env:Header>
    ...
  </env:Header>
  <env:Body>
    <!-- The SOAP fault follows, with no other QDoc content
      allowed -->
    <env:Fault>
      <env:Code>
        <env:Value>env:Sender</env:Value>
        <env:Subcode>
          <!-- Subcode value is QAD-defined -->
          <env:Value
            xmlns:qcom="http://www.qad.com/qdoc/common">
              QDocNotWellFormed
            </env:Value>
          </env:Subcode>
        </env:Code>
        <!-- Reason is taken from the QDoc exception description
          -->
        <env:Reason xml:lang="en-US">
```



```

        QDoc is not well formed
      </env:Reason>
    <env:Detail>
      <!-- Here is the QDoc exception element -->
      <qcom:exception
        xmlns:qcom="http://www.qad.com/qdoc/common">
        <qcom:number></qcom:number>
        <qcom:description>
          QDoc is not well formed
        </qcom:description>
        <qcom:severity>error</qcom:severity>
        <!-- field and context are not relevant to this
          type of error -->
        <qcom:field/>
        <qcom:context/>
      </qcom:exception>
    </env:Detail>
    ...
  </env:Fault>
</env:Body>
</env:Envelope>

```

## QDoc Requests Without SOAP Headers

In most common implementation scenarios, you configure QXI to process QDoc requests from external applications with appropriate information contained in the SOAP header. However, you can also choose not to include the SOAP header in QDoc requests from external applications that do not natively support Web services that leverage SOAP headers, such as QAD BPM. In that case, you can move the values in the original SOAP header to the session context (dsSessionContext) part in the SOAP body.

The affected SOAP headers include:

- Action
- To
- MessageID
- RelatesTo
- ReferenceParameters/suppressResponseDetail
- ReplyTo/Address

These headers should be added to ddSessionContext as in the following, taking header To as an example:

```

<qcom:propertyQualifier>QAD</qcom:propertyQualifier>
<qcom:propertyName>To</qcom:propertyName>
<qcom:propertyValue>QADERP</qcom:propertyValue>

```

For SOAP header ReferenceParameters/suppressResponseDetail and ReplyTo/Address, use suppressResponseDetail and ReplyTo respectively as the property name as in the following:

```

<qcom:propertyQualifier>QAD</qcom:propertyQualifier>
<qcom:propertyName>suppressResponseDetail</qcom:propertyName>
<qcom:propertyValue>>false</qcom:propertyValue>

```

You must follow these rules:

- When the SOAP header includes data, the receiver (the To element) and the sender (the ReplyTo element) must be specified in the SOAP header.
- When the SOAP header is empty, the receiver (the To element) must be supplied in the session context (dsSessionContext).
- If the data is provided in both the SOAP header and section context, then the values in the SOAP header take precedence.

# Telnet Reference

This section provides information on telnet configuration and security.

***Introduction*    352**

Describes the sequence of events for a normal operation.

***Creating Telnet Log-In Scripts*    352**

Explains how to create telnet log-in scripts.

***Editing QAD Enterprise Applications Telnet Scripts*    353**

Explains how to edit telnet scripts, with a sample connection manager telnet script, and information on PROMSGS, PROPATH, database connection parameters, and additional parameters.

***UNIX Telnet Security*    357**

Discusses security, including restricted shells and examples of security measures.

## Introduction

QAD QXtend Inbound (QXI) connects to the QAD Enterprise Applications receivers using telnet. This connection is managed in the Connection Pool Manager. If QXI and the QAD Enterprise Applications receivers are installed on the same machine, the Connection Pool Manager still uses telnet to connect the QAD QXtend instance to the QAD Enterprise Applications instance.

During normal operation, the sequence of events is as follows:

- 1 Start the database servers for the QAD Enterprise Applications instances.
- 2 Start QXI.
- 3 QXI Connection Pool Manager creates connections to QAD Enterprise Applications. This connection is broken down into:
  - a Log in to the database server.
  - b Move to the QAD Enterprise Applications launch directory.
  - c Launch QAD Enterprise Applications using special run scripts.

This section provides the necessary details on entering the correct telnet log-in script into the Connection Pool Manager, and how to create the special QAD Enterprise Applications run scripts.

Additional information is available at the end of the section on telnet security.

## Creating Telnet Log-In Scripts

The value entered in the Server Startup Script field in Configuration Update Settings in the Connection Pool Manager must be the exact log-in sequence for the telnet session including both system prompts and responses. See “Adding a Connection Pool” on page 216.

The objective of the script is to log in to a telnet session on the database server machine and to connect to a specific running QAD Enterprise Applications database instance. Use the following sample script and descriptions to create the correct script for your environment.

Prompts and responses are separated using the pipe symbol (|). The prompt values are case sensitive. The values you enter must be identical to prompts the telnet server displays when the Connection Pool Manager attempts to log in. Verify each step manually before attempting to start Connection Pool Manager.

```
login: |QXtend|Password: |$PASSWD|$|exec ./qma.QXprod
```

login: is the first prompt displayed by the system.

QXtend is the response to this prompt, the user ID used to log in to the system.

Password: is the second prompt displayed.

\$PASSWD: is the alias for the server startup password. This is used for added security measures. If you do not want the password to be displayed in clear text, then enter the password into the Server Startup Password field in the Connection Pool configuration parameters screen and this alias will be replaced by your password once it is decrypted. Hard coding the actual password in place of this alias will also function; however the password will be clearly visible to all. For password entry instructions, see “Adding a UI API Pool” on page 217.



\$ is the prompt displayed after successful log-in, indicating the system is ready.

`exec ./qma.QXprod` is the command to execute the connection script on a UNIX system. The `exec` is required to ensure that the script does not open in a new window.

`qma.QXprod` script is a copy of the standard production script, with the `mfgwrapper` and `apimode` parameter added to the appropriate command line. See the next section for details.

On Windows systems, an equivalent log-in script would look like:

```
login: |QXtend|password: |$PASSWD|c:\mfgsvr\telnet>| startmfg.bat
```

## Editing QAD Enterprise Applications Telnet Scripts

The telnet log-in script entered in the Connection Pool Manager calls the telnet connection script for a specific instance of QAD Enterprise Applications. See the “Generating Scripts” heading in the Character Client Install section of your QAD Enterprise Applications installation guide. The telnet connection scripts are first generated by MFG/UTIL during the installation of QAD Enterprise Applications as `qma.DBSetName` scripts, where *DBSetName* is the name of the database to which the script connects. For example, the telnet connection script for the Production database set is `qma.Production`.

In order for the QXtend Connection Pool Manager to connect to an QAD Enterprise Applications instance using the `qma` script for a database, modifications to the script are required.

The telnet connection scripts are located in your QAD Enterprise Applications database server administration directory.

In general, the connection script performs the following functions:

- Changes to the user’s home directory
- Sets environment requirements and variables
- Provides connection parameters for the databases in the set

**Note** Template scripts are deployed with QAD QXtend and can be found under the adapter directory.

## Sample Connection Manager Telnet Script

The following is a UNIX `qma` script. The bold sections are discussed in greater detail below.

```
#!/bin/sh
# Script to start multi-user session of QAD Enterprise Applications
# tokens:
# &DLC = Progress Directory
# &CLIENT-DB-CONNECT = command line to connect to each db in dbset
stty intr '^c'
DLC=${DLC:-/apps/progress/91d};export DLC
PATH=$PATH:$DLC;export PATH
PROMSGS=$DLC/promsgs;export PROMSGS
PROTERMCAP=$DLC/protermcap;export PROTERMCAP
PS1='$$ ';export PS1
PROPATH=${PROPATH:-./,/mfgsvr/<QXI webapp>,/mfgsvr,/mfgsvr/bbi}
;export PROPATH
# Set terminal type.
if [ ${TERM:-NULL} = NULL ]
then
    echo
    echo "Please enter your terminal type: c"
```

```

        read TERM
        export TERM
    fi
    #
    # Start QAD Enterprise Applications.
    #
    cd # change to home directory
    # exec $DLC/bin/_progres &DB etc
    exec $DLC/bin/_progres
        /mfgsvr/db/mfgprod -ld qaddb -znotrim -trig triggers
        -db /mfgsvr/db/hlpprod -ld qadhelp
        -db /mfgsvr/db/admprod -ld qadadm
        -d mdy -yy 1920 -Bt 350 -c 30 -D 100 -mmax 3000 -nb 200
        -s 63 -noshvarfix
        -p mfwb01aa.p
        -param mfgwrapper=true,apimode=true

```

**Note** For a cloud-based environment, such as QAD 2015 EE (cloud) or later, the parameters in the startup script can be different. For example, the startup program is `ClientBootstrap.p` instead of `mfwb01aa.p`.

## PROMSGS

Regardless of the language you are using with your QAD Enterprise Applications installation, the telnet script should reference the US English PROMSGS file. These messages are not normally displayed to the user, but QXI needs to be able to process internal messages correctly.

If you have installed more than one language, ensure the PROMSGS variable points to the US English version.

## PROPATH

Add the QXI installation directory in front of the standard PROPATH. In the example below, `/mfgsvr/<QXI webapp>` is the QXI installation directory.

```

PROPATH=${PROPATH:-./mfgsvr/<QXI webapp>/mfgsvr,/mfgsvr/bbi}
;export PROPATH#

```

## Database Connection Parameters

The sample connection script on page 353 is a local host connection—the QXI and the QAD Enterprise Applications receiver are on the same machine. You can also connect to QAD Enterprise Applications on a separate database server using a client/server connection.

### Local Host Connection Parameters

If QXI is on the same server as the QAD Enterprise Applications databases, you can use local host or shared memory connections to access the databases. This can improve QXI performance by eliminating network overhead between the processes and the databases.

To enable local host connections, the QXI parameter files must contain the connection parameters described in Table 26.1.

**Table 26.1**  
Local Host Connection Parameters

| Parameter | Description                                                                                                                                                                                                                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -db       | The physical database name parameter. Follow this parameter with the path and physical name of a QAD Enterprise Applications database.                                                                                                                                                                                  |
| -trig     | The triggers parameter. Follow this parameter with the name of the directory containing the database triggers for the main QAD Enterprise Applications database. This is the <code>triggers</code> subdirectory. The parameter value is: <code>-trig triggers</code> . This parameter is used only with main databases. |
| -ld       | The logical database name parameter. Follow this parameter with the logical name of a QAD Enterprise Applications database. This parameter is used only with support databases.                                                                                                                                         |

### Client/Server Connection Parameters

If QXI is on a different machine than the QAD Enterprise Applications databases, use client/server connections to access the databases. This can improve QXI system performance by spreading the QAD Enterprise Applications and QXI resource requirements between two servers.

To enable the server processes to make client/server connections, the QXI parameter files must contain the connection parameters described in Table 26.2.

**Table 26.2**  
Client/Server Connection Parameters

| Parameter | Description                                                                                                                                                                                                                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -db       | The physical database parameter name. Follow this parameter with the physical name of the QAD Enterprise Applications database. You do not need to include the path to the database file.                                                                                                                               |
| -trig     | The triggers parameter. Follow this parameter with the name of the directory containing the database triggers for the main QAD Enterprise Applications database. This is the <code>triggers</code> subdirectory. The parameter value is: <code>-trig triggers</code> . This parameter is used only with main databases. |
| -ld       | The logical database name parameter. Follow this parameter with the logical name of an QAD Enterprise Applications database. This parameter is used only with support databases.                                                                                                                                        |
| -H        | The host name parameter. Follow this parameter with the machine name or IP address of the QAD Enterprise Applications database server. This guide uses <i>DBServer</i> as an example in place of an actual machine name or IP address.                                                                                  |
| -S        | The database service name parameter. Follow this parameter with a QAD Enterprise Applications database service name. You can use the Database Set Maintenance utility in MFG/UTIL to find the service name for a database.                                                                                              |
| -N        | The network parameter. Follow this parameter with the network protocol used to connect to the QAD Enterprise Applications databases. This is TCP/IP. The parameter value is: <code>-N tcp</code> .                                                                                                                      |

A Progress on UNIX example of a client/server connection would look like:

```
-db mfgprod -ld qaddb -H svr01 -S prod-srv -N tcp -trig triggers
-db mfghelp -ld qadhelp -H svr01 -S help-srv -N tcp
-db mfgadmin -ld qadadm -H svr01 -S admin-srv -N tcp
```

## Additional Parameters

Two additional changes are required for QXI implementation: changing the Progress calling program and adding the Connection Pool Manager parameters. If you are using an HP-UX or Tru64 environment, an additional change may be required.

### Progress/Oracle Calling Program

The Progress or Oracle calling program to connect to QAD Enterprise Applications for QXtend is `mfwb01aa.p`. Change the `-p` value to reflect this.

```
-p mfwb01aa.p
```

For details on setting up an Oracle implementation, refer to *QAD QXtend Installation Guide*.

### Connection Pool Manager Parameters

The Connection Pool Manager for QXI requires two additional parameters at the end of the connection script:

```
-param mfgwrapper=true,apimode=true
```

**Note** For Windows, the connection pool manager parameters should be:

```
-param mfgwrapper=true,apimode=true,DSU=OFF
```

### FailureException or AdapterException Responses

To avoid a `FailureException` or `AdapterException` response, you can modify your connection script or server startup scripts command as defined in the sections below.

#### HP-UX/COMPAQ Tru64 Environments

If you are operating in an HP-UX or COMPAQ Tru64 environment, ensure that the following parameters are available in the QXtend telnet script:

```
stty -icanon
stty ixoff
```

#### Linux Environment

If you are operating in a Linux environment, add `|exit` (the pipe symbol and the word `exit`) or: `exit` (a colon and the word `exit`) to your server startup scripts command. For example:

```
login: |qxtenduser|Password: |$PASSWD|>|/scripts/qxipool.sh|exit
```



## UNIX Telnet Security

Because QXI communicates over telnet via HTTP, the account log-in ID and password are sent using unencrypted text. Since this may compromise system security, you should configure the telnet environment with server-side security measures in mind.

A range of security options exists to solve the unencrypted log-in and password problem. This section outlines two sample security setups: one providing a maximum level of security and one providing less security but more flexibility for Progress client session and home directory access. In both setups, it is recommended that you use a restricted shell (rsh).

### Restricted Shells

Restricted shells are restricted versions of the common UNIX Bourne shell or Korn shell. In the Bourne shell, the restricted shell is run as rsh (/usr/lib/rsh), while in the Korn Shell it is run as rksh (/usr/bin/rksh).

The restricted versions of these shells allow users to log in with restricted access. They cannot:

- Use the cd command to change directories.
- Specify a path or command using /.
- Use redirection (>, >>).
- Set the value of PATH.

**Note** A user's path should not include /usr/bin. This lets the user run another shell, thereby inheriting access to any commands that the child shell allows. The default shell for a user is located in the /etc/passwd file.

## Examples of Security Measures

### Case 1: Maximum Security

One UNIX account with the following characteristics is used for all QXI telnet sessions:

- No write permissions to home directory. Temporary files are written elsewhere.
- PATH, DLC, and PROPATH environment variables are set in .profile and inaccessible to the user.
- Startup command and/or scripts run from .profile.
- Telnet disconnects immediately after the user exits the session.

Use the following instructions to set up Case 1:

- 1 Create the unique QXI account for log in to UNIX through telnet.
- 2 Make the default shell for this account the restricted shell.
- 3 Remove all write permissions for this user in their home directory. Use the -T option in the remote script to specify an alternate temporary directory.
- 4 Set up the .profile to set minimal environment variables.
- 5 Set up the .profile to run the script automatically.

**Example** .profile for Case 1:

```

/*Sample .profile for QXtend session, single QXtend login*/
#set default for error (STOP) condition handling
stty intr ^C
#set environment variables
PATH=/dlc91:/dlc91/bin
DLC=${DLC - /dlc91}
PROEXE=${PROEXE - $DLC/bin/_progres}
export PATH DLC PROEXE
#Autorun remote script for QXtend access and automatically exit
exec remote.script
exit

```

**Case 2: Less Security**

Users have their own unique log in and password, but run the restricted shell by default:

- Write permission to directory is possible, but not necessary.
- PATH, DLC, and PROPATH environment variables are set in .profile and inaccessible to the user.
- Users run a subset of UNIX commands, which you add to /usr/rbin.
- Users can run the system manually from command line or script.

Use the following instructions to set up Case 2:

- 1 Create or modify accounts for users of maintenance programs by changing their default shell in the /etc/passwd file to the restricted shell.
- 2 Create the directory /usr/rbin and copy the UNIX commands necessary for these users. Make the /usr/bin directory read-only so users cannot change path variables.
- 3 Set up a special .profile for the maintenance program users.
- 4 Set the minimal environment variables, remembering to include /usr/rbin.
- 5 Copy the QXI telnet connection script to each user's home directory with read-only access.
- 6 Put any other necessary read-only script files in the home directory.

**Example** .profile for Case 2:

```
#!/* Sample .profile for QXtend session, for individual logins
#remote.script should be in home dir; executable by QXtend*/
#set default for error (STOP) condition handling
stty intr ^C
#set environment variables
PATH=/dlc91:/dlc91/bin:/usr/rbin#don't forget /rbin directory
DLC=${DLC - /dlc91}
PROEXE=${PROEXE - $DLC/bin/_progres}
export PATH DLC PROEXE
```



# SAX Writer Reference

This section describes the Simple API for XML (SAX) Writer, which is used for creating QDocs inside QAD Enterprise Applications.

## ***Introduction***    **362**

Explains how to QDocSAXWriter works, with details on the SAX Writer class.

## ***SAX Writer API Methods***    **363**

Lists and describes different API methods.

## Introduction

Extensible Markup Language (XML) is a widely used standard grammar for exchanging business documents between applications, especially over communications networks. QAD Enterprise Applications defines QDocs—XML documents containing QAD Enterprise Applications application data that conforms to a QAD-specified syntax—for this purpose.

Many interoperability scenarios require QDocs or other XML documents to be generated within QAD Enterprise Applications and exported, perhaps as a result of some interesting business event that updates the QAD Enterprise Applications database. The purpose of the SAX Writer API is to provide QAD Enterprise Applications software developers with a high-level set of callable procedures that can be used to create such XML documents within the QAD Enterprise Applications run-time environment, hiding many of the unnecessary details of QDoc and XML syntax from the programmer.

The QDocSAXWriter class supports the following:

- If the QDoc must be created in the 1.0 standard and it contains array fields, the profile dataset is passed in and serialized to XML using the SAX Writer.
- If the QDoc is a delta QDoc, the profile dataset is passed in and serialized to XML using the SAX Writer.

## SAX Writer Class

The QDoc SAX Writer class is called `com.qad.xml.QdocSAXWriter`. The SAX Writer class is available for OpenEdge 10.1A and over. The SAX Writer is a stand-alone program that must be started using standard OO4GL constructs. For example:

```
define variable oQdocSAXWriter as class com.qad.xml.QdocSAXWriter.
oQdocSAXWriter = new com.qad.xml.QdocSAXWriter().
```

The QDoc SAX Writer can be used in several ways:

- Create every node in the QDoc manually.
- Create some nodes manually and pass a ProDataSet to populate other nodes.
- Create some nodes manually and pass a buffer handle to populate other nodes.
- Create some nodes manually and include an XML document fragment.
- Pass just the QDoc parameters and a ProDataSet to create the QDoc automatically.

All methods to create an XML document follows the same structure.

- 1 Set the XML output method. Use one of the three methods `setOutputToLongChar`, `setOutputToFile`, or `setOutputToMemPtr` to specify the output type.

- 2 Set the QDoc XML syntax. Use the method `setQDocXMLSyntax10` or `setQDocXMLSyntax11`.

**Note** Steps 3, 4, and 5 can be combined into one call by using the `buildQdocFromProDataSet` method, or each step can be performed individually.

- 3 Start the document. Use one of four methods: `startDocument`, `startQdocSOAPEnvelope`, `startQdocSOAPBody`, or `startQdocRequestBody`.



- 4 Add the nodes. Use the methods `addNode`, `addNamespace`, `addNodesFromBuffer`, `addAllNodesFromBuffer`, or `addNodesFromProDataSet`.
- 5 End the document. Use the `writeDocument` method.
- 6 Get the document. Use the `getXMLAsLongChar` and `getXMLAsMemptr` methods.

## SAX Writer API Methods

This section describes the primary methods available in the SAX Writer.

### setOutputToLongChar

This method sets the output type of the XML document to be a longchar. This method has no parameters.

### setOutputToFile

This method sets the output type of the XML document to be a file. The following table lists parameters of `setOutputToFile`.

| Parameter Name          | Type      | Description                           | I/O | Req |
|-------------------------|-----------|---------------------------------------|-----|-----|
| <code>pcFileName</code> | Character | Name of the file to write the XML to. | I   | Yes |

### setOutputToMemptr

This method sets the output type of the XML document to be a memptr. This method has no parameters.

### getXMLAsLongChar

This method gets the XML document as a longchar. The method returns nothing if the output method was not set to be a longchar. Otherwise the method returns a longchar. This method has no parameters.

### getXMLAsMemptr

This method gets the XML document stored in a memptr. This method return nothing if the output method was not set to be a memptr. Otherwise the method returns a memptr. This method has no parameters.

### setQDocXMLSyntax10

This method sets the XML syntax used to create the QDoc to be 1.0. This method has no parameters.

## setQDocXMLSyntax11

This method sets the XML syntax used to create the QDoc to be 1.1. This method can be used only with QAD QXtend version 1.4 and above. This method has no parameters.

## buildQdocFromProDataSet

This method creates an entire QDoc, including the SOAP details. The node names in the QDoc are the same names as the buffers and fields in the ProDataSet. This method requires that the QDoc syntax and output type are already set.

The following table lists parameters of buildQdocFromProDataSet.

| Parameter Name        | Type      | Description                                                                                               | I/O | Req |
|-----------------------|-----------|-----------------------------------------------------------------------------------------------------------|-----|-----|
| phDataSet             | Handle    | Handle to the dataset with the QDoc data in.                                                              | I   | Yes |
| pcSenderURL           | Character | URL that identifies the sending application.                                                              | I   | Yes |
| pcReceiverURL         | Character | URL that identifies the receiver in QXtend.                                                               | I   | Yes |
| pcConfirmationLevel   | Character | Indicates the confirmation level required (QDoc Syntax 1.0 only).                                         | I   | No  |
| pcMessageID           | Character | Any character ID that identifies this message.                                                            | I   | Yes |
| pcQdocName            | Character | Name of the QDoc that is being created.                                                                   | I   | Yes |
| pcQdocVersion         | Character | Version number of the QDoc.                                                                               | I   | Yes |
| pcQdocNamespace       | Character | Namespace of the QDoc                                                                                     | I   | No  |
| plScopeTransaction    | Logical   | Identifies whether QXtend processes the entire QDoc as a single transaction.                              | I   | Yes |
| plSuppressRespDetails | Logical   | Identifies whether QXtend returns a detailed response QDoc.                                               | I   | Yes |
| plMnemonicsRaw        | Logical   | Identifies whether the QDoc contains the mnemonic or the specific language value for translatable values. | I   | Yes |
| pcDomain              | Character | The domain in QAD Enterprise Applications that this data is loaded in to.                                 | I   | No  |
| pcUsername            | Character | The user name used to log in to QAD Enterprise Applications.                                              | I   | No  |
| pcPassword            | Character | The password for the user.                                                                                | I   | No  |
| pcLanguage            | Character | The ISO Language Code                                                                                     | I   | No  |



**Note** There is an overloaded method for `buildQdocFromProDataSet`, which accepts `pcSessionID` (character) as an input in place of the username and password. If a session ID value is supplied to this overloaded method (for example, TMP12345), then the QDoc that is generated has the session ID in the QDoc session context. See the following example:

```
<qcom:ttContext>
  <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
  <qcom:propertyName>sessionID</qcom:propertyName>
  <qcom:propertyValue>TMP12345</qcom:propertyValue>
</qcom:ttContext>
```

## startQdocSOAPEnvelope

This method starts a new document and creates a SOAP envelope node with the correct namespaces defined. This method has no parameters.

## endQdocSOAPEnvelope

This method closes the SOAP envelope node. This method has no parameters.

## createQdocSOAPHeader

This method controls the process of creating a SOAP header that conforms to the QDoc standards.

The following table lists parameters of `createQdocSOAPHeader`.

| Parameter Name                   | Type      | Description                                                                                      | I/O | Req |
|----------------------------------|-----------|--------------------------------------------------------------------------------------------------|-----|-----|
| <code>pcSenderURL</code>         | Character | URL that identifies the sending application.                                                     | I   | Yes |
| <code>pcReceiverURL</code>       | Character | URL that identifies the receiver in QXtend.                                                      | I   | Yes |
| <code>pcDocumentStandard</code>  | Character | Identifies the standard that controls the content of the XML in the body (QDoc syntax 1.0 only). | I   | No  |
| <code>pcDocumentType</code>      | Character | Identifies the specific type of message contained in the request body (QDoc syntax 1.0 only).    | I   | No  |
| <code>pcDocumentVersion</code>   | Character | Identifies the specific version of the message contained in the body (QDoc syntax 1.0 only).     | I   | No  |
| <code>pcConfirmationLevel</code> | Character | Indicates the confirmation level required (QDoc syntax 1.0 only).                                | I   | No  |
| <code>pcMessageID</code>         | Character | Any character ID that identifies this message.                                                   | I   | Yes |
| <code>pcDomain</code>            | Character | The domain in QAD Enterprise Applications that the data is loaded in to.                         | I   | No  |

| Parameter Name        | Type      | Description                                                  | I/O | Req |
|-----------------------|-----------|--------------------------------------------------------------|-----|-----|
| pcUsername            | Character | The user name used to log in to QAD Enterprise Applications. | I   | No  |
| pcPassword            | Character | The password for the user.                                   | I   | No  |
| plSuppressRespDetails | Logical   | Identifies whether QXtend returns a detailed response QDoc.  | I   | Yes |

### startQdocSOAPBody

This method creates a SOAP body node with the correct namespace. This method has no parameters.

### endQdocSOAPBody

This method closes the SOAP body node. This method has no parameters.

### startQdocRequestBody

This method controls the process of creating the content of the SOAP body. It builds the standard QDoc root node and allows the caller to define all of the settings available on the QDoc root node.

The following table lists parameters of startQdocRequestBody.

| Parameter Name        | Type      | Description                                                                                               | I/O | Req |
|-----------------------|-----------|-----------------------------------------------------------------------------------------------------------|-----|-----|
| pcQdocName            | Character | Name of the QDoc that is being created.                                                                   | I   | Yes |
| pcQdocVersion         | Character | Version number of the QDoc.                                                                               | I   | Yes |
| pcQdocNamespace       | Character | Namespace of the QDoc                                                                                     | I   | No  |
| plScopeTransaction    | Logical   | Identifies whether QXtend processes the entire QDoc as a single transaction.                              | I   | Yes |
| plSuppressRespDetails | Logical   | Identifies whether QXtend returns a detailed response QDoc.                                               | I   | Yes |
| pcDomain              | Character | The domain in QAD Enterprise Applications that the data is loaded in to.                                  | I   | No  |
| plMnemonicsRaw        | Logical   | Identifies whether the QDoc contains the mnemonic or the specific language value for translatable values. | I   | Yes |
| pcUsername            | Character | The user name used to log in to QAD Enterprise Applications.                                              | I   | No  |
| pcPassword            | Character | The password for the user.                                                                                | I   | No  |
| pcLanguage            | Character | The ISO Language Code                                                                                     | I   | No  |

**Note** There is an overloaded method for `startQdocRequestBody`, which accepts `pcSessionID` (character) as an input in place of the username and password. If a session ID value is supplied to this overloaded method (for example, TMP12345), then the QDoc that is generated has the session ID in the QDoc session context. See the following example:

```
<qcom:ttContext>
  <qcom:propertyQualifier>QAD</qcom:propertyQualifier>
  <qcom:propertyName>sessionID</qcom:propertyName>
  <qcom:propertyValue>TMP12345</qcom:propertyValue>
</qcom:ttContext>
```

## endQdocRequestBody

This method closes the QDoc root node.

The following table lists parameters of `endQdocRequestBody`.

| Parameter Name | Type      | Description                             | I/O | Req |
|----------------|-----------|-----------------------------------------|-----|-----|
| pcQdocName     | Character | Name of the QDoc that is being created. | I   | Yes |
| pcNamespace    | Character | Namespace of the QDoc                   | I   | No  |

## startDocument

This method starts the a new XML document. This method has no parameters.

## startIteration

This method adds a node to the XML document being created. The following table lists parameters of `startIteration`.

| Parameter Name  | Type      | Description                               | I/O | Req |
|-----------------|-----------|-------------------------------------------|-----|-----|
| pcIterationName | Character | Name of the iteration to add to the QDoc. | I   | Yes |
| pcNamespace     | Character | Namespace of the node                     | I   | No  |

## addNode

This method adds a node to the XML document being created and writes the data from the passed-in character value.

The following table lists parameters of `addNode`.

| Parameter Name | Type      | Description                          | I/O | Req |
|----------------|-----------|--------------------------------------|-----|-----|
| pcNodeName     | Character | Name of the node to add to the QDoc. | I   | Yes |
| pcNodeValue    | Character | Value of the node being added.       | I   | Yes |
| pcNamespace    | Character | Namespace of the node                | I   | No  |

## addNamespace

This method adds a namespace to the XML document being created.

The following table lists parameters of addNamespace.

| Parameter Name  | Type      | Description         | I/O | Req |
|-----------------|-----------|---------------------|-----|-----|
| pcNamespaceName | Character | The namespace code. | I   | Yes |
| pcNamespaceURI  | Character | The namespace URL.  | I   | Yes |

## endIteration

This method closes an iteration node.

The following table lists parameters of endIteration.

| Parameter Name  | Type      | Description                     | I/O | Req |
|-----------------|-----------|---------------------------------|-----|-----|
| pcIterationName | Character | Name of the iteration to close. | I   | Yes |
| pcNamespace     | Character | Namespace of the node           | I   | No  |

## addNodesFromBuffer

This method adds a defined set of fields from the current buffer record into the QDoc XML. The caller defines the list of fields to extract from the buffer and a corresponding list of the name that each field's node should be assigned in the QDoc XML.

The following table lists parameters of addNodesFromBuffer.

| Parameter Name | Type      | Description                                                                           | I/O | Req |
|----------------|-----------|---------------------------------------------------------------------------------------|-----|-----|
| phBuffer       | Handle    | Handle to the buffer to extract the fields from.                                      | I   | Yes |
| pcFieldList    | Character | Comma delimited list of the field names to extract from the buffer.                   | I   | Yes |
| pcNodeNameList | Character | Comma delimited list of the node names to use for the data extracted from the buffer. | I   | Yes |
| pcNamespace    | Character | Namespace of the nodes in the buffer.                                                 | I   | No  |

## addAllNodesFromBuffer

This method adds all of the fields from the current buffer record into the QDoc XML. The names of the nodes are pulled from the name of the fields in the temp table.

The following table lists parameters of addAllNodesFromBuffer.

| Parameter Name | Type      | Description                                      | I/O | Req |
|----------------|-----------|--------------------------------------------------|-----|-----|
| phBuffer       | Handle    | Handle to the buffer to extract the fields from. | I   | Yes |
| pcNamespace    | Character | Namespace of the nodes in the buffer             | I   | No  |

## addNodesFromProDataSet

This method controls the process of parsing the contents of the ProDataSet and extracting all of its data into the QDoc that is being generated.

The following table lists parameters of addNodesFromProDataSet.

| Parameter Name | Type      | Description                                     | I/O | Req |
|----------------|-----------|-------------------------------------------------|-----|-----|
| phProDataSet   | Handle    | Handle to the dataset to extract the data from. | I   | Yes |
| pcNamespace    | Character | Namespace of the nodes in the buffer.           | I   | No  |

## writeDocument

This method closes the document and triggers the writing of the file to the specified output location. This method has no parameters.

## insertLogicalAttribute

This method inserts a new attribute into the XML and controls the format of the text so that it is either true or false.

The following table lists parameters of insertLogicalAttribute.

| Parameter Name   | Type      | Description                                                      | I/O | Req |
|------------------|-----------|------------------------------------------------------------------|-----|-----|
| pcAttributeName  | Character | Name that is assigned to the attribute being created in the XML. | I   | Yes |
| plAttributeValue | Logical   | Logical value.                                                   | I   | Yes |

## insertDocumentFragment

This method inserts a new XML document fragment.

The following table lists parameters of insertDocumentFragment.

| Parameter Name | Type     | Description        | I/O | Req |
|----------------|----------|--------------------|-----|-----|
| plcFragment    | Longchar | The XML to insert. | I   | Yes |



# DOM Builder Reference

This section describes the DOM Builder, an API for creating QDocs and other XML documents inside QAD Enterprise Applications.

**Note** The DOM Builder creates QDocs in the 1.0 syntax specification only.

## ***Introduction 372***

Explains how the DOM Builder works.

## ***DOM Builder Procedures 373***

Describes DOM Builder procedures.

## ***DOM Builder and Q/LinQ 373***

Explains how DOM Builder and Q/LinQ are related.

## ***QDoc-Specific API Methods 375***

Lists and describes QDoc-specific API methods.

## ***General XML API Methods 377***

Lists and describes general XML API methods.

## ***Utility Methods 381***

Lists utility methods.

## Introduction


The name DOM Builder comes from the term *Document Object Model (DOM)*, the major industry-standard API for building XML documents. DOM objects are tree-representations of XML documents that contain the parent-child node relationships of XML parent elements, child elements, and attributes and values, letting the software developer navigate from parent nodes to child nodes or vice-versa using designated API methods.

Beginning with Progress 9, the Progress 4GL contains language elements that allow XML documents to be represented and manipulated in memory as DOM objects. These XML objects may be constructed, navigated, and parsed node-by-node using particular Progress 4GL methods. The objects are referenced in Progress source code as X-DOCUMENT and X-NODEREF handles.

The following sample illustrates a simple XML document and its partial DOM representation. Figure 28.1 is a graphical representation of this code sample.

```
<order>
  <id>ord1234</id>
  <dueDate>2003-08-06</dueDate>
  <customer>cust567</customer>
  <line>
    <nbr>01</nbr>
    <qty>22</qty>
    <item>item890</item>
  </line>
  <line>
    <nbr>02</nbr>
    <qty>7</qty>
    <item>item123</item>
  </line>
  <line>
    <nbr>03</nbr>
    <qty>32</qty>
    <item>item456</item>
  </line>
</order>
```

**Fig. 28.1**  
XML Document and DOM Representation

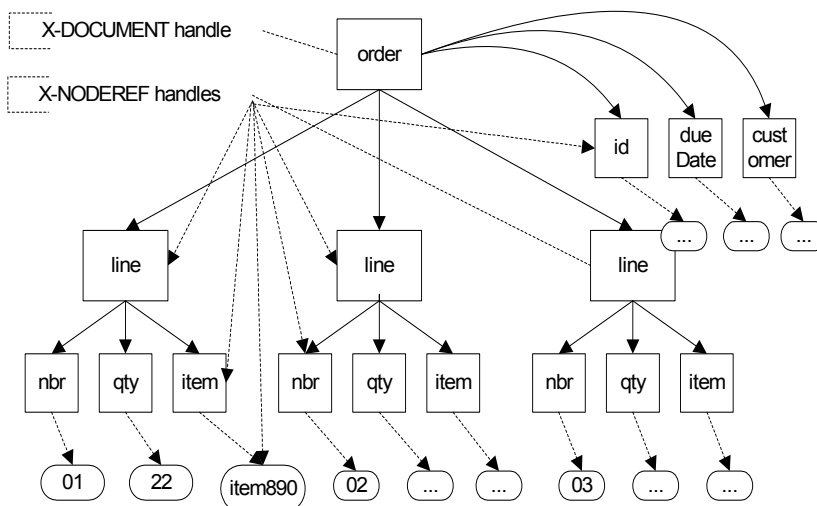

Using the DOM Builder, QAD Enterprise Applications programs can:



- Assemble QAD Enterprise Applications data to be placed into an XML document in either character variables or temp-table form.
- Send the information to the DOM Builder one level or one node at a time.
- Obtain the handle of the resulting XML parent node.

Once completed, the entire XML document can be retrieved as either a handle, temp-table, or character value. The QAD Enterprise Applications developer does not have to directly manipulate each XML node using the lower-level XML methods of Progress, as the DOM Builder does so automatically.

## DOM Builder Procedures

The DOM Builder is a group of API methods written as internal procedures in two QAD Enterprise Applications programs that are run persistently.

- General XML DOM Builder: `gpdomcr . p`
- QDoc DOM Builder: `gpqdoccr . p`

The XML DOM Builder is a super-procedure of the QDoc DOM Builder, as the latter reimplements some of the general XML methods to automatically add attributes that appear in all valid QDocs, such as the QAD-defined XML namespaces. The QDoc DOM Builder should be started as persistent from QAD Enterprise Applications if the objective is to generate QDocs. It will automatically launch the XML DOM Builder.

If the objective is to generate non-QDoc XML, the general XML DOM Builder should be started as persistent instead. Most of the methods are applicable to both QDocs and other XML documents, but some of the methods are QDoc-specific. See “QDoc-Specific API Methods” on page 375.

Most programs that use the DOM Builder API would structure their method calls as follows:

- Start `gpqdoccr . p` or `gpdomcr . p` running persistently, depending on whether the intent is to create QDocs or other kinds of XML documents.
- Call `createNewXMLDocument` to create the XML document.
- Call `addNode`, `addNodeGroup`, `addRecordNode`, `addAttributes`, and `createException` in combination in order to populate the XML document level-by-level, node-by-node.
- Call `getXMLAsTempTable`, `getXMLAsDOM`, `getXMLAsString`, or `getXMLAsFile` to retrieve the completed XML document objects in the form required.
- Call `deleteDocument` to delete the XML objects.

**Important** Only a single XML document can be under construction at one time in a single QAD Enterprise Applications session. Each time `createNewXMLDocument` is called, any XML document already in process for that session is lost and a new one started.

## DOM Builder and Q/LinQ

The DOM Builder is a general-purpose API that is not part of Q/LinQ. However, it can easily be used in conjunction with the Q/LinQ publishing API to publish QDocs and other XML documents for outside applications. In Q/LinQ publishing scenarios, the DOM Builder methods would be

called to create the desired XML object and serialize it into the records of a temp-table. The resulting temp-table would be passed to the `qqPublishXMLDoc` method of the publishing API. See *Technical Reference: QAD Q/LinQ* for details on Q/LinQ APIs.

The following partial code sample illustrates how the two APIs can be used together. Also, the Q/LinQ program responsible for creating QDoc confirmation documents, `qqsndack.p`, is a good working example.

Use of the publishing API consists of a single call to `qqPublishXMLDoc`, but requires that the XML document be built beforehand using the XML capabilities of the Progress 4GL. It accepts an X-DOCUMENT handle to an XML document, and serializes it into the Q/LinQ export queue.

```
/*
 * Use Progress XML DOM object support to build your XML document. If
 * possible, call the DOM Builder methods to create the XML data and
 * store it in a handle. The key methods are createNewXMLDocument,
 * createNewQDoc, addNodeGroup, addRecordNode, addNode,
 * addAttributes, getXMLAsTempTable.
 */

{pxrun.i
  &PROC = createNewXMLDocument
  &PARAM = "(
    ...)"
  &HANDLE = domBuilder
  &CATCHERROR = true
}

{pxrun.i
  &PROC = addNode
  &PARAM = "(
    ...)"
  &HANDLE = domBuilder
  &CATCHERROR = true
}

...

{pxrun.i
  &PROC = getXMLAsTempTable
  &PARAM = "(input (buffer exportDoc:handle))"
  &HANDLE = domBuilder
  &CATCHERROR = true
}

/*Set the document type and other control information*/
/*Populate the input parameters for qqPublishXMLDoc*/
/*Call internal procedure to create document log*/

...


{pxrun.i
  &PROC = qqPublishXMLDoc
  &PARAM = "(
    ...)"
  &HANDLE = domBuilder
  &CATCHERROR = true
}

/*Delete the completed document to reclaim memory resources*/
{pxrun.i
  &PROC = deleteDocument
  &HANDLE = domBuilder
  &CATCHERROR = true
}
```

If the `qqDocPublished` output parameter contains a value of true, the publishing API call executed successfully. Otherwise, an error occurred and the XML document could not be published.

Figure 28.2 illustrates the logic of publishing in XML format.

**Fig. 28.2**  
Publishing API Adapter Logic for XML Documents

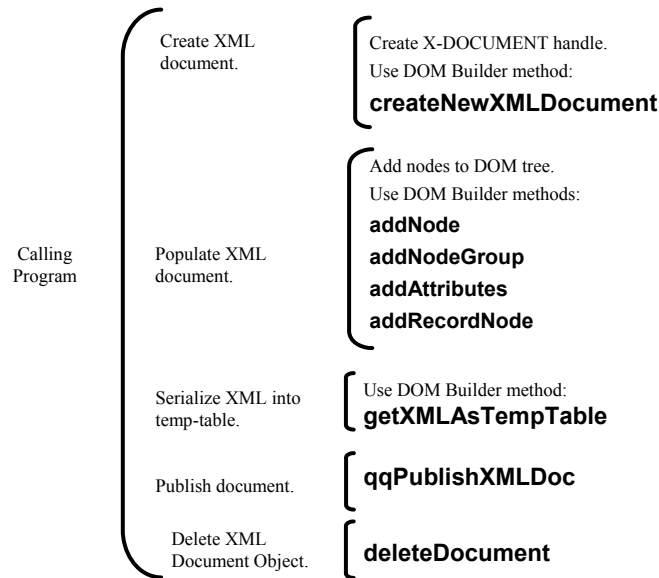

## QDoc-Specific API Methods

This section describes the primary methods provided by the DOM Builder that are applicable only to QDocs.

### createException

This method processes all exceptions present in the `tmp_err_msg` table, creating a QDoc exception element for each record and adding it to the in-process QDoc under the given parent element node. It is useful for building a QDoc response for an earlier QDoc request.

The `tmp_err_msg` temp-table is used by some QAD Enterprise Applications programs, and in particular by all QAD Enterprise Applications API procedures, to contain QAD Enterprise Applications error and warning messages generated during transaction processing. It is defined in the include file `pxttmsg.i`.

The following table lists parameters of `createException`.

| Parameter Name                | Type   | Description                                                                                                       | I/O | Req |
|-------------------------------|--------|-------------------------------------------------------------------------------------------------------------------|-----|-----|
| <code>errorTableBuffer</code> | Handle | Handle to the <code>tmp_err_msg</code> temp-table buffer.                                                         | I   | Y   |
| <code>parentNode</code>       | Handle | X-NODEREF object pointing to the parent node under which the exception elements will be placed as child elements. | I   | Y   |

## createNewXMLDocument

This method creates a new QDoc.

The following table lists parameters of createNewXMLDocument.

| Parameter Name         | Type    | Description                                                                                                                                 | I/O | Req |
|------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|
| qdocName               | Char    | Name of the QDoc root element.                                                                                                              | I   | Y   |
| qdocVersion            | Char    | Version attribute of the QDoc root element.                                                                                                 | I   | Y   |
| qdocSchemaLocation     | Char    | URL of the QDoc's XML schema, for syntax validation purposes.                                                                               | I   | N   |
| sxopeTrans             | Logical | Indicates whether the entire QDoc must be processed as a single unit of work.                                                               | I   | Y   |
| logTrans               | Logical | Indicates whether the QDoc should be logged during processing.                                                                              | I   | Y   |
| transId                | Char    | User-defined identifier for the QDoc, for tracking purposes if it is logged.                                                                | I   | N   |
| suppressResponseDetail | Logical | Indicates whether the response to the QDoc should include detailed application data, or only the outcome of processing with any exceptions. | I   | Y   |
| qdocRootNode           | Handle  | X-NODEREF object pointing to the root node of the new QDoc.                                                                                 | O   | Y   |

## createReturnStatus

This method creates a node in the QDoc indicating the success or failure of an earlier corresponding QDoc request. It is useful for building a QDoc response for an earlier QDoc request.

The following table lists parameters of createReturnStatus.

| Parameter Name | Type   | Description                                                    | I/O | Req |
|----------------|--------|----------------------------------------------------------------|-----|-----|
| returnStatus   | Char   | Value to be stored as the return status of an earlier request. | I   | Y   |
| qdocNode       | Handle | X-NODEREF object pointing to the QDoc root node.               | I   | Y   |

## createSOAPMessage

This method creates a SOAP 1.0 envelope with a valid QDoc SOAP header, and wraps the designated QDoc into the SOAP body. It is useful for packaging a QDoc in the form that would be required for a Web service request or response.

The following table lists parameters of createSOAPMessage.



| Parameter Name      | Type   | Description                                                                                                                                                                                                                                                                           | I/O | Req |
|---------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|
| senderURL           | Char   | URL that identifies the sending party or application.                                                                                                                                                                                                                                 | I   | N   |
| receiverURL         | Char   | URL that identifies the receiving party or application.                                                                                                                                                                                                                               | I   | N   |
| senderDocumentId    | Char   | Locally unique identifier for the QDoc SOAP message being generated.                                                                                                                                                                                                                  | I   | N   |
| documentStandard    | Char   | Identifies the standard or specification to which the QDoc content conforms. Normally set to qdoc.                                                                                                                                                                                    | I   | N   |
| documentType        | Char   | Identifies the type of QDoc being created. Normally set to the QDoc root element name.                                                                                                                                                                                                | I   | N   |
| documentVersion     | Char   | Identifies the version of the QDoc being created. Normally set to the QDoc version attribute.                                                                                                                                                                                         | I   | N   |
| confirmationLevel   | Char   | Indicates whether or when a response to the created QDoc-based message is required at some later time, for confirmation purposes. Normally set to all, error, or none.                                                                                                                | I   | N   |
| senderDocumentRef   | Char   | Reference to a business or data object in the sending application.                                                                                                                                                                                                                    | I   | N   |
| receiverDocumentRef | Char   | Reference to a business or data object in the receiving application.                                                                                                                                                                                                                  | I   | N   |
| timeZone            | Char   | Time zone of the system creating the request, in the format of the QAD Enterprise Applications Time Zone field (tzo_mstr.tzo_label) maintained in Multiple Time Zones Maintenance (36.16.22.1) or the Time Zone field (qqc_ctrl.qqc_timezone) maintained in Q/LinQ Control (36.8.24). | I   | N   |
| requestRootNode     | Handle | X-NODEREF object pointing to the root element node of the QDoc to be included in the SOAP message.                                                                                                                                                                                    | I   | Y   |

## General XML API Methods

This section describes the primary methods provided by the DOM Builder that are applicable to all XML documents, whether QDocs or not.

### addAttributes

This method adds a list of attributes and the values to the specified XML element node.

**Important** This method is implemented as a Progress function, not an internal procedure.

## Return Codes

| Type    | Description                                         |
|---------|-----------------------------------------------------|
| Logical | Indicates whether the function call was successful. |

The following table lists parameters of `addAttributes`.

| Parameter Name               | Type   | Description                                                                                                                                                                                                               | I/O | Req |
|------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|
| <code>currentNode</code>     | Handle | Handle of the element node to which the attributes will be added.                                                                                                                                                         | I   | Y   |
| <code>attributeNames</code>  | Char   | List of the attribute names, delimited by the ASCII 3 (Progress chr(3)) character.                                                                                                                                        | I   | Y   |
| <code>attributeValues</code> | Char   | List of the attribute values, delimited by the ASCII 3 (Progress chr(3)) character. The number of entries is the same as the <code>attributeNames</code> list, and the order of values is the same as the order of names. | I   | Y   |

## addNode

This method creates a new child element node under a given parent element node, with a specified name and value.

The following table lists parameters of `addNode`.

| Parameter Name          | Type   | Description                                                                               | I/O | Req |
|-------------------------|--------|-------------------------------------------------------------------------------------------|-----|-----|
| <code>nodeName</code>   | Char   | Name of the new element node.                                                             | I   | Y   |
| <code>nodeValue</code>  | Char   | Value of the new element node.                                                            | I   | N   |
| <code>parentNode</code> | Handle | X-NODEREF object pointing to the element node that will be the parent of the new element. | I   | Y   |
| <code>newNode</code>    | Handle | X-NODEREF object pointing to the new element node.                                        | O   | Y   |

## addNodeGroup

This method creates a group of element nodes and adds them as children under a given parent element node, each with a specified name and value.

The following table lists parameters of `addNodeGroup`.

| Parameter Name         | Type | Description                                                                                   | I/O | Req |
|------------------------|------|-----------------------------------------------------------------------------------------------|-----|-----|
| <code>nodeNames</code> | Char | List of names of the new element nodes, delimited by the ASCII 3 (Progress chr(3)) character. | I   | Y   |

| Parameter Name | Type   | Description                                                                                                                                                                                                       | I/O | Req |
|----------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|
| nodeValue      | Char   | List of values of the new element nodes, delimited by the ASCII 3 (Progress chr(3)) character. The number of entries is the same as the nodeName list, and the order of values is the same as the order of names. | I   | N   |
| parentNode     | Handle | X-NODEREF object pointing to the node that will become the parent element of the new elements.                                                                                                                    | I   | Y   |

## addRecordNode

This method creates an element node with a group of child element nodes under a given parent element, where the group of created nodes is an XML representation of a buffer. The caller can specify which fields from the buffer to include in the XML or, alternatively, which fields to exclude.

The following table lists parameters of addRecordNode.

| Parameter Name | Type    | Description                                                                                                                                                                                            | I/O | Req |
|----------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|
| nodeName       | Char    | Name to give the top-level element node to be created, under which element nodes corresponding to the fields in the buffer will be added as children.                                                  | I   | Y   |
| bufferHandle   | Handle  | Handle of the buffer whose contents will be used to create child element nodes.                                                                                                                        | I   | Y   |
| prefixToStrip  | Char    | A fixed prefix of characters (for example, a database table identifier) to be stripped from the XML element names derived from the buffer field names.                                                 | I   | N   |
| includeMode    | Logical | Indicates whether the caller-provided list of buffer fields represent data to include in or exclude from the resulting XML.                                                                            | I   | N   |
| fieldList      | Char    | A list of field names from the buffer that will be included/excluded from the resulting XML, depending on the includeMode parameter. The list is delimited by the ASCII 3 (Progress chr(3)) character. | I   | N   |
| parentNode     | Handle  | Handle to the element node under which the generated top-level element nodes will be placed as a child, and the elements corresponding to the buffer fields will be placed as grandchildren.           | I   | Y   |
| newNode        | Handle  | Handle to the top-level node created.                                                                                                                                                                  | O   | Y   |

## createNewXMLDocument

This method creates a new XML document.

To create a QDoc, use the QDoc-specific version of this method. See page 376.

The following table lists parameters of createNewXMLDocument.

| Parameter Name | Type   | Description                                                          | I/O | Req |
|----------------|--------|----------------------------------------------------------------------|-----|-----|
| initialXml     | Char   | Valid XML string used as the starting point of the new XML document. | I   | N   |
| rootNode       | Handle | X-NODEREF object pointing to the root node of the new XML document.  | O   | Y   |

## deleteDocument

This method deletes all the XML document and node objects that have been created by the DOM Builder. It should be called by any programs using the DOM Builder after it has finished building an XML document, in order to reclaim memory and eliminate the possibility of referencing stale handles later on.

The following table lists parameters of deleteDocument.

| Parameter Name | Type | Description | I/O | Req |
|----------------|------|-------------|-----|-----|
| None           |      |             |     |     |

## getXMLAsDOM

This method returns the node referencing the generated XML document.

The following table lists parameters of getXMLAsDOM.

| Parameter Name | Type   | Description                                             | I/O | Req |
|----------------|--------|---------------------------------------------------------|-----|-----|
| builtDocument  | Handle | X-DOCUMENT node pointing to the generated XML document. | O   | Y   |

## getXMLAsFile

This method serializes the content of an XML document object into ASCII characters and stores it in a designated text file.

The following table lists parameters of getXMLAsFile.

| Parameter Name | Type | Description                                                              | I/O | Req |
|----------------|------|--------------------------------------------------------------------------|-----|-----|
| xmlFile        | Char | Name of the text file in which the generated XML document will be saved. | I   | Y   |

## getXMLAsString

This method serializes the content of an XML document object into a single ASCII character string.

**Important** Due to Progress size limitations, the number of characters in the XML document cannot exceed 32,000. If the XML document could be larger than that, it should be retrieved using the getXMLAsTempTable or getXMLAsFile method instead.

The following table lists parameters of getXMLAsString.



| Parameter Name | Type | Description                         | I/O | Req |
|----------------|------|-------------------------------------|-----|-----|
| xmlString      | Char | Text of the generated XML document. | O   | Y   |

## getXMLAsTempTable

This method serializes the content of an XML document object into ASCII characters and stores it in the records of the `ttXMLDocument` temp-table. The document is partitioned into 15,000-character chunks, with each chunk stored in a single record of the temp-table.

**Important** The `ttXMLDocument` temp-table is defined by include file `gpdomcr.i`. This file must be included in any QAD Enterprise Applications program that intends to load the finished XML document into a temp-table using the `getXMLAsTempTable` method. The include file defines the temp-table used by the DOM Builder to pass the XML data back to the caller.

The following table lists parameters of `getXMLAsTempTable`.

| Parameter Name | Type       | Description                                                               | I/O | Req |
|----------------|------------|---------------------------------------------------------------------------|-----|-----|
| ttXMLDocument  | Temp-table | Temp-table that will contain the XML data in chunks of 15,000 characters. | I   | Y   |

## Utility Methods

In addition to the above methods, the following utility methods are also available in `gpdomcr.p`. They perform various lower-level data manipulation functions useful in the generation of XML, such as converting QAD Enterprise Applications dates and languages into the standard ISO syntax required for most XML-based standards. For detailed information, see the `gpdomcr.p` source code.

- `convertDataFormat`
- `createNode`
- `getDate`
- `getDateTime`
- `getLogical`
- `getXMLSchemaType`
- `getXMLLanguage`
- `processArrayField`
- `stripPrefix`



## QAD QXtend Exception Codes

This section provides descriptions of the QXtend exception codes.

### **Overview 384**

Gives an overview of the QXI exceptions.

### **Transformation Exceptions 385**

Lists and describes exceptions made by the QXI transformation engine.

### **Event Exceptions 387**

Lists and describes exceptions made by the improper processing of a QDoc.

### **Connection Exceptions 390**

Lists and describes exceptions made by errors in the Connection Pool Manager.

### **Queue Exceptions 391**

Lists and describes exceptions made during QXtend startup.

### **SOAP Exceptions 394**

Lists and describes exceptions made by the SOAP messages.

### **Transaction Exceptions 395**

Lists and describes exceptions made by the QXtend transaction units.

### **Adapter Exceptions 396**

Lists and describes exceptions made by undiagnosed exceptions.

### **QDoc Exceptions 396**

Lists and describes exceptions made by errors in the contents of a request or response QDoc.

### **Configuration Exceptions 404**

Lists and describes exceptions made by configuration errors.

### **Process Exceptions 409**

Lists and describes exceptions made by processes.

### **Failure Exceptions 410**

Lists and describes exceptions made by the low-level errors.

### **Internationalization Exceptions 411**

Lists and describes exceptions made by internationalization errors.

### **Reflection Exceptions 411**

Lists and describes exceptions made by internal faults with the engine.

## Overview

This section contains a complete list of possible QAD QXtend Inbound (QXI) exceptions. Exceptions can include other exceptions. An included exception is contained in the response QDoc (unless `excludeTraces` is set) and in the log files (regardless of `excludeTraces`); the included exception can provide more insight into the problem. See “Include Java Trace Information” on page 163 for information on the `excludeTraces` setting.

Table 29.1 provides the directory locations of the log and configuration files referenced in the exception codes. See “Logging” on page 166 for a discussion of all the QXI logging options.

**Table 29.1**  
Configuration and Log Files by Location

| Path                                                                                            | Files                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\qxtendQueues</code>                                | <code>directoryloaderconfig.xml</code><br><code>soapconfig.xml</code>                                                                                                          |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\qxtendQueues\QUEUE_NAME</code>                     | <code>queueconfig.xml</code>                                                                                                                                                   |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\WEB-INF\conf</code>                                | <code>config-files.xml</code><br><code>connectionManagerConfig.xml</code><br><code>environmentmanager.xml</code><br><code>qxtendconfig.xml</code><br><code>routings.xml</code> |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\WEB-INF\descriptors\MFGPRO_VERSION</code>          | <code>implementationQdocs.xml</code><br><code>qadQdocs.xml</code><br>(global)                                                                                                  |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\WEB-INF\logs</code>                                | <code>connectionPools.log</code><br><code>qdocInfo.log</code><br><code>queue.log.date</code><br><code>outbound-ui.log</code>                                                   |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\WEB-INF\receivers</code>                           | <code>qdocReceivers.xml</code>                                                                                                                                                 |
| <code>TOMCAT_HOME\webapps\&lt;QXI webapp&gt;\WEB-INF\receivers\RECEIVER_NAME\descriptors</code> | <code>implementationQDocs.xml</code><br><code>qadQdocs.xml</code><br>(receiver specific)                                                                                       |

## Transformation Exceptions

Transformation exceptions are raised by the QXI transformation engine when applying transformations to documents that do not conform to QXI standards. Transformation exception codes use the format “TransformationCode” plus the code identifier—for example, TransformationException001.” The Exception Code column in Table 29.2 shows only the code identifier.

**Table 29.2**  
License Exceptions

| Exception Code | Description                                                   | Notes                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 001            | Specified key does not exist in myParserClass hashmap         | This configuration issue should never occur. When transformation has been configured, the <code>requestparsermanager.xml</code> file is used to control the creation of RequestParsers that are used to parse the request to extract information from the request. If this exception occurs, the requested RequestParser type has not been configured in the <code>requestparsermanager.xml</code> file.                   |
| 002            | Could not create specified class                              | The transformation engine uses Reflection—which creates classes at runtime based off parameters—to create instances of classes with the type specified in a configuration file. If the process of creating a class fails, this exception is raised. This exception means that the class specified in the configuration file <code>TransformationManager.xml</code> or the RequestParser manager could not be instantiated. |
| 003            | Could not find the <code>requestParserManager.xml</code> file | The <code>requestparsermanager.xml</code> file must be located in the <code>&lt;TomcatHome&gt;/webapps/&lt;qxtend-web-app&gt;/WEB-INF/conf</code> directory. This error indicates that the file cannot be found.                                                                                                                                                                                                           |
| 004            | Problem occurred while creating DocumentWrapper               | Indicates the XML document being loaded is invalid.                                                                                                                                                                                                                                                                                                                                                                        |
| 005            | Specified key does not exist in myTransformationClasses       | Similar exception to 001. However, instead of not having the RequestParser configured, it is the Transformer class that has not been configured in the <code>transformationmanager.xml</code> file.                                                                                                                                                                                                                        |

| Exception Code | Description                                                                                | Notes                                                                                                                                                                                                                                       |
|----------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 006            | Could not locate the <code>transformationmanager.xml</code> file at the specified location | The <code>transformationmanager.xml</code> file must be located in the <code>&lt;TomcatHome&gt;/webapps/&lt;qxtend-web-app&gt;/WEB-INF/conf</code> directory. This error indicates that the file cannot be found.                           |
| 007            | No transformer node in <code>transformationmanager.xml</code>                              | The <code>transformationmanager.xml</code> file requires a predefined structure. As part of that structure it requires a node named <code>transformer</code> . If that node cannot be found in the correct place, this exception is thrown. |
| 008            | Envelope header is null                                                                    | When processing transformations it is required that the request contains a SOAP envelope, this error is thrown if a request does not contain a SOAP envelope.                                                                               |
| 009            | Problem getting request header and body                                                    | When processing Transformations the engine split the SOAP message into two parts—the header and the body. This exception indicates that the request could not be split.                                                                     |
| 010            | Problem occurred creating transformer                                                      | Transformation uses a shared library for executing the transformations. The first step is to obtain a Transformer class from a TransformerFactory class. This exception is thrown when the creation of the Transformer class fails.         |
| 011            | Error occurred during transformation                                                       | An unhandled error occurred while the transformer was processing the XSLT transformation.                                                                                                                                                   |
| 012            | Problem occurred while setting the response header and body                                | While building the response message—which is a SOAP message with a header and a body—an unhandled error occurred.                                                                                                                           |
| 013            | No child node of root node present                                                         | If the request XML being transformed does not have a root node (single node with no parent), this exception is thrown.                                                                                                                      |
| 014            | Problem getting parser from <code>requestParserManager</code>                              | The Request Parser Manager controls access to all request parser instances. This exception is raised when a request parser is requested from the Manager, and it cannot return one.                                                         |
| 015            | Could not find the queue configuration file                                                | Indicates that for a specific queue the <code>queueconfig.xml</code> file could not be found.                                                                                                                                               |

| Exception Code | Description                             | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 018            | No requestParsers node present in XML   | The <code>requestparsermanager.xml</code> file requires a predefined structure. As part of that structure it requires a node named <code>requestParsers</code> . If that node cannot be found in the correct place, this exception is thrown.                                                                                                                                                                                                                                  |
| 019            | No matching mapping specification found | The valid mapping specifications are defined in <code>transformationmanager.xml</code> . This exception indicates that for the combination of <code>documentStandard</code> , <code>documentType</code> , <code>documentVersion</code> , and <code>receiver</code> that no mapping specification could be located to use to transform the message. Change the configuration in <code>transformationmanager.xml</code> to ensure that there is a mapping specification defined. |

## Event Exceptions

Events are responsible for assisting in the navigation of the QAD Enterprise Applications screens. These exceptions may occur during the processing of a QDoc. The event exceptions are visible in the response QDoc and in the logs.

**Table 29.3**  
Event Exceptions

| Exception Code    | Description                          | Notes                                                                                                                                                                                                                                                                                   |
|-------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EventException001 | Error processing data                | During the processing of a QDoc request, QXtend passed through the same field twice that was not the start of an iteration. The field in question can be found in the exception detail.                                                                                                 |
| EventException002 | Unexpected prompt field after delete | Unexpected field name in the events file for the delete confirmation prompt. The expected field name is usually the response to the QAD Enterprise Applications confirmation query: Are you sure you wish to delete this record? Review the events file or use QGen to update the file. |
| EventException003 | Error while deleting                 | An QAD Enterprise Applications error occurred while deleting a record. Review the data in the QDoc and ensure that this data can be deleted.                                                                                                                                            |
| EventException004 | Unable to load an events document    | The specified events file cannot be found or loaded. There may be invalid XML in the file.                                                                                                                                                                                              |

| Exception Code    | Description                                                                                          | Notes                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EventException005 | Error creating an event object                                                                       | While adding a new events type, no Java class exists with the event name. Check the events file for the event types. This occurs only if the events file has been incorrectly updated. Review the events file for an invalid event type such as IterationEvent: <code>&lt;IterationEvent iterationname="supplier" exititeration="f4"/&gt;</code> |
| EventException006 | Object is not an event                                                                               | The event object created (see EventException005) does not conform to a specific Java interface. This occurs only if the events file has been incorrectly updated. Review the events file for an invalid event type such as IterationEvent.                                                                                                       |
| EventException007 | Incorrect iteration                                                                                  | Internal exception that arises when QXtend is attempting to resynchronize with the UI after an unexpected UI event.                                                                                                                                                                                                                              |
| EventException008 | No name found for the iteration                                                                      | Current field at the start of each iteration cannot be located in the events file. Review the events file for this program; it may need remapping using QGen.                                                                                                                                                                                    |
| EventException009 | Invalid selection in selection list                                                                  | The value entered in the QDoc for a selection list is not in QAD Enterprise Applications. Review the data in the QDoc and ensure that the selection item exists in QAD Enterprise Applications.                                                                                                                                                  |
| EventException010 | No data in the QDoc                                                                                  | No data to process in the QDoc.                                                                                                                                                                                                                                                                                                                  |
| EventException011 | Data sent too large                                                                                  | The data submitted for a primary field is too large. It may update an existing record rather than create a new record. Review the data in the QDoc.                                                                                                                                                                                              |
| EventException012 | Ambiguous selection in selection list                                                                | Data for a selection list in the QDoc exists in more than one row in QAD Enterprise Applications. Review the data in the QDoc and QAD Enterprise Applications for this selection list.                                                                                                                                                           |
| EventException013 | The QDoc has processed successfully but some QAD Enterprise Applications messages may have been lost | Occurs when switching from reading messages using the MessageReceiverServlet and the message area of the UI.                                                                                                                                                                                                                                     |
| EventException014 | Preprocess program name is null                                                                      | The program name for the preprocess event is null. Verify the name in the events file.                                                                                                                                                                                                                                                           |
| EventException015 | Error calling preprocess program                                                                     | An error occurs while calling the preprocessor program. Review the events file.                                                                                                                                                                                                                                                                  |



| Exception Code    | Description                                                                                   | Notes                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| EventException016 | Preprocess – Updated iteration node does not match existing iteration node                    | The preprocess program changes the name of the current iteration. This is invalid. Correct the preprocess program code.   |
| EventException017 | Postprocess – Updated response iteration node does not match existing response iteration node | The postprocess program changes the name of the current iteration. This is invalid. Correct the postprocess program code. |
| EventException018 | An attempt was made to access invalid events data. See context for details.                   | The events data file does not match the fields in the QDoc.                                                               |
| EventException019 | An error was encountered when updating a node using the QXI preprocessor or postprocessor.    |                                                                                                                           |

## Connection Exceptions

These exceptions are related to errors raised when using the Connection Pool Manager. These exceptions are included in the response QDocs.

**Table 29.4**  
Connection Exceptions

| Exception Code         | Description                                                                           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConnectionException001 | Unable to initialize Connection Pool                                                  | <p>Cannot initialize a connection pool session. The maximum number of sessions has been reached, or the QAD Enterprise Applications databases are not up. There may also be a problem with the log-in script or a step omitted. Test this by following the log-in script from the Connection Pool setup parameters and ensuring all steps are correct.</p> <p>Another possible cause is that the startup script for launching the QAD Enterprise Applications session (invoked by the Connection Manager) may have been configured to run in normal mode instead of MFGWrapper mode. (See “Starting QGen” on page 232 for more on the MFGWrapper mode.) Review the startup script and update if incorrect, then restart the Connection Pool.</p> |
| ConnectionException002 | Unable to get a working session using unique IDs (session ID and process sequence ID) | Unable to get a working session using unique IDs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ConnectionException003 | Failure to initialize the Connection Pool Manager                                     | The Connection Pool Manager cannot initialize. One responsibility of the Connection Pool Manager is to open XML configuration files. This error can occur if there is an invalid configuration file. To see a list of configuration files look at <code>config-files.xml</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ConnectionException004 | Unable to get an idle session                                                         | A client requested a new program to be run and an idle session cannot be retrieved from the connection pool. Verify that the connection pool has not exceeded the maximum number of connections. It is also possible that the Connection Pool Manager was initializing new sessions that were not yet available.                                                                                                                                                                                                                                                                                                                                                                                                                                 |

| Exception Code         | Description                                                     | Notes                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConnectionException005 | Unable to get session because pool has been shut down           | A user attempted to create a new session or make a request on an existing one after the Connection Pool Manager was shut down. In this case, all connections are invalid and the Connection Pool Manager must be restarted.                                     |
| ConnectionException006 | User has reached max sessions allowed                           | A user has requested to run another QDoc; however, this user has exceeded the maximum number of allowed connections.                                                                                                                                            |
| ConnectionException007 | Extracting a value from the configuration file failed           | Invalid value encountered during load of <code>connectionManagerConfig.xml</code> . Review all numeric values in the file.                                                                                                                                      |
| ConnectionException008 | Unable to locate the Connection Pool Manager configuration file | This file should be located in <code>webapps/&lt;QXI webapp&gt;/WEB-INF/config</code> . If it is not there, then a default version of the file can be copied and configured. This is located in <code>webapps/&lt;QXI webapp&gt;/WEB-INF/config/defaults</code> |
| ConnectionException009 | Telnet connection not available                                 | The telnet server for the specified receiver is unavailable.                                                                                                                                                                                                    |
| ConnectionException010 | Host is unavailable or incorrect                                | View the connection pool details for this receiver and validate the host is correct and available.                                                                                                                                                              |
| ConnectionException011 | Telnet connection is refused                                    | The connection to the host was refused. Manually launch a telnet connection from the QXtend machine to the host machine to isolate the problem.                                                                                                                 |
| ConnectionException012 | QAD Enterprise Applications server is unreachable               | The connection to the host is successful but the launch of an QAD Enterprise Applications session is not. Manually launch a telnet connection from the QXtend machine to the host machine and run the QXtend startup script to isolate the problem.             |

## Queue Exceptions

If an exception is raised during QXtend startup, the UI paints the Queue link in red. This indicates an error that is logged to `queue.log` and `qdocInstall.log`. If an exception is raised during the processing of a QDoc through a queue, this exception appears in the `qdocinfo.log` and possibly the `outbound-ui.log`, as well as in the response QDoc.

**Table 29.5**  
Queue Exceptions

| Exception Code    | Description                                              | Notes                                                                                                                                                                                               |
|-------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QueueException001 | Unable to create queue object components                 | Class file names required to determine what Java classes to create are incorrect in <code>directoryloaderconfig.xml</code> .                                                                        |
| QueueException002 | Configuration file does not contain a queue node         | The queue configuration file is missing a queue node. Update or create a new queue in the Queue Manager.                                                                                            |
| QueueException003 | The parameter types do not exist as classes              | There is no <code>&lt;queue&gt;</code> node in the <code>queueConfig.xml</code> file.                                                                                                               |
| QueueException004 | Error due to incorrect URL                               | The URL specified by the user in Update Queue in the Queue Manager is incorrect. The URL is the location of the QXtend Web services component.                                                      |
| QueueException005 | Could not load Queue Manager config file                 | Verify the correct path and existence of: <code>directoryloaderconfig.xml</code> .                                                                                                                  |
| QueueException006 | Could not create class                                   | See QueueException001.                                                                                                                                                                              |
| QueueException007 | Could not locate <code>queueConfig.xml</code>            | The queue configuration file has been deleted, moved, or renamed. Update or create a new queue in Queue Manager. Verify correct path and existence of <code>queueConfig.xml</code> .                |
| QueueException008 | No queue type in queue configuration file                | QXI has one valid queue type— <code>qdoc</code> —in Queue Configuration. This exception is raised if the queue type is set incorrectly.                                                             |
| QueueException009 | No <code>queueClass</code> element in configuration file | The settings for all queues are stored in an XML configuration file. This file must have been manually updated incorrectly. Using the Queue Manager, delete and recreate the queue to correct this. |
| QueueException010 | No URL element in configuration file                     | The URL is set incorrectly in the Queue Configuration.                                                                                                                                              |
| QueueException011 | No frequency element in configuration file               | The Frequency is set incorrectly in the Queue Configuration.                                                                                                                                        |
| QueueException012 | Base directory does not contain any queues               | No queues exist in the base directory. Create a new queue using the Queue Manager.                                                                                                                  |
| QueueException013 | Envelope details missing from configuration file         | SOAP envelope details required for QDoc updates are missing. This only impacts queues configured to add SOAP envelopes to the QDocs placed in the request directory. Update or create a queue.      |
| QueueException014 | No QDoc nodes in the default envelope                    | See QueueException013 for details. Update the queue.                                                                                                                                                |

| Exception Code    | Description                                                                                              | Notes                                                                                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QueueException015 | Queue configuration file missing                                                                         | The queue configuration file, <code>queueConfig.xml</code> , has been deleted, moved, or renamed. Update or create a queue.                                        |
| QueueException017 | Specified queue missing                                                                                  | The queue directory has been removed or renamed. Create a new queue.                                                                                               |
| QueueException018 | Queue Manager configuration file missing                                                                 | The Queue Manager config file, <code>directoryloaderconfig.xml</code> , is missing. This file contains global configuration details.                               |
| QueueException019 | QueueType node missing from configuration file                                                           | QueueType identifies the type of the requests on the queue. Update or create a queue.                                                                              |
| QueueException020 | No queueType or blank queueType specified in queue configuration file                                    | The Queue Manager config file is incorrect. Open <code>directoryloaderconfig.xml</code> . Copy in the XML node shown under “Queue Type Node” following this table. |
| QueueException021 | No queueTypes set up in queue config file                                                                | See QueueException020.                                                                                                                                             |
| QueueException022 | Queue Manager base directory missing                                                                     | The full path to the top-level queue directory must be specified in <code>environmentmanager.xml</code> .                                                          |
| QueueException029 | The configuration file does not contain the pooler node                                                  | No pooler node in <code>queueConfig.xml</code> .                                                                                                                   |
| QueueException030 | The configuration file does not contain the <code>initialSize</code> element under the pooler node       | No pooler node in the <code>queueConfig.xml</code> file.                                                                                                           |
| QueueException031 | The configuration file does not contain the <code>maxSize</code> element under the pooler node           | No pooler node in the <code>queueConfig.xml</code> file.                                                                                                           |
| QueueException032 | The configuration file does not contain the <code>webServiceTimeout</code> element under the pooler node | No pooler node in the <code>queueConfig.xml</code> file.                                                                                                           |
| QueueException033 | The configuration file does not contain the <code>retryTime</code> element under the pooler node         | No pooler node in the <code>queueConfig.xml</code> file.                                                                                                           |
| QueueException034 | The pooler node in the config file contains child elements that specify invalid numbers                  | An element value should contain integer values in the <code>queueConfig.xml</code> file.                                                                           |

## Queue Type Node

The following queue type node applies to QueueException020.

```
<queueTypes>
  <!-- Each queue Type supported by the directory loader must be specified here. Each type
  then has a processor class and a queue class associated with it-->
  <queueType>
    <!-- type - Identifies the type of a queue.
    processorClass - This is the class that will be used to process any requests on a
    queue of this type
    queueClass - This is the class that will be created to hold a queue of this type -->
    <type value="qdoc"/>
    <processorClass value="com.qad.qxtend.utils.QdocFileProcessor"/>
    <queueClass value="com.qad.qxtend.utils.QdocDirectoryQueue"/>
  </queueType>
</queueTypes>
```

## SOAP Exceptions

These exceptions relate to the SOAP messages such as calling a SOAP service or extracting QDocs from the SOAP message. These exceptions appear in the response QDoc.

**Table 29.6**  
SOAP Exceptions

| Exception Code    | Description                                                   | Notes                                                                                                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOAPEException001 | Incorrect destination URL for SOAP request                    | The destination URL that points to the QXI server is invalid or the URL is unreachable.                                                                                                                                                                         |
| SOAPEException003 | SOAP Manager configuration file is missing                    | Verify the path and existence of <code>soapconfig.xml</code> .                                                                                                                                                                                                  |
| SOAPEException004 | XML document create failed                                    | Invalid XML in <code>soapconfig.xml</code> . Review and correct the file.                                                                                                                                                                                       |
| SOAPEException005 | Invalid data in SOAP configuration file                       | Invalid data in <code>soapconfig.xml</code> . Review and correct the file.                                                                                                                                                                                      |
| SOAPEException006 | Problem returning response                                    | Writing QDoc response file to the SOAP response failed. Likely cause is that the HTTP connection has abnormally closed. View <code>queue.log</code> .                                                                                                           |
| SOAPEException007 | Request from document processor to pass to destination failed | Retrieving the QDoc response file from the SOAP request failed. Likely cause is that the HTTP connection has abnormally closed. View <code>queue.log</code> .                                                                                                   |
| SOAPEException008 | No SOAP configuration file specified                          | When launching QXtend, if the Queue Manager is active, there is an entry in <code>environmentmanager.xml</code> for the SOAP caller manager. One of the nodes is the path to <code>soapconfig.xml</code> . Verify the path. View <code>qdocInstall.log</code> . |
| SOAPEException009 | Server is suspended                                           | QXtend is suspended, possibly as a result of someone updating the configuration. Re-activate using Resume in QXtend.                                                                                                                                            |

## Transaction Exceptions

Transaction exceptions relate to the QXtend transaction unit, which is made up of the request and response QDocs and manages the process of routing the message through the UI API adapter or service interface adapter. These exceptions appear in the response QDoc.

**Table 29.7**  
Transaction Exceptions

| Exception Code          | Description                                             | Notes                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TransactionException001 | Error during processing. Full transaction roll back.    | QDoc processing failed. The entire transaction rolls back.                                                                                                                                                                                                                                                                                                    |
| TransactionException002 | Invalid routing ID                                      | An invalid routing ID was used in the QDoc. The routing ID determines if the QDoc is processed using the service interface API or UI API. Check the routing for each QDoc in the Configuration Manager under Schemas by QAD Enterprise Applications version.                                                                                                  |
| TransactionException003 | Unable to load routing document                         | The correct document is not in <code>routing.xml</code> , or is an invalid XML document.                                                                                                                                                                                                                                                                      |
| TransactionException004 | Error creating RoutingTask object                       | RoutingTask object cannot be instantiated. Review <code>routing.xml</code> for the QDoc for a particular route.                                                                                                                                                                                                                                               |
| TransactionException005 | RoutingTask object is not a routing task                | The RoutingTask object in <code>routing.xml</code> is not the correct type.                                                                                                                                                                                                                                                                                   |
| TransactionException006 | Null field returned by the processor                    | QAD Enterprise Applications reports that the current field is null, or the session that started the program failed to initialize, or QAD Enterprise Applications aborted abnormally. To determine the cause, run an QAD Enterprise Applications CHUI session manually using the Connection Pool Manager startup script and follow the processing in the QDoc. |
| TransactionException007 | Error during processing. Partial transaction roll back. | QXtend was unable to complete the processing of the QDoc. View the response QDoc for the error that caused the problem. This rolls back the current transaction (main iteration level) in QAD Enterprise Applications.                                                                                                                                        |

| Exception Code          | Description                              | Notes                                                                                                                                                                                                                                                                                    |
|-------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TransactionException009 | Requested delete operation did not occur | QXtend was unable to delete a record in QAD Enterprise Applications.                                                                                                                                                                                                                     |
| TransactionException010 | Program did not initialize               | The QAD Enterprise Applications session failed to initialize; this failure was probably due to an incorrect setting on the QAD Enterprise Applications side. Check for PROGRESS errors and verify that the compilation is correct. Also check the PROPATH settings on the telnet script. |

## Adapter Exceptions

This exception traps any undiagnosed exceptions during the processing of a QDoc using the UI API adapter. These exceptions appear in the response QDoc.

**Table 29.8**  
Adapter Exceptions

| Exception Code      | Description                                                 | Notes                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AdapterException003 | Unknown exception servicing QDoc request                    | An undiagnosed exception was returned during QDoc processing. Review the response details for an indication of the problem. This exception should never occur. Contact QAD Support.<br><br>For details about avoiding AdapterException responses in HP-UX, COMPAQ, or LINUX environments, see “FailureException or AdapterException Responses” on page 356. |
| AdapterException004 | Exception encountered when fill in foreign keys to response | Exception encountered when fill in foreign keys to response.                                                                                                                                                                                                                                                                                                |

## QDoc Exceptions

These exceptions report errors in the contents of request or response QDocs. This section also contains exception details when using the Queue Manager to process QDocs. These exceptions appear in the response QDoc.

**Table 29.9**  
QDoc Exceptions

| Exception Code   | Description                        | Notes                                                                                          |
|------------------|------------------------------------|------------------------------------------------------------------------------------------------|
| QDocException001 | Request QDoc missing SOAP envelope | Cannot read the QDoc SOAP envelope. Ensure the SOAP envelope is correct and validate the QDoc. |
| QDocException002 | QDoc receiver is not recognized    | Ensure the QDoc is set up for the correct receiver and the receiver is set up correctly.       |





| Exception Code   | Description                                                                                                                                       | Notes                                                                                                                                                                                                                    |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException003 | Request does not contain a request body                                                                                                           | QDoc must have a body. Review and correct the QDoc.                                                                                                                                                                      |
| QDocException004 | Failed to create a new XML document instance                                                                                                      | Loading the QDoc schema file failed because the schema does not exist or the schema file does not contain valid XML. Check the schema version in the QDoc and validate the schema file.                                  |
| QDocException005 | QDoc is not supported                                                                                                                             | Ensure the QDoc is set up for the correct receiver and the receiver is set up correctly; add the appropriate schema to the receiver.                                                                                     |
| QDocException007 | Failed to create a clone of the QDocKey instance                                                                                                  | A clone of the QDocKey instance could not be created.                                                                                                                                                                    |
| QDocException008 | Error creating response QDoc                                                                                                                      | QXtend cannot create a QDoc response. Usually due to invalid XML data.                                                                                                                                                   |
| QDocException009 | Failed to create a clone of the QDoc envelope template                                                                                            | A clone of the QDoc envelope template could not be created.                                                                                                                                                              |
| QDocException010 | Failed to create a new QDoc response instance                                                                                                     | See QDocException008.                                                                                                                                                                                                    |
| QDocException011 | Failed to parse the XML schema                                                                                                                    | See QDocException004.                                                                                                                                                                                                    |
| QDocException012 | Could not read schema file <i>fileName</i>                                                                                                        | See QDocException004.                                                                                                                                                                                                    |
| QDocException013 | Could not set the response object in the transaction instance. Another adapter may have set the response already. The response should be updated. | Update the response.                                                                                                                                                                                                     |
| QDocException014 | Failed to locate an initialized Connection Manager instance                                                                                       | The Connection Pool Manager is not initialized correctly. This should only occur on the first use of QXtend. Review Connection Manager, <code>connectionPools.log</code> , and <code>qdocInstall.log</code> .            |
| QDocException015 | Timed out waiting for idle AppServer connection                                                                                                   | This applies to the service interface API adapter. Not enough application servers are available for the number of requests. Review the connections in the Connection Pool and update the number of sessions or timeouts. |

| Exception Code   | Description                                                                              | Notes                                                                                                                                                                                                                                                                                                                                                                         |
|------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException016 | Failed to parse the QDoc schema                                                          | While processing a QDoc in the service interface API adapter or updating the response QDoc when <code>suppressResponseDetail</code> is set to false for the UI API adapter, the respective request and response schemas are loaded into memory and parsed. If an error occurs parsing these schemas, this exception is returned. Review the schemas and the exception detail. |
| QDocException017 | Failed to map the QDoc request into a QdocResultSet                                      | See QDocException016.                                                                                                                                                                                                                                                                                                                                                         |
| QDocException018 | Failed to construct a new IQDocMapper instance                                           | <code>qxtend.jar</code> does not contain the required classes. Contact your system administrator.                                                                                                                                                                                                                                                                             |
| QDocException019 | Processing of request on Progress AppServer connection failed                            | This applies to the service interface API. An unexpected exception occurred during the processing. See exception detail and logs.                                                                                                                                                                                                                                             |
| QDocException020 | QDoc processing failed with an unhandled exception                                       | This applies to the service interface API. An unexpected exception occurred during the setup or processing of the QDoc. View the response QDoc and log files for further information.                                                                                                                                                                                         |
| QDocException021 | Error on startup of the QXtend server                                                    | QXtend startup failed to launch all of the managers, such as Configuration, Connection Pool, Queue, and so on. View <code>qdocInstall.log</code> .                                                                                                                                                                                                                            |
| QDocException022 | Failed to map the QDoc schema into a sequence of fields used to create the response QDoc | Edit the QDoc so that the schema is mapped correctly.                                                                                                                                                                                                                                                                                                                         |
| QDocException023 | Failed to create data in the QDoc response                                               | This applies to the service interface API. Creating the response failed. View the response QDoc and log files for further information.                                                                                                                                                                                                                                        |
| QDocException024 | Reading data from a result set returned from the AppServer failed                        | Failed to extract the response returned from Progress, or failed to add error data returned from the service interface API adapter to the response QDoc. View exception details.                                                                                                                                                                                              |
| QDocException025 | Request prevented from being passed to the API                                           | No response data has been returned from the service interface API adapter. View the QDoc response.                                                                                                                                                                                                                                                                            |
| QDocException026 | Error during an API request                                                              | This exception returns Progress errors from processing QDocs through the service interface API adapter to the QDoc response.                                                                                                                                                                                                                                                  |

| Exception Code   | Description                                   | Notes                                                                                                                                                                                                                                                                                                                                                   |
|------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException027 | Failed to locate specified file               | A schema or events file was not located for a QDoc. Review the response QDoc and ensure the files are in the correct location.                                                                                                                                                                                                                          |
| QDocException028 | QAD and custom namespaces are identical       | Custom QDocs should have a namespace URI that is appropriate to your organization. Do not use the same namespace as that used for standard QDocs. The default namespace for QAD QDocs is: <code>urn:schemas-qad-com:xml-services</code> . View the file <code>implementationQdocs.xml</code> in the relevant receiver directory to check the namespace. |
| QDocException029 | Could not extract header from SOAP envelope   | The SOAP envelope header does not exist or is in the incorrect format. See “QDoc Message Envelope” on page 335 for sample SOAP envelopes.                                                                                                                                                                                                               |
| QDocException030 | Could not extract body from SOAP envelope     | The body of the SOAP envelope does not exist or is in the incorrect format.                                                                                                                                                                                                                                                                             |
| QDocException031 | Could not set header in SOAP envelope         | The SOAP header was not imported into the response QDoc.                                                                                                                                                                                                                                                                                                |
| QDocException032 | Could not set body in SOAP envelope           | The SOAP body was not imported into the response QDoc.                                                                                                                                                                                                                                                                                                  |
| QDocException033 | Request file cannot be found in request queue | This applies to the Queue Manager. A request QDoc was removed from the directory queue during processing.                                                                                                                                                                                                                                               |
| QDocException034 | Error processing request                      | This applies to the Queue Manager. This is a serious technical exception caused by an installation or environment problem, and should never occur. Review <code>queue.log</code> and <code>outbound-ui.log</code> . Contact your system administrator and QAD Support.                                                                                  |
| QDocException035 | Problem creating class                        | A problem was encountered when creating a class.                                                                                                                                                                                                                                                                                                        |
| QDocException036 | Error getting request                         | This applies to the Queue Manager. The Queue Manager polls the request directory for a list of files, then loads the files for processing. If a request QDoc is deleted between these events, this exception is returned. View the <code>queue.log</code> .                                                                                             |
| QDocException037 | No request directory found in path            | This applies to the Queue Manager. The path to the request directory is invalid. Check <code>environmentmanager.xml</code> . Also check that a <code>requests</code> directory exists in the relevant queue folder.                                                                                                                                     |

| Exception Code   | Description                                                     | Notes                                                                                                                                                                                                                                                                                                                                                         |
|------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException039 | Error writing response to file                                  | This applies to the Queue Manager. QXtend was unable to write the response QDoc to the responses directory. This may be due to a permissions issue, or the directory was deleted or moved. Verify the response directory exists with correct permissions.                                                                                                     |
| QDocException040 | Request file is not in a working state                          | This applies to the Queue Manager. Moving a file that has not been processed to the responses directory failed. This occurs if duplicate file names are used.                                                                                                                                                                                                 |
| QDocException041 | Error writing contents of request file                          | This applies to the Queue Manager. QXtend is unable to write the request QDoc to the response directory. This is a permissions issue or the directory was deleted or moved. Verify the response directory exists with correct permissions. It is also possible that the response data is invalid. View <code>queue.log</code> and <code>qdocInfo.log</code> . |
| QDocException042 | Error renaming file                                             | This applies to the Queue Manager. QXtend is unable change the request QDoc to a processing state. This may be due to a permissions issue. Check permissions in the request directory. View <code>queue.log</code> and <code>qdocInfo.log</code> .                                                                                                            |
| QDocException043 | Unreachable destination, invalid request, missing SOAP envelope | This applies to the Queue Manager. The Web service is down or the link is incorrect. View the request and response QDocs, <code>queue.log</code> , and <code>qdocInfo.log</code> .                                                                                                                                                                            |
| QDocException044 | Problem wrapping request in envelope                            | This applies to the Queue Manager. Adding a SOAP envelope to the QDoc through the Queue Manager failed. This may be due to a permissions issue. Verify correct permissions on the request QDoc.                                                                                                                                                               |
| QDocException045 | Error occurred while adding the envelope                        | This applies to the Queue Manager. See QDocException044.                                                                                                                                                                                                                                                                                                      |
| QDocException046 | Error occurred when parsing the response                        | This applies to the Queue Manager. Writing the response QDoc to the response directory failed. A default QDoc response is created and written to the responses directory error detail. A permissions problem with the queue directories is also possible. Check <code>queue.log</code> and <code>qdocInfo.log</code> for details.                             |

| Exception Code   | Description                                                  | Notes                                                                                                                                                                                                                                       |
|------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException047 | Queue Manager is in error                                    | This applies to the Queue Manager. QXtend cannot access the Queue Manager. View <code>queue.log</code> , <code>qdocInfo.log</code> , and <code>qdocInstall.log</code> for details.                                                          |
| QDocException048 | Error launching Queue Manager                                | This applies to the Queue Manager. An exception was raised during the startup of the Queue Manager and is logged to <code>queue.log</code> and <code>qdocInstall.log</code> . The Queue UI link displays in red.                            |
| QDocException049 | Could not find response file                                 | This applies to the Queue Manager. Queue Manager is unable to write the response document to the response directory. Verify that the directory exists. View <code>queue.log</code> and <code>qdocInfo.log</code> .                          |
| QDocException050 | Could not create response document from QXtend output        | This applies to the Queue Manager. Retrieving response details from QXtend failed. A default QDoc response is created and written to the response directory with error details. View <code>queue.log</code> and <code>qdocInfo.log</code> . |
| QDocException051 | Could not find request file                                  | See QDocException036.                                                                                                                                                                                                                       |
| QDocException052 | Could not write XML to file                                  | See QDocException039.                                                                                                                                                                                                                       |
| QDocException053 | Could not create directory                                   | QXI is unable to create a directory during the configuration of a queue or receiver. This is possibly a permissions problem. Verify permissions on the corresponding directories.                                                           |
| QDocException057 | Could not read request file                                  | The request QDoc has incorrect format or contains invalid characters.                                                                                                                                                                       |
| QDocException058 | Could not write to request file                              | See QDocException041.                                                                                                                                                                                                                       |
| QDocException059 | Import or include schema has invalid namespace               | A node in the QDoc schema does not have an associated namespace.                                                                                                                                                                            |
| QDocException060 | Import or include schema has invalid schema location         | An import schema in the QDoc is invalid. Ensure the QDoc notation is correct.                                                                                                                                                               |
| QDocException061 | Request requires authentication details                      | If this error is raised, the QDoc contains blank or missing username and password or session ID entries, but the receiver requires authentication information in the QDoc.                                                                  |
| QDocException063 | Unable to get an instance of the appropriate connection pool | The connection pool has not started. Check the log for errors.                                                                                                                                                                              |

| Exception Code   | Description                                                                  | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException064 | Invalid QDoc schema for XML syntax 1.1                                       | Check that the correct syntax is being used for the schema in use.                                                                                                                                                                                                                                                                                                                                                                                                           |
| QDocException065 | Failed to map the QDoc schema into a ProDataGraphMetaData                    | Check the QDoc and modify as appropriate to correctly map the schema.                                                                                                                                                                                                                                                                                                                                                                                                        |
| QDocException066 | Failed to map the QDoc request into a ProDataGraph                           | Check the QDoc and modify as appropriate to correct the mapping issue.                                                                                                                                                                                                                                                                                                                                                                                                       |
| QDocException067 | Failed reading data from a ProDataGraph returned from the Progress AppServer | Failed reading data from a ProDataGraph returned from the Progress AppServer.                                                                                                                                                                                                                                                                                                                                                                                                |
| QDocException068 | Only supports QDoc 1.1                                                       | Check the syntax version in use.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| QDocException069 | \$1 element in QDoc request does not match schema file                       | Check the syntax version in use.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| QDocException070 | Failed to convert ProDataGraph to XML                                        | Check the QDoc and modify as appropriate to correctly map the schema.                                                                                                                                                                                                                                                                                                                                                                                                        |
| QDocException071 | Unable to create sample QDoc request                                         | This option creates a sample QDoc based on an XML schema you specify. The schema must be one that is supported by QXI. The schema is parsed and all possible entries from the QDoc schema are created in the sample QDoc. The sample QDoc shows the way to represent all of the possible data structures in the QDoc. The generated QDoc shows the structure and content of the QDoc that needs to be sent to QXI. The generated schema also contains a valid SOAP envelope. |
| QDocException072 | Unable to parse QDoc schema                                                  | Check the schema syntax in use.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| QDocException073 | Cannot pass data to the AppServer                                            | Check the AppServer setting and the data to be sent.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| QDocException074 | Cannot get the QDoc XML syntax                                               | Check whether the schema has been added to the receiver. Also check if the XML syntax is correct.                                                                                                                                                                                                                                                                                                                                                                            |
| QDocException075 | The QDoc XML syntax is incorrect.                                            | Check the XML syntax of the required QDoc in the API page.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| QDocException076 | QXtend is not licensed for this type of QDoc Message.                        | Check the Address value in QDoc. If it is empty, then Standard or Enterprise QXtend license is needed for QXtend to process the QDoc.                                                                                                                                                                                                                                                                                                                                        |
| QDocException077 | Cannot add new sender. The sender already exists.                            | Check if the sender has already been added.                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| QDocException078 | Invalid value for Sender. Sender cannot be null or an empty string.          | Check the Sender value.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Exception Code   | Description                                                                                   | Notes                                                                                                                                         |
|------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| QDocException079 | Invalid value for Licensed Sender Application. Application cannot be null or an empty string. | Check the Licensed Sender Application value when adding a new Licensed Sender in <code>senders.xml</code> .                                   |
| QDocException080 | Could not write changes to the Sender XML file.                                               | Check if the WEB-INF/conf directory has write permissions and the <code>senders.xml</code> file has the encrypted content.                    |
| QDocException081 | There are no licensed domains for the Receiver.                                               | Check whether the domain in QDoc (if not specified, it is the default domain) is configured as licensed domain in the receiver configuration. |
| QDocException083 | Invalid receiver ID in URI for QDoc 1.0 format                                                | Check the receiver ID in the URI in the Receiver section of the QDoc Header.                                                                  |
| QDocException084 | Invalid operation defined in QDoc                                                             | Allowed operation tags are: A-Add, M-Modify, R-Delete, S-Sync, G-Get, and N-No Operation.                                                     |
| QDocException086 | Unable to find the session context                                                            | Check the session context section in QDoc request.                                                                                            |
| QDocException087 | Invalid sender. Add a new sender first.                                                       | When updating the Sender License Expires in <code>senders.xml</code> , check if the Sender is a Licensed Sender first.                        |
| QDocException088 | The QDoc name and version match those of a system QDoc.                                       | When generating a sample QDoc, for the given receiver version, there is a system QDoc (schema) with the same name and version.                |
| QDocException089 | Receiver is not licensed.                                                                     | QDoc needs a Licensed Agent but Receiver (without domain) is not registered with the Licensed Manager.                                        |
| QDocException090 | Unique name of SI-API Schema should not exceed 32 characters.                                 | Check the length of the unique name for the SI-API schema.                                                                                    |
| QDocException091 | Keyref name of SI-API Schema should not exceed 32 characters.                                 | Check the length of the Keyref name for the SI-API Schema.                                                                                    |
| QDocException092 | Receiver is not specified either in SOAP header or dsSessionContext.                          | Specify the receiver in either the SOAP header or dsSessionContext.                                                                           |
| QDocException093 | Profile name in query service request is not consistent with the QDoc name.                   | Check if the Profile name in query service request is consistent with the QDoc name.                                                          |
| QDocException094 | Appserver broker did not return an Appserver agent.                                           | Check the SI Appserver to see if there are sufficient agents to assign to the SI-API Connection pool agents.                                  |

## Configuration Exceptions

These exceptions relate to errors which may occur while configuring QXI. These exceptions are displayed on the UI when configuring the system; details are available in `outbound-ui.log` and `qdocInstall.log`.

**Table 29.10**  
Configuration Exceptions

| Exception Code            | Description                             | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConfigurationException001 | Receiver specified is not valid         | While adding a new schema, the receiver assigned does not exist.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ConfigurationException002 | Receiver directory not present          | While deleting a receiver, the receiver directory does not exist.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ConfigurationException003 | Reloading managers failed               | QXtend launches managers that carry out specific functions, for example, Queue Manager to allow QDoc processing through a queue and Configuration Manager to configure QXI. If QXI is restarted using the Tomcat admin functionality or the restart option in QXtend, these managers are reloaded. If some configuration has changed prior to reloading which invalidates any of the managers, then the QXtend UI link displays red and this exception appears in <code>qdocInstall.log</code> with more information. |
| ConfigurationException004 | Schema descriptor info incorrect        | When modifying a schema, the schema details are retrieved from a configuration file. If the details are unavailable, this error is raised. This occurs if the configuration file is directly modified and that record deleted. Review the configuration for this schema and reinstall if necessary.                                                                                                                                                                                                                   |
| ConfigurationException005 | Events directory not found              | While adding or updating a schema, the events directory does not exist.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ConfigurationException008 | Events file not found                   | When adding or modifying a schema, the events file must exist in the specified location. If not, this exception is raised.                                                                                                                                                                                                                                                                                                                                                                                            |
| ConfigurationException009 | Error occurred configuring the system   | An exception occurred on QXtend startup related to the configuration of QXtend. The QXtend link displays red. The error is logged in <code>qdocInstall.log</code> .                                                                                                                                                                                                                                                                                                                                                   |
| ConfigurationException010 | Error getting API configuration details | This error displays on the UI if an error occurs removing API support for a specified schema. This should only occur if the configuration files were manually updated. Contact the system administrator or QAD Support.                                                                                                                                                                                                                                                                                               |



| Exception Code            | Description                                      | Notes                                                                                                                                                                                                      |
|---------------------------|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConfigurationException011 | Duplicate entries for an API                     | QADQdocs.xml or implementationQdocs.xml were incorrectly modified. View logs for details and contact the system administrator or QAD Support.                                                              |
| ConfigurationException012 | Referenced node missing in descriptor file       | See ConfigurationException004.                                                                                                                                                                             |
| ConfigurationException013 | Error loading configuration details              | An error occurred loading a configuration file. The file may have been manually moved or deleted, or manually updated with invalid data. View logs for details. Also verify the path and file permissions. |
| ConfigurationException014 | Schema files do not exist in specified directory | While adding or deleting a schema, the schema files cannot be located. Verify path and permissions.                                                                                                        |
| ConfigurationException016 | File already exists                              | While creating or modifying a schema, the descriptor file already exists. Verify path and permissions.                                                                                                     |
| ConfigurationException017 | Problem writing to new file                      | While adding a new schema, the schema files already exist.                                                                                                                                                 |
| ConfigurationException018 | Duplicate nodes exist in descriptor file         | You cannot create an entry in a descriptor file for a node that already exists.                                                                                                                            |
| ConfigurationException019 | Schema directory not found                       | While adding a schema, the schema directory does not exist or is read-only. Verify path and permissions.                                                                                                   |
| ConfigurationException020 | Deleting receiver directory failed               | While deleting a receiver, the write to the backup directory failed.                                                                                                                                       |
| ConfigurationException021 | Receiver name cannot be null                     | While adding a receiver, the receiver name is blank or null. The null state may be raised if an error occurs recovering the value from the UI. Refresh and restart.                                        |
| ConfigurationException022 | Version not installed                            | While adding a receiver, the schema directory does not exist, could not be created, or the receiver version is blank.                                                                                      |
| ConfigurationException024 | Receiver already supported                       | You cannot add a new receiver that already exists for that version. Specify a different receiver or edit existing receiver.                                                                                |
| ConfigurationException025 | Receiver details not found                       | While deleting a receiver, cannot find the receiver node in receivers.xml.                                                                                                                                 |
| ConfigurationException026 | Parsing descriptorInfo failed                    | Building a hashmap of nodes from a descriptor file failed. Verify that the file exists.                                                                                                                    |

| Exception Code            | Description                                             | Notes                                                                                                                                                                                                                                                       |
|---------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConfigurationException027 | Updating descriptorInfo failed                          | This error occurs while creating a new receiver structure, path directory, or subdirectory for requests. It can also occur while updating global or receiver descriptor files with a new node.                                                              |
| ConfigurationException028 | Specified configuration file not found                  | The configuration files <code>qxtendalertconfig.xml</code> , <code>qxtendalertgroupconfig.xml</code> , and <code>qxtendalertuserconfig.xml</code> are missing from <code>WEB-INF/emailAlerts</code> . Replace the files.                                    |
| ConfigurationException029 | Alert recipient must be assigned a value                | The Alert Recipient field is blank. Enter a valid e-mail address.                                                                                                                                                                                           |
| ConfigurationException030 | Alert recipient's e-mail address is invalid             | The specified e-mail address uses an incorrect format. The correct format is <code>username@domain</code> .                                                                                                                                                 |
| ConfigurationException031 | Alert recipient already exists                          | The alert recipient entered already exists. Enter a different recipient.                                                                                                                                                                                    |
| ConfigurationException032 | A problem occurred when updating the configuration file | The configuration files <code>qxtendalertconfig.xml</code> , <code>qxtendalertgroupconfig.xml</code> , and <code>qxtendalertuserconfig.xml</code> cannot be updated. Check that the <code>WEB-INF/emailAlerts</code> directory exists and file permissions. |
| ConfigurationException033 | Cannot map schema and XML files to ProDataGraph         | Check the log file.                                                                                                                                                                                                                                         |
| ConfigurationException035 | Cannot create menu XML                                  | Check the log file.                                                                                                                                                                                                                                         |
| ConfigurationException036 | Problem occurred when reading XML                       | The configuration files <code>qxtendalertconfig.xml</code> , <code>qxtendalertgroupconfig.xml</code> , and <code>qxtendalertuserconfig.xml</code> are not well-formed or contain incorrect data. Check the files.                                           |
| ConfigurationException037 | Alert group must be assigned a value                    | The Alert Group field is blank. Enter an alert group name.                                                                                                                                                                                                  |
| ConfigurationException038 | Alert group already exists                              | There is already an alert group with the alert group name just entered. Enter a different name.                                                                                                                                                             |

| Exception Code            | Description                                                    | Notes                                                                                                                                                                                                                                                                                                                                  |
|---------------------------|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ConfigurationException039 | Cannot find alert receiver                                     | The alert receiver specified may have been deleted or modified by another user. Refresh the screen to get the latest information.                                                                                                                                                                                                      |
| ConfigurationException040 | Domain name must be assigned a value                           | The Alert Domain field is empty. Enter a domain name.                                                                                                                                                                                                                                                                                  |
| ConfigurationException041 | Domain name already exists                                     | There is already a domain using the domain name just entered. Enter a different name.                                                                                                                                                                                                                                                  |
| ConfigurationException042 | Problem occurred removing receiver in alert                    | The receiver may have been deleted or modified by another user. Refresh the screen to get the latest information.                                                                                                                                                                                                                      |
| ConfigurationException043 | Problem occurred creating a session to send mail               | There was a JavaMail error.                                                                                                                                                                                                                                                                                                            |
| ConfigurationException044 | Problem occurred creating a mime to send mail                  | There was a JavaMail error.                                                                                                                                                                                                                                                                                                            |
| ConfigurationException045 | Problem occurred setting mail subject                          | The e-mail subject is incorrect. If the alert group is using the default message configuration, check the <code>qxtendalertconfig.xml</code> file in the <code>WEB-INF/emailAlert</code> directory. If it is not using the default message configuration, check the e-mail subject setting in the Group Configuration Parameters page. |
| ConfigurationException046 | Problem occurred setting mail body                             | The e-mail body is incorrect. If the alert group is using the default message configuration, check the <code>qxtendalertconfig.xml</code> file in the <code>WEB-INF/emailAlert</code> directory. If it is not using the default message configuration, check the e-mail body setting in the Group Configuration Parameters page.       |
| ConfigurationException047 | Problem occurred adding mail attachment                        | Cannot add the attachment. Check the log for more details.                                                                                                                                                                                                                                                                             |
| ConfigurationException048 | Problem occurred setting the e-mail "From:" in the mail header | The e-mail "From:" is incorrect. Check the setting in the Email Configuration Parameters screen.                                                                                                                                                                                                                                       |

| Exception Code            | Description                                                  | Notes                                                                                                                                         |
|---------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| ConfigurationException049 | Problem occurred setting the e-mail "To:" in the mail header | The e-mail "To:" is incorrect. Check the setting in the Email Configuration Parameters screen.                                                |
| ConfigurationException050 | Problem occurred sending mail                                | An error occurred when sending the e-mail. Check the SMTP setting, e-mail body, e-mail subject, and attachments.                              |
| ConfigurationException051 | SMTP server must be assigned a value                         | The SMTP Server field is blank. Enter the name of an SMTP server.                                                                             |
| ConfigurationException052 | The "From:" e-mail address is invalid                        | The specified "From:" e-mail address is incorrect. The correct e-mail address format is <code>username@domain</code> .                        |
| ConfigurationException053 | Cannot find alert domain                                     | The specified alert domain may have been deleted or modified by another user. Refresh the screen to get the latest information.               |
| ConfigurationException055 | SMTP settings are invalid                                    | The SMTP settings are incorrect. Check the SMTP server, port number, and authentication details in the Email Configuration Parameters screen. |
| ConfigurationException056 | Recipient must be assigned a value                           | The Alert Recipient field is blank. Enter a valid e-mail address.                                                                             |
| ConfigurationException057 | Recipient's e-mail address is invalid                        | The format of the e-mail address entered for the recipient is incorrect. The correct format is <code>username@domain</code> .                 |
| ConfigurationException058 | No recipients                                                | There are no recipients specified for the e-mail. Check the alert recipients setting in the Group Configuration Parameters screen.            |
| ConfigurationException059 | The "From:" must be assigned a value                         | The Email From field is blank. Enter a valid e-mail address.                                                                                  |

## Process Exceptions

These exceptions relate to errors which may occur during the processing of a QDoc. These exceptions appear in the response QDoc and/or in log files.

**Table 29.11**  
Process Exceptions

| Exception Code      | Description                                                                                             | Notes                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ProcessException001 | Session failed to initialize                                                                            | QDoc processing program failed to launch. Review the Connection Pool Manager settings for the pool and test the initialization by manually following the pool log-in script.                                                                                                                                                                                                                      |
| ProcessException002 | Failure to send message to begin submitting data                                                        | Data submission to the server failed. An acknowledgement may fail due to the trigger failing to fire. To find the root cause, follow the process through a character session and look for any unusual user interface functions such as alert boxes, selection lists, or browses.                                                                                                                  |
| ProcessException003 | Failure to send action or data message                                                                  | See ProcessException002.                                                                                                                                                                                                                                                                                                                                                                          |
| ProcessException005 | Failure to send spacebar event                                                                          | QXtend is unable to respond to a pause event that occurs in QAD Enterprise Applications. Enable QXtend logging to the warn level and follow the process through a character session, looking for any unusual interface functions around that field.<br><br>See “Log Report Levels” on page 167.                                                                                                   |
| ProcessException007 | Java encoding specification sent from Progress failed                                                   | The QAD Enterprise Applications session request for user encoding from QXtend returned an invalid encoding string. Check the user encoding. This exception may also occur if the session failed to initialize correctly. Check the initialization procedure described in ProcessException001.                                                                                                     |
| ProcessException009 | Timeout occurs waiting for response from QAD Enterprise Applications QdocReceiver Configuration Manager | Communication occurs constantly between QXtend and QAD Enterprise Applications, from session start to the processing of the QDoc. QXI defines a timeout for a response to take place from QAD Enterprise Applications. If the expected response is not received within this timeout period, this exception is returned. May occur if a record is locked or if the terminal was exited abnormally. |
| ProcessException010 | Error while attempting to reset a Progress AppServer connection                                         | Closing the connection to the application server raises an error. Check the details on the exception for details.                                                                                                                                                                                                                                                                                 |

## Failure Exceptions

These are low-level exceptions, which, in most cases, are wrapped within another exception and are only seen at the lower level of a stack trace. These exceptions appear in the response QDoc and/or in log files.

**Table 29.12**  
Failure Exceptions

| Exception Code      | Description                                                 | Notes                                                                                                                                                                                                                                                                                          |
|---------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FailureException002 | Error processing XML document                               | This error occurs when the request QDoc is not a valid XML file. The error message is logged in <code>qxtendserver.log</code> .                                                                                                                                                                |
| FailureException003 | Writing document to file failed                             | While updating configuration settings using the Connection Pool Manager, the new settings cannot be written to a file.<br><br>For details about avoiding FailureException responses in HP-UX, COMPAQ, or LINUX environments, see “FailureException or AdapterException Responses” on page 356. |
| FailureException005 | Loading environmentmanager manager classes failed           | QXtend startup failed to launch all of the managers, such as Configuration, Connection Pool, Queue, and so on. View <code>qdocInstall.log</code> .                                                                                                                                             |
| FailureException006 | New XML document instance create failed                     | This error occurs if QXtend attempts to read in an invalid XML document.                                                                                                                                                                                                                       |
| FailureException007 | Unknown error occurred instantiating manager class          | An error occurs starting up QXtend. This may be caused by invalid configuration files. View <code>qdocInstall.log</code> .                                                                                                                                                                     |
| FailureException008 | Unable to find or load configuration file for manager class | A configuration file was not found during QXtend startup. View <code>qdocInstall.log</code> .                                                                                                                                                                                                  |
| FailureException009 | Unable to find or load configuration file                   | A configuration file listed in <code>config-files.xml</code> was not found during QXtend startup. View <code>qdocInstall.log</code> .                                                                                                                                                          |
| FailureException010 | Timeout on sending data                                     | The QAD Enterprise Applications session may be locked out by another user.                                                                                                                                                                                                                     |
| FailureException011 | Invalid locale information returned from Progress           | There is a Progress error on the QAD Enterprise Applications client.                                                                                                                                                                                                                           |
| FailureException012 | Invalid system information returned from Progress           | The QXtend client files on QAD Enterprise Applications may be the incorrect version.                                                                                                                                                                                                           |

## Internationalization Exceptions

These exceptions may arise if, for example, multiple languages are used and there is no resource file for the language in use.

**Table 29.13**  
Internationalization Exceptions

| Exception Code   | Description                       | Notes                                                            |
|------------------|-----------------------------------|------------------------------------------------------------------|
| I18NException001 | Error processing - invalid locale | An invalid locale was encountered during processing.             |
| I18NException002 | Missing resource bundle           | A resource bundle is missing.                                    |
| I18NException003 | Locale does not exist             | The specified locale does not exist. Check the locale specified. |

## Reflection Exceptions

These exceptions may arise due to internal faults with the engine itself—for example, missing Java classes arising from a faulty installation.

**Table 29.14**  
Reflection Exceptions

| Exception Code         | Description                            | Notes                                                          |
|------------------------|----------------------------------------|----------------------------------------------------------------|
| ReflectionException001 | Error while creating instance of class | An error was encountered when creating an instance of a class. |
| ReflectionException002 | Error invoking given method            | An error was encountered when invoking a given method.         |

## License Exceptions

These exceptions may arise if agents are unavailable or if the license code is invalid.

**Table 29.15**  
License Exceptions

| Exception Code      | Description                   | Notes                                                                                                                            |
|---------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| LicenseException008 | The license code is corrupt.  | The license code is corrupt or is invalid. Retype the license code. If the problem persists, contact QAD support.                |
| LicenseException009 | The license code is blank.    | A blank license code has been submitted.                                                                                         |
| LicenseException015 | No Licensed Agents available. | There are no available licensed agents for the request. If the problem occurs frequently, extra agents may need to be purchased. |





# **QXO Entity Relationships and Tables Reference**

This section contains QAD QXtend Outbound (QXO) entity relationship diagrams and table descriptions for the QXtend database.

***Entity Diagrams    414***

Illustrates diagrams that detail key relationships among various tables in the QXtend database.

***QXtend Table Descriptions    422***

Lists and describes tables used in the QXtend schema.


## Entity Diagrams

This section includes diagrams that detail key relationships among various tables in the QXtend database.


**Note** For details about conventions used in entity relationship diagrams (ERDs), refer to *Entity Diagrams*.

These diagrams should be used in conjunction with the section “QXtend Table Descriptions” on page 422. The entity diagrams are in alphabetical order starting on the next page.


## E-mail Alert

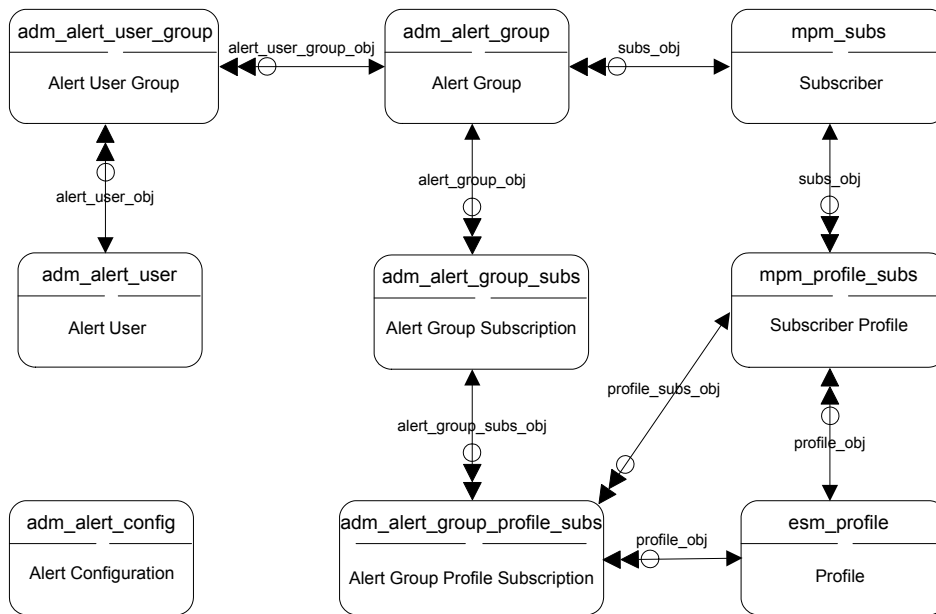


## Delivery Scheduler

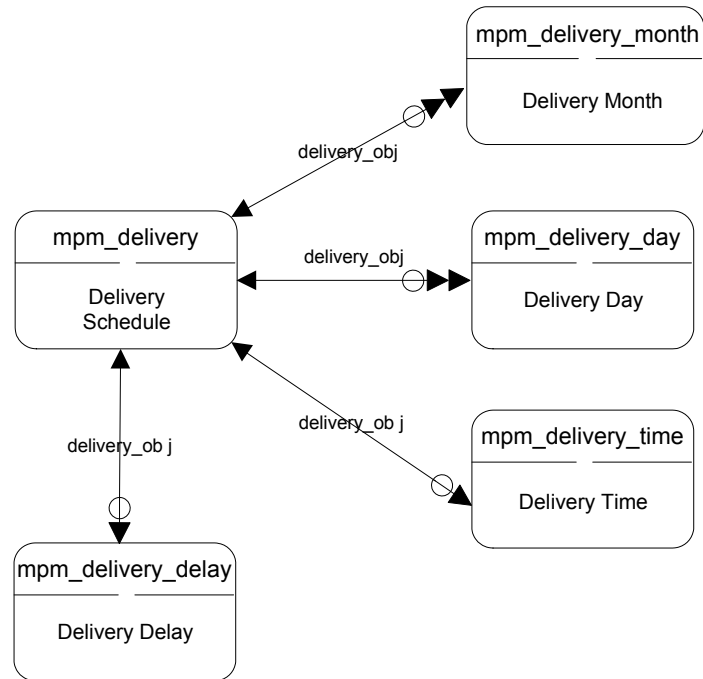


## Message Traceability

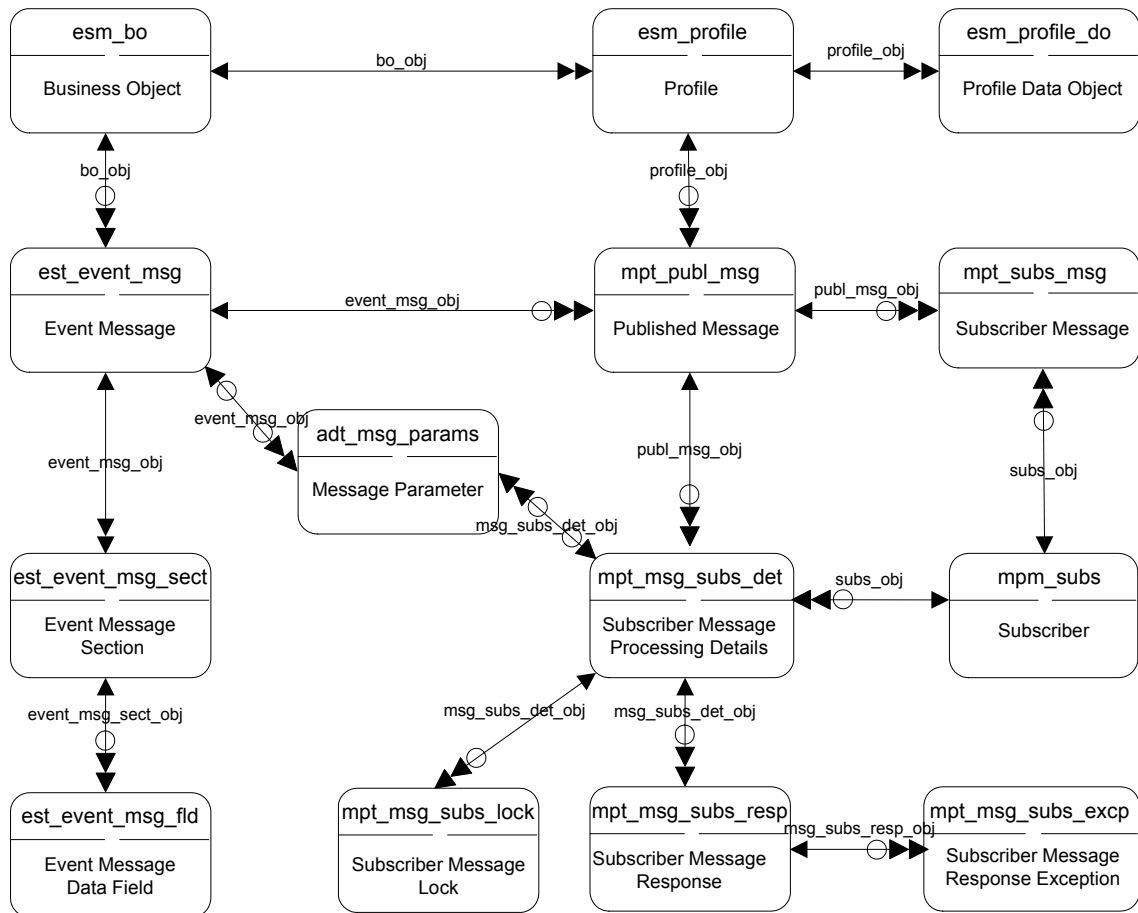


## Subscriber

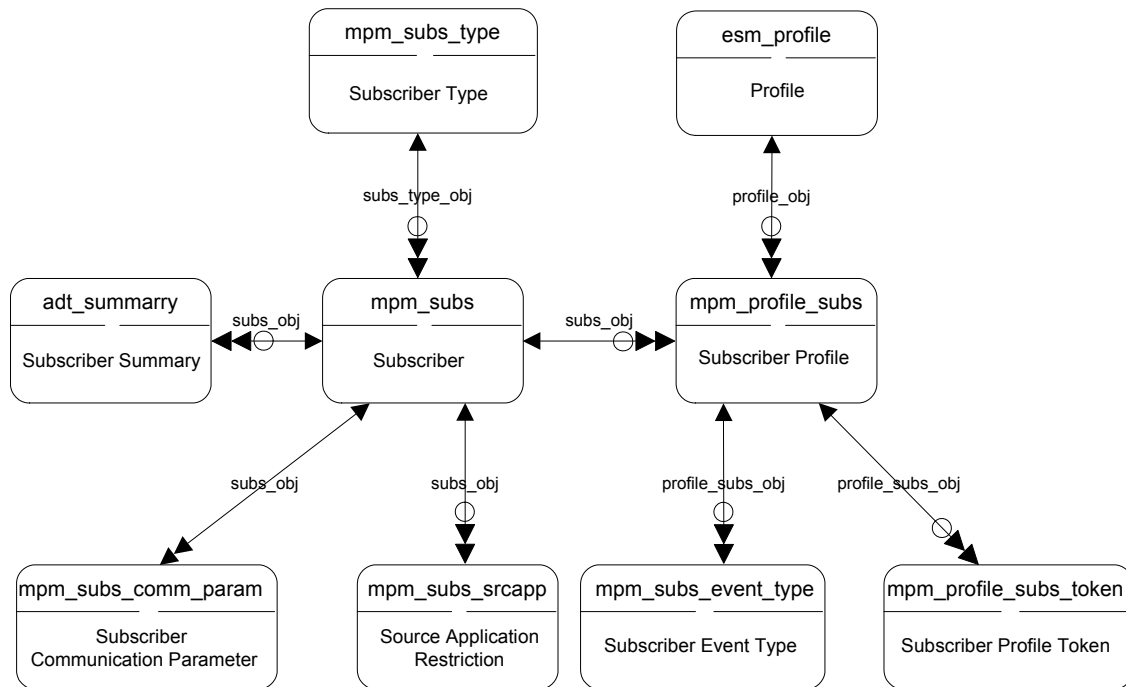

## Business Object and Profile

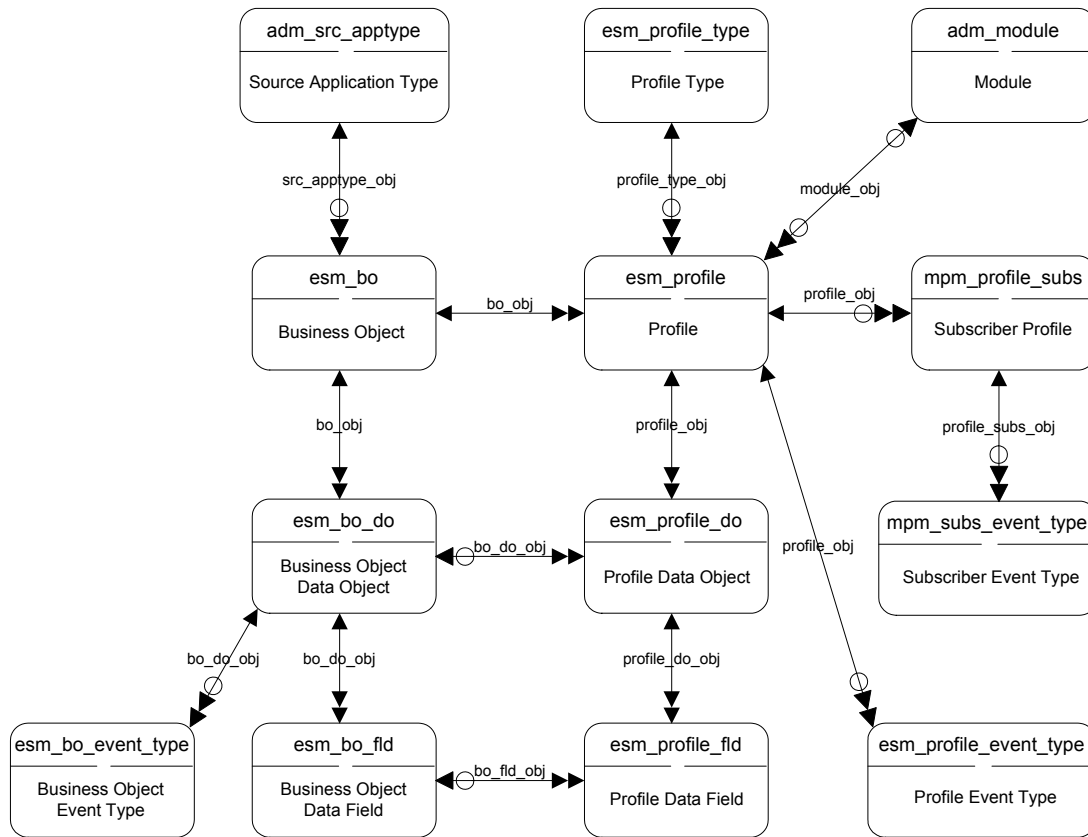


## Service Session

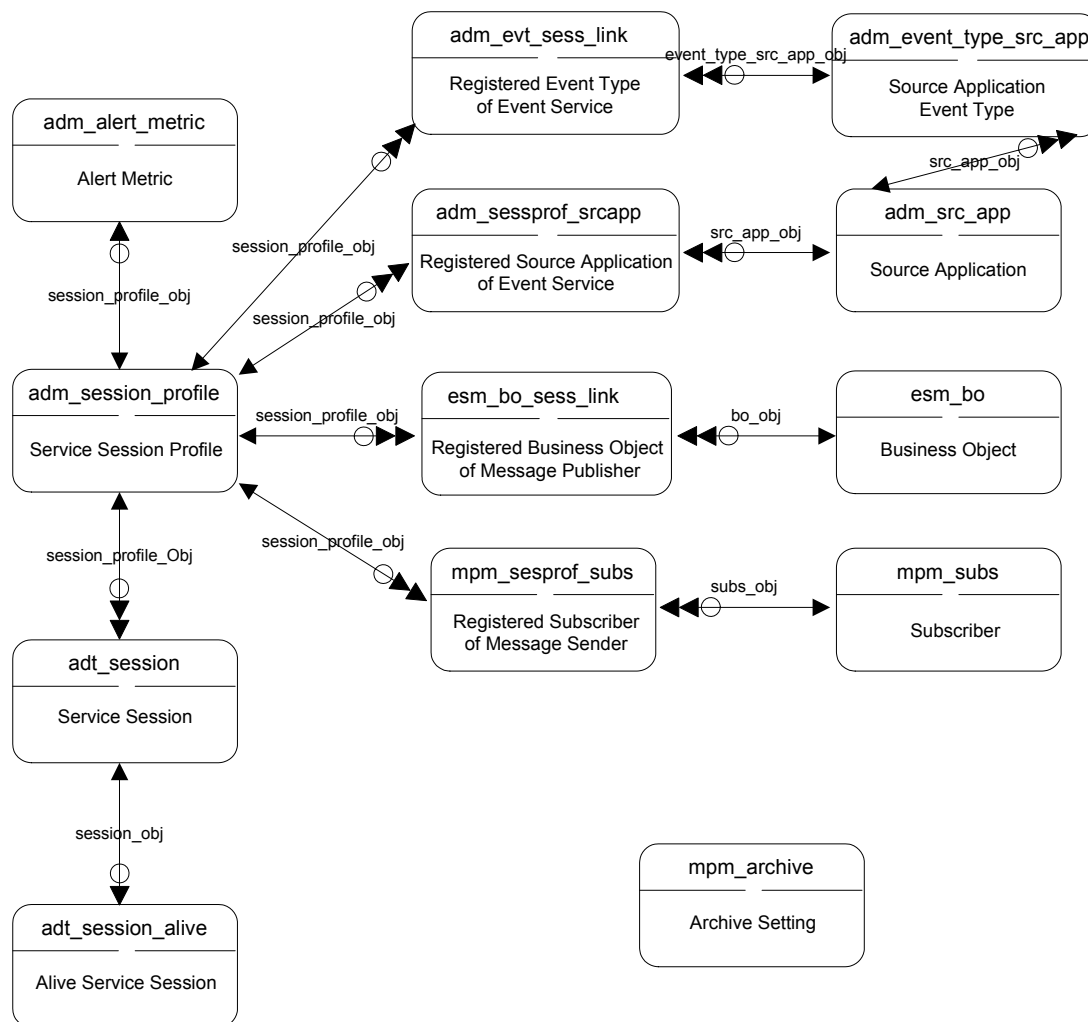



## Source Application

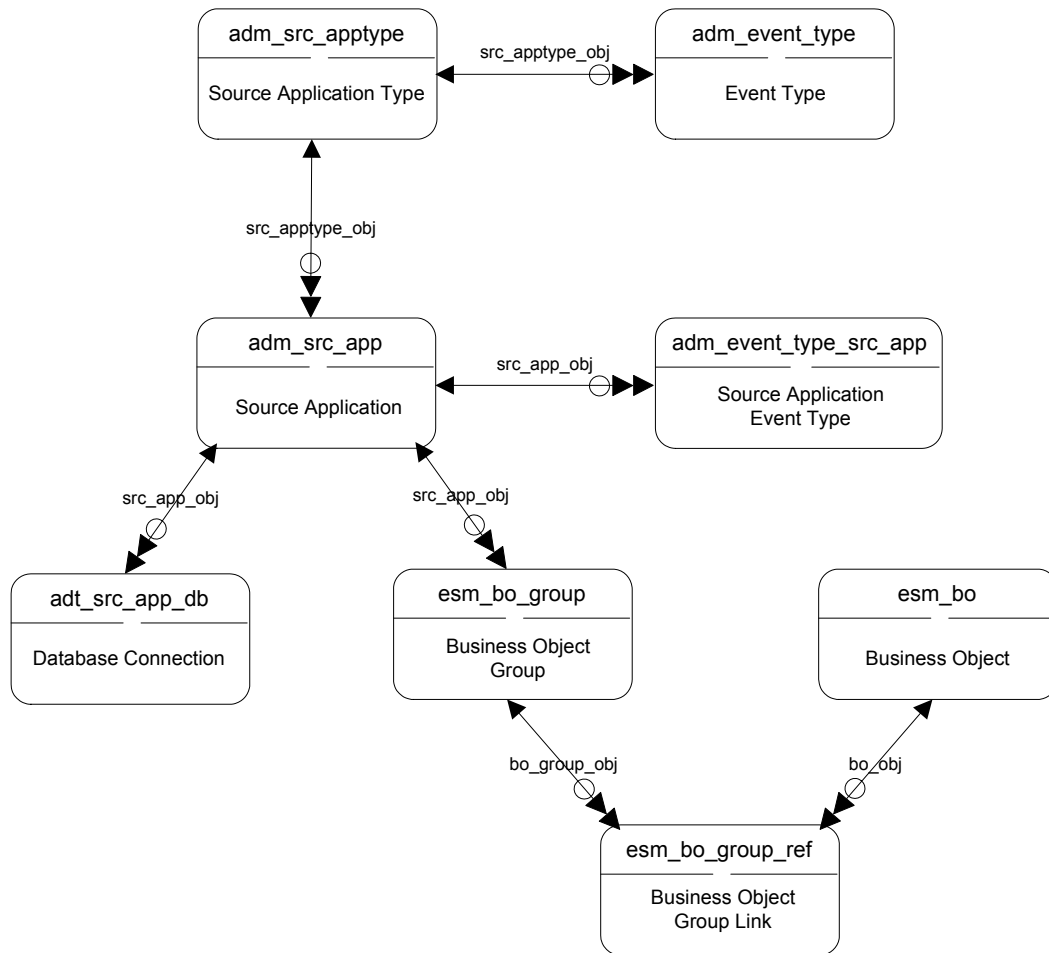

## QXtend Table Descriptions

This section includes an alphabetical listing of tables used in the QXtend schema.

These definitions are meant to be used in conjunction with the section “Entity Diagrams” on page 414.

| Table                        | Name                                   | Description                                                                                                                                                                                                                                    |
|------------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| adm_alert_config             | Alert Configuration                    | This entity specifies general configuration for the alerts functionality. It defines the generic parameters required to send an e-mail alert.                                                                                                  |
| adm_alert_group              | Alert Group                            | This entity defines a collection of users and configuration parameters specific to that group of users. It is used to assign parameters defining the appropriateness of receiving an alert.                                                    |
| adm_alert_group_profile_subs | Alert Group Profile Subscription       | This entity defines registrations between a group and profile such that the group is assigned to receive alerts for that profile.                                                                                                              |
| adm_alert_group_subs         | Alert Group Subscription               | This entity defines registrations between a group and subscriber such that the group is assigned to receive alerts for that subscriber.                                                                                                        |
| adm_alert_metric             | Alert Metric                           | This entity defines a metric that is checked at runtime for all sessions derived from the session profile for which alerts are raised when stated conditions are not met. The metrics must be members of the set supported by QXtend Outbound. |
| adm_alert_user               | Alert User                             | This entity defines an individual user (email address) that enables it to be registered to groups to receive alerts.                                                                                                                           |
| adm_alert_user_group         | Alert User Group                       | This entity defines registrations between a user and group such that all members of a group will receive an alert if required.                                                                                                                 |
| adm_event_type               | Event Type                             | This entity defines the event types for the source application type.                                                                                                                                                                           |
| adm_event_type_src_app       | Source Application Event Type          | This entity defines the event types for the source application.                                                                                                                                                                                |
| adm_evt_sess_link            | Registered Event Type of Event Service | This entity maintains registered source application event types of an event service.                                                                                                                                                           |
| adm_module                   | Module                                 | This entity defines the application module for the profile.                                                                                                                                                                                    |

| Table               | Name                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| adm_session_profile | Service Session Profile                        | This entity defines a service session for all kinds of services, e.g. event service, message publisher, message sender; configures common session settings; and associates different entities to different services.                                                                                                                                                                                                                                                                                       |
| adm_sessprof_srcapp | Registered Source Application of Event Service | This entity lists source application codes that are serviced by profile sessions. It is populated for event service session profiles only.                                                                                                                                                                                                                                                                                                                                                                 |
| adm_src_app         | Source Application                             | This entity defines a source application whose events are published by QXtend Outbound.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| adm_src_apptype     | Source Application Type                        | This entity includes application type codes that represents source applications with the same structure. These applications may share the same business object definitions because their schema is the same.                                                                                                                                                                                                                                                                                               |
| adm_system_code     | Outbound Parameter Settings                    | This table stores the various QXtend Outbound parameter settings in a hierarchical structure similar to that of an XML document.                                                                                                                                                                                                                                                                                                                                                                           |
| adt_activity_log    | Activity Log                                   | This entity provides an audit trail of each significant QXtend Outbound activity, in the form of a comprehensive log record suitable for export to spreadsheet applications or other analysis/reporting tools. Activities recorded include session startup and shutdown, application event processing, and event message processing. The record references any associated application event or event message and provides the raw detail used to calculate overall QXtend Outbound operational statistics. |
| adt_alert_log       | Alert Log                                      | This entity stores alert conditions raised by QXtend Outbound processes and sends them to the attention of a system administrator. Where available, it references the activity log record for each alert condition.                                                                                                                                                                                                                                                                                        |
| adt_email_queue     | Alert Email Queue                              | This entity contains the queue of email alerts ready to be delivered.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| adt_msg_params      | Message Parameters                             | This entity contains the message parameters passed between the Outbound services.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| adt_session         | Service Session                                | This entity describes the state of each running event service, message publisher, message sender, or subscriber services session, providing current processing status and basic throughput statistics.                                                                                                                                                                                                                                                                                                     |
| adt_session_alive   | Alive Service Sessions                         | This entity indicates whether a service is running.                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

| Table             | Name                                            | Description                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| adt_src_app_db    | Databases Connection                            | This entity stores the database connection information for one database that is part of a source application.                                                                                                                                                                                                                                                                              |
| adt_summary       | Subscriber Summary                              | This entity contains the subscriber message summary.                                                                                                                                                                                                                                                                                                                                       |
| adt_svc_alerts    | Alert Conditions                                | This entity stores alert conditions raised by QXtend Outbound processes to the attention of a system administrator. It references the source process of each alert condition.                                                                                                                                                                                                              |
| esm_bo            | Business Object                                 | This entity defines the business object. Business objects specify all application data available for publishing, constraining the definitions of subscription profiles. They query the application databases and extract the data to be published for each event.                                                                                                                          |
| esm_bo_do         | Business Object Data Object                     | This entity defines a table contained in the business object that lists the joining relationship with the business object parent table and other extraction-related attributes. It references a child entity in the QXtend Outbound database to maintain field-level detail for each table.                                                                                                |
| esm_bo_event_type | Business Object Event Type                      | This entity contains the various event types for the business objects.                                                                                                                                                                                                                                                                                                                     |
| esm_bo_fld        | Business Object Data Field                      | This entity identifies a field from a database table included in the business object or subscription profile and specifies data-formatting details inside outbound messages. Additional derived fields to be published are also defined. It is not maintained for all fields, only those using any attribute to control publishing.<br><br>Note: This table is obsolete as of version 1.4. |
| esm_bo_group      | Business Object Group                           | This entity defines groups of business objects whose events must be published in chronological sequence. It is used to preserve the sequence of published outbound messages when all active event types within the group are all registered with the same event service.                                                                                                                   |
| esm_bo_group_ref  | Business Object Group Link                      | This entity references each event group to its member event types.                                                                                                                                                                                                                                                                                                                         |
| esm_bo_sess_link  | Registered Business Object of Message Publisher | This entity is an association table between esm_bo_profile and adm_session_profile.                                                                                                                                                                                                                                                                                                        |

| Table                  | Name                             | Description                                                                                                                                                                                                                                                                                                                         |
|------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| esm_msgprof_link       | Message Section Data Object Link | This entity maintains a link between a profile data table and the event message data table for determining if the record still exists in the source application.                                                                                                                                                                    |
| esm_profile            | Profile                          | This entity defines the business object. Business objects specify all application data available for publishing, constraining the definitions of subscription profiles. They also query the application databases and extract the data to be published for each event.                                                              |
| esm_profile_do         | Profile Data Object              | This entity defines a table contained in the business object that lists joining relationships with the business object parent table and other extraction-related attributes. It references a child entity in the QXtend Outbound database to maintain field-level detail for each table.                                            |
| esm_profile_event_type | Profile Event Type               | This entity contains the various event types for profiles.                                                                                                                                                                                                                                                                          |
| esm_profile_fld        | Profile Data Field               | This entity identifies a field from a database table included in the business object or subscription profile and specifies data-formatting details inside outbound messages. Additional derived fields to be published are also defined. It is not maintained for all fields, only those using any attribute to control publishing. |
| esm_profile_type       | Profile Type                     | This entity lists valid profile types that can be assigned to the esm_profile table.                                                                                                                                                                                                                                                |
| est_event_msg          | Event Message                    | This entity defines an event message consisting of a queued application event and the data regarding its associated business objects at the time the event was recorded. It is created and populated for each application event, and processed to create outbound messages for external subscribers.                                |
| est_event_msg_fld      | Event Message Data Field         | This entity defines a single data field and its value within a section of an event message. It represents the application data about the event that is available for publishing to external subscribers. This table is obsolete from version 1.4 onwards.                                                                           |
| est_event_msg_sect     | Event Message Section            | This entity defines the section of an event message containing the data extracted from one entity instance within the event's associated business object. Normally, each section contains the data from a single record in the application database.                                                                                |
| est_extract_event      | Extract Event                    | This entity records the events that identify the data to be extracted from the source application.                                                                                                                                                                                                                                  |
| est_extract_row        | Extract Row                      | This entity includes the row identifier of the top level record of a business object in the source application.                                                                                                                                                                                                                     |
| mpm_archive            | Archive Settings                 | This entity identifies the settings for the archive service.                                                                                                                                                                                                                                                                        |
| mpm_delivery           | Delivery Schedule                | This entity identifies a delivery schedule that can be attached to a subscriber or a subscriber profile.                                                                                                                                                                                                                            |

| Table                  | Name                                    | Description                                                                                                                                                                                                                                                                                                                  |
|------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| mpm_delivery_day       | Delivery Day                            | This entity identifies a day to send a document for a delivery schedule.                                                                                                                                                                                                                                                     |
| mpm_delivery_Delay     | Delivery Delay                          | This entity identifies a delay time for a delivery schedule.                                                                                                                                                                                                                                                                 |
| mpm_delivery_month     | Delivery Month                          | This entity identifies a sending month for a delivery schedule.                                                                                                                                                                                                                                                              |
| mpm_delivery_time      | Delivery Time                           | This entity identifies a sending time for a delivery schedule.                                                                                                                                                                                                                                                               |
| mpm_profile_subs       | Profile Subscription                    | This entity references a subscription profile to which an external system or application subscribes.                                                                                                                                                                                                                         |
| mpm_profile_subs_token | Subscriber Profile Tokens               | This entity contains the tokens that can be used with subscriber profiles.                                                                                                                                                                                                                                                   |
| mpm_sesprof_subs       | Registered Subscriber of Message Sender | This entity identifies the message sender process for a subscriber.                                                                                                                                                                                                                                                          |
| mpm_subs               | Subscriber                              | This entity identifies an external system or application that subscribes to one or more business objects and describes how they communicate with QXtend Outbound.                                                                                                                                                            |
| mpm_subs_comm_param    | Subscriber Communication Parameter      | This entity defines the communications-related settings used to send messages to the external subscriber. The settings must be from the predefined set supported by QXtend Outbound for the subscriber's communications method.                                                                                              |
| mpm_subs_event_type    | Subscriber Event Type                   | This entity defines the event types for subscribers.                                                                                                                                                                                                                                                                         |
| mpm_subs_srcapp        | Source Application Restriction          | This entity lists source applications that the subscriber is interested in.                                                                                                                                                                                                                                                  |
| mpm_subs_type          | Subscriber Type                         | This entity identifies a subscriber type with which any external subscriber must be associated. The contents are populated at QAD and distributed to the customer, not maintained by users. All fields are encrypted before being stored to prevent users from making unauthorized changes to their QXtend Outbound license. |
| mpt_msg_subs_det       | Subscriber Message Processing Details   | This entity references a business object and external subscriber to which the outbound message is to be published. It is used to track the delivery of each message to all its subscribers.                                                                                                                                  |
| mpt_msg_subs_excp      | Subscriber Message Response Exception   | This entity lists exceptions contained in a specific subscriber response message.                                                                                                                                                                                                                                            |
| mpt_msg_subs_lock      | Subscriber Message Lock                 | This entity indicates that a subscriber message for a particular rowid in the database is being sent. Only one message per rowid per subscriber can be sent at any one time.                                                                                                                                                 |
| mpt_msg_subs_resp      | Subscriber Message Response             | This entity contains the response information for a specific attempt to send the QDoc to the subscriber.                                                                                                                                                                                                                     |
| mpt_publ_msg           | Profile Message                         | This entity defines a QDoc XML message created from an event message and to be published to one or more subscribers. It stores the processing state of the message.                                                                                                                                                          |

| Table        | Name                      | Description                                               |
|--------------|---------------------------|-----------------------------------------------------------|
| mpt_subs_msg | Subscriber Message        | This entity contains the message details for subscribers. |
| qxodb_ctrl   | Outbound Database Control | Database Control for QXODB.                               |





# SSH Reference

This section provides information on SSH key pair and SSH settings in configuring the UIAPI connection pool in QXI.

***Introduction    430***

Introduces SSH protocol.

***Setting SSH Public Key Authentication    430***

Explains how to set up SSH public key authentication.

## Introduction

Besides Telnet, you can also use SSH protocol to connect QAD QXtend Inbound (QXI) to the QAD Enterprise Applications receivers. Using Public Key Authentication, the SSH protocol provides confidentiality and security for data exchanged between two computer systems.

Public key authentication is an alternative means of identifying authenticated users to a login server, instead of typing a password. The authentication system requires a key pair consisting of a public key and a private key. The keys are generated most commonly using RSA algorithms.

Before setting up a UIAPI connection pool in QXI using SSH protocol, set up the SSH public key authentication.

## Setting SSH Public Key Authentication

This section uses an example to describe how to set up an SSH key pair.

In the example, the user `qadeatest` is a user on the QAD EA server `qadea linux`, and the user `demo` is a user on the Tomcat server `tomcat linux`, who started Tomcat. The user `qadeatest` is going to create the public/private key pair for the SSH connection between `qadea linux` and `tomcat linux` so that the user `demo` can SSH to the QAD EA server using the private key. In this way, the QXI UIAPI connection pool can get an idle connection to QAD EA. See the following instructions:

- 1 Use the user name `qadeatest` to log in to the QAD EA server.
- 2 If there is not an `.ssh` directory in `/home/qadeatest`, run the following commands to create a directory and set the correct permissions.

```
mkdir ~/.ssh
chmod 700 ~/.ssh
```

- 3 In the directory `/home/qadeatest/.ssh`, create the public and private key pair using the command:

```
ssh-keygen -t rsa
```

- 4 Specify the file where you store the generated keys when prompted as the following:

```
Generating public/private rsa key pair.
Enter file in which to save the key (/home/qadeatest/.ssh/id_rsa):
```

Ensure that you follow the name convention `id_rsa`. Enter `/home/qadeatest/.ssh/qadeatest_rsa`.

- 5 Set a password for the keys when prompted and repeat the password to confirm. Leave it empty if you do not want to set a password. The password protects your private key. It is recommended that you set a password for the key.

The keys are generated when the following prompts:

```
Your identification has been saved in qadeatest_rsa.
your public key has been saved in qadeatest_rsa.pub.
The key fingerprint is:
99:c3:5f:30:02:a4:5d:59:46:c6:cd:60:9f:9c qadeatest@qadealinux.qad.com
```

- 6 Append the public key to `authorized_keys2` in the directory `/home/qadeatest/.ssh`.



If the `authorized_keys2` file does not exist in the directory `/home/qadeatest/.ssh`, copy `qadeatest_rsa` to `authorized_keys2`.

**7** Copy the private key to the Tomcat server.

- a** Log in to the Tomcat server as *demo*.
- b** If there is no `.ssh` directory in `/home/demo/`, create one using the following command and set the correct permissions:

```
mkdir .ssh
chmod 700 .ssh
```

- c** Copy the private key `qadeatest_rsa` from the QADEA server. Run the following command:

```
scp qadeatest@qadealinux.qad.com:~/.ssh/qadeatest_rsa ~/.ssh
```

- d** When prompted, enter yes to confirm the connection and enter the password for `qadeatest@qadealinux.qad.com`.

**8** Verify whether the SSH connection is established.

- a** On the Tomcat server, run the following command to SSH to the QAD EA server:

```
ssh qadeatest@qadealinux.qad.com -i ~/.ssh/qadeatest_rsa
```

- b** When prompted, enter the password for the key `qadeatest_rsa`.  
If you are prompted for the password of `qadeatest@qadealinux.qad.com` rather than the password for the private key `qadeatest_rsa`, the SSH connection is not established. In this case, add the `-v` option to the `ssh` command for debugging.
- c** If the SSH connection is established, the user `demo` is logged in to `qadealinux` as `qadeatest`. Check it using the command `$ id`.

**Note** Anyone who has the private key and the password for the key can access the target host server. Ensure that you safely store the private key.



# SSL-Enabled AppServer Reference

This section provides information on how to enable an AppServer for SSL and how to set up an SSL Java client on a Linux server.

## ***Introduction 434***

Gives brief information about Secure Sockets Layer (SSL).

## ***Enabling SSL for AppServers 434***

Explains how to enable SSL for AppServers.

## ***Enabling SSL for Java Clients of an AppServer 437***

Explains how to enable SSL for Java clients.

## ***Configuring Connection Pools for SSL-Enabled AppServer 438***

Explains how to configure connection pools for SSL-enabled AppServer.

## ***Configuring Outbound for SSL-Enabled QXOUI AppServer 439***

Explains how to configure QXO for SSL-enabled QXOUI AppServer.

## ***Other Configurations for SSL-Enabled AppServer 439***

Includes additional configurations on QXtend UI and summarizes all configuration required for using SSL-enabled AppServer.

## ***Summary of QXtend Configurations for SSL-Enabled AppServer 440***

Lists all required configurations for SSL-enabled AppServer.

## ***Limitations 440***

Describes the limitation of SSL connection on OE11.1 and the workaround.

## Introduction

You can use the Secure Sockets Layer (SSL) to provide a security infrastructure that protects AppServer communications both on the Internet and the intranet. SSL provides data privacy over network connections and authentication between clients and servers on those connections using elements of Public Key Infrastructure (PKI). These elements include private and public keys. The clients and servers use the keys to authenticate each other and to set up data encryption and decryption services between the SSL client and SSL server. The server is identified by the private key that it stores. The client is identified as a valid SSL client for that server by the public key that it stores and provides to the server. SSL clients gain access to public keys using digital (public key) certificates. The Certificate Authority (CA) provides the public key and the private key confidentially to the SSL server.

In QXtend Inbound, the SIAPI and the FinAPI connection pool can connect to the AppServer by a secure connection. The connection depends on the settings on the Configuration Settings Update page for the SIAPI or FinAPI connection pool. When the AppServer Secure Connect option is checked and the correct directory of the public key is specified, the connection to the AppServer is secured with SSL.

To secure the connection between the connection pool and the AppServer with SSL, configure:

- The AppServer as an SSL-enabled server
- The AppServer client (connection pool) as an SSL client

## Enabling SSL for AppServers

Enabling SSL on the AppServer involves the following steps:

- 1 Set up OpenSSL environment on the AppServer.
- 2 Create the private key and certificate request.
- 3 Enable SSL for the QADSI and QADFin AppServers.
- 4 Generate the public key.

### Setting OpenSSL on AppServer

- 1 Log in as root and run proenv.

```
$DLC/bin/proenv
```

- 2 Run the commands in the following order to create directories and files.

```
mkdir myssl
cd myssl
mkdir newcerts
touch index.txt
echo '01' > serial
echo '01' > crlnumber
cp $DLC/keys/policy/pscpki.cnf myssl.cnf
```



The commands create the `myssl` folder, which includes the `newcerts` folder and the files: `index.txt`, `serial`, `crlnumber`, and `myssl.cnf`.

- 3 Edit the `myssl.cnf` file as follows:

| Change from                                                                | To                                                                     |
|----------------------------------------------------------------------------|------------------------------------------------------------------------|
| <code>database = \$dir/index.txt # database index file.</code>             | <code>database = ./index.txt # database index file.</code>             |
| <code>new_certs_dir = \$dir/newcerts # default place for new certs.</code> | <code>new_certs_dir = ./newcerts # default place for new certs.</code> |
| <code>serial = \$dir/serial # Current serial number</code>                 | <code>serial = ./serial # Current serial number</code>                 |

- 4 Run the following command to make the `myssl.cnf` file not readable:

```
chmod 0600 myssl.cnf
```

## Creating Private Key and Certificate Request

- 1 Run the following command to create a private key:

```
pkutil -keysize 2048 -newreq demoSSL
```

`demoSSL` is an example. You can specify your own alias name.

- 2 Set your password when prompted and then reenter it for verification.
- 3 Specify values for the following items when you are prompted:

- Country Name
- State or Province Name
- Locality Name
- Organization Name
- Organizational Unit Name
- Server DNS name

Ensure that you enter the Server DNS name and that the Server DNS name you entered is the same as the host configured in the SI-API or Fin-API Connection Pool. You can leave some of the other items blank by entering a dot (.).

The system prompts:

You may now use the file `/progress/dlc11/keys/requests/demoSSL.pk10` to request a new Digital Certificate from a CA Certificate Authority.

After you obtain the new Digital Certificate from the CA, use the `-import` command to insert the certificate into the KeyStore.

**Note** If you are going to use the Digital Certificate from a Certificate Authority (CA), skip to step 11 to import the certificate. If you want to sign your certificate by yourself for test, follow step 4 through step 10.

- 4 Create the root certificate using the following command:

```
openssl req -config myssl.cnf -new -x509 -days 1001 -key $DLC/keys/requests/demoSSL.pk1 -out $DLC/keys/requests/rootCA.cer
```

- 5 Enter the password for `demoSSL.pk1` when the system prompts you to. The password is the one you set in step 2.

**6** Specify values for the following items when the system prompts you to:

- Country Name
- State or Province Name
- Locality Name
- Organization Name
- Organizational Unit Name
- Server DNS name

Ensure that you enter the Server DNS name and that the Server DNS name you entered is the same as the host configured in the SI-API or Fin-API Connection Pool. You can leave some of the other items blank by entering a dot (.).

**7** Create the digital certificate.

```
openssl ca -config myssl.cnf -cert $DLC/keys/requests/rootCA.cer -in
$DLC/keys/requests/demoSSL.pk10 -keyfile $DLC/keys/requests/demoSSL.pk1 -days 365 -out
$DLC/keys/requests/demoSSL.cer
```

**8** Enter the password for demoSSL . pk1 when the system prompts you to. The password is the one you set in step 2.**9** The system prompts you to sign the certificate and update the database with the new entry. Enter y (yes) to confirm.**10** Run the commands in the following order to verify the signed digital certificate.

- a** `openssl x509 -subject -issuer -enddate -noout -in $DLC/keys/requests/demoSSL.cer`
- b** `openssl x509 -in $DLC/keys/requests/demoSSL.cer -noout -text`
- c** `openssl verify -purpose sslserver -CAfile $DLC/keys/requests/rootCA.cer $DLC/keys/requests/demoSSL.cer`

**11** Import the signed digital certificate into the Progress KeyStore as a private key. Run the following command and enter the password when the system prompts you to.

```
pkiutil -import demoSSL $DLC/keys/requests/demoSSL.cer
```

This command creates a private key demoSSL . pem under the \$DLC/keys folder. Do not delete the key. Otherwise, the AppServer cannot start in SSL mode.

**12** Generate the key alias password for the AppServer. Run

```
genpassword -password [password]
```

Use the password that you set in step 2. The encoded password will be used for enabling SSL for the QADSI and QADFin AppServers.

## Enabling SSL for AppServers

**1** Open the ubroker . properties file from \$DLC/properties.**2** Locate the section for the AppServer (for example, UBroker.AS.qadsi\_AS and UBroker.AS.qadfin\_AS) and add the following entries:

- sslEnable=1
- keyAlias=*demoSSL*





- `keyAliasPassword=212a3b223c21 # Encoded Password`

`demoSSL` and `212a3b223c21` are for example only. Use the `keyAlias` and encoded password that you got in “Creating Private Key and Certificate Request” on page 435.

You can either use the same `keyAlias` for all the AppServer brokers or use a separate `keyAlias` for each AppServer broker. The SSL AppServer brokers that use the same `keyAlias` use the same private key; for example, `$DLC/keys/demoSSL.pem`.

- 3 Restart the AppServer broker and query the broker to see whether there are available AppServer agents for it.

**Note** If you want to enable SSL for the existing Fin AppServer that is in use by multiple clients, ensure that all the clients (including CHUI and .NET UI) are also SSL-enabled. If you want to make the SSL-enabled Fin AppServer work with QXtend only, create a Fin AppServer for QXtend and enable SSL for it.

## Generate the Public Key

- 1 Import the rootCA certificate into the Progress KeyStore as an X509 certificate to generate the public key. Run the following command:

```
certutil -import $DLC/keys/requests/rootCA.cer
```

- 2 Check whether the read-and-write permissions are right for the public key. Run the following command:

```
ls -ltr $DLC/certs/976f8f0c.0
```

`976f8f0c.0` is the name of the public key file and varies with different keys.

The server and clients use the public key to authenticate each other. Make sure that you bundle the public key in the `psccerts.jar` file and deploy the public key bundle to the `$DLC/certs` folder of the ABL clients. QXtend Inbound is an Open Java client for the AppServer. For more information on how to enable SSL for Java clients, see “Enabling SSL for Java Clients of an AppServer”.

## Enabling SSL for Java Clients of an AppServer

To make the Java clients (QXI) work with the SSL-enabled AppServer, bundle the public key to `psccerts.jar` and deploy the public key bundle to the Java clients.

- 1 Import the public key (for example, `976f8f0c.0`) generated for the AppServer into `$DLC/certs/psccerts.jar`.
  - a On the AppServer Host, use Progress on the same host as the AppServer and run the following command:
 

```
cd $DLC/certs
$DLC/bin/procertm -i 976f8f0c.0 psccerts.jar
```
  - b To check whether the key is included in the `psccerts.jar` file, list all the certificates in the `psccerts.jar` file. Run the following command:
 

```
$DLC/bin/procertm -l psccerts.jar
```

**Note** If the public key certificate with the same alias name exists in the `psccerts.jar` file, remove it first and import the new one.

## 2 Deploy the public key bundle to the Java client.

- For a one-tier system, ensure that the `psscerts.jar` file is in the `$DLC/certs` directory.
- On a two-tier system that has no Progress installed on the Tomcat host, copy the `certs` directory containing the public key and paste it to a location on the Tomcat host.
- For multiple connection pools, if the pools use different certificates, ensure that the public key bundle files (`psscerts.jar`) are stored in different `certs` directories.

## Configuring Connection Pools for SSL-Enabled AppServer

- 1 On the Configuration Settings Update page of the SI-API or Fin API, select the App Server Secure Connect check box and enter the Public Key Location. The Public Key Location is on the tomcat host, which contains the `certs` directory having all the certificates and the `psscerts.jar` file in it.

**Fig. 32.1**  
AppServer Secure Connect for SI-API

Configuration Settings Update

Pool Name: Test

Debug: No

App Server Name: vmlinux

Host: host

App Server Direct Connect: ☐

**App Server Secure Connect: ☒**

**Public Key Location: /progress/dlc11**

Port: 5162

State Free: ☒

User: userid

Password:

Domain (If Applicable):

Minimum Connections: 1

Maximum Connections: 5

Maximum Failures: 20

Connections Monitor Frequency: 60000

Maximum Connection Idle Time: 180000

Maximum Connection Init Time: 20000

Wait time for Idle Connection: 10000

Max Licensed Agent Retry: 5

Wait time for Licensed Agent: 20000

Save Cancel

**Note** For Windows system, specify the Public Key Location with the short Windows path. For example, if the directory is `c:\Program Files\certs\psscerts.jar`, specify the Public Key Location with `c:\progra~1`.

## 2 Restart the connection pool when you finish the configuration.

An available idle connection indicates that the connection is successfully established. If you do not see any idle connection, check the `qxtendserver.log` for errors.

## Configuring Outbound for SSL-Enabled QXOUI AppServer

To configure QXtend Outbound for SSL-enabled QXOUI AppServer:

- 1 Locate and open the `environmentmanager.xml` file at `TOMCAT_HOME/webapps/<QXO webapp>/WEB-INF/conf`.
- 2 Specify the following parameters basing on the type of connection between qxoui AppServer and QXO web application. For example:

```
<!-- Indicate if connection to Appserver is using SSL -->
<param name="secureConnect" value="true"/>
<!-- The Public Key Location which contains the certs directory -->
<param name="publicKeyLocation" value="/progress/dlc11"/>
```

Public Key Location is the location that contains the certs directory. In the above example, the Public Key `psccerts.jar` resides in `/progress/dlc11/certs`, which is `$DLC/certs` in the environment.

- 3 Restart the QXO web application.

## Other Configurations for SSL-Enabled AppServer

- Set QXtend Adapter AppServer configuration parameters for QXO Source Application.

On the Source Application Details page, specify the AppServer parameters for calculated programs and Event Consolidation on WAN. The parameters vary depending on how QXO connects to the QAD SI AppServer. For examples, see “Examples of AppServer Parameters” on page 27.

- Set QXO SI AppServer configuration for Financial direct data publish.

Go to Event Destination Modify (36.14.16.14.2) in QAD Enterprise Applications and specify the AppServer Connection. The protocol varies depending on the connection to the QXO SI AppServer. See “AppServer Protocols” on page 141 for more information.

## Summary of QXtend Configurations for SSL-Enabled AppServer

The following table summarizes the required configurations for SSL-enabled AppServer.

| SSL-enabled AppServer | Configurations to change                                                                                                                    |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| qadsi                 | SI-API Connection Pool: see page 220 for configurations.<br>Source Application Details: see page 26 for configurations.                     |
| qadfin                | FinAPI Connection Pool: see page 220 for configurations.                                                                                    |
| qxoui                 | Outbound UI Configuration Setting: see page 439 for configurations.                                                                         |
| qxosi                 | SI-API Connection Pool of Outbound Receiver: see page 130 for configurations.<br>QAD EE Event Destination: see page 141 for configurations. |

## Limitations

The SSL connection between the Java SSL client (QXO webapp on Tomcat) and the SSL server (SSL-enabled QXOUI AppServer) is slower because of encryption and decryption of data on both ends. The performance could be slow with OE11.1 because Progress APIs from OE11+ use secure random numbers for the Java client to connect to the SSL-enabled AppServer. The connection takes time, especially on Virtual Machines.

The workaround is to use the OS Random Number Generator to increase the Entropy to speed up the random number generation, but at the same time, it reduces security. On OE10.2B and lower versions, the performance is not an issue.

To run the OS Random Number Generator for OE11 and later versions:

- On Linux: Execute the `/sbin/rngd -r /dev/urandom` command as root.
- On HP-UX: There is no native random number generator. Install it from the HP site and configured it on HP-UX.

## Appendix

This section includes the following appendixes:

***Data Synchronization* 443**

Explains how to synchronize data.

***Parameter Data* 453**

Discusses different types of parameter data.

***Response Parser* 459**

Explains how to use a customized response parser for a Web Service subscriber.

***Asynchronous Acknowledgement* 467**

Explains how to configure and implement asynchronous acknowledgement.



# Data Synchronization

This section describes how to synchronize data between QAD Enterprise Applications source and destination domains. It is intended for users of the QAD DataSync application.

## ***Introduction 444***

Explains how data synchronization works, with an illustrated workflow.

## ***Completing Prerequisite Activities 444***

Lists and describes prerequisite activities.

## ***Setting Up Data Synchronization 446***

Give an example scenario and describes how to set up source applications, import business objects, activate tables to synchronize, and set up subscribers.

## ***Customizing Your Synchronization 451***

Explains how to use fixed values and calculated fields.

## Introduction

This document is designed to explain to users of QAD QXtend—comprising QAD QXtend Inbound (QXI) and QAD QXtend Outbound (QXO)—how to synchronize data between QAD Enterprise Applications source and destination domains.

**Note** The tasks described in this section are described in detail elsewhere in this user guide. This appendix is intended to provide an overview of these activities and how they support data synchronization. Use the cross-references provided to see details about performing these activities.


If you currently use QAD DataSync as your data synchronization solution, you can continue to do so. If you do not currently use DataSync—or if you intend to replace DataSync with the QAD QXtend—use this appendix as a guide to synchronizing data between domains in distributed QAD Enterprise Applications databases.

**Important** Only QDoc version 1.1 has been validated for QAD SE and QAD EE.

## Data Synchronization Work Flow

Figure A.1 illustrates the data synchronization work flow; use it to set up data synchronization in your environment.

**Fig. A.1**  
Data Synchronization Workflow

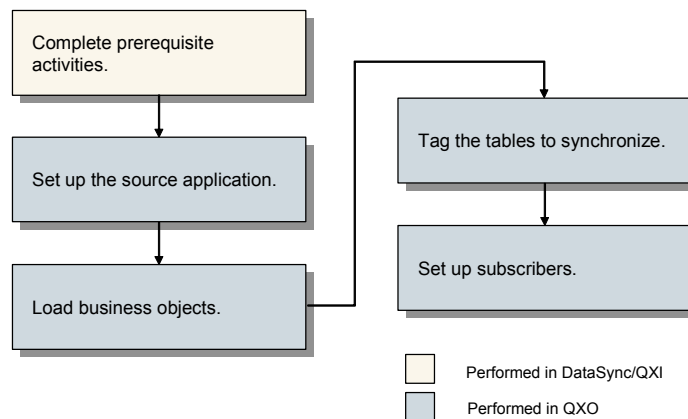

Before you can synchronize your data, several prerequisite steps must be completed—documenting your existing DataSync configuration, identifying your client domains, and so on.

## Completing Prerequisite Activities

Before synchronizing your data, you must:

- Determine the data to be synchronized
- Define your receivers

## Determining the Data to Synchronize

You can determine the data that needs synchronizing in either of two ways:



- If you currently use DataSync to synchronize data, by noting the setup of your synchronization profiles
- If you do not use DataSync, by performing an audit of your data synchronization requirements

### Documenting Your DataSync Configuration

DataSync synchronizes static data among multiple, distributed QAD Enterprise Applications databases. Synchronization profiles specify which data—tables and fields—to synchronize between databases and which types of data changes—add, change, delete—to synchronize.

To identify the tables—and within the tables, the fields—that are currently synchronized, use Synchronization Profile Maintenance (36.8.22.1) to review your existing DataSync profiles. (Typically the name of the profile matches the name of the associated table.) The screen displays the fields in the table for which data will be sent.

You also can use Synchronization Profile Inquiry (36.8.22.2) to review the contents of your synchronization profiles. The inquiry shows the table the profile links to and the fields to be exported in that table. You must run an inquiry for each synchronization profile.

### Auditing Your Data Synchronization Requirements

A complete description of how to perform an audit of your data synchronization requirements is beyond the scope of this document. However, your audit should answer the following types of questions:

- What data is shared by the QAD Enterprise Applications domains in my various sites or companies?
- Where does the maintenance of this data need to be centralized?
- Which domains will share the data?

After defining the types of data to be shared, relate the data back to the tables which control this data, and then identify the specific fields you require.

Refer to the list of business objects and associated tables that are provided with QXtend to see if the tables you have identified are included with this release. See “Business Objects and Outbound QDocs” on page 4.

If a suitable business object is provided, you may have to edit the business object to suit your specific purposes. If the tables you want to synchronize are not supported by a business object, you will have to create a new business object as well as develop a corresponding QDoc.

### Define the Receivers

After planning which data to synchronize, the first implementation step in QXtend Inbound is to define your receiver or receivers. Receivers are named QAD Enterprise Applications instances. You need to define a receiver for each QAD Enterprise Applications database. Each receiver can supply data to multiple domains in the database.

Use the Configuration Manager in QXI to:


- Create a receiver for each destination database to receive data
- Assign QDocs to each receiver

For details about these steps, see “Inbound Receivers” on page 190.

### Create a Receiver for Your Domains

Use the Configuration Administration screen (Configuration|Receivers) to create a new QAD2008 receiver for the destination database.

**Fig. A.2**  
Add a Receiver

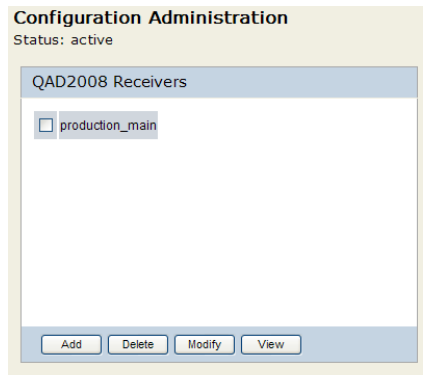

Click Add to add a new receiver. The name of the receiver should match the name of the QXI Connection Pool name. If you are running QXI you are prompted to suspend the application while adding the receiver.

**Note** For details about connection pools, see Chapter 17, “QXI Connection Pool Manager,” on page 213.

Choose Next to display the list of available QDocs.

### Assign QDocs to the Receivers

In the Configuration Administration screen indicate which QDocs you want to assign to the receiver. The QDocs that display are part of the standard set that is supplied with QXI. Click Done when you have finished assigning the QDocs. If you suspended QXI you should restart it.

## Setting Up Data Synchronization

After completing the prerequisite activities, you are ready to set up data synchronization in QXtend Outbound. You must:

- Set up the source applications and databases
- Load the business objects
- Tag the tables you want to synchronize
- Set up your subscribers

## Example Scenario

A business object named Forecast is supplied with QXtend. Follow the descriptions in this section using the Forecast business object to understand how data is synchronized between the source domain (demo1) and destination domain (demo2).

The Forecast business object has been assigned the source application type QADSE. The source application type contains the source application named New York.

The Forecast business object has two profiles: PF - Forecast and PF - Forecast DataSync. The PF - Forecast profile is associated with the data object named Forecast with the table name fcs\_sum (Forecast Summary). The appropriate event types for the application have been activated.

## Set Up the Source Application

The next step is to set up your source application:

- Define and activate your source application type
- Define your source applications

### Define and Activate Your Source Application Type

Source application types are the specific databases from which the QXO event service extracts data. Defining a source application type enables you to identify the event types that you want to extract from the databases within that source application type. Activating the source application type allows the system to extract the data.

Source applications are defined by using the Source Application Types screen (QXO Console|Configuration|Source Applications).

**Note** The QADSE source application type is delivered with QAD QXtend, but you must select the Active check box to activate it.

For details see “QXO Source Applications” on page 24.

### Define Your Source Applications

Next, define the source applications from which you want to extract events. Source applications are the specific databases from which the QXO event service extracts data. Multiple source applications can belong to the same source application type as long as they use an identical database schema.

Use the Databases screen to define source application databases. Click Databases under the source application and add the new databases. You must define both the production qadddb database as well as the qxevents database.

For details see “QXO Source Applications” on page 24.


## Import Your Business Objects

The next step is to import your business objects and profiles. You can import your business objects one at a time or all of them at the same time. Importing your business objects populates the qxodb database with data.

**Note** In order to be able to import your business objects and profiles, you must first have created your source application and databases. This procedure assumes that you can connect to those databases.

You use the XML Import screen (QXO Console|Configuration|Utilities|XML Import) to import your business objects.

**Fig. A.3**  
Import Your Business Objects




Our scenario uses the Forecast business object and a corresponding profile named MaintainForecast. To import business objects you type the location of your business object in the XML to Load field—for example, QADSE/forecast/\*—select the Business Objects and Profiles check boxes, and then click Load.

For details see “Importing Business Objects and Profiles” on page 62.

You use the Business Object screen (QXO Console|Business Objects) to verify your business objects have been imported successfully into the database. Click the Forecast business object node to view the tables included in the business object and the associated data object.

**Fig. A.4**  
Forecast Business Object

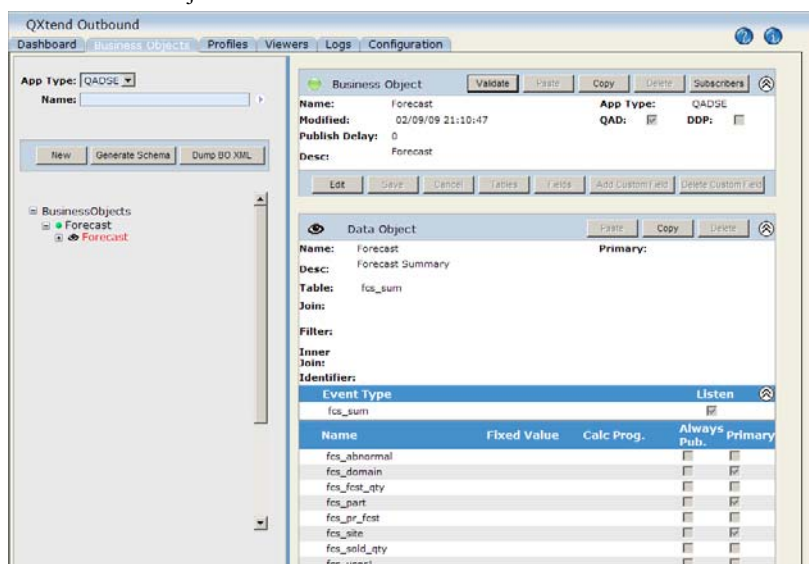

## Activate the Tables to Synchronize

After importing your business objects and profiles, the next step is to activate the event types for the tables in the source application. You use the Event Types screen (Configuration|Source Applications|QADSE|*application*|Event Types) to activate your event types.

In our scenario the source application will trigger an event when the event service detects that the fcs\_sum (Forecast Summary) table has been modified.

**Important** New customers to QXtend will always use QDoc Version 1.1. QDoc Version 1.0 is described for backward compatibility reasons.

**Fig. A.5**  
Events Types

The screenshot shows the 'Event Types' configuration window. It has two main sections: 'Database Events' and 'Business Events'. In the 'Database Events' section, there is a table with columns: 'Table', 'Event Filter', and 'Active'. The 'fcs\_sum' table is listed, and its 'Active' checkbox is checked, which is highlighted with a red circle. Below this, the 'Business Events' section is visible, showing a table with columns: 'Event Name', 'Table/Object', 'Event Filter', and 'Active'. At the bottom of the window, there are buttons for 'Delete', 'Save', 'Cancel', 'Import', and 'Export'.

| Table                             | Event Filter | Active                              |
|-----------------------------------|--------------|-------------------------------------|
| <input type="checkbox"/> abs_mstr |              | <input type="checkbox"/>            |
| <input type="checkbox"/> absc_det |              | <input type="checkbox"/>            |
| <input type="checkbox"/> absd_det |              | <input type="checkbox"/>            |
| <input type="checkbox"/> absi_det |              | <input type="checkbox"/>            |
| <input type="checkbox"/> absr_det |              | <input type="checkbox"/>            |
| <input type="checkbox"/> an_mstr  |              | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> anl_det  |              | <input type="checkbox"/>            |
| <input type="checkbox"/> ans_det  |              | <input type="checkbox"/>            |
| <input type="checkbox"/> bom_mstr |              | <input type="checkbox"/>            |
| <input type="checkbox"/> ca_mstr  |              | <input type="checkbox"/>            |


| Event Name                                         | Table/Object  | Event Filter | Active                   |
|----------------------------------------------------|---------------|--------------|--------------------------|
| <input type="checkbox"/> AccPeriodGOTOVATPeriod    | BPeriod       |              | <input type="checkbox"/> |
| <input type="checkbox"/> Approve                   | BJournalEntry |              | <input type="checkbox"/> |
| <input type="checkbox"/> AutoReversalCreate        | BJournalEntry |              | <input type="checkbox"/> |
| <input type="checkbox"/> CarrierAddressMaintenance | Is_mstr       |              | <input type="checkbox"/> |
| <input type="checkbox"/> Change Numbers            | BCDocument    |              | <input type="checkbox"/> |
| <input type="checkbox"/> Change Status             | BCDocument    |              | <input type="checkbox"/> |
| <input type="checkbox"/> Change Status             | BDDocument    |              | <input type="checkbox"/> |
| <input type="checkbox"/> ChangeSystem              | BSetting      |              | <input type="checkbox"/> |
| <input type="checkbox"/> ChangeUser                | BSetting      |              | <input type="checkbox"/> |
| <input type="checkbox"/> CommodityCodeMaster       | com_mstr      |              | <input type="checkbox"/> |

Note that in our scenario, in the Database Triggers section of the Event Types area, the check box in the Active column is selected for the fcs\_sum table (indicated).

For details, see the section “Editing Source Application Event Types” on page 31.

You can check the profiles associated with the Forecast business object. Click the Profiles tab and select the QADSE source application type. Click the Profiles option and perform the search. Expand the Profiles node and select the BO - Forecast business object. Select the PF - MaintainForecast.

**Fig. A.6**  
DataSync Profiles

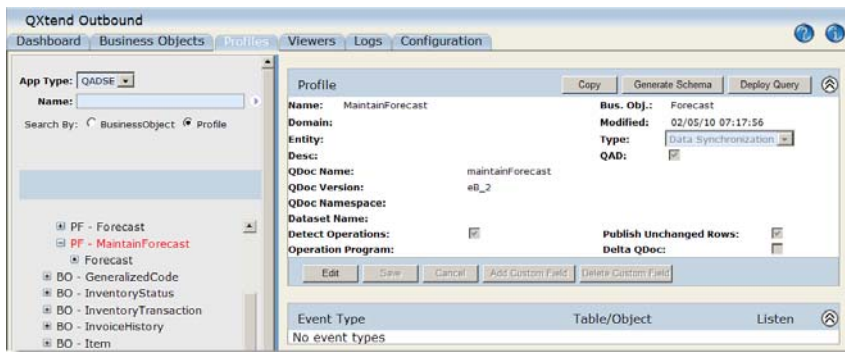

The profile takes the business object and converts it into a QXI QDoc. Click the Forecast data object node to view the Incl column which indicates the fields that will be included in the exported QDoc.

**Fig. A.7**  
Forecast Data Object

Data Object

XML Name: forecast

Include: ☒

DO Name: Forecast

Pub. with parent: ☐

Desc: Forecast Summary

Filter:

| XML Name    | Name         | Fixed Value | Calc. Prog. | Always Pub.              | Incl.                               | Add Only                 |
|-------------|--------------|-------------|-------------|--------------------------|-------------------------------------|--------------------------|
| fcsAbnormal | fcs_abnormal |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsDomain   | fcs_domain   |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsFcst     | fcs_fcst_qty |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| fcsPart     | fcs_part     |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| fcsPrFcst   | fcs_pr_fcst  |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsQadc01   | fcs_qadc01   |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsSite     | fcs_site     |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| fcsSoldQty  | fcs_sold_qty |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsUser1    | fcs_user1    |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsUser2    | fcs_user2    |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| fcsYear     | fcs_year     |             |             | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| oidFcsSum   | oid_fcs_sum  |             |             | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |

1 - 12 of 12

Prev

Next

## Set Up Your Subscribers

The next step is to set up your subscribers, which involves two steps:

- Create a subscriber for each domain.
- Assign profiles to your subscribers.

### Create a Subscriber for Each Domain


You configure subscribers using the Configuration Parameters screen (QXO Console|Configuration|Subscribers). In our scenario data is being synchronized between the source domain (demo1) and the destination domain (demo2).

In the Configuration Parameters screen, set the Communication Method to QXtend Web Service. Then specify the Tomcat location of QXI, the receiver, and domain. For details on defining a subscriber using the options for the QXtend Web Service method of communication, see “QXO Subscribers” on page 41.

## Assign Profiles to Your Subscribers

The final step is to assign profiles to your subscribers using the Configuration Parameters screen. Click the Register Profiles button under the Registered Profiles list box and select the profiles used to format QDocs for this subscriber.

**Fig. A.8**  
Register Profiles

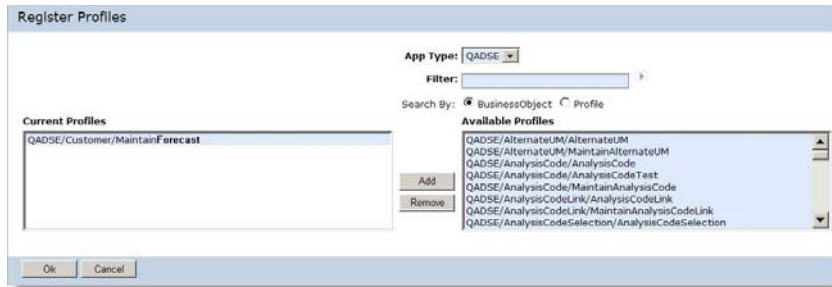

For details see “Modifying Profiles” on page 95.

## Customizing Your Synchronization

If you want, once you have created or modified a business object, you can modify the related data objects to adapt them to your data synchronization requirements. For example, you can define custom fields to contain either a fixed value or a calculated value.

You use the Data Objects area of the Business Object screen to define a custom field as a fixed value or calculated field. You also can define this using the Profiles screen.

**Fig. A.9**  
Fixed Value

| Name                                          | Data Type | Fixed Value          | Calc. Prog.          | Always Pub.              | Primary                             |
|-----------------------------------------------|-----------|----------------------|----------------------|--------------------------|-------------------------------------|
| <input type="checkbox"/> <input type="text"/> | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| oid_so_mstr                                   | decimal   | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| so_channel                                    | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| so_cust                                       | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| so_domain                                     | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| so_nbr                                        | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| so_sched                                      | logical   | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| so_site                                       | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| so_stat                                       | character | <input type="text"/> | <input type="text"/> | <input type="checkbox"/> | <input type="checkbox"/>            |

1 - 9 of 9    Prev    Next

## Using Fixed Values

Defining a fixed value means that every time the business object is updated, that specified value is always used in that field.

When using fixed values, you can use subscriber tokens to handle the situation where each domain you are sending data to might need a specific value. For details, see “Configuring Subscriber Profiles” on page 50.

For details on using fixed values, see “QAD and Custom Business Objects and Profiles” on page 74 and “Modifying Business Object Data Objects” on page 85.

## Using Calculated Fields

Calculated fields require a specific return value in a specific format, and correct connection parameters for the AppServer.

To define a custom field as a calculated field, in the Calculated Program field you enter the name of the Progress program (.p) to be run on the QAD QXtend AppServer for the associated source application (use the AppServer parameter settings you specified on page 26). The program determines the field to be used in the business object based on the destination domain.

For details on using calculated fields, see “Implementing Calculated Fields” on page 70.



# Parameter Data

This section contains parameter data and other information about operation programs, calculated fields, the response parser, session context parameters, and inline triggers.

***Operation Programs* 454**

Lists and describes different standard operation elements.

***Session Context Parameters* 455**

Lists and describes context parameters for QXtend Inbound and QXtend Outbound.

***Inline Triggers* 456**

Describes how to create an in-line trigger.

## Operation Programs

QAD QXtend provides a set of standard operation elements to indicate the valid types of maintenance that can be requested for business objects. Allowed values are A (Add), M (Modify), R (Remove), and U (Unmodified). By using operation programs, you can customize these operation elements as required. For example, instead of using “A” as the operation element, you could use “Add.”

To create your operation programs, use the template program called `operationProgramTemplate.p` in the `<qxoserver>/src/samples` directory.

Operation programs require three procedures to be implemented:

- `getOperationTag` - Defines the name of the operation tag used for this profile. This procedure is required to support delta QDocs and to publish unchanged rows.
- `getOperationValue` - Defines the values of the operation tag used for this profile. This procedure is required to support delta Qdocs and to published unchanged rows.
- `updateOperationTags` - Compares two profile message datasets—the current message and the previous message—and updates the operation value of each record in the current message. The procedure returns an output parameter indicating whether or not there is a difference between the two messages. If there is no difference, the current message is discarded by the message publisher.

### getOperationTag

```
procedure getOperationTag:
    define output parameter pcOperationTag as character.
    /*
    * Here the operation tag is called <action>
    */
    pcOperationTag = "action".
end procedure.
```

### getOperationValue

```
procedure getOperationValue:
    define input parameter pcOperationValue as character.
    define output parameter pcCustomValue as character.

    /*
    * In this example, use New, Change, Delete and Unchanged as the values for the <action>
    tag
    */
    case pcOperationValue:
        when "A" then
            pcCustomValue = "New".
        when "M" then
            pcCustomValue = "Change".
        when "R" then
            pcCustomValue = "Delete".
        otherwise
            pcCustomValue = "Unchanged".
    end case.
end procedure.
```

### getOperationTags

```
procedure updateOperationTags:
    define input parameter dataset-handle phCurrentMessage.
```



```

define input parameter dataset-handle phPreviousMessage.
define output parameter plModified as logical initial false.
end procedure.

```

## Session Context Parameters

The following tables describe session context parameters required by SOAP messages for QXI and QXO. For details about session context information in QDocs, see “Session Context” on page 302.

### QXtend Inbound

**Table B.1**  
QXI Session Context Parameters

| Qualifier | Name             | Optional/<br>Mandatory | Notes                                                                                                                                           |
|-----------|------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| QAD       | domain           | Optional               | Domain that the message is for.                                                                                                                 |
| QAD       | scopeTransaction | Optional               | Scope the message to an entire transaction; back it out if there is an error (true or false).                                                   |
| QAD       | version          | Mandatory              | Version of the QDoc.                                                                                                                            |
| QAD       | mnemonicsRaw     | Optional               | Use the language mnemonic rather than the translated version (true or false).                                                                   |
| QAD       | username         | Optional               | User name to log in to the receiver application.                                                                                                |
| QAD       | password         | Optional               | Password to log in to the receiver application.                                                                                                 |
| QAD       | action           | Optional               | Action code for Financials Objects.                                                                                                             |
| QAD       | entity           | Optional               | Entity code for Financials Objects.                                                                                                             |
| QAD       | email            | Optional               | Email address of person requiring notification of the message after receiver has processed it. Separate multiple e-mail recipients with commas. |
| QAD       | emailLevel       | Optional               | Email delivery level (1 or ERR - send on error, 2 or WRN - send on error or warning, 3 or MES - send all).                                      |
| QAD       | sessionID        | Optional               | QAD Enterprise Application session ID for authentication.                                                                                       |
| QAD       | decimalSeparator | Optional               | Replace the decimal separator with a dot (.) before processing the QDocs in a system that does not use a dot as the decimal separator.          |
| QAD       | timeoutLimit     | Optional               | The number of seconds for the API to process before timing out. Zero value means no timeout.                                                    |
| QAD       | hideFields       | Optional               | Hide the actual value of the specified fields and display them as asterisks in response QDocs and log files.                                    |

If the QDoc has no SOAP headers, the following SOAP headers have to be moved to the session context.

**Table B.2**  
SOAP Headers in Session Context

| SOAP Header | Session Context<br>Parameter | Optional/<br>Mandatory |
|-------------|------------------------------|------------------------|
| Action      | Action                       | Optional               |
| To          | To                           | Mandatory              |

| SOAP Header                                  | Session Context Parameter | Optional/Mandatory |
|----------------------------------------------|---------------------------|--------------------|
| MessageID                                    | MessageID                 | Optional           |
| RelatesTo                                    | RelatesTo                 | Optional           |
| ReferenceParameters / suppressResponseDetail | suppressResponseDetail    | Optional           |
| ReplyTo/Address                              | ReplyTo                   | Optional           |

## QXtend Outbound

### BusinessObjectManager.p

Table B.3 shows session context parameters for `com/qad/qxtend/si/BusinessObjectManager.p`.

**Table B.3**  
QXO Session Context Parameters

| API                                   | Qualifier | Name              | Notes                                                                                                      |
|---------------------------------------|-----------|-------------------|------------------------------------------------------------------------------------------------------------|
| createBusinessObjectMessage (DDP API) | QAD       | domain            | Domain the message is from.                                                                                |
|                                       | QAD       | entity            | Entity the message is from.                                                                                |
|                                       | QAD       | businessEvent     | The event that triggered the message.                                                                      |
|                                       | QAD       | email             | Email address(es) of person requiring notification of status of message after Subscriber receives it.      |
|                                       | QAD       | emailLevel        | Email delivery level (1 or ERR - send on error, 2 or WRN - send on error or warning, 3 or MES - send all). |
|                                       | QAD       | sender            | Sender ID of originating application.                                                                      |
|                                       | QAD       | sourceApplication | Source Application code of originating application.                                                        |
|                                       | QAD       | delete            | Message is for a delete operation (true or false).                                                         |

## Inline Triggers

QXtend provides in-line triggers for some business objects. You can define your own inline triggers for your application as required.



To create an inline trigger:

- 1 At the top of the program, add the `qxodef.i` include file to the variable definitions section at the top of the program.
- 2 Determine all the places in the code that require an event to be raised. Add a call to the `fireOutboundEvent` procedure. The parameters are different depending on whether you are using QAD SE or above, or MFG/PRO eB2 or below:

- QAD SE and above

```
run fireOutboundEvent (input 'SupplierMaintenance',
    input 'vd_mstr',
    input rowid(vd_mstr),
    input oid_vd_mstr,
    input 'DELETE').
```

The parameters are:

- Event name (character)
  - Table name (character)
  - Rowid of the record (rowid)
  - OID of the record (decimal)
  - Event type, either WRITE or DELETE (character)
- MFG/PRO eB2 and below
- ```
run fireOutboundEvent (input 'SupplierMaintenance',
    input 'vd_mstr',
    input rowid(vd_mstr),
    input 'DELETE').
```

The parameters are:

- Event name (character)
- Table name (character)
- Rowid of the record (rowid)
- Event type, either WRITE or DELETE (character)



# Response Parser

This section contains information on response parser.

**Overview 460**

**Requirements 460**

**Populating the Response Dataset 461**

**Parsing SOAP Responses 461**

## Overview

You can create a customized response parser for a Web Service subscriber. The response parser must be implemented as an OpenEdge Object Oriented class that conforms to a standard interface that QXtend understands. The job of the response parser is to determine the status of the response in terms of success or failure, and in the case of failure, to extract the descriptions of the error from the response to make them available in the QXtend Message Monitor.

## Requirements

The only requirement of a response parser is to implement an interface defined by QXtend Outbound. The class containing the interface is `com.qad.qxtend.qxo.ISubscriberResponseParser`. The definition for this interface is:

```
method public void parseResponse (input pcResponse as longchar,
                                output dataset for dsQdocResponseDetails).
```

The definition of the `dsQdocResponseDetails` dataset is defined in the file `com/qad/qxtend/qxo/dsResponseDetails.i`.

```
define temp-table ttProcessingResult no-undo
  field resultStatus as character
  field resultSequence as integer
  index resultSequence is primary unique resultSequence.
define temp-table ttProcessingException no-undo
  field exceptionNumber as character
  field exceptionDescription as character
  field exceptionSeverity as character
  field exceptionContext as character
  field resultSequence as integer
  field exceptionSequence as integer
  index exceptionSequence is primary unique resultSequence exceptionSequence.
define dataset dsQdocResponseDetails
  for
    ttProcessingResult, ttProcessingException
    data-relation for ttProcessingResult, ttProcessingException
    relation-fields (resultSequence, resultSequence).
```

The response parser class receives the response as a longchar (`pcResponse`). This longchar variable contains the entire response, and it is up to the parser to determine from this variable whether the request was a success or failure, if it was a failure what type of failure, and any other information that can be gleaned.

Therefore, a template for creating a response parser would be:

```
using com.qad.qxtend.qxo.QdocResponseHandler.
class <classname> implements com.qad.qxtend.qxo.ISubscriberResponseParser:
  {com/qad/qxtend/qxo/dsResponseDetails.i}
  method public void parseResponse (input pcResponse as longchar,
                                   output dataset for dsQdocResponseDetails):
    < implement parsing code here >
  end method.
end class.
```



## Populating the Response Dataset

The result of the parser must go in the dsQdocResponseDetails dataset. This dataset contains two temp-tables, ttProcessingResult and ttProcessingException. The ultimate result of the request must go in the ttProcessingResult temp-table in the field resultStatus. The values that this field can take are defined as static properties in the com.qad.qxtend.qxo.QdocResponseHandler class.

| Property             | Value   | As Code                                  |
|----------------------|---------|------------------------------------------|
| PendingStatusCode    | PEND    | QdocResponseHandler:PendingStatusCode    |
| WarningStatusCode    | WRN     | QdocResponseHandler:WarningStatusCode    |
| SuccessStatusCode    | DLV     | QdocResponseHandler:SuccessStatusCode    |
| SendingErrorCode     | SENDERR | QdocResponseHandler:SendingErrorCode     |
| SoapFaultErrorCode   | SOAPERR | QdocResponseHandler:SoapFaultErrorCode   |
| ApplicationErrorCode | APPERR  | QdocResponseHandler:ApplicationErrorCode |

For example, if the parser determines that an application error has occurred, the code required would be:

```
create ttProcessingResult.
assign
  ttProcessingResult.resultStatus = QdocResponseHandler:ApplicationErrorCode
  ttProcessingResult.resultSequence = 1.
```

If the parser found two errors with appropriate descriptions, the code to add these to the dataset would be:


```
create ttProcessingException.
assign
  ttProcessingException.resultSequence = 1
  ttProcessingException.exceptionSequence = 1
  ttProcessingException.exceptionNumber = "999"
  ttProcessingException.exceptionDescription = "Part does not exist"
  ttProcessingException.exceptionSeverity = "ERROR"
  ttProcessingException.exceptionContext = "part = 'ABC123'".
create ttProcessingException.
assign
  ttProcessingException.resultSequence = 1
  ttProcessingException.exceptionSequence = 2
  ttProcessingException.exceptionNumber = "888"
  ttProcessingException.exceptionDescription = "User not authorized"
  ttProcessingException.exceptionSeverity = "ERROR"
  ttProcessingException.exceptionContext = "user = 'lchild'".
```

The resultSequence value must be the same as that in ttProcessingResult, and each ttProcessingException record must have a unique exceptionSequence number. The remaining fields can be filled out with information gleaned from the response, or left blank.

## Parsing SOAP Responses

QXtend Outbound already parses SOAP responses from QXtend Inbound. As such, there is a class available to check for SOAP errors and this can be extended to parse the remainder of a SOAP response.

The structure that a class would take to parse a SOAP response would be as follows:

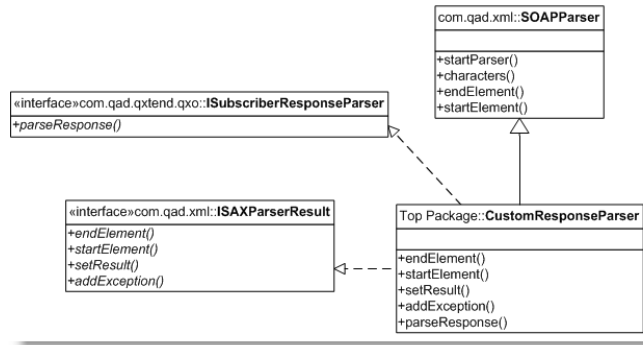

In other words, the CustomResponseParser will inherit the SOAPPARSER class, and implement the ISubscriberResponseParser and ISAXParserResult interfaces. This results in five methods that must be implemented in the parser. The SOAP Parser uses SAX to parse the XML response.

The ISAXParserResult interface is this:

```

method public void startElement ().
method public void endElement ().
method public void setResult (input pcResultCode as character).
method public void addException (input pcNumber      as character,
                                input pcDescription as character,
                                input pcSeverity    as character,
                                input pcContext     as character).
  
```

The startElement method is called when a start node is encountered in the XML.

The endElement method is called when an end node is encountered in the XML.

The setResult method is called when the parser has determined the overall state of the response, where it will create a ttProcessingResult record.

The addException method is called when the parser has found a detailed exception message, where it will create a ttProcessingException record.

In addition to this, the SOAPPARSER class has a number of properties that can be used to assist in parsing the response.

| Property            | Type             | Description                                  |
|---------------------|------------------|----------------------------------------------|
| CurrentElementName  | character        | The current node in the XML                  |
| CurrentElementData  | character        | The current data between the nodes           |
| CurrentNamespace    | character        | The namespace of the current node            |
| CurrentAttributes   | handle           | Handle to the attributes of the current node |
| StopParser          | logical          | Flag to stop parsing at any time             |
| ParserResultHandler | ISAXParserResult | Object reference to the result handler       |

**Example** A successful SOAP response from an external web service looks like this:

```

<?xml version="1.0" encoding="UTF-8" ?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:xsd=
"http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance">
  <soapenv:Body>
    <Response xmlns="urn:custom-service:custom">
      <resultCode>
        <codeNumber>200</codeNumber>
        <userMessage>OK</userMessage>
      
```

```

        <debugInfo />
    </resultCode>
</Response>
</soapenv:Body>
</soapenv:Envelope>

```

And an unsuccessful response looks like this:

```

<?xml version="1.0" encoding="UTF-8" ?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:xsd=
"http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance">
    <soapenv:Body>
        <Response xmlns="urn:custom-service:custom">
            <resultCode>
                <codeNumber>411</codeNumber>
                <userMessage>Login Failed</userMessage>
                <debugInfo>Unauthorized access</debugInfo>
            </resultCode>
        </Response>
    </soapenv:Body>
</soapenv:Envelope>

```

From this we can determine that a codeNumber of 200 means the request was successful, but any other code means the request returned an error. The response is also a SOAP response, hence there may be SOAP errors such as invalid address information, bad envelopes or other errors. We can extend the SOAPParser to create a response parser for this type of response. The response parser we will create will examine the codeNumber value, the userMessage value, and stop parsing once it has reached the end of the resultCode block.

```

using com.qad.xml.SOAPParser.
using com.qad.xml.ISAXParserResult.
using com.qad.qxtend.qxo.ISubscriberResponseParser.
using com.qad.qxtend.qxo.QdocResponseHandler.

class CustomResponseParser inherits SOAPParser
    implements ISAXParserResult, ISubscriberResponseParser:

    {com/qad/qxtend/qxo/dsResponseDetails.i}

    define variable gcReturnCode          as character no-undo.
    define variable gcExceptionDesc       as character no-undo.
    define variable giExceptionSequence as integer    no-undo.

    constructor CustomResponseParser ():

        /*
         * The SOAPParser class makes calls to a class that implements the
         * ISAXParserResult interface whenever it starts and finishes
         * processing a node. Make this object that class
         */
        assign
            ParserResultHandler = this-object.

    end constructor.

    method public void parseResponse (input pcResponse as longchar,
                                      output dataset for dsQdocResponseDetails):
    /*-----
    Purpose      : Starts the parsing of the Response XML

    Parameters   : [input]
                   pcResponse - The full XML response
                   [output]
                   dsQdocResponseDetails - Result and Exceptions dataset

    Notes        : Implementation of the ISubscriberResponseParser interface
    -----*/

```

```

dataset dsQdocResponseDetails:empty-dataset().

/*
 * Call the method on the SOAPParser class to start parsing
 */
startParser(input pcResponse).

end.

method public void startElement ():
/*-----
 Purpose      : Executes when a start node is encountered

 Parameters   : [none]

 Notes       : Implementation of the ISAXParserResult interface. There is
               nothing we need to do when the parser encounters the
               start of an element.
-----*/

end method.

method public void endElement ():
/*-----
 Purpose      : Executes when an end node is encountered

 Parameters   : [none]

 Notes       : Implementation of the ISAXParserResult interface.
-----*/

if CurrentNamespace = "urn:custom-service:custom" then do:

    case CurrentElementName:
        when "codeNumber" then
            gcReturnCode = CurrentElementData.
        when "userMessage" then do:
            gcExceptionDesc = CurrentElementData.
            /*
             * The '200' response means there were no exceptions. Anything
             * else indicates there was a problem and we must log it. Set
             * the result to be an "APPERR"
             */
            if gcReturnCode <> "200" then do:
                setResult (input QdocResponseHandler:ApplicationErrorCode).
                addException (input gcReturnCode,
                             input gcExceptionDesc,
                             input "",
                             input "").
            end.
        end.
        when "resultCode" then do:
            if gcReturnCode = "200" then do:
                /*
                 * Set the result to be a success, or "DLV"
                 */
                setResult (input QdocResponseHandler:SuccessStatusCode).
                /*
                 * Stop parsing at this point, since we have reached the
                 * end node containing all the information we need
                 */
                StopParser = true.
            end.
        end.
    end case.

end.

end method.

method public void setResult (input pcResultCode as character):
/*-----

```

```

Purpose      : Creates a processing result record

Parameters   : [input]
                pcResultCode - A string representing the result of the
                           response

Notes        : Implementation of the ISAXParserResult interface. This
                method will allow the SOAPParser class to create
                SOAPERR results
-----*/

find first ttProcessingResult no-error.
if not available ttProcessingResult then
    create ttProcessingResult.

assign
    ttProcessingResult.resultStatus = pcResultCode
    ttProcessingResult.resultSequence = 1.

end method.

method public void addException (input pcNumber      as character,
                                input pcDescription as character,
                                input pcSeverity     as character,
                                input pcContext      as character):
/*-----
Purpose      : Creates an exception record

Parameters   : [input]
                pcNumber      - Exception number
                pcDescription - Exception description
                pcSeverity     - Exception severity
                pcContext      - Exception context

Notes        : Implementation of the ISAXParserResult interface. This
                will allow the SOAPParser class to log detailed
                error messages when it gets a SOAP Error
-----*/

create ttProcessingException.
assign
    ttProcessingException.resultSequence      = 1
    ttProcessingException.exceptionSequence    = giExceptionSequence
    ttProcessingException.exceptionNumber      = pcNumber
    ttProcessingException.exceptionDescription = pcDescription
    ttProcessingException.exceptionContext     = pcContext
    ttProcessingException.exceptionSeverity    = pcSeverity.

    giExceptionSequence = giExceptionSequence + 1.
end method.
end class.

```

To enable a subscriber in QXtend Outbound to use this response parser, just enter the full name of the parser class. In this case the parser class is just CustomResponseParser, however you can also put it in a package form; for example, com.xyz.parser.CustomerResponseParser.

**Fig. C.1**  
Subscriber Configuration Parameters

| Configuration Parameters       |                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Subscriber Code*               | <input type="text"/> (25 Character Max)                                                                               |
| Subscriber Description         | <input type="text"/>                                                                                                  |
| Source Domain                  | <input type="text"/>                                                                                                  |
| Source Entity                  | <input type="text"/>                                                                                                  |
| Suspend on                     | Sending Error <input type="checkbox"/> SOAP Error <input type="checkbox"/> Application Error <input type="checkbox"/> |
| Sending Option                 | <input type="button" value="Send Immediately"/>                                                                       |
| Communication Method           | <input type="text" value="Web Service"/>                                                                              |
| Subscriber Type                | <input type="text" value="External Application"/>                                                                     |
| XML Syntax                     | <input type="text" value="Qdoc 1.1"/>                                                                                 |
| Allow Superseded               | <input type="checkbox"/>                                                                                              |
| Require Acknowledgement        | <input type="checkbox"/>                                                                                              |
| Target URL*                    | <input type="text"/>                                                                                                  |
| Response Parser                | <input type="text"/>                                                                                                  |
| Response Timeout*              | <input type="text" value="120"/>                                                                                      |
| HTTP Version*                  | <input type="text" value="1.1"/>                                                                                      |
| Receiver*                      | <input type="text"/>                                                                                                  |
| Destination Domain             | <input type="text"/>                                                                                                  |
| Destination Entity             | <input type="text"/>                                                                                                  |
| Scope Transaction              | <input type="checkbox"/>                                                                                              |
| User Name                      | <input type="text"/>                                                                                                  |
| Password                       | <input type="text"/>                                                                                                  |
| Encode Password                | <input type="checkbox"/>                                                                                              |
| Email Data Owner               | <input type="checkbox"/>                                                                                              |
| <div>Registered Profiles</div> |                                                                                                                       |

The class must be compiled into the regular location for the QXtend Outbound services; that is, a directory in the PROPATH defined in the start-sess.sh script.

# Asynchronous Acknowledgement

This section contains information on subscriber message acknowledgement.

**Overview 468**

**Configuring a Subscriber in QXO 468**

**Implementing Asynchronous Acknowledgement 469**

## Overview

When QXO subscriber messages are sent to subscribing applications, some subscribing applications, such as QXtend Inbound, process the message synchronously within the same subscriber message-sending procedure. Other subscribing applications, such as BPM, process the messages asynchronously (after the subscriber message-sending procedure).

In the synchronous case, the message processing result is returned to QXtend in the same subscriber message-sending procedure. However, in the asynchronous case, the message status returned only shows whether the subscribing application received the message or not. The message processing result has to be sent back to QXtend in a separate callback procedure (asynchronous acknowledgement) by the subscribing application.

Beginning with QXtend 1.8.2, asynchronous acknowledgement supports subscribers that fulfill the following conditions:

- Using QDoc XML Syntax 1.1
- Using one of the following communication methods:
  - File Directory Service
  - Web Service
  - QAD BPM
- The Require Acknowledgement option is activated

If a subscriber is configured to require acknowledgement, the subscriber message status is set to WAITACK when QXtend receives a response of a successful delivery and is updated accordingly to DLV, APPERR, or WRN when QXtend receives the acknowledgement from the subscriber.

An acknowledgement can contain single or multiple subscriber message processing results of the same subscribing application.

## Configuring a Subscriber in QXO

To configure a subscriber, go to the subscriber Configuration Parameters page in QXO and make sure that the following fields are set correctly:

- Choose File Directory Service, Web Service, or QAD BPM from the Communication Method list.
- Choose Qdoc 1.1 from the XML Syntax list.
- Select the Require Acknowledgement check box.

Figure D.1 illustrates the options described above.



**Fig. D.1**  
Configuring a Subscriber in QXO

| Configuration Parameters |                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Subscriber Code*         | <input type="text"/> (25 Character Max)                                                                               |
| Subscriber Description   | <input type="text"/>                                                                                                  |
| Source Domain            | <input type="text"/>                                                                                                  |
| Source Entity            | <input type="text"/>                                                                                                  |
| Suspend on               | Sending Error <input type="checkbox"/> SOAP Error <input type="checkbox"/> Application Error <input type="checkbox"/> |
| Sending Option           | Send Immediately <input type="button"/>                                                                               |
| Communication Method     | File Directory Service <input type="button"/>                                                                         |
| Subscriber Type          | External Application <input type="button"/>                                                                           |
| XML Syntax               | Qdoc 1.1 <input type="button"/>                                                                                       |
| Allow Superseded         | <input type="checkbox"/>                                                                                              |
| Require Acknowledgement  | <input checked="" type="checkbox"/>                                                                                   |
| Target Directory*        | <input type="text"/>                                                                                                  |
| File Extension           | xml <input type="button"/>                                                                                            |
| Include Soap Envelope    | <input type="checkbox"/>                                                                                              |
| Email Data Owner         | <input type="checkbox"/>                                                                                              |
| Registered Profiles      |                                                                                                                       |

## Implementing Asynchronous Acknowledgement

The asynchronous acknowledgement is implemented as a callback Web service named `processMessageAcknowledgement` that can be invoked by the URL:

<http://<host>:<port>/<qxi webapp>/services/QdocWebService>

The WSDL is available at

<http://<host>:<port>/<qxi webap>/services?wsdl=processMessageAcknowledgement>

### Subscriber Message Request

If a subscriber is configured to require acknowledgement, each of its subscriber messages contains two session context properties named `requiresAcknowledgement` and `businessEventID`.

The subscribing application checks the `requiresAcknowledgement` session context properties to determine if an acknowledgement is required.

If an acknowledgement is required, the subscribing application retrieves the subscriber message ID from the `businessEventID` session context properties.

### Subscriber Message Response

If the `businessEventID` session context properties are not available or contain an empty value, the subscribing application sends an error response to QXtend.

## Acknowledgement Request

Here is the schema of the acknowledgement request:

```
<?xml version="1.0" encoding="utf-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns="urn:schemas-qad-com:xml-services"
  xmlns:prodata="urn:schemas-progress-com:xml-prodata:0001"
  xmlns:qdoc="urn:schemas-qad-com:xml-services"
  elementFormDefault="qualified"
  targetNamespace="urn:schemas-qad-com:xml-services">
  <xsd:element name="dsAcknowledgementRequest" prodata:datasetName=
    "dsAcknowledgementRequest" prodata:prefix="qdoc" prodata:proDataSet="true">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element minOccurs="0" maxOccurs="unbounded" name=
          "AcknowledgementRequest" prodata:tableName="ttAcknowledgementRequest">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element minOccurs="0" name="businessEventId" nillable=
                "true" type="xsd:string" />
              <xsd:element minOccurs="0" name="acknowledgementSeverity"
                nillable="true" type="xsd:string" />
              <xsd:element minOccurs="0" maxOccurs="unbounded" name=
                "AcknowledgementRequestDetail" prodata:tableName=
                  "ttAcknowledgementRequestDetail">
                <xsd:complexType>
                  <xsd:sequence>
                    <xsd:element minOccurs="0" name="businessEventId"
                      nillable="true" type="xsd:string" />
                    <xsd:element minOccurs="0" name="exceptionSeverity"
                      nillable="true" type="xsd:string" />
                    <xsd:element minOccurs="0" name="exceptionNumber"
                      nillable="true" type="xsd:string" />
                    <xsd:element minOccurs="0" name="exceptionContext"
                      nillable="true" type="xsd:string" />
                    <xsd:element minOccurs="0" name=
                      "exceptionDescription" nillable="true" type=
                        "xsd:string" />
                  </xsd:sequence>
                </xsd:complexType>
              </xsd:element>
            </xsd:sequence>
          </xsd:complexType>
        </xsd:element>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:unique name="BusinessEventId" prodata:primaryIndex="true">
    <xsd:selector xpath="."/>
    <xsd:field xpath="qdoc:businessEventId"/>
  </xsd:unique>
  <xsd:keyref name="relException" prodata:nested="true" refer="qdoc:BusinessEventId">
    <xsd:selector xpath="."/>
    <xsd:field xpath="qdoc:businessEventId"/>
  </xsd:keyref>
</xsd:schema>
```

An acknowledgement request contains one `dsAcknowledgementRequest` element, which contains one or more `AcknowledgementRequest` elements.

Each `AcknowledgementRequest` element is for one subscriber message processing result, and it contains the following direct children:

- One `businessEventId` element - its value should be the same as the `businessEventId` session context properties from the corresponding subscriber message request
- One `acknowledgementSeverity` element - the severity of the acknowledgement that is mapped to corresponding subscriber message status as listed in the following table:

| acknowledgementSeverity/<br>exceptionSeverity | Subscriber Message Status |
|-----------------------------------------------|---------------------------|
| Success                                       | DLV                       |
| Warning                                       | WRN                       |
| Error                                         | APPERR                    |

If there is one or more AcknowledgementRequestDetail child elements (see below) of the AcknowledgementRequest, the acknowledgementSeverity of the parent element should have a value that equals the highest value of the exceptionSeverity in the child elements. For example, if there are three AcknowledgementRequestDetail child elements, with exceptionSeverity as DLV, WRN, and APPERR respectively, the acknowledgementSeverity of the parent element should be APPERR.

- No or multiple AcknowledgementRequestDetail elements - they provide details of the processing result and each of them contains the following direct children:
  - One businessEventId element - it must have the same value as the businessEventId of its parent
  - One exceptionSeverity element - its value could be one of the severity values (as shown in the above table)
  - One exceptionNumber element - the exception number
  - One exceptionContext element - the exception context
  - One exceptionDescription element - the exception message

For each warning/error for a subscriber message to be sent to QXtend, an AcknowledgementRequestDetail child element is created.

Here is a sample acknowledgement request:

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns="urn:schemas-qad-com:xml-services" xmlns:qcom="urn:schemas-qad-com:xml-services:common" xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:wsa="http://www.w3.org/2005/08/addressing">
  <soapenv:Header>
    <wsa:Action/>
    <wsa:To>urn:services-qad-com:QADQX0</wsa:To>
    <wsa:MessageID>urn:services-qad-com::QADQX0</wsa:MessageID>
    <wsa:ReferenceParameters>
      <qcom:suppressResponseDetail>true</qcom:suppressResponseDetail>
    </wsa:ReferenceParameters>
    <wsa:ReplyTo>
      <wsa:Address>urn:services-qad-com:</wsa:Address>
    </wsa:ReplyTo>
  </soapenv:Header>
  <soapenv:Body>
    <processMessageAcknowledgement>
      <dsAcknowledgementRequest>
        <AcknowledgementRequest>
          <businessEventId>201101170004185664.00093</businessEventId>
          <acknowledgementSeverity>error</acknowledgementSeverity>
          <AcknowledgementRequestDetail>
            <businessEventId>201101170004185664.00093</businessEventId>
            <exceptionSeverity>warning</exceptionSeverity>
            <exceptionNumber></exceptionNumber>
            <exceptionContext>ItemApprovalProcess</exceptionContext>
            <exceptionDescription>Approval crossed due
              date</exceptionDescription>
          </AcknowledgementRequestDetail>
          <AcknowledgementRequestDetail>
            <businessEventId>201101170004185664.00093</businessEventId>
            <exceptionSeverity>error</exceptionSeverity>
```

```

        <exceptionNumber>BPM-301</exceptionNumber>
        <exceptionContext>ItemValidateProcess</exceptionContext>
        <exceptionDescription>Post message to BPEventQueue failed:
        java.rmi.RemoteException: Unrecoverable
        Exception:java.rmi.RemoteException:BizPulsehasnotbeenstartedat
        (Unknown Source) at
        com.savvion.ejb.bizpulse.manager.BizPulseManagerBean.postJMSMessage
        (Unknown Source) at
        sun.reflect.NativeMethodAccessorImpl.invoke0(NativeMethod)at
        org.apache.coyote.http11.Http11Protocol$Http11ConnectionHandler.pro
        cess(Http11Protocol.java:598) at
        org.apache.tomcat.util.net.JIoEndpoint$Worker.run(JIoEndpoint.java:
        447) at java.lang.Thread.run(Thread.java:662)
        </exceptionDescription>
    </AcknowledgementRequestDetail>
</AcknowledgementRequest>
<AcknowledgementRequest>
    <businessEventId>201204020000045224.00090</businessEventId>
    <acknowledgementSeverity>warning</acknowledgementSeverity>
    <AcknowledgementRequestDetail>
        <businessEventId>201101170004185664.00090</businessEventId>
        <exceptionSeverity>warning</exceptionSeverity>
        <exceptionNumber></exceptionNumber>
        <exceptionContext>SalesOrderCreditProcess</exceptionContext>
        <exceptionDescription>Requires Acknowledgement flag not set for
        Subscriber SO-BPM Subscriber</exceptionDescription>
    </AcknowledgementRequestDetail>
</AcknowledgementRequest>
</dsAcknowledgementRequest>
</processMessageAcknowledgement>
</soapenv:Body>
</soapenv:Envelope>

```

## Acknowledgement Response

QXtend returns a response to the subscribing application after it receives an acknowledgement request.

- If the acknowledgement request does not conform to the schema, then a SOAP Fault error is returned.
- If the businessEventId is not provided in the acknowledgement request, an error is returned.
- If the businessEventId is not a valid decimal value, a warning is returned.
- If a subscriber message does not exist for the businessEventId, a warning is returned.
- If the subscriber's requiresAcknowledgement is set to false, a warning is returned.
- If the acknowledgementSeverity node has a value other than success, warning, or error, an error is returned.
- If the subscriber message has already been acknowledged or does not need to be acknowledged, a warning is returned indicating that the subscriber message is not waiting for acknowledgement.
- If the subscriber message is locked by another process, a warning is returned.
- If any of the above errors/warnings are encountered, the current AcknowledgementRequest from the QDoc is skipped and the next AcknowledgementRequest (if available) in the QDoc is processed.

# Product Information Resources

QAD offers a number of online resources to help you get more information about using QAD products.

[QAD Forums \(community.qad.com\)](https://community.qad.com)

Ask questions and share information with other members of the user community, including QAD experts.

[QAD Knowledgebase \(knowledgebase.qad.com\)\\*](https://knowledgebase.qad.com)

Search for answers, tips, or solutions related to any QAD product or topic.

[QAD Document Library \(documentlibrary.qad.com\)](https://documentlibrary.qad.com)

Get browser-based access to user guides, release notes, training guides, and so on; use powerful search features to find the document you want, then read online, or download and print PDF.

[QAD Learning Center \(learning.qad.com\)\\*](https://learning.qad.com)

Visit QAD's one-stop destination for all courses and training materials.

\*Log-in required



# Index

## Symbols

.NET customizations 230

## Numerics

32-bit startup option 124

36.8.1.1 261

36.8.1.3 262

36.8.24 261

## A

adapter exceptions 356, 396

adapters

    routings 202

    service interface 155

    UI 155, 170

addAttributes 377, 378

addNodeGroup 378

addRecordNode 379

AdminServer 256

    ports 256

    starting 255, 258

AdminServerPlugins.dat 256

alert messages 118

Allow Superseded option 44

Always Publish option 88

apimode parameter 353, 356

APIs

    available QDocs 192

    connection pools 214, 216, 217

    overview 174

    routings 202

AppServer 434

    parameters 256

    starting 255, 258

archive service 36

archive settings 63

arrays

    SOAP encoding 317

authentication

    receiver 191

## B

business object groups 30

business objects

    copying 79

    creating 82

    deleting 85

    direct data publish 13

    dumping XML 91

    fields 4

    in source applications 74

    inner joins 89

    list of standard objects 5

    loading QAD objects 62

    overview 4, 74

    publish delay 79

    required contents 74

    subscribers 78

    supported tables 5

    tables 4, 15

## C

calculated fields 70, 455

Choose Event 229, 234

CIM 4

CIM Interface 264

clients

    Web 159

codes

    exception 129

    license exception 411

comments fields 235

common attribute group 322

commonTypes.dat 235

configuration data

    descriptor 285

    export 282

    import 283

    mapping 290

    reporting 291

    scenario 292

configuration exceptions 404

Configuration Manager

    overview 162, 190

    starting 190

configuration validation 67

CONFIRM\_BOD 265

connection exceptions 390

Connection Pool Manager

    monitoring users 224

    overview 162, 214

    starting 215

    telnet setup 352

connection pools 216, 223

    UI API 217

connectionManagerConfig.xml 217

connectionPools.log 167, 168, 216

context 130

control.p 123

createException 375

createNewXMLDocument 376, 379

createReturnStatus 376

createSOAPMessage 376  
 cron job  
   archiving 65  
   services operation 124  
 custom fields 75  
   adding 88  
   deleting 89  
 customizations  
   .NET UI 230  
 customized programs 158

## D

dashboard  
   overview 20, 104  
 data objects 85  
   inner joins in 89  
 Data Synchronization 4  
 database  
   connection parameters 354  
 database definitions 422  
 database triggers 14  
 debugging  
   QDocs 224  
 delete fields 229, 234, 307  
 deleteDocument 380  
 delivery schedules 44, 54  
 delivery status 128  
 delta QDocs 96  
 direct data publishing 13  
 directoryloaderConfig.xml 178  
 directoryloaderconfig.xml 176, 178  
 document  
   delivery 43  
   updates 44  
 Document Object Model (DOM) 372  
 document standards 178  
 documents  
   import specifications 262  
   standards, types 263  
 DOM Builder 371–381  
   general XML methods  
     addAttributes 377, 378  
     addNodeGroup 378  
     addRecordNode 379  
     createNewXMLDocument 379  
     deleteDocument 380  
     getXMLAsDOM 380  
     getXMLAsFile 380  
     getXMLAsString 380  
     getXMLAsTempTable 381  
   procedures 373  
   QDoc methods 375  
     createException 375  
     createNewXMLDocument 376  
     createReturnStatus 376  
     createSOAPMessage 376  
 domains 29  
 dump and load 122

## E

e-mail alerts 56–62  
   alert groups 58  
   alert recipients 58  
   alert types 56

  and subscribers 41  
   configuration 56  
   e-mail service 62  
   e-mail template 58  
 e-mail notification, subscriber 41  
 e-mail service 62  
 Enhanced Controls schema 25  
 entity diagrams 414  
 envelope  
   common message 310  
 environmentmanager.xml 175  
 errors 155  
   QGen 245  
   SOAP faults 345  
 event exceptions 387  
 event services  
   defining 36  
   overview 15  
   process overview 37  
 event types 33  
   activating 31  
   adding 33  
   on source applications 24  
 events 157  
   Choose Event 234  
   first entry 229, 234, 307  
   named 12, 34  
 events files 300, 305  
 exception codes 129  
   adapter 396  
   configuration 404  
   connection 390  
   event 387  
   failure 410  
   internationalization 411  
   license 411  
   overview 384  
   process 409  
   QDoc 396  
   queue 391  
   reflection 411  
   SOAP 394  
   transaction 395  
   transformation 385  
 excludeUnusedWarnings node 163

## F

failure exceptions 356, 410  
 faults  
   SOAP 345  
 fields  
   calculated 70, 455  
 filters 126  
 first entry event 229, 234, 307  
 fixed values 87  
 Force Publish option 41, 50  
 free use of QXO 42

## G

getXMLAsDOM 380  
 getXMLAsFile 380  
 getXMLAsString 380  
 getXMLAsTempTable 381  
 gpdmcrc.p 373





gpqdoccr.p 373

## H

hideFields 172, 455  
HTTP version 46

## I

ICT. *See* QAD Integrated Customization Toolkit (ICT)  
implementationQdocs.xml 200, 204  
import  
    document specifications 262  
    document standards, types 263  
Import Specification Maintenance 262  
inline triggers 456  
inner joins 89, 133  
installation log 166  
iterations 157, 229  
    in data files 301  
    mapping 235  
    transComments 235

## J

JIT Sequencing 4  
    connection pool 220  
joins  
    inner 89

## L

licensing 270  
    configuration 272  
        Outbound licensing settings 273  
    enterprise 270  
    exception codes 411  
    License Manager 271  
    License Manager flow 271  
    message-based 270  
    standard 270  
logs 118  
    configuring 166  
    connectionPools.log 216  
    installation 166  
    qdocDirectoryLoader.log 176  
    Queue Manager 176  
    qxtendlogging.xml 166, 176  
    reporting levels 167  
logTransaction attribute 321  
lookups 19

## M

mapping specifications 179  
    file location 177  
    XSLT 177  
mass rowid synchronization 122  
message display 163  
message publishers  
    defining 40  
    overview 15  
    tasks 40  
message senders  
    defining 41  
    processing overview 41  
messages  
    raw 130  
    viewing 112

mfgwrapper parameter 353, 356  
mfwb01aa.p 356  
mfww01b.p 219  
mnemonicsRaw attribute 320  
MOM Adapter 261  
mpt\_msg\_subs\_excp table 127  
mpt\_msg\_subs\_resp table 127

## N

named events 12, 34  
NameServer 256  
    starting 255, 258  
namespace  
    QDoc 311  
native APIs 254  
numeric operators 19

## O

operation programs 97, 454

## P

parameter files 354  
parameters  
    apimode 353, 356  
    database connection 354  
    mfgwrapper 353, 356  
parser  
    response 455  
performance 165  
pre- and postprocessing 247–251  
process exceptions 409  
profile message summary 127  
profiles  
    deleting 98  
    dumping XML 91  
    event types 98  
    for subscribers 50  
    generating schema 50  
    loading QAD objects 62  
    modifying 95  
    overview 5, 74, 75, 94  
    type 96  
programs  
    operation 97, 454  
Progress  
    AdminServer 255, 258  
    AppServer 220, 255, 256, 258  
    NameServer 255, 258  
PROPATH 353, 354, 357  
Publish Delay option 79

## Q

Q/LinQ 4  
    document specifications 262  
    message envelope specification 335  
    MOM Adapter 261  
    receiver ID 338  
    sender ID 337  
    using with QXtend 259–265  
Q/LinQ Control 261  
QAD Enterprise Applications 4  
    database connection parameters 354  
    fields in response QDoc 229  
    telnet connection 352

- triggers 14
  - QAD Integrated Customization Toolkit (ICT) 230
  - qadQdocs.xml 200
  - QDoc exceptions 396
  - qdocDirectoryLoader.log 176
  - qdocInfo.log 167
  - qdocInstall.log 166, 167, 168
  - qdocReceivers.xml 169
  - qdocRequests.log 167
  - qdocResponses.log 167
  - QDocs
    - data files 300
    - debugging 224
    - delta 96
    - DOM Builder methods 375
    - events 157
    - examples 330
    - format 169
    - message envelope specifications 335
    - namespaces 97
    - naming and identification specifications 310
    - overview 4, 154, 300
    - QAD Enterprise Applications syntax specifications 323
    - requests 154, 174
    - responses 155, 174
    - sample 169
    - schemas 190, 301
    - specifications and standards 309–349
    - versions 97
    - viewing 112
    - XML attribute specifications 319
    - XML element specifications 312
  - QGen
    - data mapping 158
    - errors 245
    - generating 242
    - installation 229
    - loading 241
    - modes 241
    - overview 157, 228
    - running 232
    - saving 240
  - qma scripts 353
  - Query Service 131
    - API 133
    - filters 90
    - inner joins 90
    - native Progress call 132
    - Progress appserver call 132
    - request 133
    - service interface API 132
    - setup
      - direct connection 134
      - Web service 136
    - XML Web service 132
  - queue exceptions 391
  - Queue Manager
    - directory structure 175
    - initializing 175
    - logging 176
    - overview 154, 162, 174
    - SOAP envelopes 186
    - starting 179
  - queue.log 167, 168
  - qxevents database
    - overview 14
  - qxodb database
    - message publisher use 15
    - overview 15
  - QXOS.server.log 119
  - QXOSession.broker.log 119
  - QXtend Inbound 154
    - overview 4, 154
  - QXtend Manager
    - overview 162
    - starting 165
  - QXtend Outbound
    - configuration validation 67
    - dashboard 20
    - free use 42
    - implementation steps 16
    - overview 154
    - processing 14
    - QAD Enterprise Applications versions 4
    - viewers 112
  - qxtendlogging.xml 166, 167, 176, 216
  - qxtendserver.log 167, 168
- ## R
- raw data
    - viewing 112
  - raw messages 130
  - receivers 155
    - adding 191
    - authentication 191
    - creating 190
    - deleting 199
    - on schemas 203
    - overview 190
    - Queue Manager 187
    - removing schemas 194
    - telnet connections 352
  - reflection exceptions 411
  - Register External Application 261
  - requestparser.xml 178
  - requestparsermanager.xml 178
  - requests 154
    - failed 182
    - format 174
    - resubmission 129
  - Require Authentication setting 191
  - response parser 455
  - responses 155
    - file extensions 174
    - populating with QAD Enterprise Applications fields 229
  - restricted shells 357
  - resubmission
    - request 129
  - Resubmit All Requests command 129
  - Resubmit menu 129
  - Resubmit Request command 129
  - resume 170
  - routings
    - adapters 202
  - rowid-msync.p 122
  - rows

publishing unchanged 97

## S

Sales Order Maintenance 156

SAX Writer 361–369

schedules

delivery 44, 54

schemas 190

adding 202

custom 202

directory 202

Enhanced Control 25

receivers on 203

requirements 300

types of 301

scopeTransaction attribute 321

security

restricted shells 357

telnet 357

Send Immediately option 129

Sending Option 43

server URL, defining for Q/LinQ 261

service interface 24, 155

services

command line operation 123

starting 106

viewing 105

session context 455

session control 123

settings

archive 63

severity level 68

SOAP 154

envelopes 155, 186

protocol 15

specification for QDocs 309

SOAP action 48

SOAP envelope 48

SOAP exceptions 394

SOAP header 48

source applications

defining 24

domains 29

event types on 24

multiple databases 28

naming 25, 62

SSH

setting key pair 430

SSH connection 430

port 218

private key 218

SSL 434

AppServer 436

Java clients 437

private key 435

public key 437

status

delivery 128

Subscriber Messages viewer 115

Subscriber Message Details tab 130

Subscriber Messages tab 127

Subscriber Responses tab 129

subscribers

business objects 78

defining 41

e-mail alerts 41

e-mail notification 41

overview 4, 15

profiles 50

type 44

viewing messages 115

visibility 52

Subscribers report 78

supersession 44

suppressResponseDetail attribute 322

suspend 170

synchronization

mass rowid 122

## T

table

descriptions 422

filters 18

joins 86

telnet

connection pools 214

QAD Enterprise Applications connection 352

QXI overview 156

security 357

server 217

windows 224

test harness 166, 169

process request 169

text operators 18

Tomcat

port number 165

restarting 166

starting 165

tools

mass rowid synchronization 122

session control 123

transaction exceptions 395

transaction scope 248, 321

transactionID attribute 321

transComments 235

transformation engine 155, 176, 178

contentTypeMaps 178

document standards 178, 179

mapping specifications 179

parserType 178

transformerType 178

transformation exception codes 385

transformation exceptions 385

transformationEngine.debug 167, 169

transformationEngine.log 167

transformationengine.log 168

transformationengineRequests.log 167, 168, 169

transformationengineResponses.log 167

transformationManager.xml 178

triggers 14, 456

troubleshooting 118

## U

ubroker.properties 256, 257

UI adapter 155, 170

UI Adapter Connection Test 170

UI API

connection pool 217

controller program 219  
 Use Delivery Schedule option 129  
 users in Connection Pool Manager 224

## V

validations 155  
 version attribute 320

## W

warnings 155  
 Web clients 159  
 Web services 155  
 Web Services Description Language (WSDL)  
     generation for receiver/API 195  
 WSDL. *See* Web Services Description Language

(WSDL)

## X

### XML

format 154  
 generating 91  
 importing 62  
 proprietary formats 177  
 QDoc element specification 312  
 schemas 102  
 source directory 26  
 specification for QDocs 310  
 XML. *See also* DOM Builder and SAX Writer  
 XSLT mapping specifications 177