



**QAD Adaptive Applications**

**Enterprise Edition**

Installation Guide

# **QAD Production Execution**

70-3489-4.0-Rev1  
QAD Production Execution 4.0.0  
QAD Enterprise Edition  
December 2022

This document contains proprietary information that is protected by copyright and other intellectual property laws. No part of this document may be reproduced, translated, or modified without the prior written consent of QAD Inc. The information contained in this document is subject to change without notice.

QAD Inc. provides this material as is and makes no warranty of any kind, expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. QAD Inc. shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance, or use of this material whether based on warranty, contract, or other legal theory.

This document contains trademarks owned by QAD Inc. and other companies.

Copyright © 2022 by QAD Inc.

QADProductionExecution\_IG\_v4.pdf/r9m/r9m

**QAD Inc.**

100 Innovation Place  
Santa Barbara, California 93108  
Phone (805) 566-6000  
<http://www.qad.com>

# Contents

## Chapter 1: Introduction

Overview	7
Cloud Installation	7
Software and Environment Requirements	8
Single-Server Requirements	8
Multiple Server Requirements	8
PE Hardware and Software Sizing Requirements	10
Overview	10
Network Topology Standards and Requirements	10
Server Hardware and Software Requirements	10
Client Hardware and Software Requirements	14
Technical Installation Checklist	15

## Chapter 2: Installing QAD Production Execution

Installation Overview	18
Installing QAD Production Execution	18
Pre-Installation Tasks	18
Installing Ignition and MariaDB Artifacts	18
Single Server Installation	26
Multiple Server Installation	28
Installing Nifi Remote Components on Standalone Server	28
Installing Nifi Local Components on Standalone Server/Ignition and Mariadb Server	29
Configure Ignition Gateway	30
EQMS PE Integration Configuration	57
Updating Nifi Flow Components	64
Deactivate Previous Version of Nifi Flow	64

[Comments? Submit feedback here](#)



# Change Summary

## Change Summary

The following table summarizes significant differences between this document and previous versions.

Date/Version	Description	Reference
December 2022/v4.0.0-Rev1	Added PE Hardware and Sizing Requirements section	10
	Added the Create Internal User Source section	37
	Updated the User Source Table	42
October 2022/v4.0.0	Second Release	--
December 2021/v3.5.0	First release	--

Chapter 1:

# Introduction

This chapter provides an overview of the QAD Production Execution installation process and the software and environment requirements:

[Overview](#)


[Software and Environment Requirements](#)

## Overview

Installing QAD Production Execution requires the following three sets of artifacts:

1. Adaptive UX-related components. Installed with the `peaux-app` YAB package.
2. Ignition and MariaDB related components. Installed with the manufacturer's installation package.
3. Nifi flow related-components. Installed with the `penifilocal` and `penifiremote` YAB package.

Depending on the implementation needs and goals, each of these pieces can be installed on a single server or on multiple servers. The following diagram shows the installation options.

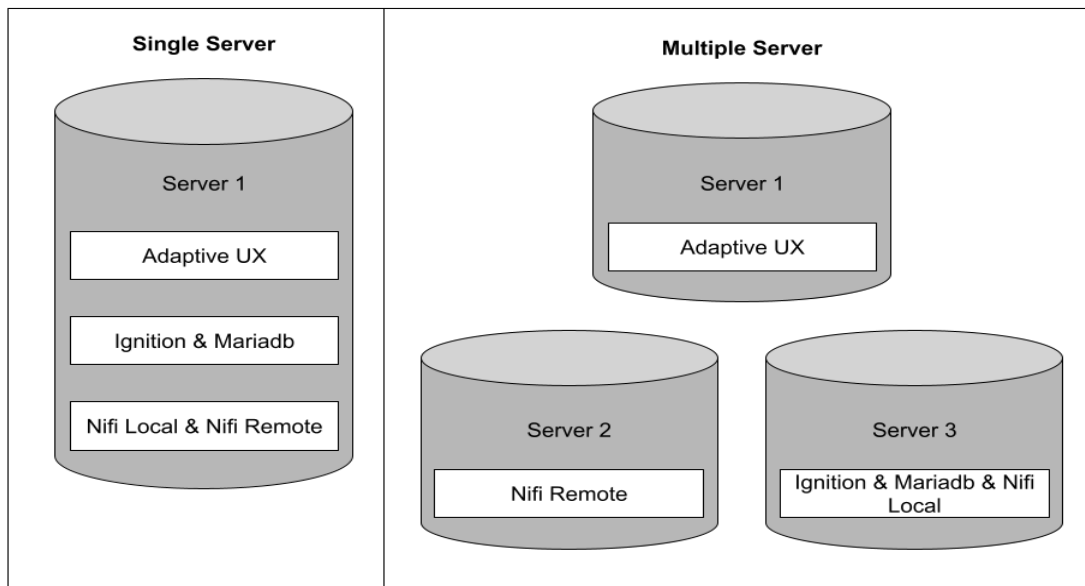

The `peaux-app`, `penifiremote` and `penifilocal` packages can be installed using `yab`. Ignition and MariaDB-related artifacts require manual installation.

## Cloud Installation

QAD recommends installing QAD Production Execution in the Cloud; therefore, the instructions in this installation guide are for Cloud installations only. For information about On-Premise installations, please contact QAD Services.

## Software and Environment Requirements

The following sections describe the software and environment and other requirements for installing QAD Production Execution on a single server or on multiple servers.

### Single-Server Requirements

If you are installing all the sets of artifacts on a single server, the server must have the following software and environments to install software for QAD Production Execution:

- Enterprise Edition 2019EE or above
- QAD Automation Solutions: Data Collection v3.2.2.10 or above
- QAD Automation Solutions: Label Printing Services v3.2.0.0 or above
- QAD Production Orders 3.2.4.0 or above
- Nifi 1.15.1 or above
- Nifi QRA Authentication 1.1.0.9 or above
- Java Runtime Environment (JRE) 1.8 or above
- Progress 11.7 or above
- YAB 1.14.1 or above (yab-ee-app 1.14.1.0 or above)
- qad-enterprise-platform v3.14.1.12 and above
- If installing on a UNIX Server, the zip and unzip packages must be installed
- Production Execution supports Ignition v8.0.15 or above. For the version of Ignition being installed, see the Ignition website for software and hardware requirements: <https://inductiveautomation.com/downloads/>
- Production Execution supports MariaDB v10.5.x. See the MariaDB website for software and hardware requirements: <https://mariadb.com/>

### Multiple Server Requirements

If you are installing the artifacts on separate servers, you must have the following software and environment to install software for QAD Production Execution:

#### Adaptive UX Components

The server where the Adaptive UX components are installed must have the following software and environment to install software for QAD Production Execution:

- Enterprise Edition 2019EE or above
- QAD Automation Solutions: Data Collection v3.2.2.10 or above
- QAD Automation Solutions: Label Printing Services v3.2.0.0 or above
- QAD Production Orders 3.2.4.0 or above

- Java Runtime Environment (JRE) 1.8 or above
- Progress 11.7 or above
- YAB 1.14.1 or above (yab-ee-app 1.14.1.0 or above)
- qad-enterprise-platform v3.14.1.12 or above

### Nifi Flow Components

The Server where Nifi Local or Nifi Remote components are installed must have the following software and environment to install software for QAD Production Execution:

- Yab Core 1.16 or above (if installing using yab)
- Nifi 1.11.3.0 or above
- Nifi QRA Authentication 1.1.0.9 or above
- Nifi Toolkit 1.15.1.0
- Java Runtime Environment (JRE) 1.8 or above

### Ignition and MariaDB Components

The server where the Ignition and MariaDB components are installed must have the following software and environment to install software for QAD Production Execution:

- Supports Ignition v8.0.15 or above. For the version of Ignition being installed, see the Ignition website for software and hardware requirements: <https://inductiveautomation.com/downloads/>
- Supports MariaDB v10.5.x. See the MariaDB website for software and hardware requirements: <https://mariadb.com/>
- PE Ignition package (downloaded from the QAD store during the installation process). This package contains artifacts required for Ignition and MariaDB configuration.
- Python version 3 (if using MariaDB installation script)

### Recommended Memory Allocation

**Ignition.** Recommended to run with at least 8GB of memory. Ignition.conf file needs to be updated for providing the recommended memory.

**Mariadb.** Recommended configuration. This is set in mysql configuration file (my.cnf):

```
innodb_buffer_pool_size = 11G
read_buffer_size = 1G
read_rnd_buffer_size = 1G
sort_buffer_size = 1G
max_connections = 500
```

## PE Hardware and Software Sizing Requirements


### Overview

All hardware specifications in this section are minimum requirements for a single instance of QAD Production Execution. These specifications assume that certain server components (NiFi, Ignition) are installed on their own dedicated server. Combining these server components (or multiple QAD Production execution software instances) on a single server will negatively impact performance and require additional hardware resources to run appropriately.

If additional concurrent users are using the system, additional resources will be required. Similarly, if the servers are used for applications or purposes outside of dedicated hosting of QAD Production Execution, the server resource requirements should be scaled accordingly.

### Network Topology Standards and Requirements

The standard network configuration for QAD Production Execution is to have a Production Execution Ignition gateway, also containing the MariaDB server, the NiFi server, and a NiFi integration server within the private Cloud network.

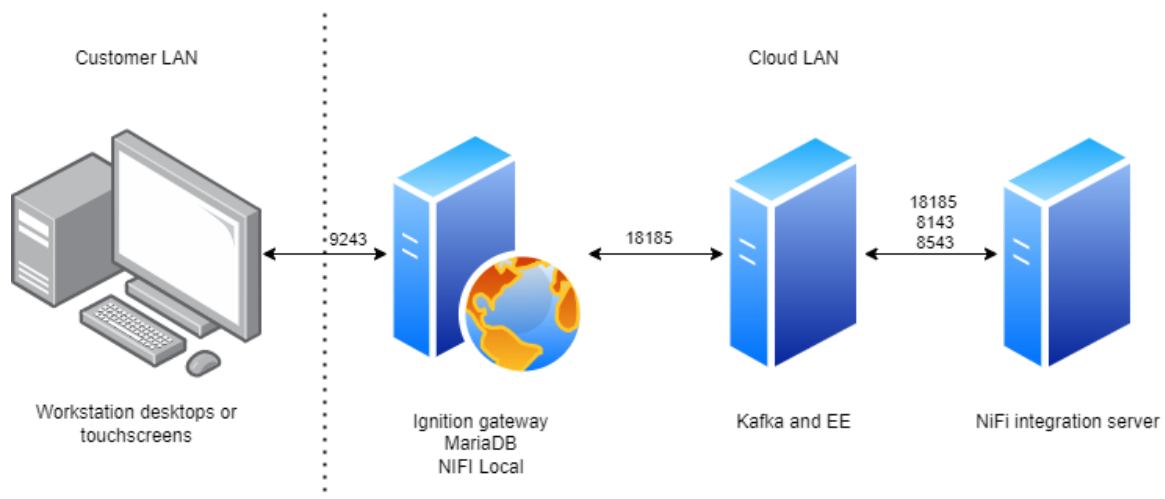

### Server Hardware and Software Requirements

The customer's IT department should be aware of the minimum requirements for the installation and support of QAD Production Execution. If any of the following requirements are lacking, QAD Production Execution cannot be installed.

**Hardware Requirements**

<b>Concurrent Clients</b>	<b>Production</b>	<b>Development / Test</b>
1-50	<p>Note: Production servers must be dedicated to production.</p> <p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [100 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [16 GB]                             <ul style="list-style-type: none"> <li>○ 8 GB Ignition</li> <li>○ 4 GB MariaDB</li> <li>○ 4 GB NiFi</li> </ul> </li> </ul> <p><b>**Assumption:</b></p> <p>Combination of customer released Work Orders and Operations is less than 2500 instances.</p> <p>Note: If the number of instances is greater than described in the assumption above, please consult the architecture team on recommendations forward.</p>	<p>Note: Ignition gateway server should be dedicated to a non-production environment. NiFi and integration servers can be combined for non-production environments, but must be separated from production.</p> <p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [100 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [12 GB]                             <ul style="list-style-type: none"> <li>○ 4 GB Ignition</li> <li>○ 4 GB MariaDB</li> <li>○ 4 GB NiFi</li> </ul> </li> </ul> <p><b>**Assumption:</b></p> <p>Combination of customer released Work Orders and Operations is less than 2500 instances.</p> <p>Note: If the number of instances is greater than described in the assumption above, please consult the architecture team on recommendations forward.</p>
	<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [100 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [8 GB]</li> </ul>	<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [100 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [4 GB]</li> </ul>
	<p>EE/AUX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> <li>● Memory [2 GB]                             <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with 5 agents)</li> </ul> </li> </ul>	<p>EE/AUX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> <li>● Memory [2 GB]                             <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with 5 agents)</li> </ul> </li> </ul>



50-250	<p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [4 CPUs (8 cores total)]</li> <li>● Memory [32 GB] <ul style="list-style-type: none"> <li>○ 16 GB Ignition</li> <li>○ 8 GB MariaDB</li> <li>○ 8 GB NiFi</li> </ul> </li> </ul> <p>**Assumptions</p> <p>Combination of customer released Work Orders and Operations is less than 10,000 instances.</p> <p>Note: If the number of instances is greater than described in the assumption above, please consult the architecture team on recommendations forward.</p>	<p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [3 CPUs (6 cores total)]</li> <li>● Memory [24 GB] <ul style="list-style-type: none"> <li>○ 12 GB Ignition</li> <li>○ 6 GB MariaDB</li> <li>○ 6 GB NiFi</li> </ul> </li> </ul> <p>**Assumptions</p> <p>Combination of customer released Work Orders and Operations is less than 10,000 instances.</p> <p>Note: If the number of instances is greater than described in the assumption above, please consult the architecture team on recommendations forward.</p>
	<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [4 CPUs (8 cores total)]</li> <li>● Memory [16 GB]</li> </ul>	<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [8 GB]</li> </ul>
	<p>EE/Adaptive UX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> <li>● Memory [2 GB] <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with 10 agents)</li> </ul> </li> </ul>	<p>EE/Adaptive UX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> <li>● Memory [2 GB] <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with 10 agents)</li> </ul> </li> </ul>
250+	<p>Ignition gateway server</p> <p>Note: With 250+ clients on one gateway it is advised to cluster Ignition into a gateway network consisting of multiple gateways of 250 clients. For this setup, please contact your QAD representative.</p>	
	<p>NiFi Integration server</p> <p>Double the resources per 250 clients:</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [4 CPUs (8 cores total)]</li> <li>● Memory [16 GB]</li> </ul>	<p>NiFi Integration server</p> <p>Double the resources per 250 clients:</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [250 GB]</li> <li>● Processor [2 CPUs (4 cores total)]</li> <li>● Memory [8 GB]</li> </ul>
	<p>EE/Adaptive UX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> </ul>	<p>EE/Adaptive UX Server</p> <ul style="list-style-type: none"> <li>● Extra Hard Drive Free Space [100 GB]</li> </ul>

	<ul style="list-style-type: none"> <li>● Memory [2 GB]             <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with <math>10 + n * 5</math> agents, <math>n</math> = number of clients divided by 250 clients)</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>● Memory [2 GB]             <ul style="list-style-type: none"> <li>○ 1 GB Kafka</li> <li>○ 1 GB WSA and AppServer (with <math>10 + n * 5</math> agents, <math>n</math> = number of clients divided by 250 clients)</li> </ul> </li> </ul>
--	--	--

## Software Requirements

Ignition Gateway Server Requirements	Notes
Note: The following requirements apply to production, dev, and test servers.	
Linux 64 bit  Supported Operating Systems: <ul style="list-style-type: none"> <li>● Red Hat V 8</li> <li>● CentOS V 8</li> </ul>	Both virtual servers and physical servers are supported.
Ignition V 8.1.17	An external license is required.  Currently this is not provided with the package and needs to be downloaded at <a href="https://inductiveautomation.com/downloads/">https://inductiveautomation.com/downloads/</a>
NiFi V 1.15.1	This is only provided in a package when installed with YAB.  Note: This is not recommended for customer installs. This needs to be downloaded at <a href="https://archive.apache.org/dist/nifi/1.15.1/nifi-1.15.1-bin.tar.gz">https://archive.apache.org/dist/nifi/1.15.1/nifi-1.15.1-bin.tar.gz</a>
MariaDB V 10.5+	Any version higher than version 10.5 will work.  Note: This is not provided in the packages, but it can be installed with the yum package manager.
SSL Certificate	All QAD Production Execution traffic takes place over the SSL/TLS protocol and therefore requires that a Digital Certificate be assigned.

NiFi Integration Server Requirements	Notes
<p>Note: The following requirements apply to production, dev, and test servers.</p>	
<p>Linux 64-bit</p> <p>Supported Operating Systems:</p> <ul style="list-style-type: none"> <li>● Red Hat V 8</li> <li>● CentOS V 8</li> </ul>	<p>Both virtual servers and physical servers are supported.</p>
<p>NiFi V 1.15.1</p>	<p>Only provided in a package when installed with YAB.</p> <p>Note: This is not recommended for customer installs. This needs to be downloaded at <a href="https://archive.apache.org/dist/nifi/1.15.1/nifi-1.15.1-bin.tar.gz">https://archive.apache.org/dist/nifi/1.15.1/nifi-1.15.1-bin.tar.gz</a></p>
<p>TCP/IP</p>	<p>The TCP/IP protocol must be available. Firewall needs to be set open on ports 18185, 8143, and 8543</p>

## Client Hardware and Software Requirements

### Hardware Requirements

Client Requirements	Client Recommended	Notes
<p>Note: The following requirements apply to running against production, dev, and/or test sites.</p> <p>Desktop / Laptop</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [10 GB]</li> <li>● Processor [dual-core]</li> <li>● Memory [8 GB]</li> <li>● 1920x1080 resolution</li> <li>● 10 mb connection to Ignition server</li> </ul>	<p>Note: The following requirements apply to running against production, dev, and/or test sites.</p> <p>Desktop / Laptop</p> <ul style="list-style-type: none"> <li>● Hard Drive Free Space [10 GB]</li> <li>● Processor [quad-core]</li> <li>● Memory [16 GB]</li> <li>● 1920x1080 resolution</li> <li>● 25 mb connection to Ignition server</li> </ul>	
<p>Mobile</p> <p>Note: Currently mobile devices are not supported.</p>	<p>Mobile</p> <p>Note: Currently mobile devices are not supported.</p>	

## Software Requirements

Client Requirements	Notes
<p>Note: The following requirements apply to running against production, dev, and/or test sites.</p>	
<p>Desktop / Laptop</p> <p>Supported Client Operating Systems:</p> <ul style="list-style-type: none"> <li>● Windows Server 2008/2012/2016/2019</li> <li>● Windows 7.8, and 10</li> <li>● MacOS</li> <li>● Ubuntu 12.4 or related linux distro's</li> </ul>	

## Technical Installation Checklist

Note: This should be completed by the customer's IT department.

Customer Name:	
IT Contact Name:	IT Contact Number:

The purpose of this section is to collect information about the systems in which QAD Production Execution will be installed and to reduce the possibility of exceptions during the installation and configuration of the system.

Production	Development / Test
<p>Note: Production servers must be dedicated to production.</p>	<p>Note: The Ignition gateway server should be dedicated per non production environment. NiFi integration server can be combined for non production environments but must be separated from production.</p>
<p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Name: [ ]</li> <li>● Operating System: [ ]</li> <li>● Hard Drive Free Space [ ]</li> <li>● Processor (include speed and total number of cores) [ ]</li> <li>● Memory [ ]</li> <li>● Preferred Drives/Folders:                             <ul style="list-style-type: none"> <li>○ Ignition [ ]</li> </ul> </li> </ul>	<p>Ignition gateway server</p> <ul style="list-style-type: none"> <li>● Name: [ ]</li> <li>● Operating System: [ ]</li> <li>● Hard Drive Free Space [ ]</li> <li>● Processor (include speed and total number of cores) [ ]</li> <li>● Memory [ ]</li> <li>● Preferred Drives/Folders:                             <ul style="list-style-type: none"> <li>○ Ignition [ ]</li> </ul> </li> </ul>

<ul style="list-style-type: none"> <li>○ MariaDB [ ]</li> <li>○ NiFi [ ]</li> </ul>	<ul style="list-style-type: none"> <li>○ MariaDB [ ]</li> <li>○ NiFi [ ]</li> </ul>
<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Name: [ ]</li> <li>● Operating System: [ ]</li> <li>● Hard Drive Free Space [ ]</li> <li>● Processor (include speed and total number of cores) [ ]</li> <li>● Memory [ ]</li> <li>● Preferred Drive/Folder [ ]</li> </ul>	<p>NiFi Integration server</p> <ul style="list-style-type: none"> <li>● Name: [ ]</li> <li>● Operating System: [ ]</li> <li>● Hard Drive Free Space [ ]</li> <li>● Processor (include speed and total number of cores) [ ]</li> <li>● Memory [ ]</li> <li>● Preferred Drive/Folder [ ]</li> </ul>

Chapter 2:

# Installing QAD Production Execution

This chapter provides detailed instructions on installing QAD Production Execution:

[\*Installation Overview\*](#)

[\*Installing QAD Production Execution\*](#)

[\*Updating Nifi Flow Components\*](#)

## Installation Overview

This chapter describes how to install the three sets of artifacts for QAD Production Execution:

- Ignition
- Maria DB
- Adaptive UX

The installation instructions in this install guide are for Cloud installations. The installation packages for each set of artifacts do not need to be downloaded and are installed from the Cloud catalog.

**Note:** For information about On-Premise installations, please contact QAD Services.

## Installing QAD Production Execution

### Pre-Installation Tasks

#### Back Up Databases

Before installing the three sets of artifacts for QAD Production Execution, back up your databases and supporting environments.

To back up all databases, execute the command:

```
> yab database-backup
```

Alternatively, to back up a specific database, execute the command:

```
> yab database-[INSTANCE]-backup
```

#### Download PE Ignition Package

Download the PE Ignition package from the QAD Store onto the server where Ignition and MariaDB will be installed. The PE Ignition package contains artifacts for MariaDB and Ignition configuration.

## Installing Ignition and MariaDB Artifacts

The installation steps for single server architecture and multiple server architecture are the same for Ignition and MariaDB artifacts.

#### Stop Firewall

Before installing Ignition and the Maria DB artifacts, stop the firewall with the following command. Make sure ports are open to red-hat linux repositories.

```
service firewalld stop
```

## Installing MariaDB

You can install MariaDB by using the script or manually. You must choose *only one* of these options to install MariaDB.

### Installing MariaDB Using the Script

1. Download the PEIgnition package on the server.
2. Use the script <download directory>/manualinstall/mariaDB/script/mariadb\_install.py provided in the package for installation of MariaDB.
3. The script provides help on setting parameters that are provided as input to the script.

```
$ python3 mariadb_install.py --help
-h, --help
```

Arguments	Description
-h --help	Show this help message and exit
-P <port>, --port <port>	MariaDB server port (default: 3306)
--mariadb-data-dir <MARIADB_DATA_DIR>	MariaDB data directory (default: /qond/apps/mysql)
--mariadb-mysqld-config <MARIADB_MYSQLD_CONFIG>	A JSON string to update MariaDB my.cnf mysqld section's configuration. (default: None)  e.g {"max_connections": 500, "sort_buffer_size": "1G"}
--mariadb-version <MARIADB_VERSION>	MariaDB server version (default: 10.5)
--root-password <ROOT_PASSWORD>	MariaDB root user password (default: None)
-u <USER>, --user <USER>	MariaDB user for production order integration (default: None)

-p <PASSWORD>, --password <PASSWORD>	Integration MariaDB user's password (default: None)
--database <DATABASE>	QAD Production Execution database name (default: qad)
--schema-dir <SCHEMA_DIR>	Ignition schema files location (default: None)
--seed-data-dir <SEED_DATA_DIR>	Seed data files location (default: None)
--skip-mariadb-install	Skip MariaDB installation (default: False)
--reset	Uninstall and reset MariaDB before reinstall (default: False)

4. To install and configure MariaDB, run the following command:

**Note:** The table above lists the parameter values for the script. For the parameters where the Default = None, you must replace the parameter in the following command, which is in brackets <xxx xxx>, with the appropriate values based on your environment. In the <Mariadb User id> parameter, you must enter a MariaDB User ID. This parameter cannot be blank.

```
python3 mariadb_install.py --port <mariadb port>
--mariadb-data-dir <Data directory> --root-password <root
password for mariadb> --user <Mariadb User id> --password
<Mariadb User's Password> --database <name of database to
be created> --schema-dir <download
dir/manualinstall/mariaDB/schema> --seed-data-dir
<download dir/manualinstall/mariaDB/data>
```

5. Provide access to the port for MariaDB using the command below:

```
sudo firewall-cmd --zone=public --add-port=<MariaDB
Port>/tcp --permanent

sudo firewall-cmd --reload
```

6. The installation and configuration of MariaDB are complete.

### Manually Installing MariaDB

1. Create the following `MariaDB.repo` file if it does not exist. If this file exists, skip to the next step to update the file.

```
/etc/yum.repos.d/MariaDB.repo
```

2. Specify the version of MariaDB to be installed by adding the following lines to the `MariaDB.repo` file:

```
[mariadb]
name = MariaDB-10.5
baseurl=https://yum.mariadb.org/10.5/centos7-amd64
# alternative:
baseurl=http://archive.mariadb.org/mariadb-10.5/yum/centos7-amd64
gpgkey=https://yum.mariadb.org/RPM-GPG-KEY-MariaDB
gpgcheck=1
```

3. Create a directory to store the MariaDB data and configuration files; for example, `/dr01/mariadb/mysql`.

```
sudo mkdir -p /dr01/mariadb/mysql
```

4. Add user `mysql` if it does not exist.

```
sudo useradd mysql
```

5. Update ownership of the folder: `/dr01/mariadb` to `mysql` user.

```
sudo chown -R mysql: /dr01/mariadb
```

6. Run the following command to install MariaDB Server and MariaDB Client:

```
sudo yum install MariaDB-server MariaDB-client
```

7. The following installation information is displayed. When prompted, enter “y” to confirm.

```
Install 3 Packages (+8 Dependent packages)
```

```
Total download size: 53 M
```

```
Is this ok [y/d/N]: y
```

```
Retrieving key from
https://yum.mariadb.org/RPM-GPG-KEY-MariaDB

Importing GPG key 0x1BB943DB:

Userid: "MariaDB Package Signing Key
<package-signing-key@mariadb.org>"

Fingerprint: 1993 69e5 404b d5fc 7d2f e43b cbc b 082a 1bb9
43db

From: https://yum.mariadb.org/RPM-GPG-KEY-MariaDB

Is this ok [y/N]: y
```

8. Update `/etc/my.cnf` file for the following configuration:

```
[mysqld]

datadir = <Data Directory for Mariadb e.g- /dr01/mariadb>

port = <MariaDB Port e.g 3306>

character_set_server = utf8

collation_server = utf8_general_ci

innodb_buffer_pool_size = 11G

read_buffer_size = 1G

read_rnd_buffer_size = 1G

sort_buffer_size = 1G

max_connections = 500
```

9. Install the system table by entering:

```
sudo mysql_install_db
```

10. Change the ownership of the file under data directory (for example, `/dr01/mariadb/mysql`) by entering :

```
sudo chown -R mysql: <Data Directory e.g
/dr01/mariadb/mysql>
```

11. Enable MariaDB by entering:

```
sudo systemctl enable mariadb
```

12. Start MariaDB by entering:

```
sudo systemctl start mariadb
```

13. Secure the MariaDB installation by entering the following command:

```
sudo mariadb-secure-installation
```

- a. When prompted for root user password, press Enter (leave blank).

```
Enter current password for root (enter for none):
```

- b. Enter the following when prompted:

```
Switch to unix_socket authentication [Y/n] n
```

```
Change the root password? [Y/n] Y
```

```
Enter new password that you want to set for root user
```

```
New password: <enter new root user password>
```

```
Re-enter new password: <re-enter new root user password>
```

```
Remove anonymous users? [Y/n] Y
```

```
Disallow root login remotely? [Y/n] y
```

```
Remove test database and access to it? [Y/n] Y
```

```
Reload privilege tables now? [Y/n] Y
```

14. Create “database qad” and then load the schema and data:

- a. Create database qad by entering:

```
mysql -u root -p
```

- b. Enter Password: <enter root password>

- c. Enter the following:

```
MariaDB [(none)]> create database <database name>;
```

```
MariaDB [(none)]> exit;
```

- d. Load the MariaDB schema for the database. The file needs to be manually edited to replace the `qad` value with name of database provided in previous step (`<database Name>`)

**Note:** The symbol ( ` ) is tick and not a single quote.

```
mysql -u root -p <database name> < <download
Location>/manualinstall/mariaDB/schema/qad.sql
```

The PE Ignition package that was downloaded contains the schema/qad.sql file.

- e. Enter Password: <enter root password>
- f. Load the MariaDB seed data for the database:

```
mysql -u root -p <database name> < <download
Location>/manualinstall/mariaDB/data/qad.sql
```

**Note:** The PE Ignition package that was downloaded contains the data/qad.sql file.

- g. Enter Password: <enter root password>

15. Provide remote access for the user by entering the following:

```
sudo mysql -u root -p
```

```
Password: <enter root password>
```

```
MariaDB [(none)]> CREATE USER '<user id>'@'%' IDENTIFIED
BY '<enter user id's password>';
```

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON *.* TO '<user
id>'@'%' WITH GRANT OPTION;
```

```
MariaDB [(none)]> CREATE USER '<user id>'@'localhost'
IDENTIFIED BY '<enter user id's password>';
```

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON *.* TO '<user
id>'@'localhost' WITH GRANT OPTION;
```

```
MariaDB [(none)]> FLUSH PRIVILEGES;
```

```
MariaDB [(none)]> exit;
```

16. Provide access to the port for MariaDB using the command below:

```
sudo firewall-cmd --zone=public --add-port=<MariaDB
Port>/tcp --permanent
```

```
sudo firewall-cmd --reload
```

17. The installation of MariaDB is complete. Proceed to the next section and install Ignition.

## Installing Ignition

1. Download the Ignition installer package v8.0.15:

<https://inductiveautomation.com/downloads/archive/8.0.15>

2. Select the Ignition package based on the OS.

- Note:** If installing on a Linux server, make sure the downloaded file has execute permissions.
3. Execute the install file. You can log in as root or use the sudo command to install:  

```
sudo ./ignition-8.0.15-linux-x64-installer.run
```

    - a. Specify the username for installing Ignition.  

```
Username: <username to install ignition>
```
    - b. Enter the Ignition Package installation location; for example,  

```
[/usr/local/bin/ignition]: /dr01/ignition:  
  
[/usr/local/bin/ignition]: <directory path of  
ignition install>
```
    - c. Specify if the installation type is typical or custom. It is recommended that you select the “1 (Typical)” option:
      - [1] Typical - Includes Ignition with SQL Bridge, Perspective, Vision, OPC-UA, and driver modules for Allen-Bradley, Siemens, and MODBUS devices.
      - [2] Custom - Install additional modules and adjust the default modules to install.
    - d. The setup is now ready to begin installing Ignition on your computer. Enter “Y” to begin installation:  

```
Ready to Install  
  
Do you want to continue? [Y/n]: Y
```
    - e. A confirmation message is displayed when the installation is complete:  

```
Ignition Successfully Installed
```
    - f. Enter “Y” to start Ignition:  

```
Start Ignition Now [Y/n]: Y
```
    - g. Enter “Y” to install service:  

```
Install Service [Y/n]: Y
```
  4. Copy the files from “ignitionserverfiles” directory available in peignition package into the following Ignition webservice location:  

```
<Ignition Install Directory>/webserver/webapps/main
```

  
copy ignitionserverfiles/images into

```
<Ignition Install Directory>/webserver/webapps/main/images
folder
```

copy ignitionserverfiles/docs into

```
<Ignition Install Directory>/webserver/webapps/main/docs
folder
```

copy ignitionserverfiles/videos into

```
<Ignition Install Directory>/webserver/webapps/main/videos
folder
```

copy ignitionserverfiles/sounds into

```
<Ignition Install Directory>/webserver/webapps/main/sounds
folder
```

5. Copy the following three Kafka scripts, which are available in the package, into `/usr/bin` or any other directory that is in the system `PATH`:

- `rdkafka_simple_producer.sh`
- `rdkafka_simple_producer_ssl`
- `rdkafka_simple_producer`

6. Set execute permissions to the scripts by entering:

```
sudo chmod +x
<scripts-location>/rdkafka_simple_producer.sh
rdkafka_simple_producer_ssl rdkafka_simple_producer
```

7. The installation of Ignition is complete. Restart the firewall and then proceed to the next section to install the Adaptive UX components and Nifi.

## Restart Firewall

After installing MariaDB and Ignition, restart the firewall. Make sure ports are open to red-hat linux repositories.

```
service firewalld start
```

## Single Server Installation

### Installing Adaptive UX Components and Nifi Flow Components

The Adaptive UX and Nifi Flow components are installed using YAB.

YAB is a configuration management tool you can use to start, stop, reconfigure, and maintain the consistency of your Enterprise Edition environments. Your environment is defined in terms of discrete units, or packages, which you can replace and add as needed.

See *QAD Enterprise Edition Installation Guide* for more information about using YAB.

The `peaux-app-x.x.x.x` package contains the Adaptive UX components. The `penifilocal-x.x.x.x` and `penifiremote-x.x.x.x` packages contain the Nifi Flow Components.

**Note:** If you are only updating to a new version of the Nifi Flow components, see [Updating Nifi Flow Components](#).

Follow these steps to install the Adaptive UX and the Nifi Flow components:

1. Add the following properties to the `configuration.properties` file and customize its value as per your configuration needs.

```
pe.mariadb.name=<Name of the MariaDB database>

pe.mariadb.host=<Hostname where MariaDB database is
installed>

pe.mariadb.port=<Port configured for MariaDB>

pe.mariadb.user=<MariaDB login credentials for user with
write access to Production Execution tables>

pe.mariadb.password=<MariaDB login credentials for user
with write access to Production Execution tables>

pe.integration.user=<AUX login credentials for user that
is used by Nifi to login to AUX and invoke APIs>

pe.integration.password=<AUX login credentials for user
that is used by Nifi to login to AUX and invoke APIs>

pe.qms.images.targetdirectory=<Target Directory for
storing QMS artifacts>

pe.qms.images.sourcedirectory=<Source Directory for
getting QMS artifacts>
```

2. To install both packages via the Cloud catalog, enter the following yab command:

```
yab install peaux-app-x.x.x.x penifilocal-x.x.x.x
penifiremote-x.x.x.x
```

3. Provide access to Restapi port, if blocked by firewall.

- a. To find the rest api port, enter the following command:

```
yab config pe.restapi.port
```

- b. Enter the following command to provide access to Rest API port, if it is blocked by firewall:

```
<Rest API Port> is derived in earlier step
sudo firewall-cmd --zone=public
--add-port=<Rest API Port>/tcp --permanent
sudo firewall-cmd --reload
```

## Multiple Server Installation

### Installing Adaptive UX Components on AUX server

The Adaptive UX component is installed using YAB.

YAB is a configuration management tool you can use to start, stop, reconfigure, and maintain the consistency of your Enterprise Edition environments. Your environment is defined in terms of discrete units, or packages, which you can replace and add as needed.

See *QAD Enterprise Edition Installation Guide* for more information about using YAB.

The `peaux-app-x.x.x.x` package contains the Adaptive UX components.

Follow these steps to install the Adaptive UX components:

1. Add the following properties to the `configuration.properties` file and customize its value as per your configuration needs.
2. To install the package via the Cloud catalog, enter the following yab command:

```
yab install peaux-app-x.x.x.x
```

### Installing Nifi Remote Components on Standalone Server

Follow these steps to install Nifi remote components on a standalone server using yab:

1. Download the file `yab/config/docs/penifiremote-standalone.properties` from the `penifiremote-x.x.x.x` package.
2. Update the file with the correct yab properties value, some of the yab properties value needs to come from AUX server.

3. The `yab/config/docs/penifiremote-standalone.properties` file provides details on which properties need to be updated and from where the value should come.
4. Run the following yab command:
 

```
-p:penifiremote-standalone.properties -a:penifiremote-env
create.
```

## Installing Nifi Local Components on Standalone Server/Ignition and Mariadb Server

Follow these steps to install Nifi Local Components on a Standalone Server/Ignition and Mariadb Server using yab:

1. Download the file `yab/config/docs/penifilocal-standalone.properties` file from `penifilocal-x.x.x.x` package.
2. Update the file with the correct yab properties value. Some of the yab property values need to come from the AUX server.
3. The `yab/config/docs/penifilocal-standalone.properties` file provides details on which properties need to be updated and from where value should come.
4. Run the following yab command:
 

```
-p:penifilocal-standalone.properties -a:penifilocal-env
create.
```
5. Provide access to Restapi port, if blocked by firewall.
  - a. To find the rest api port, enter the following command:
 

```
yab config pe.restapi.port
```
  - b. Enter the following command to provide access to Rest API port, if it is blocked by firewall:

```
<Rest API Port> is derived in earlier step
sudo firewall-cmd --zone=public
--add-port=<Rest API Port>/tcp --permanent
sudo firewall-cmd --reload
```

## Configure Ignition Gateway

This section describes the steps required to configure the Ignition Gateway after it has been installed. During this configuration procedure you will:

- Create the Admin user and set the password.
- Update the port numbers used to access Ignition Gateway.
- Import project files, which contain PE functionality.
- Create a database connection for MariaDB.
- Create a new User Source, which connects the user roles provided with MariaDB with the Ignition project.
- Create a new Realtime Tag Provider, which provides additional functionality for PE.
- Link project files with User Source and Tags.

Follow these steps to configure the Ignition Gateway:

1. Check if the Ignition Gateway is started by entering:

```
sudo <Ignition installation directory>/ignition.sh status
```

**Note:** If the Ignition Gateway is stopped, enter the following command to start it:

```
sudo <Ignition installation directory>/ignition.sh start
```

2. Ignition Gateway is configured from a web browser. You will need the Ignition Gateway port, which is located in the following file:

```
<Ignition installation directory>/data/gateway.xml.
```

For new installations, the default port is 8088:

```
<entry key="gateway.port">8088</entry>
```


3. Access the Ignition Gateway from a web browser by entering:

```
http://<hostname>:<port>
```


**Note:** If it is not accessible, the port needs to be updated by entering:

```
sudo <Ignition installation directory>/gwcmd.sh -k <new port>
```

4. On the welcome page, select Ignition.

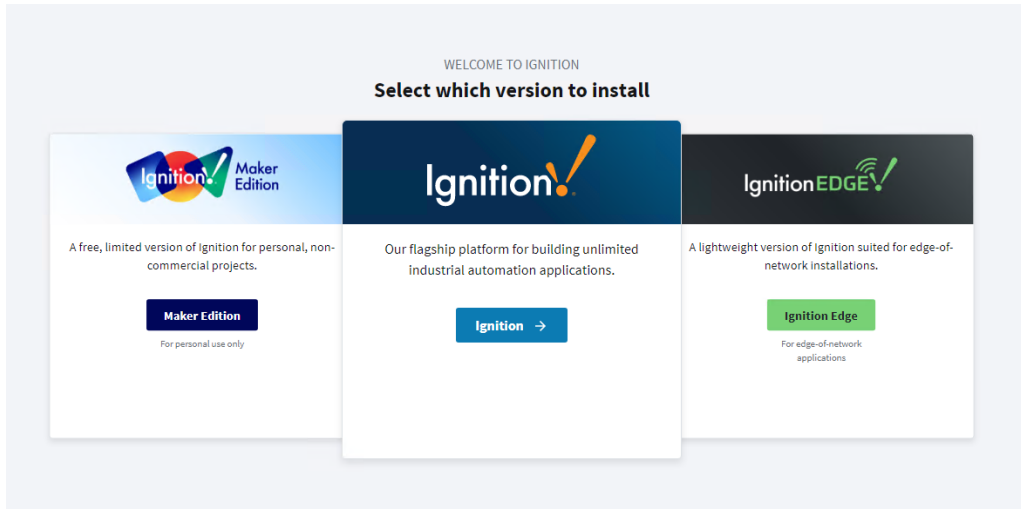

5. Navigate through the terms and conditions page.

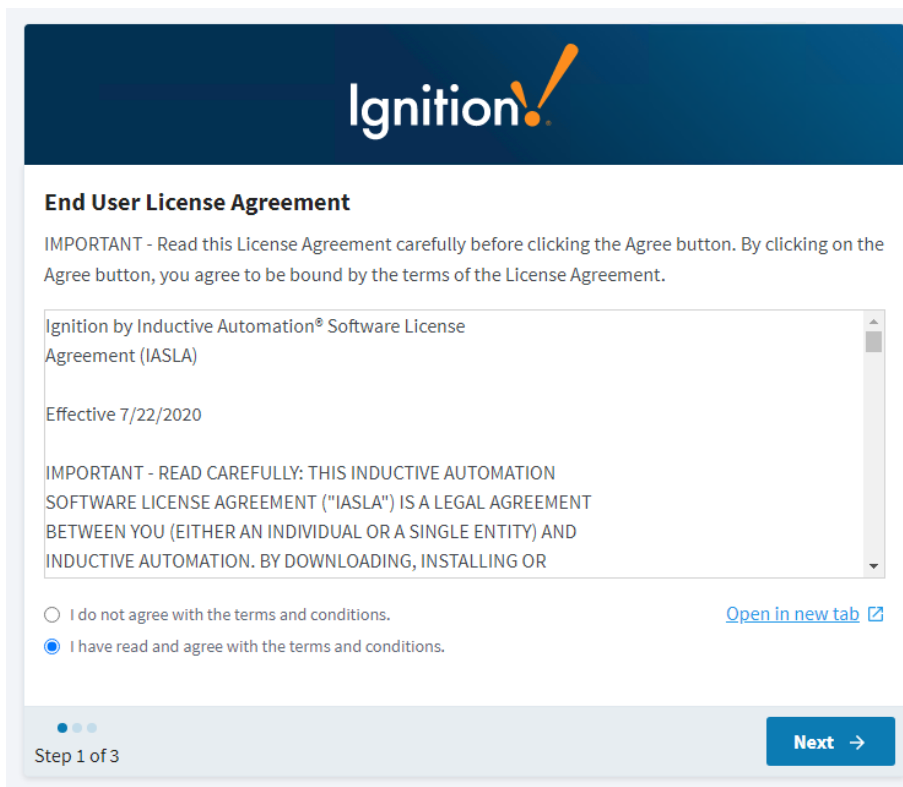

6. Create a user in Ignition for the Admin role and then set the password.

**Note:** Make a record of the username and password because these credentials are used each time you access the Ignition Gateway.

**Ignition!**

### Create a User

Take a moment to create your first user account. This user, by default, will have access to full Administrative privileges in Ignition. This can all be edited later in the Gateway.

Username

Enter Password

Confirm Password

Password Strength **Very Poor**

Your password is easily guessable. You can do better.

Step 2 of 3 Next →

- Update the port numbers for HTTP Port and HTTPS Port access. The port numbers that are entered are used to access the Ignition Gateway using the URL.

**Ignition!**

### Configure Ports


Configure which ports you would like the Ignition Gateway to bind to for HTTP and HTTPS. If you're unsure, leave the defaults, they work well in the majority of situations.

HTTP Port  
  
(default: 8088)


HTTPS Port  
  
(default: 8043)

Step 3 of 3 Finish Setup →

- Next, import the `Project.zip` file and connect MariaDB.
- Select the Config menu icon on the Ignition Gateway Home Page.

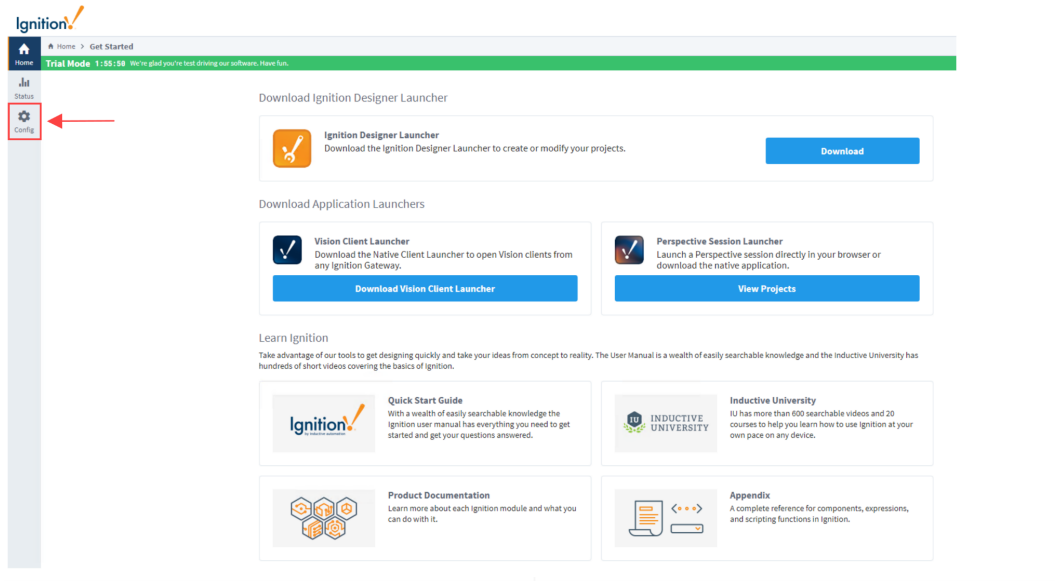

10. Select Projects from the Config menu. The Projects option allows users to import projects into the environment.

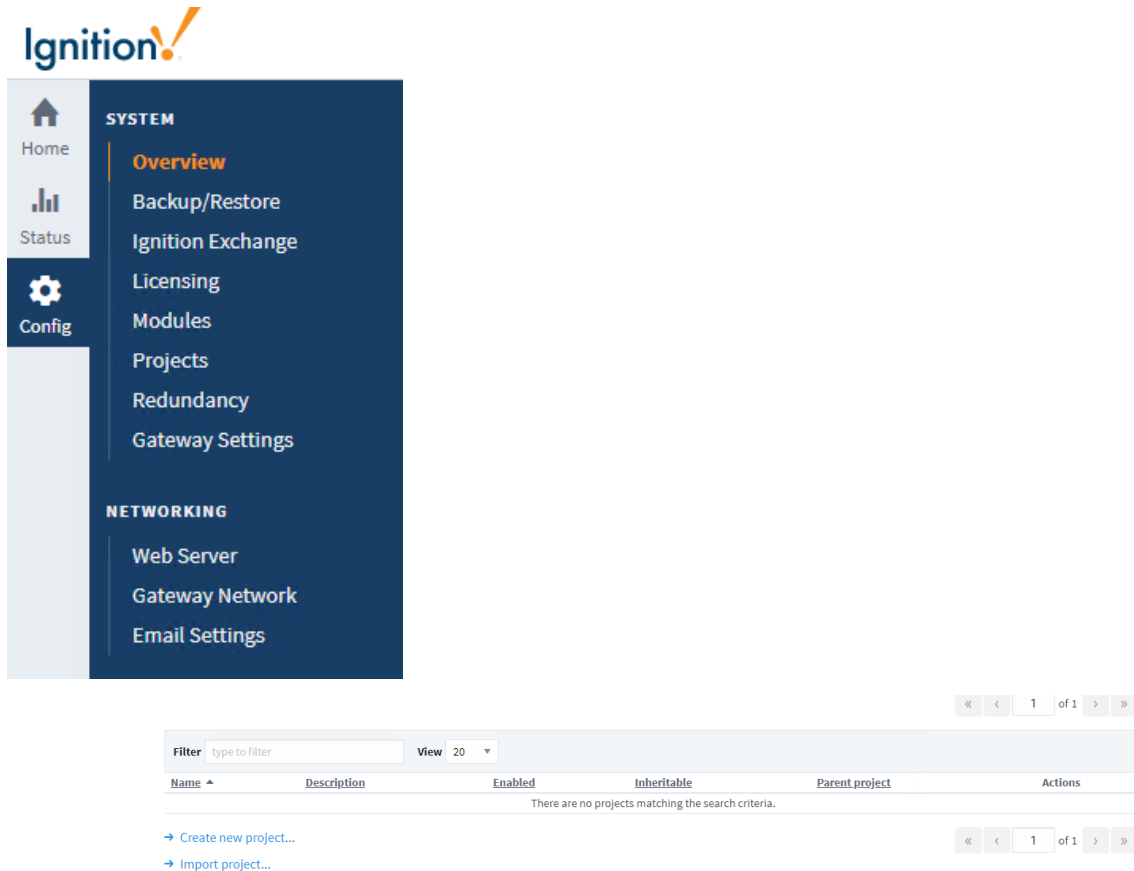

11. Import the global.zip Project file by selecting Choose File and then locating the file. The Project file is provided in the PE Ignition installation package.


12. In the Project Name field, enter “global” and then select the Allow Overwrite check box.
13. Select Import.

Import Project	
Import from File	<input type="button" value="Choose File"/> global.zip
Project Name	<input type="text" value="global"/>
Allow Overwrite	<input checked="" type="checkbox"/>

14. Import the PE-Project.zip Project file, which is also provided in the PE Ignition installation package.
15. In the Project Name field, enter “PE-Project” and select the Allow Overwrite check box.
16. Select Import.


Import Project	
Import from File	<input type="button" value="Choose File"/> PE-Project.zip
Project Name	<input type="text" value="PE-Project"/>
Allow Overwrite	<input checked="" type="checkbox"/>

17. Create a new database connection for MariaDB. From the Config menu, select Databases > Connections.

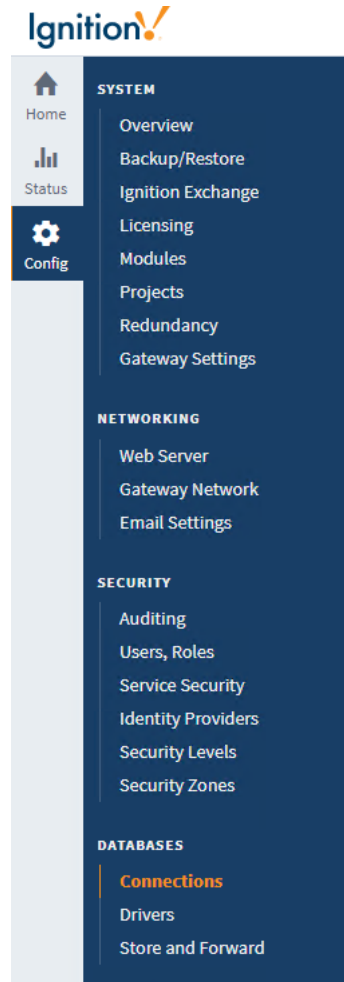

18. Select Create new Database Connection and then select the MariaDB database connection.

Name	Description
No Database Connections	
<a href="#">→ Create new Database Connection...</a>	

 Select the correct JDBC Driver for the type of database you wish to connect to. If no driver corresponds to your database, go to the Driver Configuratic

**MariaDB**

The MariaDB (a community-owned fork of MySQL) JDBC Driver - compatible with all MariaDB servers and MySQL 5.x (>= 5.5.3).

**Microsoft SQLServer**

The Microsoft SQL Server JDBC Driver is a Java Database Connectivity (JDBC) 4.2 compliant driver.

**MySQL**

The official MySQL JDBC Driver, Connector/J.

**Oracle Database**

The Oracle Database JDBC driver.

**PostgreSQL**

The official PostgreSQL JDBC Driver.

**SQLite**

Driver for the popular embedded database system.

19. Enter the Connection details for MariaDB:

Field	Setting
Name	dev
Description	PE SQL MariaDB Connection
JDBC Driver	MariaDB
Connect URL	Make sure the port and database name are specified correctly.
Username	<username for mariaDB database>
Password	<mariaDB password for username>


Main Properties	
Name	<input type="text" value="dev"/> <p>Warning: Changing the name of a database connection is risky. Any projects that refer to this connection by name (instead of referring to their project default) will start causing errors trying to connect to a connection that no longer exists. Please verify that no projects refer to this connection by name, and update the ones that do.</p>
Description	<input type="text" value="PE SQL Mariadb Connection"/>
JDBC Driver	MariaDB <p>The JDBC driver dictates the type of database that this connection can connect to. It cannot be changed once created.</p>
Connect URL	<input type="text" value="jdbc:mariadb://localhost:3306/qad"/> <p>The Connect URL is JDBC-driver specific. It usually contains the address of the machine that the database is running on. The format of the MariaDB connect URL is: <code>jdbc:mariadb://<b>host</b>:<b>port</b>/<b>database</b></code> With the three parameters (in bold) <b>host</b>: The host name or IP address of the database server. <b>port</b>: The port that the database server is running on. MariaDB default port is <b>3306</b>. <b>database</b>: The name of the logical database that you are connecting to on the MariaDB server.</p>
Username	<input type="text" value="root"/>
Change Password?	<input type="checkbox"/> Check this box to change the existing password.
Password	<input type="password"/>
Password	<input type="password"/> <p>Re-type password for verification.</p>

20. After the connection details are saved, the connection Status should display as Valid.

Name	Description	JDBC Driver	Translator	Status	
dev	PE SQL Mariadb Connection	MariaDB	MYSQL	Valid	<input type="button" value="delete"/> <input type="button" value="edit"/>

### Create Internal User Source

21. Next, create a New Internal User Source by selecting Security > Users, Roles in the Config menu.

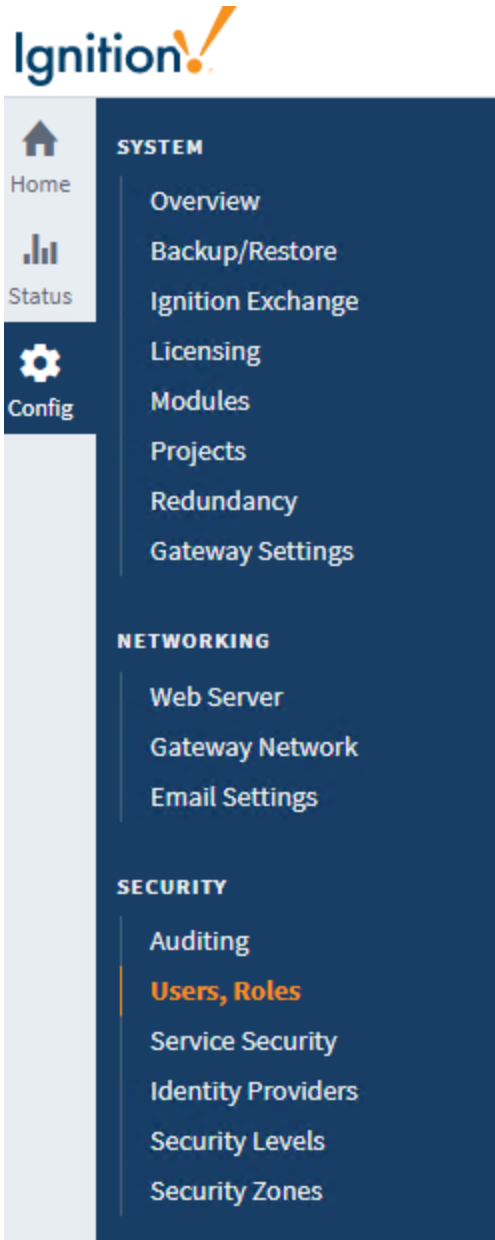


22. Select Create new User Source.

Name	Type	Description	
default	Internal	This is the default and always present internal authentication profile.	manage users edit
opcua-module	Internal	OPC UA clients will authenticate against this profile by default.	More edit

→ [Create new User Source...](#)

### 23. Select Internal as the new User Source.

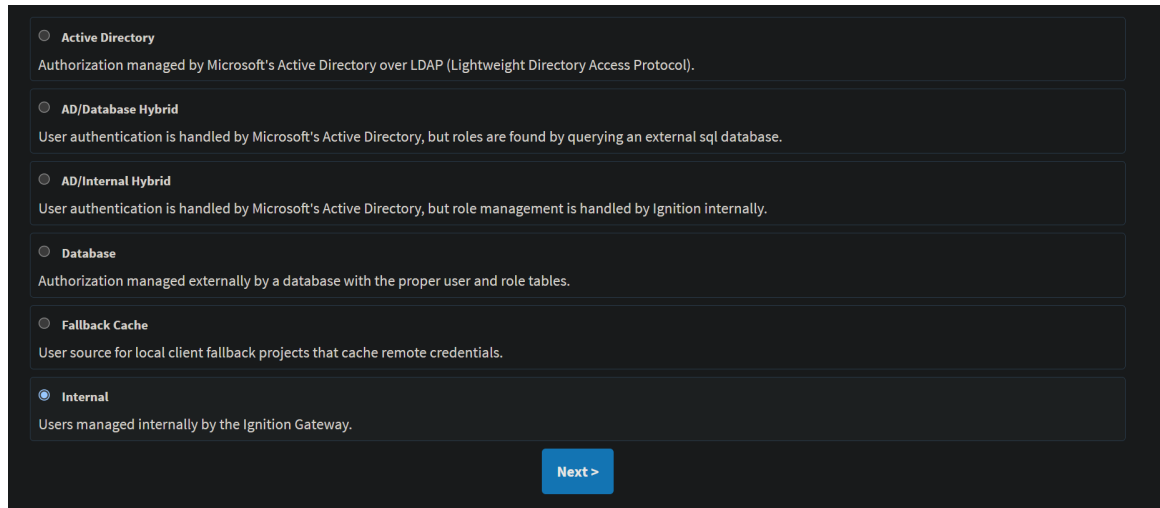

The screenshot shows a dark-themed installation wizard window with a list of radio button options for user source selection. The 'Internal' option is selected. A blue 'Next >' button is located at the bottom right of the window.

- Active Directory**  
Authorization managed by Microsoft's Active Directory over LDAP (Lightweight Directory Access Protocol).
- AD/Database Hybrid**  
User authentication is handled by Microsoft's Active Directory, but roles are found by querying an external sql database.
- AD/Internal Hybrid**  
User authentication is handled by Microsoft's Active Directory, but role management is handled by Ignition internally.
- Database**  
Authorization managed externally by a database with the proper user and role tables.
- Fallback Cache**  
User source for local client fallback projects that cache remote credentials.
- Internal**  
Users managed internally by the Ignition Gateway.


Next >

24. Enter the details for the new User Source. In the Name field, enter “QAD”.

Main	
Name	NewProfile
Description	
Schedule Restricted	<input type="checkbox"/> Users are only able to log in when their assigned schedule is active. (default: false)
Failover Source	- none - If this source is unreachable for authentication, this failover source will be used instead.
Failover Mode	Hard The failover mode to use if a failover source is set. <b>Hard:</b> Failover only if this source is un-reachable. <b>Soft:</b> Try the failover source when a user fails to authenticate with this source. (default: HARD)
Cache Validation Timeout	60000 The amount of time in milliseconds between cache updates of the user source. Values less than zero disables the cache. (default: 60,000)
Lockout Enabled	<input type="checkbox"/> Lock out a user's account after more than the maximum allowed number of failed authentication attempts occur within the lockout window (default: true)
Lockout Attempts	5 Maximum number of failed authentication attempts allowed within the lockout window before locking the user out. Values less than one disables lockout. (default: 5)
Lockout Window	15 The duration of the lockout window in minutes. Values less than one disables lockout. (default: 15)
Password Policy	
Password Max Age	0 The maximum age (in days) that a password is valid for. A value of zero disables password expiration. (default: 0)
Password Min Length	1 Passwords must be at least this many characters long. (default: 1)
Password Complexity	1 The number of character types (lowercase letters, uppercase letters, digits, punctuation) each password must contain. For example, a value of 3 means passwords must have 3 of the 4 character types to be considered valid. (default: 1)
Password History	0 The number of previous passwords to store. Passwords in the history list may not be re-used. A value of zero disables this feature. (default: 0)


25. After the User Source is saved, a confirmation message is displayed.

26. For the QAD user source, click More and then select Manage Users.

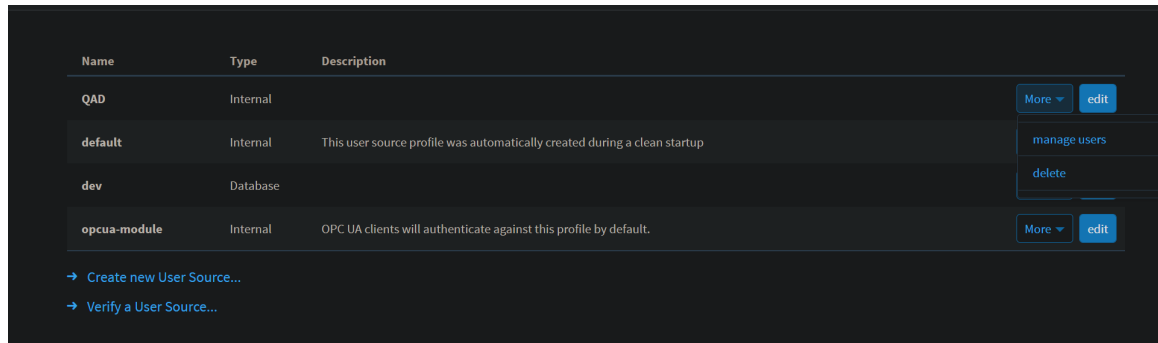

27. Select the Roles tab and create the following two roles:

- SFAuthenticated
- SFAdmin

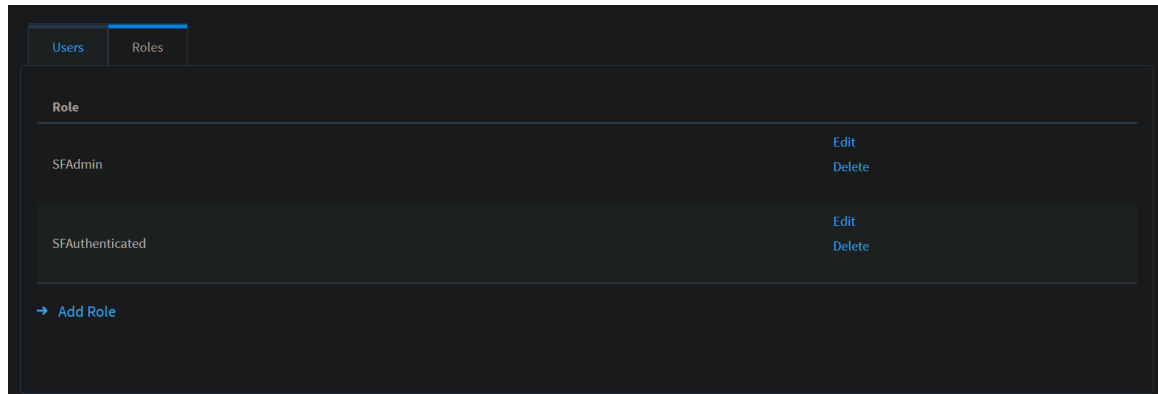

28. Once both roles are created, select the Users tab.

29. Click the Add User button to create two new users with the following properties:

Field	User 1	User 2
Username	user	admin
Password	user	password
Roles	None	SFAdmin, SFAuthenticated

Username	Name	Roles	Contact Info	Schedule	
admin		SFAuthenticated, SFAdmin		Always	Edit Delete
user				Always	Edit Delete

[→ Add User](#)

### Create Database User Source

30. Next, create a New Database User Source by selecting Security > Users, Roles in the Config menu.

31. Select Create new User Source.

Name	Type	Description	
default	Internal	This is the default and always present internal authentication profile.	<a href="#">manage users</a> <a href="#">edit</a>
opcua-module	Internal	OPC UA clients will authenticate against this profile by default.	<a href="#">More</a> <a href="#">edit</a>

[→ Create new User Source...](#)

32. Selecting Database as the new User Source.

**Active Directory**  
Authorization managed by Microsoft's Active Directory over LDAP (Lightweight Directory Access Protocol).

**AD/Database Hybrid**  
User authentication is handled by Microsoft's Active Directory, but roles are found by querying an external sql database.

**AD/Internal Hybrid**  
User authentication is handled by Microsoft's Active Directory, but role management is handled by Ignition internally.

**Database**  
Authorization managed externally by a database with the proper user and role tables.

**Fallback Cache**  
User source for local client fallback projects that cache remote credentials.

**Internal**  
Users managed internally by the Ignition Gateway.

33. Enter the details for the new User Source:

Field	Setting
Authentication Query	SELECT SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ',', 1), ',', -1) as firstname, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ',', 2), ',', -1) as lastname FROM IgnitionEmployee emp WHERE emp_addr = ? AND IgnitionPassword = CONVERT(PBKDF2('SHA512', ?, (SELECT IgnitionSalt FROM IgnitionEmployee ie WHERE emp.emp_addr = ie.emp_addr AND emp.emp_domain=ie.emp_domain LIMIT 1), 250, 128, false) USING utf8)
List Role Query	SELECT CONCAT(RoleName, ',', IgnitionRoleDomain) as rolename FROM IgnitionRoles UNION SELECT RoleName as rolename FROM IgnitionRoles WHERE rolename = 'SFAuthenticated'
User's Roles Query	SELECT rolename FROM (SELECT CONCAT(IgnitionRoleName,',',IgnitionRoleDomain) as rolename, IgnitionEmployee FROM IgnitionRoleMapping UNION SELECT IgnitionRoleName as rolename, IgnitionEmployee FROM IgnitionRoleMapping WHERE IgnitionRoleName = 'SFAuthenticated') sub WHERE IgnitionEmployee = ?
List Users Query	SELECT emp_addr AS username, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ',', 1), ',', -1) as firstname, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ',', 2), ',', -1) as lastname FROM IgnitionEmployee
Failover Mode	Soft
Failover Source	QAD

Main	
Name	dev
Description	
Schedule Restricted	<input type="checkbox"/> Users are only able to log in when their assigned schedule is active. (default: false)
Failover Source	- none - If this source is unreachable for authentication, this failover source will be used instead.
Failover Mode	Hard The failover mode to use if a failover source is set. <b>Hard:</b> Failover only if this source is un-reachable. <b>Soft:</b> Try the failover source when a user fails to authenticate with this source. (default: HARD)
Cache Validation Timeout	60000 The amount of time in milliseconds between cache updates of the user source. Values less than zero disables the cache. (default: 60,000)
Lockout Enabled	<input type="checkbox"/> Lock out a user's account after more than the maximum allowed number of failed authentication attempts occur within the lockout window (default: true)
Lockout Attempts	5 Maximum number of failed authentication attempts allowed within the lockout window before locking the user out. Values less than one disables lockout. (default: 5)
Lockout Window	15 The duration of the lockout window in minutes. Values less than one disables lockout. (default: 15)

Main Properties	
Database	dev Choose the database connection this user source will use.
Mode	Manual In Automatic mode, tables will be created for you and all interaction with the database is handled automatically. In Manual mode, you write queries by hand against tables that you've created. Management of users (adding, removing etc) is not supported in manual mode. (default: Automatic)

Automatic Mode	
Tablename Prefix	scada_ When in automatic mode, tables will be created to store the users and roles. They will have this prefix. (default: scada_)

Manual Mode	
<b>Authentication Query</b>	<p><code>SELECT SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ' ', 1), ' ', -1) as firstname, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ' ', 2), ' ', -1) as lastname FROM Ignition</code></p> <p>A query that must return a row if the given username and password combination provided is valid. The query will be run as a prepared statement, so use question mark (?) to represent username first and then password. The returned row may contain the user's basic properties under the column names: [firstname, lastname, schedule, language, notes, badge]</p> <p>Example: <code>SELECT firstname, lastname, schedule FROM USERS WHERE username = ? AND password = MD5(?)</code></p>
<b>Badge Authentication Query</b>	<p><code>SELECT username, firstname, lastname, schedule FROM USERS WHERE badge = ?</code></p> <p>A query that must return a row if the given badge provided is valid. The query will be run as a prepared statement, so use question mark (?) to represent the badge. The returned row must contain the username and may contain the user's basic properties under the column names: [firstname, lastname, schedule, language, notes, badge]</p> <p>Example: <code>SELECT username, firstname, lastname, schedule FROM USERS WHERE badge = ?</code></p>
<b>List Roles Query</b>	<p><code>SELECT CONCAT(RoleName, ';;', IgnitionRoleDomain) as rolename FROM IgnitionRoles</code></p> <p>A query that returns all possible roles that any user could be a member of. The role names must be returned in the first column of the query's results.</p> <p>Example: <code>SELECT rolename FROM roles</code></p>
<b>User's Roles Query</b>	<p><code>SELECT CONCAT(IgnitionRoleName, ';;', IgnitionRoleDomain) as rolename FROM IgnitionRoleMapping WHERE IgnitionEmployee = ?</code></p> <p>A query that returns all of the roles that the provided user belongs to. The roles must be strings and must be in the first column of the query's results. The query will be run as a prepared statement with one parameter: the username.</p> <p>Example: <code>SELECT rolename FROM mapping_table WHERE username = ?</code></p>
<b>List Users Query</b>	<p><code>SELECT emp_addr AS username, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ' ', 1), ' ', -1) as firstname, SUBSTRING_INDEX(SUBSTRING_INDEX(emp_sort, ' ', 2), ' ', -1) as</code></p> <p>A query that returns a row containing each username. There must be at least one column: the username. Other columns are optional, supported columns are: [username, firstname, lastname, schedule, language, notes, badge].</p>
<b>Contact Info Query</b>	<p><code>SELECT contact_type, contact_value FROM user_contact WHERE username=?</code></p> <p>A query that returns all of the contact info for the user. The first column must be the contact type, the second column the contact value. Optional, may be blank.</p> <p>Example: <code>SELECT contact_type, contact_value FROM user_contact WHERE username=?</code></p>
<b>Schedule Adjustment Query</b>	<p><code>SELECT start_date, end_date, is_available, note FROM user_schedule_adj WHERE username=?</code></p> <p>A query that returns the upcoming schedule adjustments for the user. Columns must be Start(date), End(date), Available(boolean), Note(string). Optional, may be blank.</p> <p>Example: <code>SELECT start_date, end_date, is_available, note FROM user_schedule_adj WHERE username=?</code></p>
<b>Extra Properties Query</b>	<p><code>SELECT prop_name, prop_value FROM user_props WHERE username=?</code></p> <p>A query that returns name, value pairs of extra properties for the user. Will be run with one parameter: the username. Optional, may be blank.</p> <p>Example: <code>SELECT prop_name, prop_value FROM user_props WHERE username=?</code></p>


34. After the User Source is saved, a confirmation message is displayed.

✔ Successfully created new User Source "dev"

Name	Type	Description	
default	Internal	This is the default and always present internal authentication profile.	<a href="#">manage users</a> <a href="#">edit</a>
dev	Database		<a href="#">More ▾</a> <a href="#">edit</a>
opcua-module	Internal	OPC UA clients will authenticate against this profile by default.	<a href="#">More ▾</a> <a href="#">edit</a>

### Create a Realtime Tag Provider

35. Create a new Realtime Tag Provider by selecting Tags > Realtime from the Config menu.

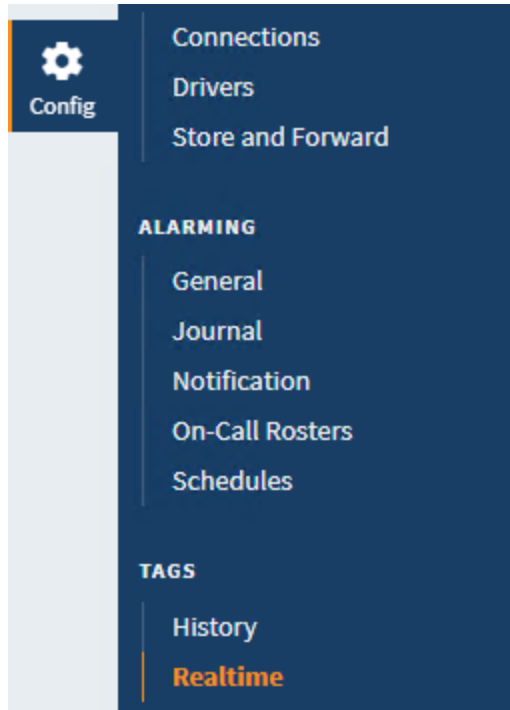

36. Select Create new Realtime Tag Provider.

Name	Description	Enabled	Type	
default	Default tag provider	true	Standard Tag Provider	<input type="button" value="delete"/> <input type="button" value="edit"/>

[→ Create new Realtime Tag Provider...](#)

37. Select Standard Tag provider.

**Standard Tag Provider**  
 Tags are stored inside of Ignition and executed by the system.

**Remote Tag Provider (Gateway Network)**  
 Creates a link to a tag provider on a different system through the Gateway Network.

38. Enter the Realtime Tag Provider information:

Field	Setting
Name	dev
Description	PE Tag Provide
Enabled	Yes/Check box selected
Default Database	dev

**Main**

<b>Name</b>	<input type="text" value="dev"/>
<b>Description</b>	<input style="width: 95%;" type="text" value="PE Tag Provider"/>
<b>Enabled</b>	<input checked="" type="checkbox"/> (default: true)

**Other**

<b>Default Database</b>	<input type="text" value="dev"/>
-------------------------	----------------------------------


39. After the Realtime Tag Provider is saved, a confirmation message is displayed.

✔ Successfully updated Realtime Tag Provider "dev"

Name	Description	Enabled	Type	
default	Default tag provider	true	Standard Tag Provider	<input style="font-size: 8px;" type="button" value="delete"/> <input style="font-size: 8px;" type="button" value="edit"/>
dev	PE Tag Provider	true	Standard Tag Provider	<input style="font-size: 8px;" type="button" value="delete"/> <input style="font-size: 8px;" type="button" value="edit"/>

### Set Up Project to Use the pesql Database and peTag

40. Next, edit the Project so that it can use the pesql database and peTag. Select Projects from the Config menu.

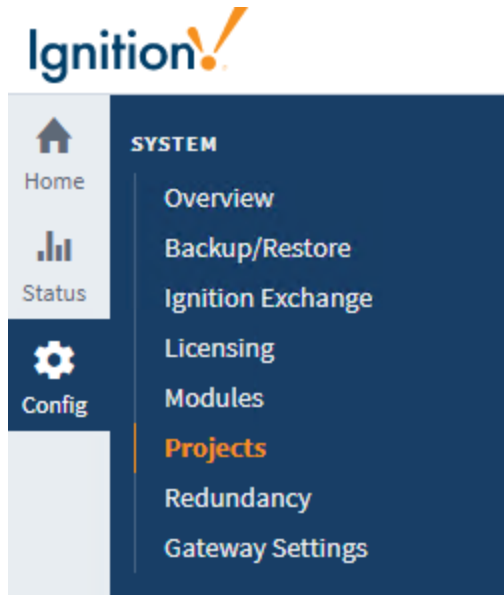

41. For the PE-Project, select Edit.

Name	Description	Enabled	Inheritable	Parent project	Actions
PE-Project	QAD Production Execution	true	false	global	More Edit

42. Enter the following information:

Field	Setting
User Source	default
Default Database	dev
Default Tag Provider	dev

**Project Settings**

**Name \*** PE-Project

**Description** QAD Production Execution

**Title** QAD PE Ignition  
The title for the project. This can contain more characters than the name (space, etc), and will be used to represent the project to users. If empty, the name will be used.

**Enabled**  A disabled project will not be active on the Gateway, but will remain editable in the Designer.

**Inheritable**  Inheritable projects are not runnable as a stand-alone project, but are intended to provide shared resources to one or more child projects.

**Parent Project** global

**Connections**

**User Source** default

**Default Database** dev

**Default Tag Provider** dev

### Install and Configure the Ignition Designer

This section contains instructions to configure the Ignition Designer.

In this procedure, you will,


- Download and install Ignition Designer.




- Import Tags and Tag Groups, which provide additional functionality for PE.
- Import the images/icons that are displayed on the Production Execution screens.

1. Download the `DesignerLauncherSetup.exe` file from the Ignition Gateway homepage. Open the `.exe` file and follow the install instructions on the screens.

Download Ignition Designer Launcher

**Ignition Designer Launcher**  
Download the Ignition Designer Launcher to create or modify your projects.  
[Download](#)

**Download the Designer Launcher**  
[Download for Windows](#)


We've detected you're on Windows. Download the Designer Launcher for Windows and follow these steps below to install.

2. Once the installation is complete, open the Ignition Designer and select Add Designer.



The screenshot shows the Ignition Designer Launcher application window. The title bar reads "Ignition Designer Launcher". Below the title bar, there is a dark blue header with the application name and "About" and "Settings" buttons. The main content area is titled "My Designers" and includes a "Filter Designers.." input field and a blue "Add Designer" button.


3. Select Manually Add Gateway.

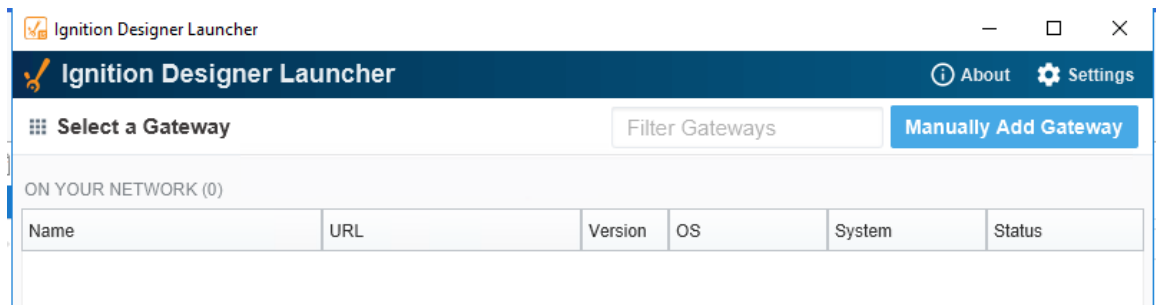


The screenshot shows the Ignition Designer Launcher application window. The title bar reads "Ignition Designer Launcher". Below the title bar, there is a dark blue header with the application name and "About" and "Settings" buttons. The main content area is titled "Select a Gateway" and includes a "Filter Gateways" input field and a blue "Manually Add Gateway" button. Below this, there is a section titled "ON YOUR NETWORK (0)" with a table that has columns for Name, URL, Version, OS, System, and Status.

Name	URL	Version	OS	System	Status
ON YOUR NETWORK (0)					


4. Enter the Gateway URL: `http://<hostname>:<gateway port>` and then select Add Gateway.

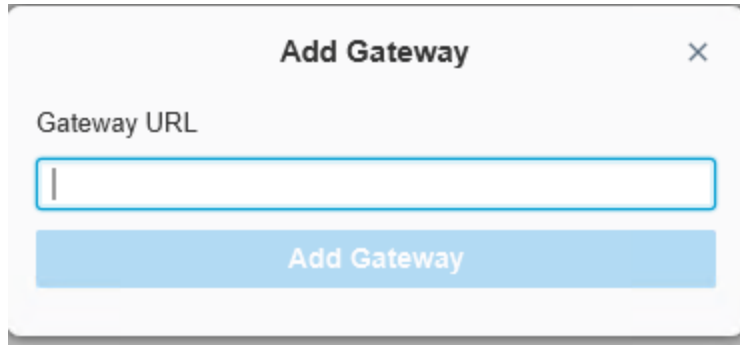

5. Select Launch.

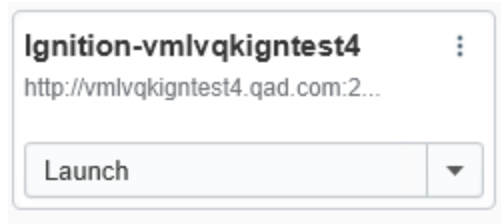


6. Enter the Ignition Gateway user credentials.

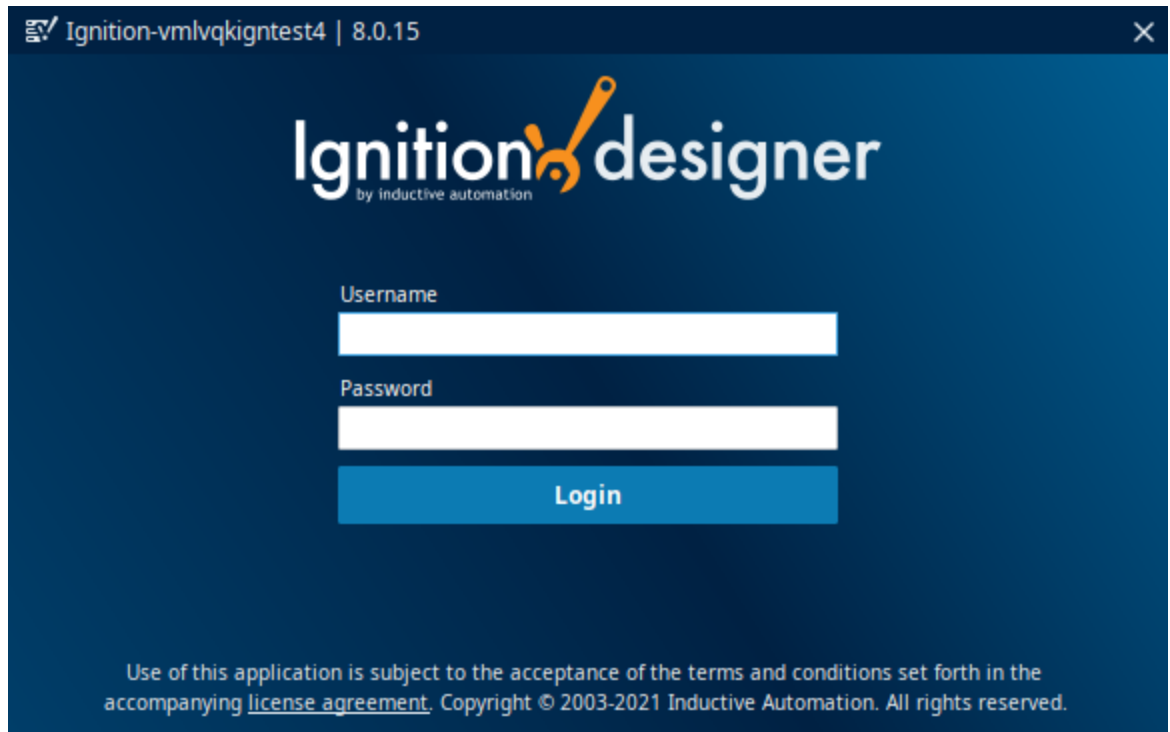


7. Select the PE-Project and then select Open.




8. Import the Tags by highlighting Tag and selecting Import.

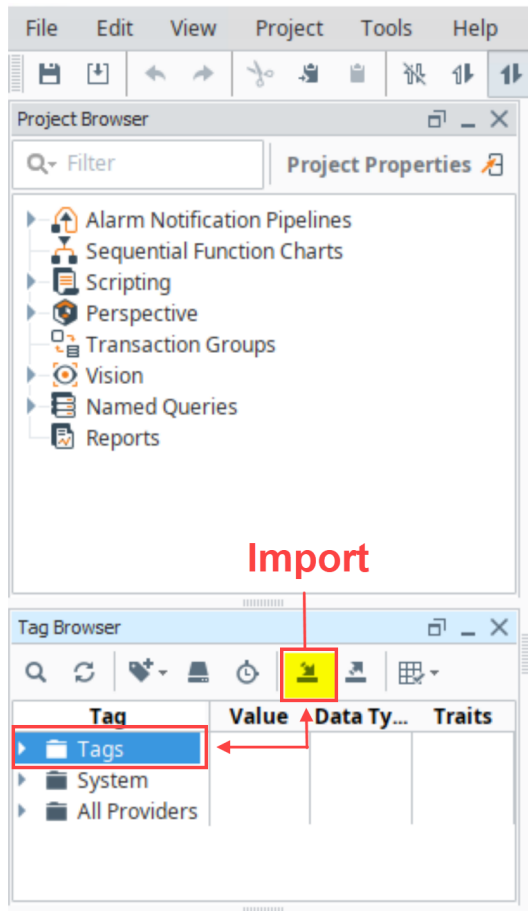


9. Select the tags.json file to import. This file is available in the PE Ignition package.

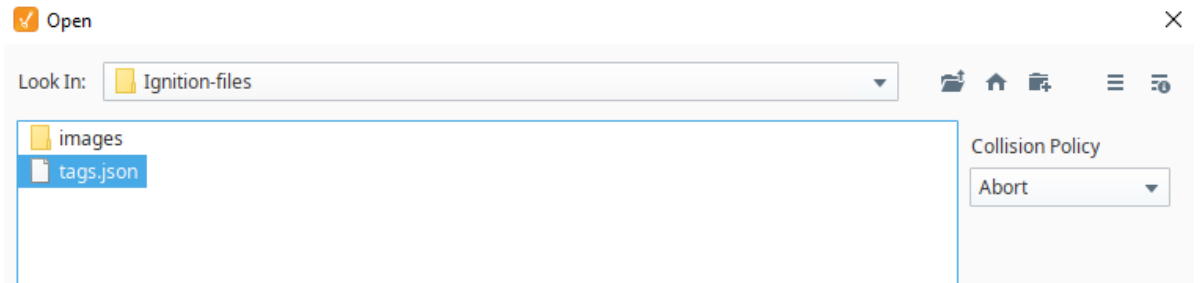


10. Select Tags and then the Edit Tag Group.

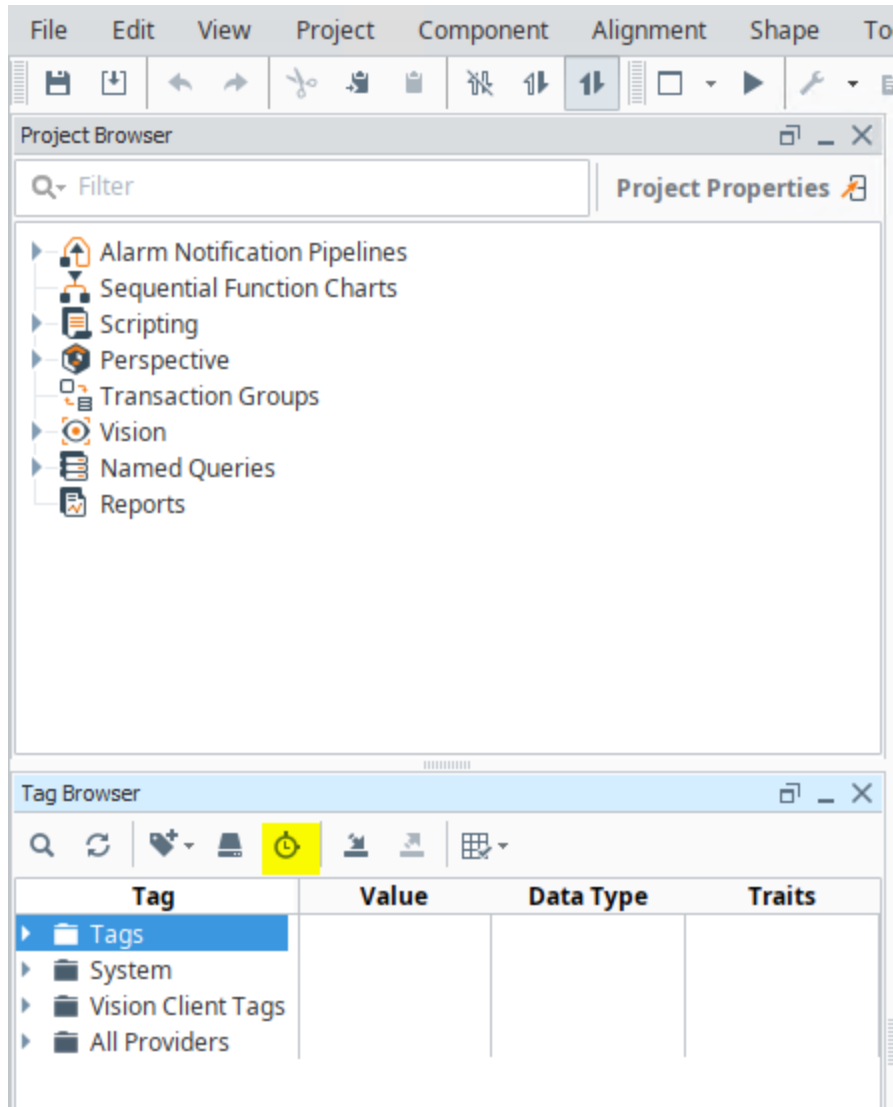


11. From the Tag Group Editor Dialog box, select Import.

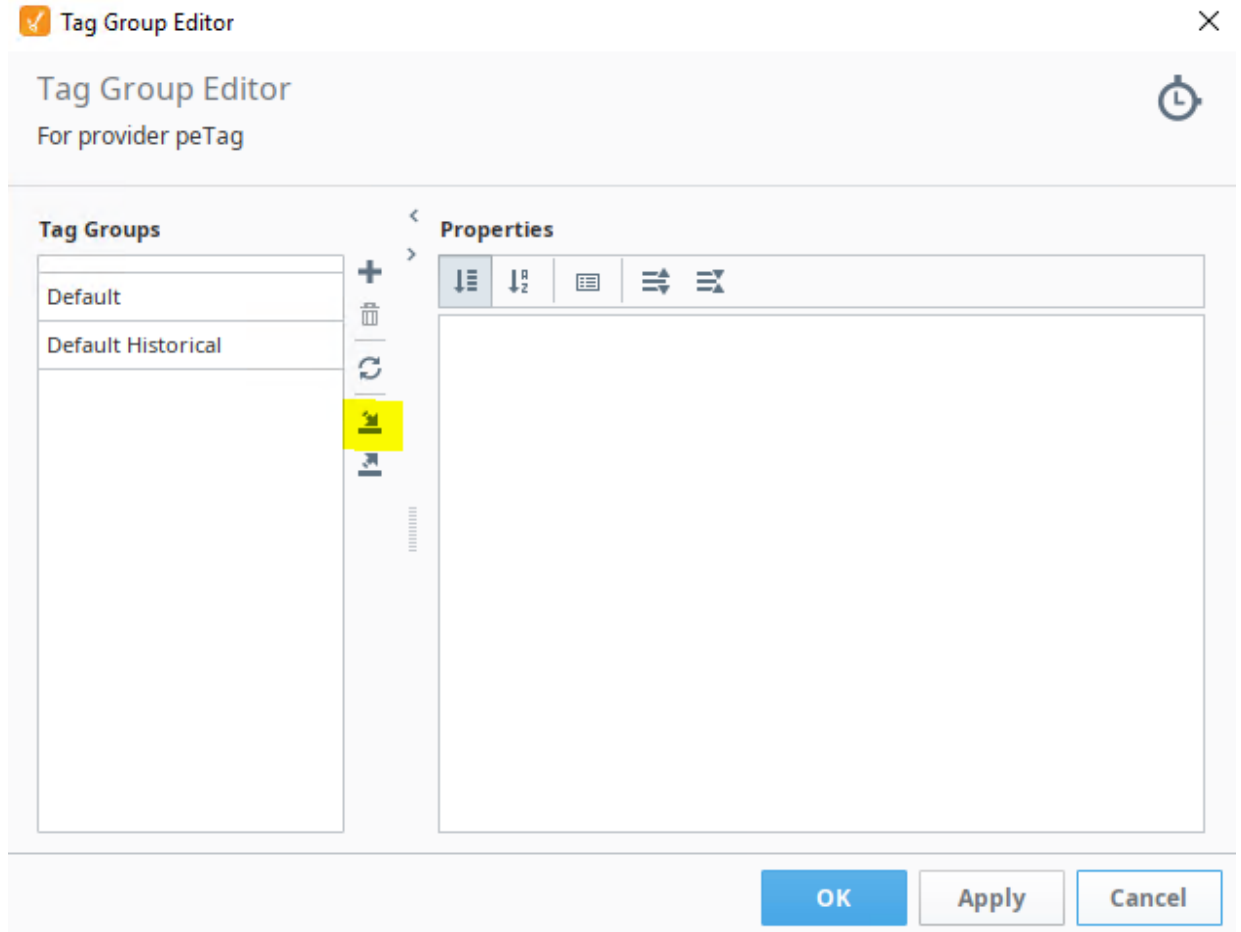


12. Select the location where the `tag-groups.json` file is saved. This file is available in the PE Ignition package.

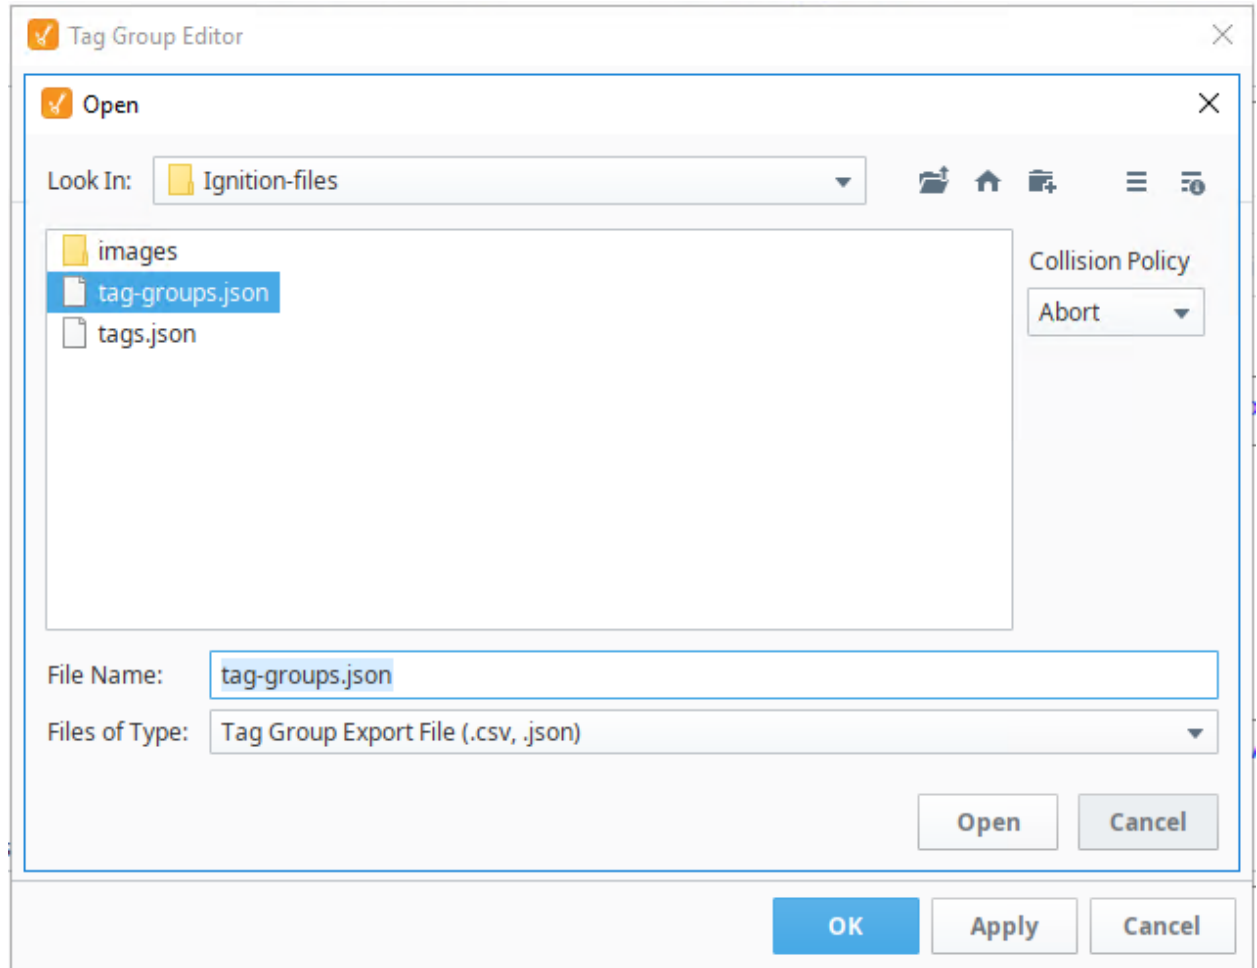


13. Next, import images/icons by extracting the image .zip file from the package into a temporary location. Select Tools from the menu and then select Image Management.

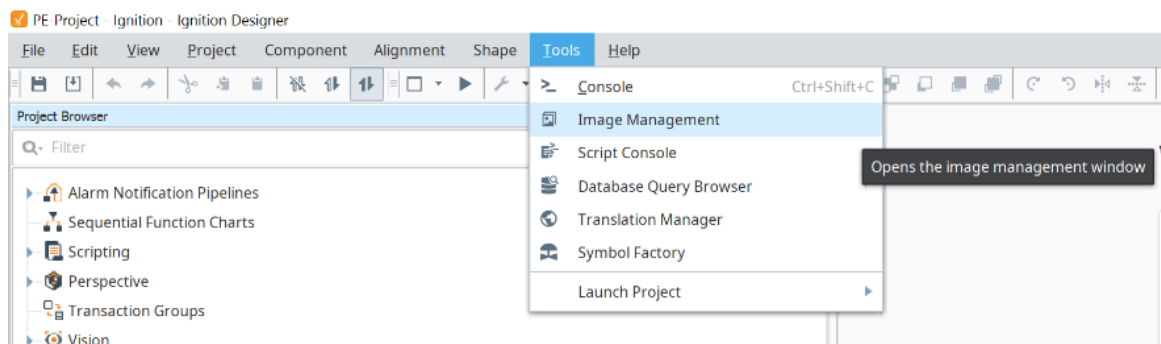


14. In the Image Management window, select Upload new image.

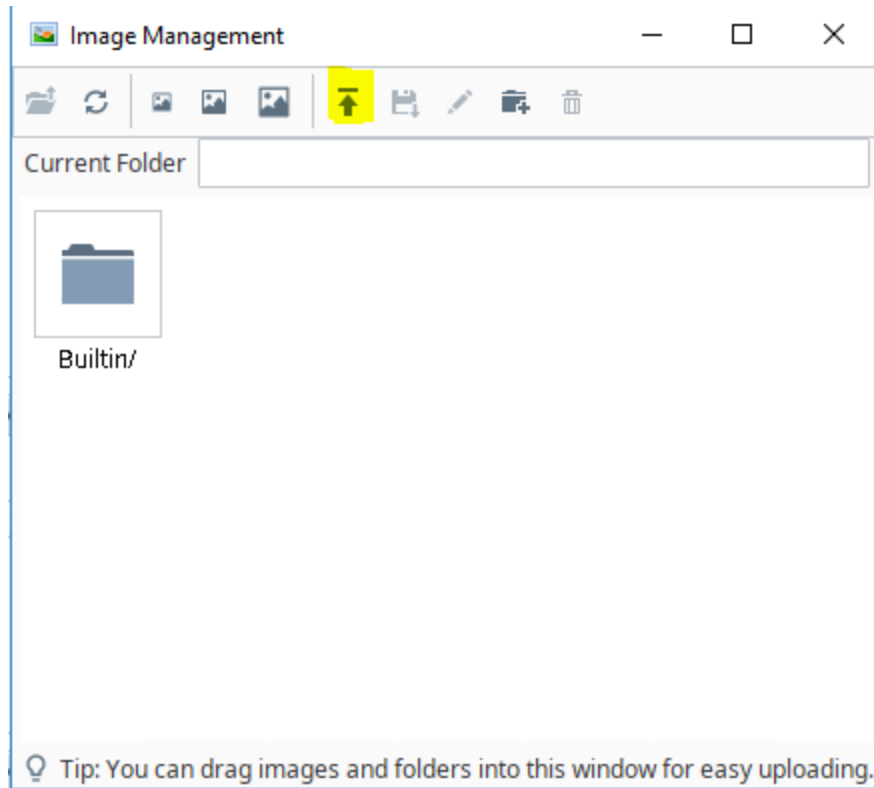

15. From the temporary location where the unzipped images are located, select all files and folders and then select Open. The `Images.zip` file is provided with the PE Ignition package.

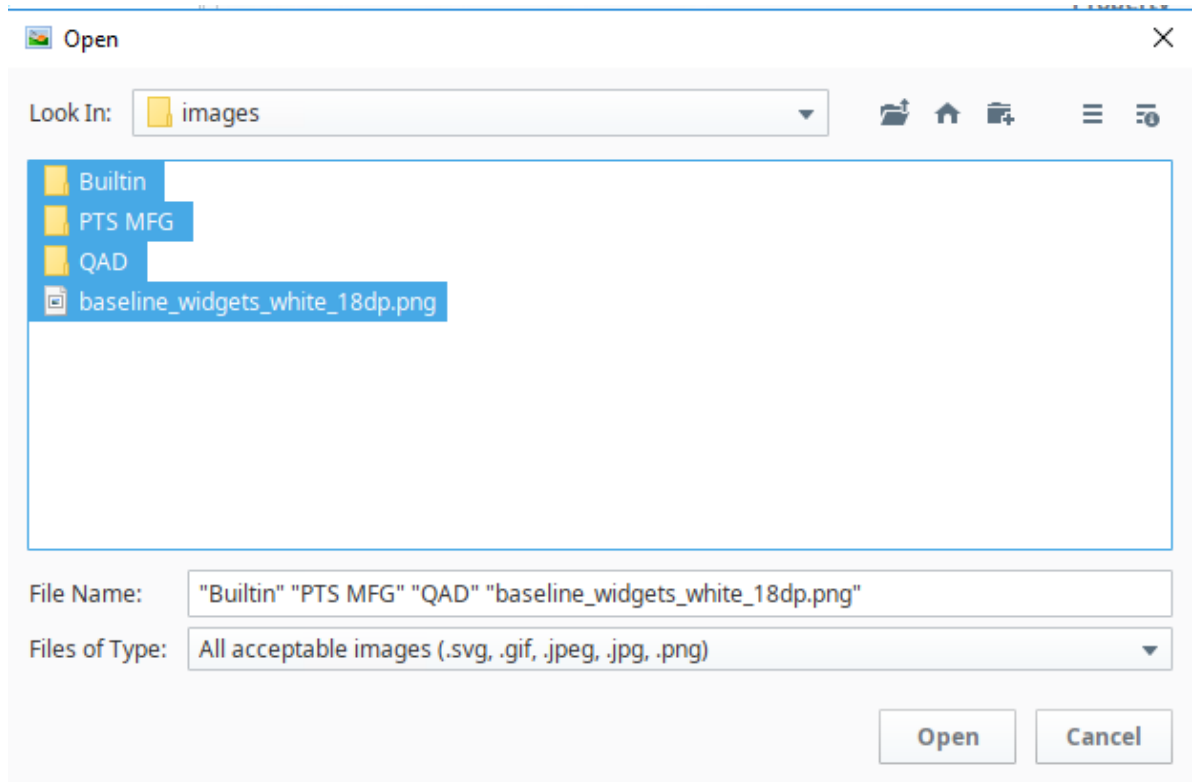


16. It may take a few minutes for Ignition to import the images. Once the import is completed, close the Image Management window.
17. To load the translation for different languages, open Ignition Designer and navigate to Tools → Translation Manager.

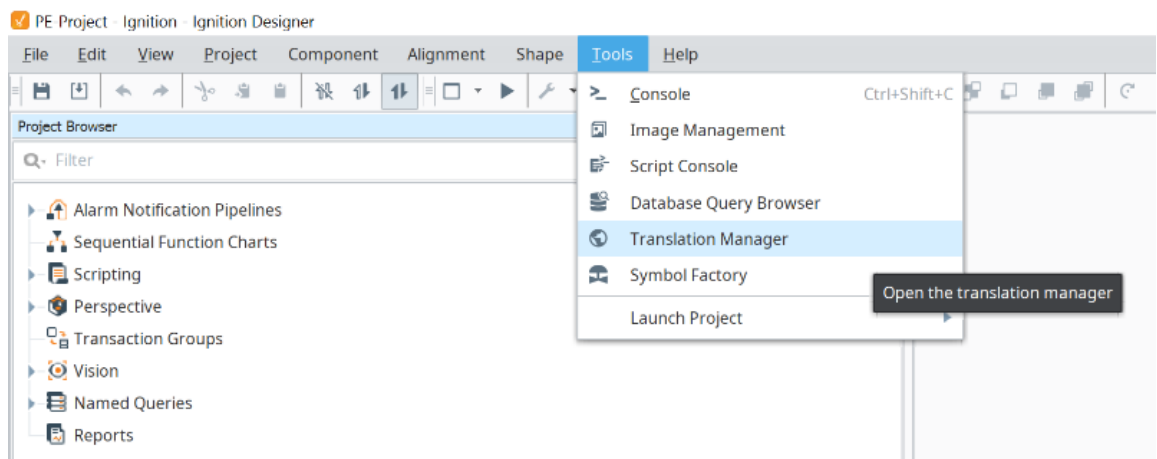


18. In the Translation Manager screen, select Import the Translation file. The translation files are available in the PE Ignition package.

19. Save the Project changes by selecting Save.

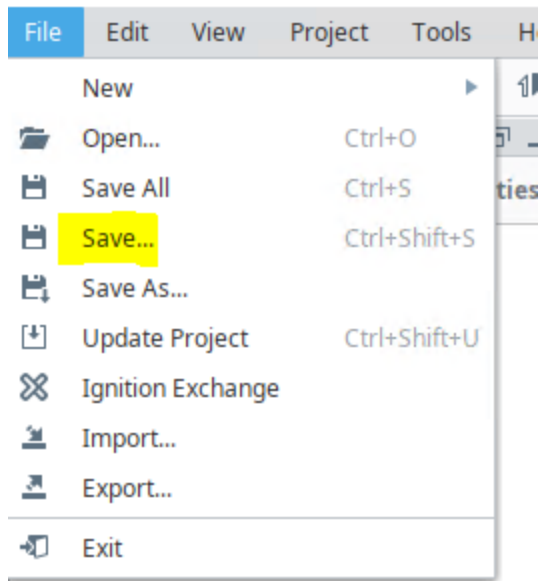

20. Then select Update Project.

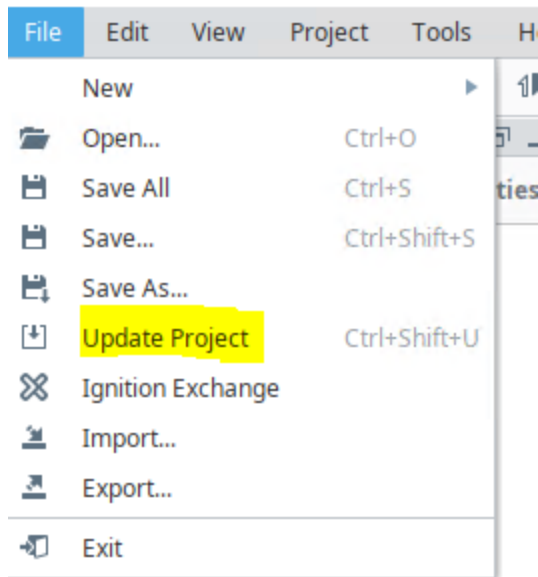

## EQMS PE Integration Configuration

**Note:** This section only applies if EQMS is installed.


1. Download and install the Web Service module in Ignition. Make sure to install the same version as the Ignition version that is installed:

<https://inductiveautomation.com/downloads/third-party-modules>

- Download the Web Services Module file (`Web_Service-module.mod1`) for Sepasoft, Inc.

Sepasoft, Inc. MES Modules for Ignition	Version	Checksum
<a href="#">Web Services Module (4.7 MB)</a>	2.80.0.2006162356 STABLE ▾	<a href="#">sha-256</a>

- Open Ignition Gateway in the web browser.  
`http://<ignitionhostname>:<port>`
- Select Modules from the Config menu.

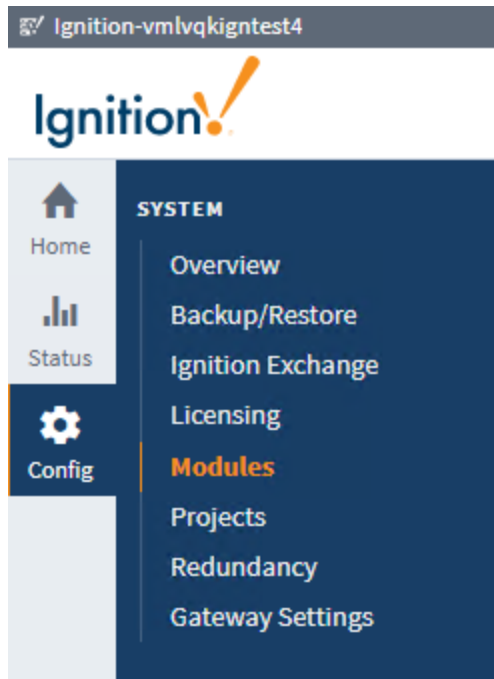


- Scroll to the bottom of the page and select Install or Upgrade a Module.

[→ Install or Upgrade a Module...](#)

**Note:** For details about a module's status, see the [Module Status](#) page.

- Select Choose File and then select `Web_Service-module.mod1`, which was downloaded. Select Install to install the module.

 To **install** a module, choose its \*.mod1 file and press "Install".  
 To **upgrade** a module, install the new version on top of the existing version.  
 Modules can be **downloaded** from [our website](#).

Choose File | Web\_Service-module.mod1


**Install**

7. Read and accept the terms in the License Agreement and then select Accept License.

I accept the terms in the License Agreement

**Accept License**

8. Accept the self-signed certificate and then select Install Module.

 This certificate is self-signed. This certificate has expired.

**Not Valid Until** 1/10/18, 4:00:00 PM  
**Not Valid After** 3/6/21, 3:59:59 PM  
**Subject Name** SepaSoft, Inc.  
**Issuer Name** Symantec Class 3 SHA256 Code Signing CA  
**Thumbprint** [ 64 F3 90 87 F9 B6 C0 40 79 39 13 D0 74 2F 0A CC BE 5F 8C 0F ]

This module was not written by Inductive Automation. Modules can make changes to your system. Make sure you trust the source of this module. Certificate is valid from Jan 10, 2018, 4:00:00 PM to Mar 6, 2021, 3:59:59 PM. Accepting expired certificates can be risky.

I understand the risk and want to install this module.

**Install Module**

9. After the Module is installed, the Config > Module screen will display the SepaSoft, Inc. module for web service.


**SepaSoft, Inc.**  
 (self-signed certificate, expired certificate)  
[View Certificate](#)

Name	Version	Description	License	State
Web Service	2.80.0 (b2006162356)	(SP2) A module that provides interfacing to web services.	Trial	Running

[More](#) [restart](#)

10. The new MESGateway project, which is now available in the Config >Project Web screen, needs to be updated to assign the correct Database and Tags.

11. Select Edit for the MESGateway project.

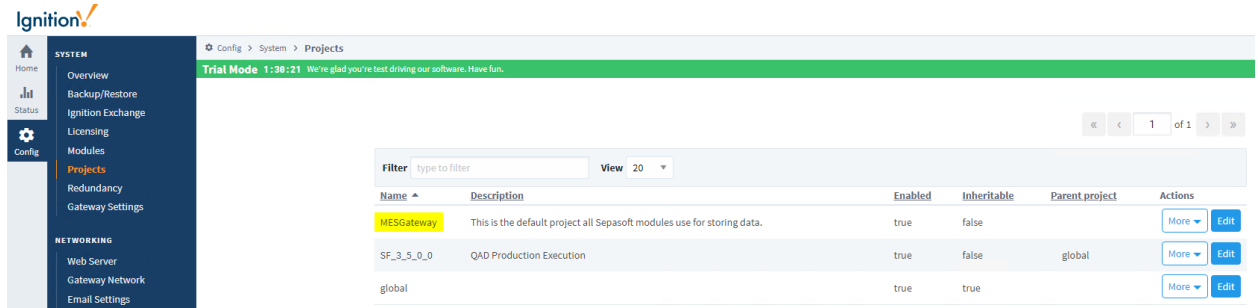

12. Assign the Database and Tags to the MESGateway project and then select Save.

Field	Setting
User Source	default
Default Database	dev
Default Tag Provider	dev

**Project Settings**

**Name \***

---

**Description**

---

**Title**   
The title for the project. This can contain more characters than the name (space, etc), and will be used to represent the project to users. If empty, the name will be used.

---

**Enabled**  A disabled project will not be active on the Gateway, but will remain editable in the Designer.

---

**Inheritable**  Inheritable projects are not runnable as a stand-alone project, but are intended to provide shared resources to one or more child projects.

---


**Parent Project**

---


**Connections**

User Source	<input type="text" value="default"/>
Default Database	<input type="text" value="dev"/>
Default Tag Provider	<input type="text" value="dev"/>

13. Next, configure the Web Services module in Ignition Designer to point to the EQMS host. Open the Ignition Designer and select the MESGateway Project.

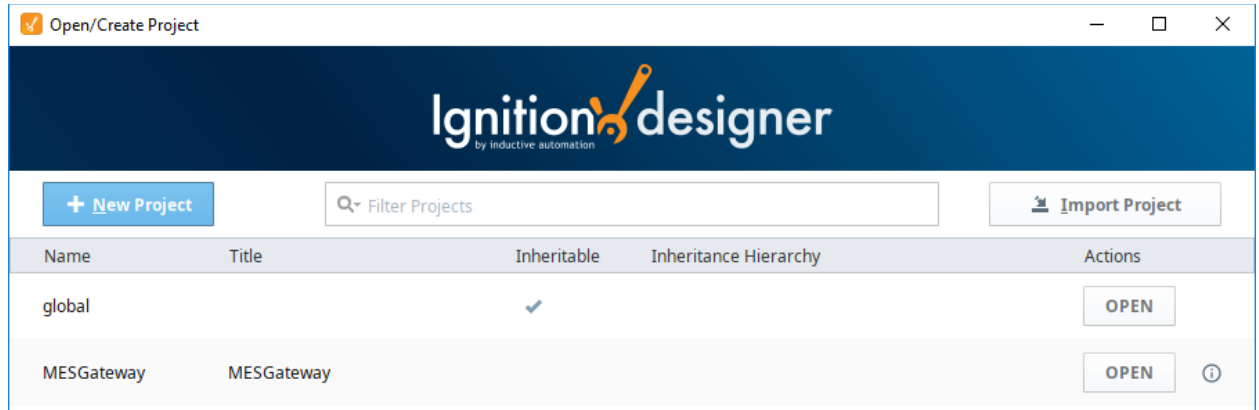


14. From the Project Browser, select Web Services > Consumers > SOAP Configurations > SOAP Configurations > Skill Validation Dev.

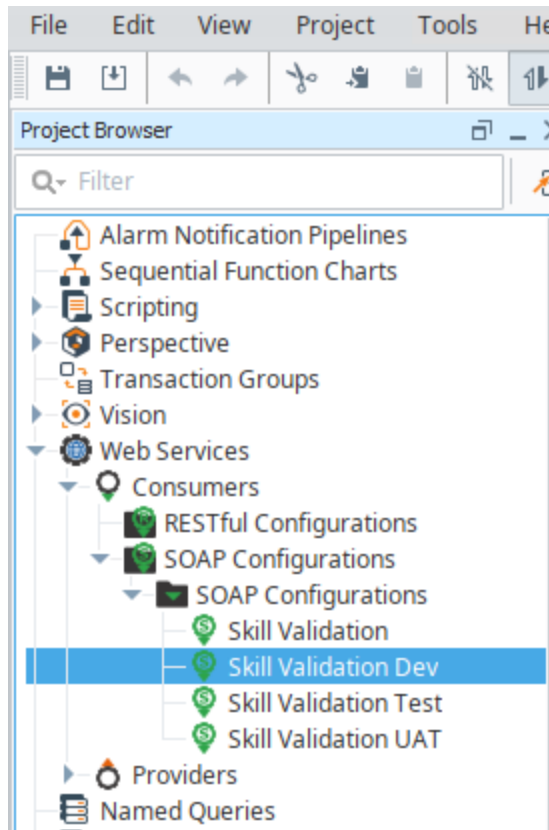


15. In the Skill Validation Dev window, enter the following WSDL link for the QMS host that needs to be integrated:



`https://<EQMS hostname>/WebApi/Integration/EmpSkillCheck.aspx?WSDL`

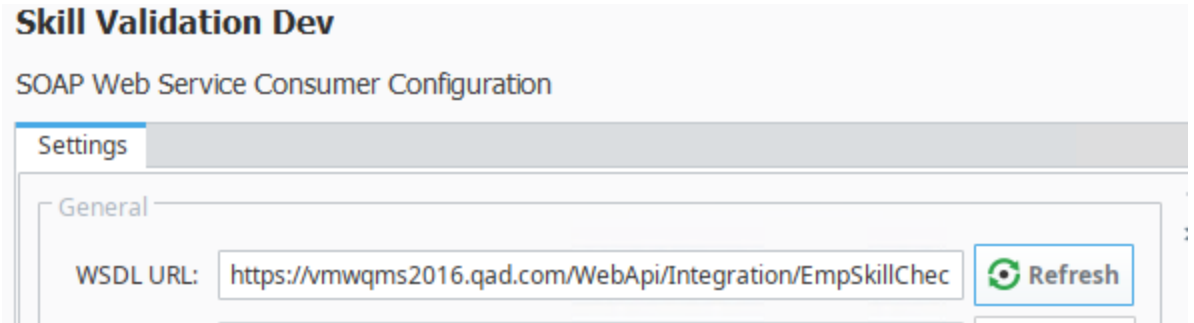

16. Select Refresh to refresh all the values on the screen.
17. Enter the values as shown. The WSDL URL must contain the EQMS host name.

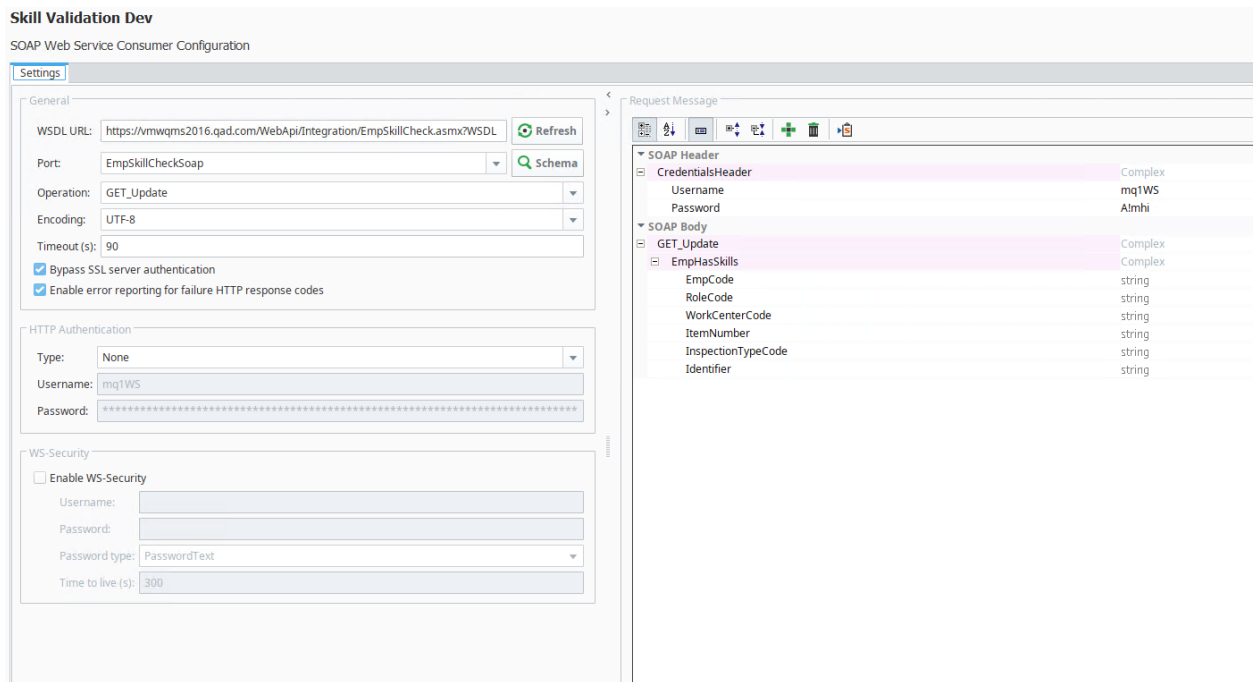

18. Save the Project changes and then select Update Project.

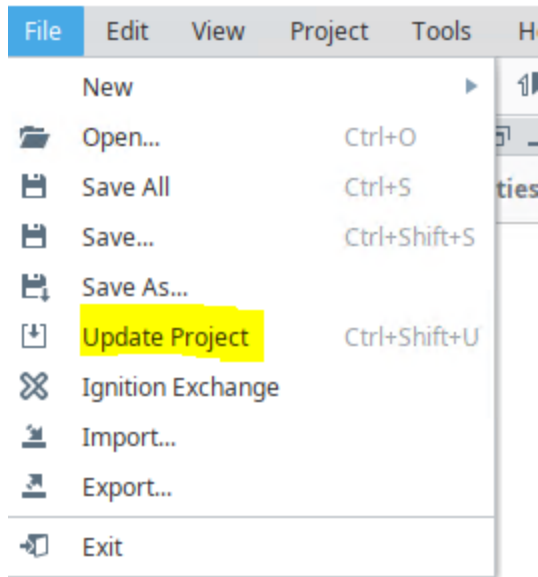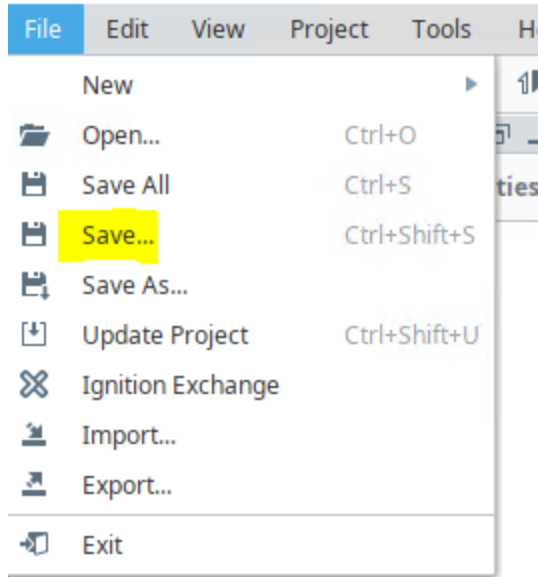

### Installing New Fonts

1. Take a Gateway backup before making any changes. From Ignition Gateway, you can take a Backup by navigating to Config → Backup/Restore → Download Backup.
2. Download a compatible font. The font should be an otf, ttf, woff or any other Linux approved font type. One suggested site, which provides a lot of fonts is <https://fonts.google.com/>. However, you can download fonts from other sites as well.
3. Place the downloaded font/fonts on Ignition Server.

4. Make note of the directory where the font files are stored and then locate the install directory for Ignition, which is usually the location where the `ignition.sh` script is placed.
5. Execute the script `peInstallFont.sh` from the PE Ignition package. This script will prompt for Ignition install the directory and font directory. Specify the directory noted in the previous step.
6. Once the script is executed, the font will be installed for Ignition. Clear the Unix server cache for changes to take effect. The cache can be cleared using [https://linuxhint.com/clear\\_cache\\_linux/](https://linuxhint.com/clear_cache_linux/) or rebooting the server.
7. On a Windows machine, clear the cache for the Vision client. Delete folder `<user directory>\.ignition\cache\resources`. For example, `c:\users\<userid>\.ignition/cache/resources`.
8. Reinstall the Vision Client by downloading the Vision client from the Ignition Gateway link.

## Updating Nifi Flow Components

Follow these steps if you are currently using QAD Production Execution and are updating the Nifi Flow Components:

1. Deactivate or remove the previous version of the Nifi Flow Components. It is recommended that you deactivate the previous version of the package rather than deleting it because it allows you to easily reactivate the previous version if necessary. See [Deactivate Previous Version of Nifi Flow](#).
2. Install the new version of the Nifi Flow Components using `yab`. See [Installing a New Version of the Nifi Flow Components](#).

## Deactivate Previous Version of Nifi Flow


**Note:** This task only applies if you are upgrading the Nifi flow and there is a prior version of the `penifi` package deployed.

If there is a prior version of the `penifi` package deployed, then the Nifi flow needs to be deactivated or removed before installing the new version. This is required because the updated Nifi flow uses the same port as the previous flow.


**Note:** It is recommended that you deactivate the previous version of the `penifi` package rather than deleting it because it allows you to easily reactivate the previous version if necessary.

Follow these steps to deactivate the previous version of the `penifi` package:


1. In Nifi, right-click on the flow and select Configure.

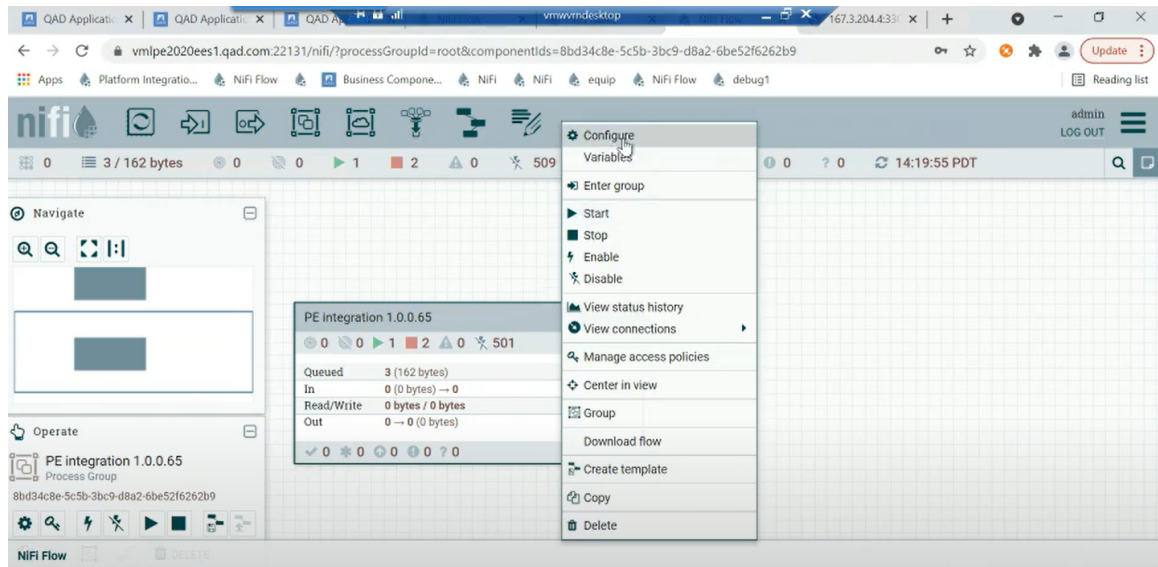


2. In the Configuration window > Controller Services tab, select the Settings button for the `PEdistributedMapCacheServer` piece of the flow.

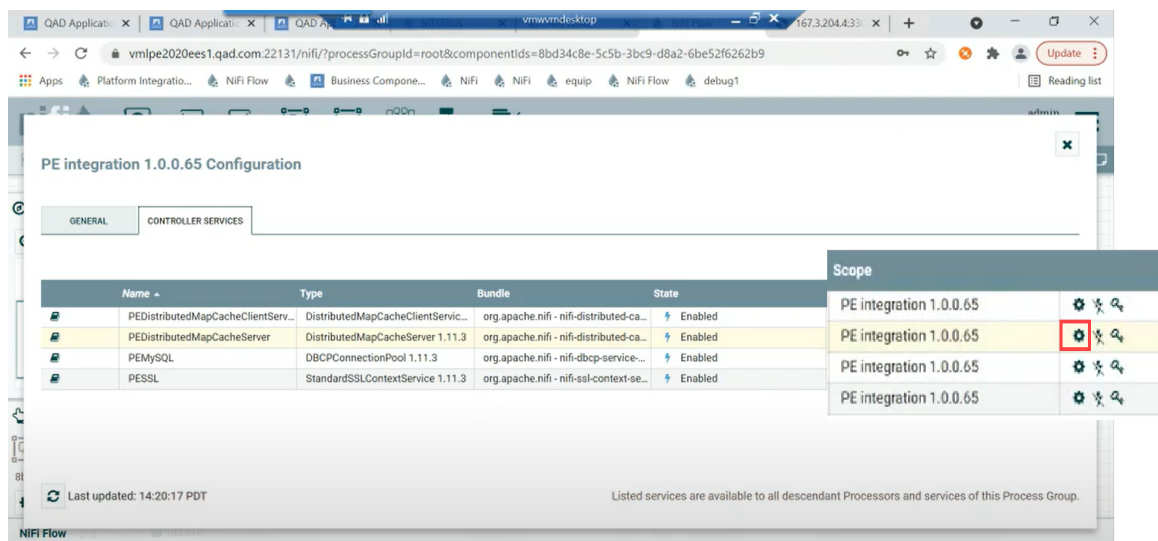


3. A Configure Controller Service window appears. Write down the Port number. If you needed to re-create this piece of the flow, you could create a new piece with the same name (`PEdistributedMapCacheServer`) and the port number you just recorded. Close the Configure Controller Service window.

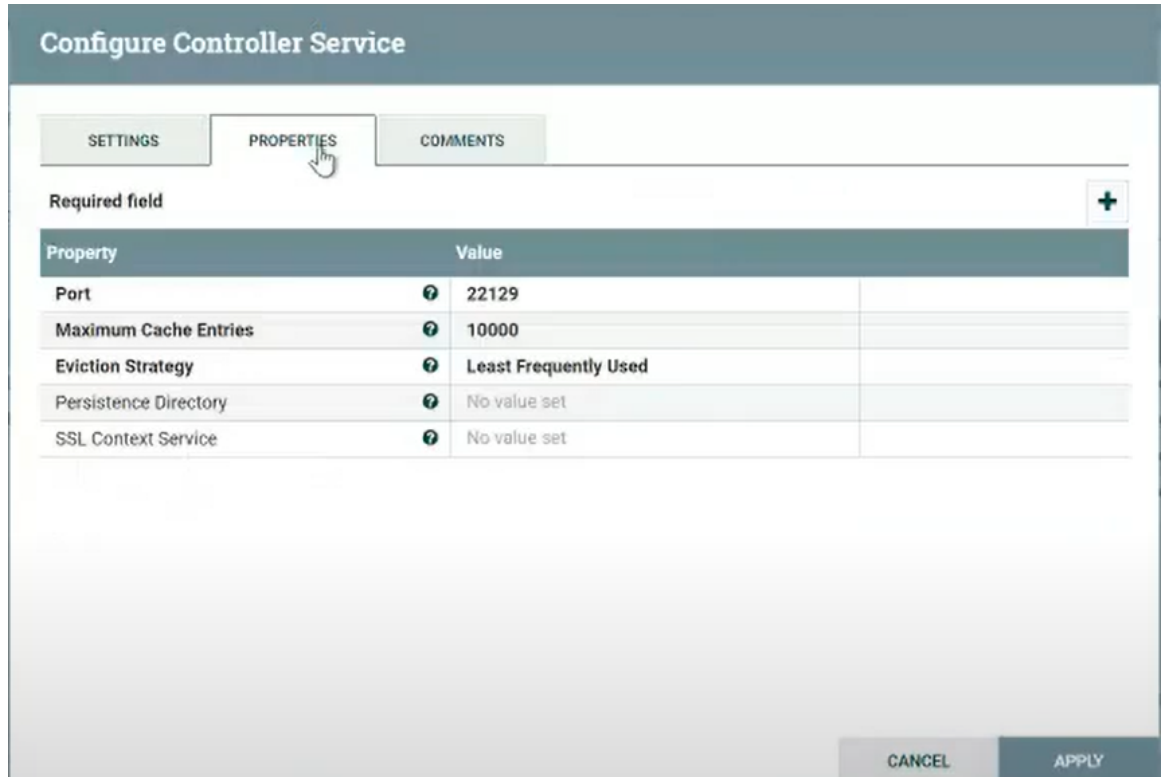


- Click the Disable button for PEDistributedMapCacheServer.

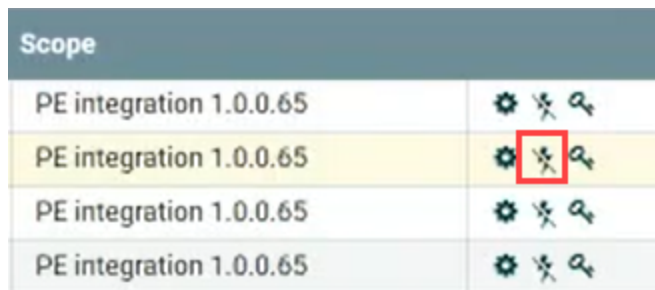

- A Disable Controller Service window opens. Select Disable and then close the window.

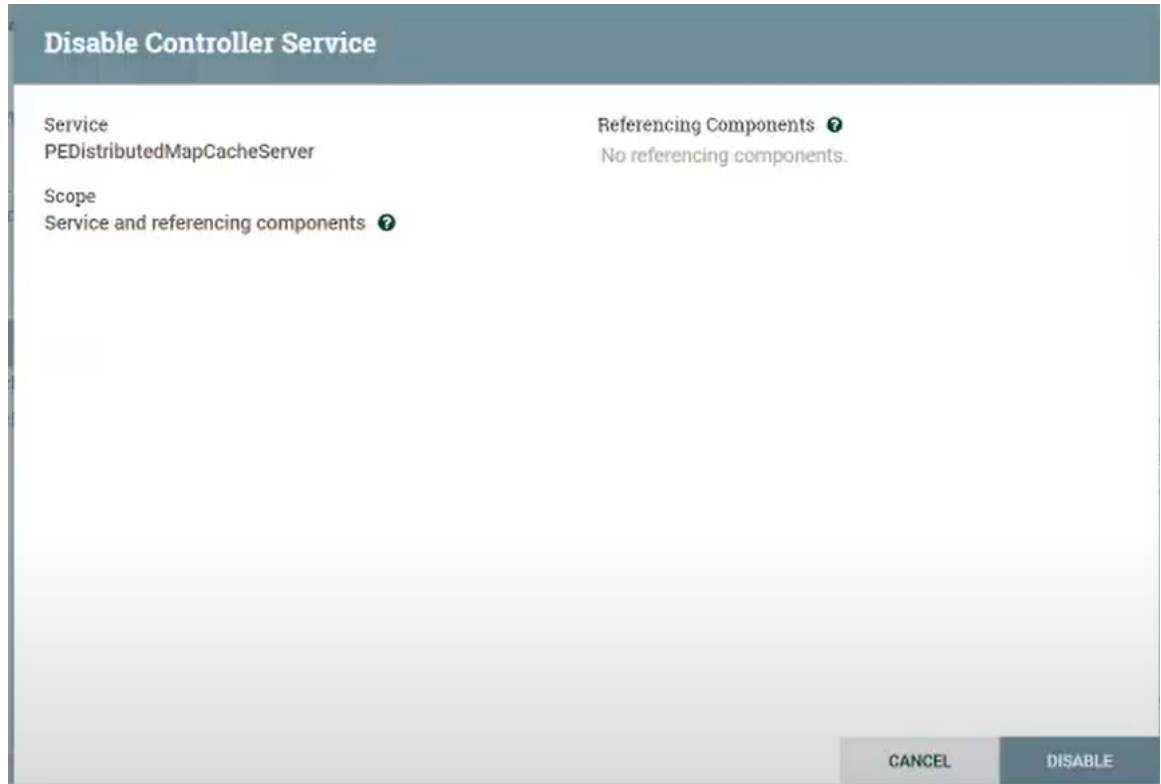

6. Once you disable PEDistributedMapCacheServer, a Delete button appears, allowing you to delete PEDistributedMapCacheServer. Select the Delete/Remove button.

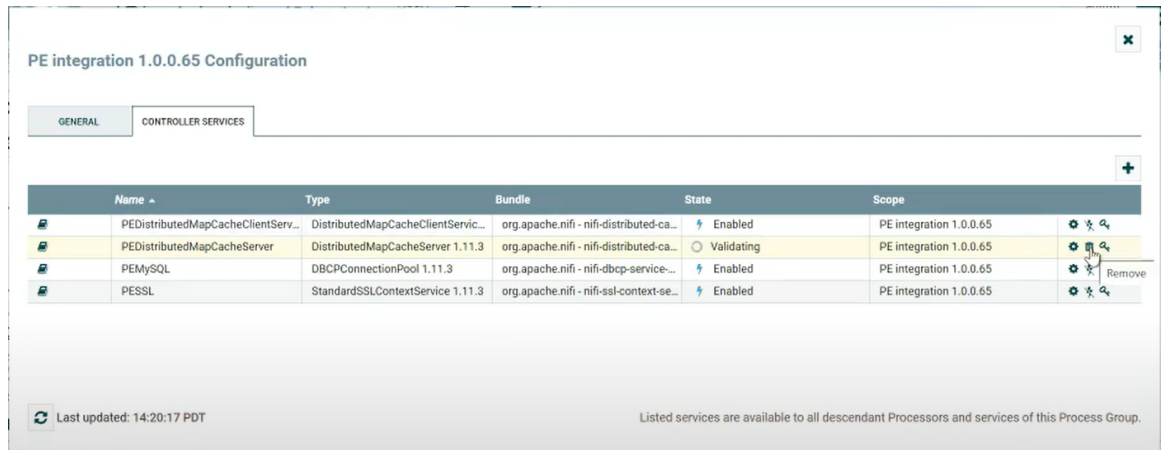

7. A Delete Controller Service window opens. Select Yes to delete.



8. Because you deleted this piece of the PE integration `x.x.x.xx` flow, this version of the flow is now disabled and not functional. You can now import the new version of the PE integration `x.x.x.xx` flow.

**Note:** If the new version of the PE integration `x.x.x.xx` flow does not function properly, you can re-enable the old version by re-creating the piece you just deleted. To re-create the piece, you need the information you recorded in the Configure Controller Service settings window.

### Deleting a Nifi Flow Using YAB


Follow these steps to delete a Nifi flow using yab:

1. Enter the following yab command to view a list of Nifi processes:

```
yab nifi-status
```

2. Then enter the following command to remove the version of the Nifi flow you want to remove:

```
yab nifi-default-pg-pe-<remote/local>-x-x-x-x-remove
```

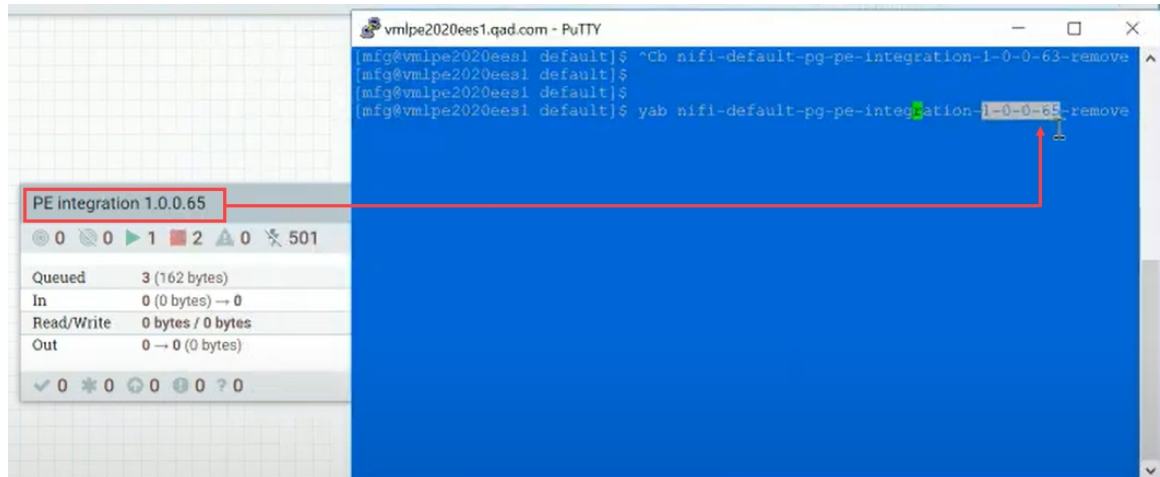

## Deleting a Nifi Flow Using Nifi


**Note:** It is recommended that you delete Nifi flows using yab as the process is easier and quicker.

Before deleting a Nifi flow you must do the following; otherwise, you will receive an error:

- Disable all associated Controller Services.
- Clear any associated Queues.


## Disable Controller Services

1. Right-click on the Nifi flow and select Stop.

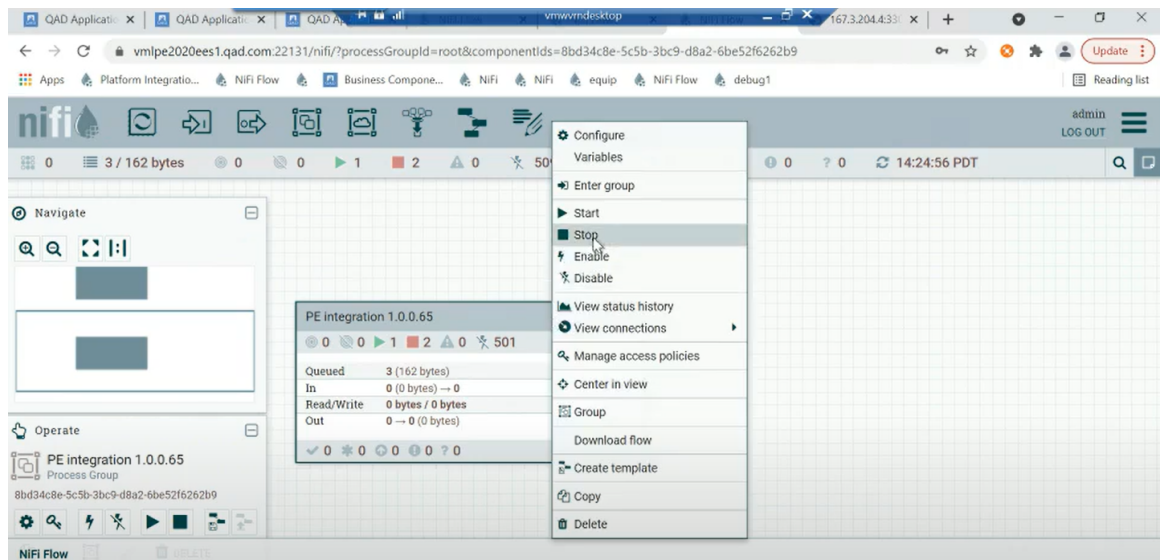


2. Right-click on the Nifi flow again and select Disable.

- Right-click on the Nifi flow again and select Configure. The Nifi flow Configuration window opens.

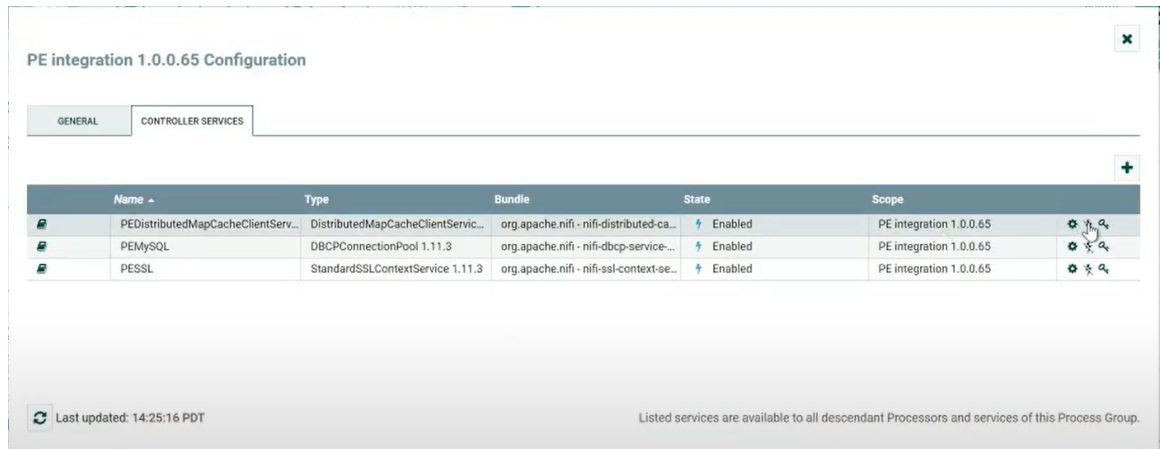


- Select the Disable button for the first Controller Service. A Disable Controller Service window opens. Select Disable and then close the window.

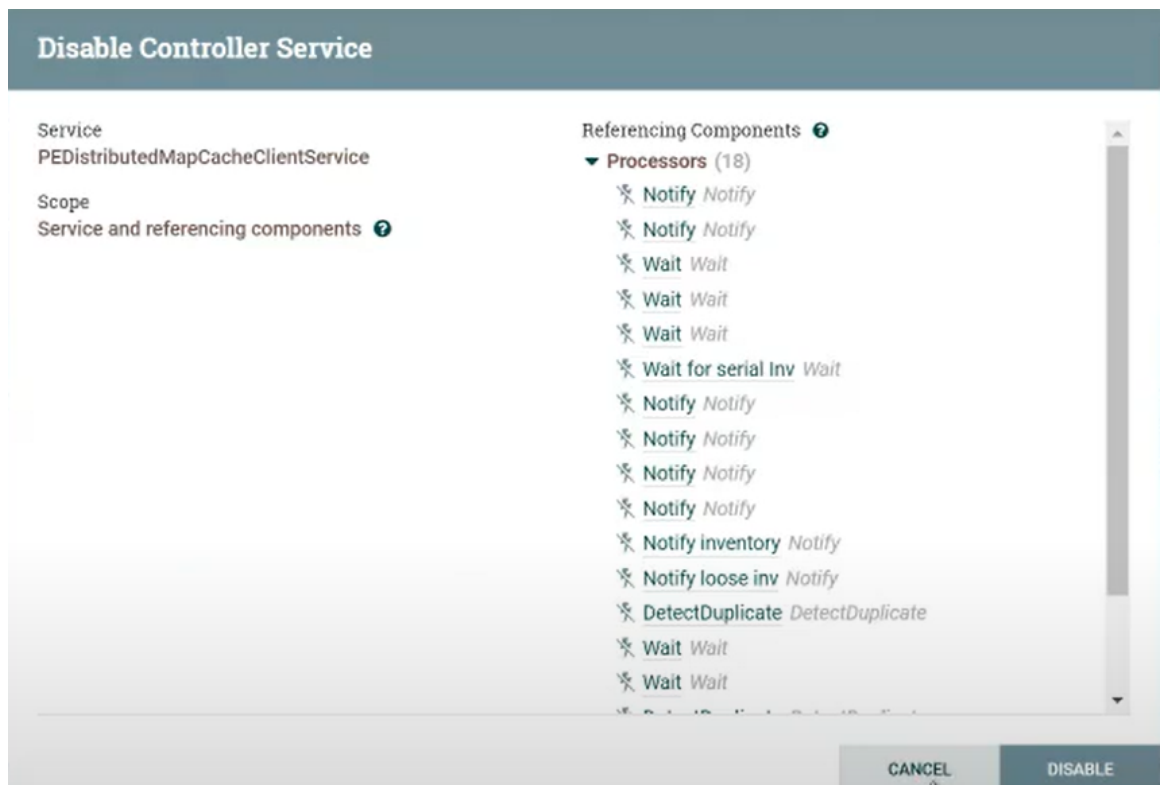


- Repeat this step for the other Controller Services until all are disabled.

### Clear Nifi Flow Queues


1. Select Summary from the Hamburger menu in the top right of the screen. The Nifi Summary window opens.

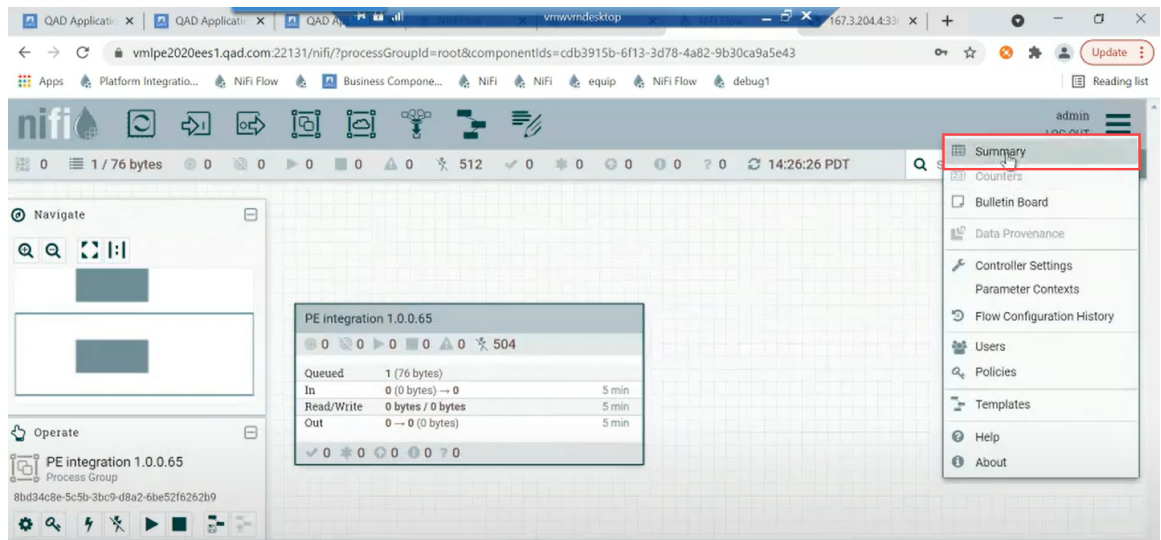


2. On the Connections tab, sort the Queue (Size) column in descending order so that any Queues that are non-zero are displayed first.

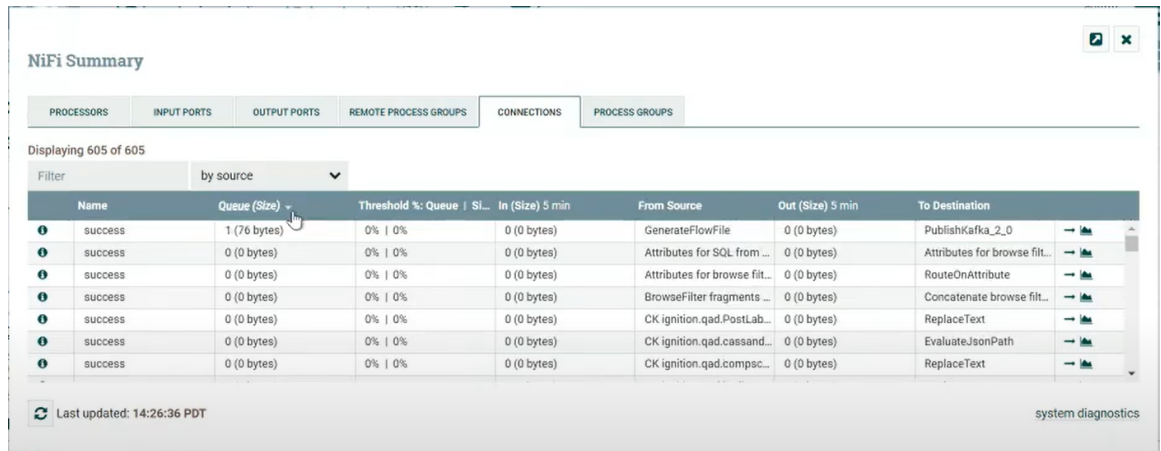

3. Select the Go To Connection button for the first Queue.

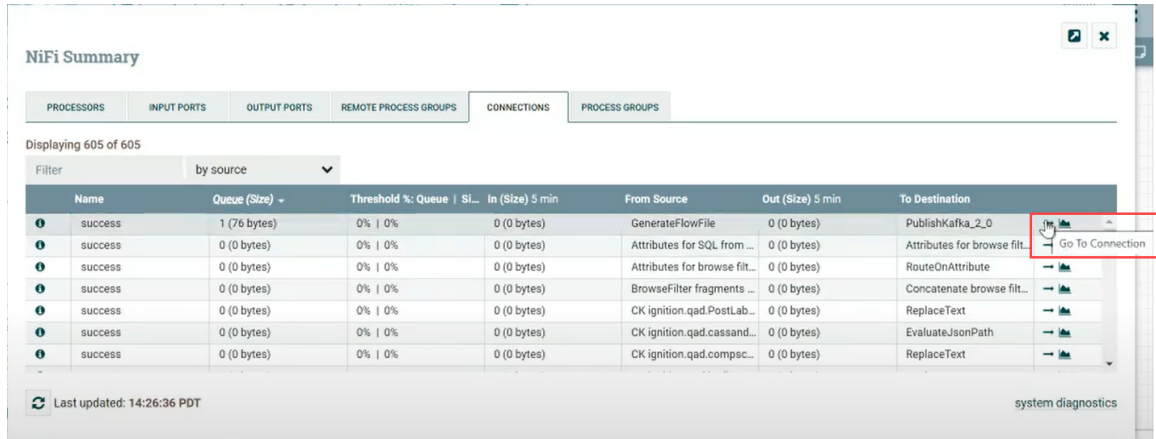


4. Right-click on the Queue and select Empty Queue.

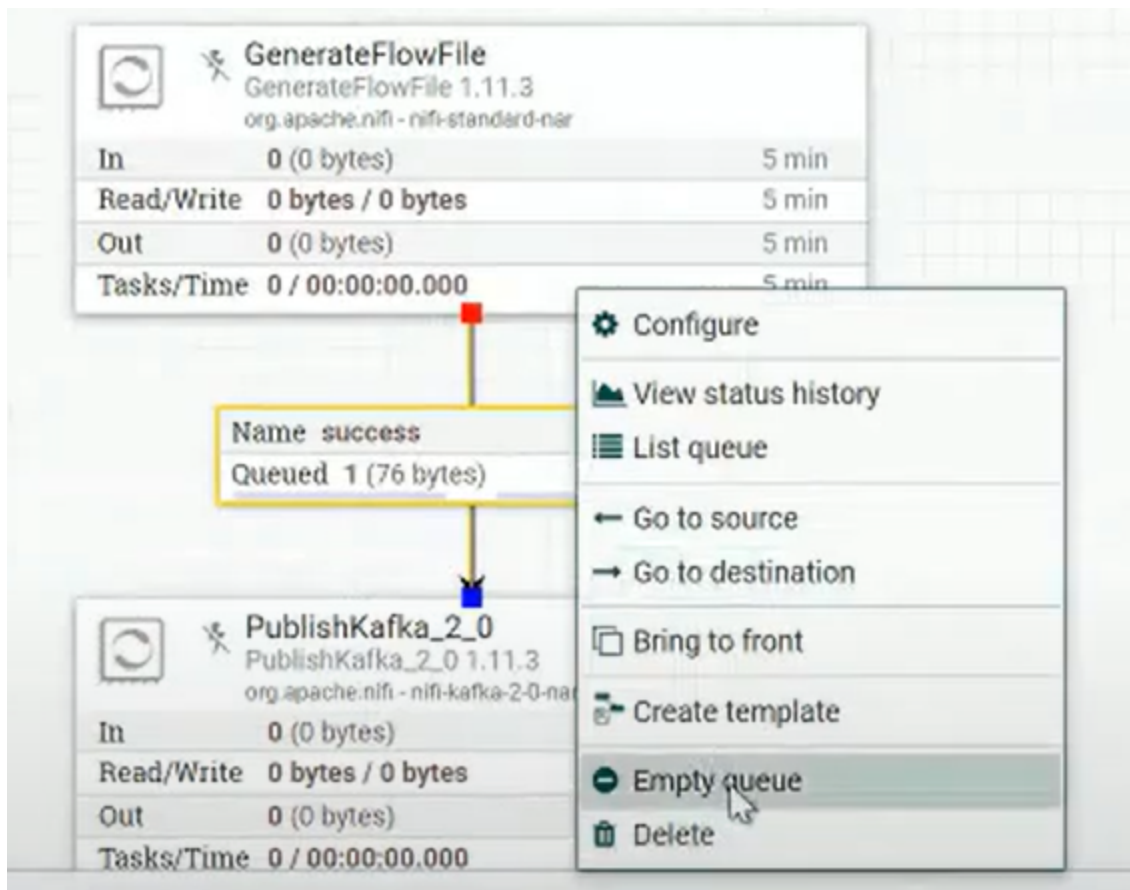

5. Navigate back to the NiFi Summary window and repeat these steps for any remaining Queues.

## Deleting a Nifi Flow

1. To delete a Nifi flow, right-click on the flow and select Delete.

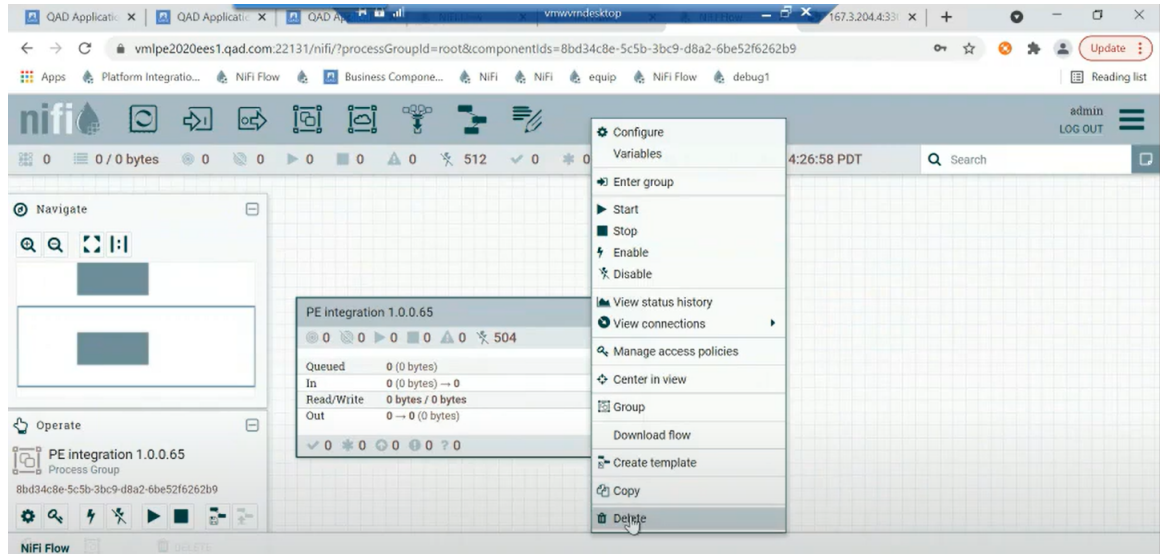

2. The flow is deleted.

