



QAD Enterprise Applications
Standard Edition

User Guide Kanban

Setting Up and Using Kanban
Using External Applications

70-3138-2014SE
QAD Enterprise Applications 2014
Standard Edition
June 2014

This document contains proprietary information that is protected by copyright and other intellectual property laws. No part of this document may be reproduced, translated, or modified without the prior written consent of QAD Inc. The information contained in this document is subject to change without notice.

QAD Inc. provides this material as is and makes no warranty of any kind, expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. QAD Inc. shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance, or use of this material whether based on warranty, contract, or other legal theory.

QAD and MFG/PRO are registered trademarks of QAD Inc. The QAD logo is a trademark of QAD Inc.

Designations used by other companies to distinguish their products are often claimed as trademarks. In this document, the product names appear in initial capital or all capital letters. Contact the appropriate companies for more information regarding trademarks and registration.

Copyright © 2014 by QAD Inc.

kanban_UG_v2014SE.pdf/mat/mat

QAD Inc.

100 Innovation Place
Santa Barbara, California 93108
Phone (805) 566-6000
<http://www.qad.com>

Contents

Change Summary	v
-----------------------------	----------

Chapter 1 Setting Up and Using Kanban	1
--	----------

Kanban Overview	3
Kanban Loops	5
Supermarkets	5
Processes	7
Calculated Values	8
Card Accumulators	10
Limited-Use Cards	11
Kanban Transactions	12
Inventory Effects	16
Card Reconciliation	18
EDI ECommerce	19
Kanban Work Flow	19
Setting Up Base and Control Data	23
System Data	24
Validated Fields	25
Control Program	25
Kanban Items	36
Kanban Containers and Labels	39
EDI ECommerce	41
Update Utilities	41
Setting Up Kanban Processes	41
Define Processes	42
Set Up Process Shifts	49
Roll Up Item Data	50
Setting Up Kanban Supermarkets	50
Setting Up Kanban Loops	52
Define Loops in Kanban Master Maintenance	52
Copy Kanban Data	73
Performing System Calculations	74
Calculate Average Demand and Safety Stock	74
Perform Process Calculations	77
Using the Kanban Workbenches	78

Workbench Elements	80
Workbench Data	88
Managing Kanban Cards	98
Create or Regenerate Cards	99
Maintain Cards	100
Print Cards	106
Manage Kanban Loops	107
Using Kanban Transactions	113
Monitor Accumulator Quantities	114
Record Kanban Transactions	115
Other Transaction Methods	120
View Kanban Transactions	125
Generate Dispatch Lists	127
Delete and Archive Kanban Transaction Records	136
Using Analysis and Scheduling Tools	136
Evaluate Supermarkets	136
Generate Level Schedules	142
Generating Reports	151
Chapter 2 Using External Applications.....	153
Introduction to External Kanban Applications	154
Kanban Workbenches	154
Exporting Kanban Workbench Data	154
Importing Kanban Workbench Data	157
Supermarket Workbench	166
Exporting Supermarket Workbench Data	166
Importing Supermarket Workbench Data	169
Level Mix Workbench	169
Exporting Level Mix Workbench Data	169
Importing Level Mix Workbench Data	174
Product Information Resources	175
Index.....	177

Kanban Change Summary

The following table summarizes significant differences between this document and previous versions.

Date/Version	Description	Reference
June 2014/2014 SE	Rebranded for QAD 2014 SE	--
June 2013/2013 SE	Added information about how kanban transactions can be integrated with Advanced Repetitive	page 15, page 119
June 2012/2012 SE	Rebranded for QAD 2012 SE	--

Setting Up and Using Kanban

The Kanban module provides features that support creating kanban loops, defining production processes to supply them, recording kanban signals and automatically generating inventory transactions, and analyzing kanban and buffer sizes to determine the most efficient quantities.

Kanban Overview 3

Introduces and describes Kanban, including details on kanban loops, supermarkets, processes, FIFO lanes, calculated values, card accumulators, limited-use cards, kanban transactions, inventory effects, card reconciliation, EDI eCommerce, kanban workflow, kanban programs.

Setting Up Base and Control Data 23

Lists prerequisite data, codes, and definitions, and describes how to set up system data, validated fields, control programs, kanban items, containers, and labels.

Setting Up Kanban Processes 41

Outlines processes definition, process shifts setup, and item data rollup.

Setting Up Kanban Supermarkets 50

Explains how to use Supermarket Maintenance (17.22.2).

Setting Up Kanban Loops 52

Explains three different ways to define kanban loops and how to copy kanban data.

Performing System Calculations 74

Describes different system calculations and different types of data the system can calculate.

Using the Kanban Workbenches 78

Outlines the two workbenches and describes prerequisites, explains how to use the programs, and lists and describes workbench data.

Managing Kanban Cards 98

Explains how to create, regenerate, maintain, and print cards, as well as manage loops with Kanban Card Management (17.22.16.16).

Using Kanban Transactions 113

Describes how to use different programs on the Kanban Transactions Menu (17.22.19), monitor accumulator quantities, record kanban transactions, deal with other types of transactions, view kanban transactions, generate dispatch lists, and delete and archive kanban transaction records. Describes how transactions can be integrated with Advanced Repetitive to use cumulative orders.

Using Analysis and Scheduling Tools 136

Explains how to evaluate supermarkets and generate level schedules in kanban.

Generating Reports 151

Lists and describes kanban reports and inquiries.

Kanban Overview

Kanban is a method of just-in-time (JIT) production that uses standard containers or lot sizes with a single card attached to each. It is a pull system in which work centers use a card to signal that items are to be withdrawn from supply sources. The Japanese word *kanban*, loosely translated, means card, billboard, or sign. The term is often used synonymously for the specific scheduling system developed and used by the Toyota Corporation in Japan.

The kanban system is conceptually very simple. It defines a communication signal or card indicating that items need replenishment.

Traditional production processes rely on schedules to push inventory into stocking locations. Kanban pulls material through the manufacturing process based on the actual demand from customer orders or production consumption. Kanban is an integral component of demand pull manufacturing, where material is pulled to where it is needed, when it is needed—and no sooner.

The Kanban module is a flexible, comprehensive set of tools for setting up, managing, and optimizing the performance of a pull-based kanban system. Features include methods of calculating key information that is vital to the success of the lean enterprise. For example, planners can have the system determine:

- Every-part-every interval (EPEI): The time needed to make all the parts built by a manufacturing process, allowing for changeover time. Accurate EPEI calculations let planners see opportunities for shortening the interval as much as possible so that lead times can be minimized, on-hand inventories can be limited, and the overall process can be more flexible and responsive to variability in product mix and demand.
- Takt time: The pace at which a production process must operate to meet customer demand. Accurate takt time measurements let planners synchronize production at key processes with the anticipated rate of sales.

Two options support the most common forms of kanban: one-card or two-card systems:

- In a one-card system, the same card both authorizes replenishment of the amount consumed and authorizes the completed items to be moved to the destination supermarket. For example, work center A produces a part used by work center B and delivers it to a supermarket. Work center B pulls a container from the supermarket when it needs material and may return an empty container. When B pulls the container, the kanban card is removed from the container and placed in the card rack at A. The kanban in A indicates an authorization for A to produce another container of parts.
- A two-card system, which has a move kanban and a replenishment kanban, is used when the movement of a container of parts may not trigger an immediate replenishment of that part. Items are pulled in one (move) quantity and replenished in another (replenishment) quantity. For example, items are moved to a destination supermarket in quantities of 10 and only produced at the supplying source in quantities of 50.

See “Kanban Loops” on page 5.

The inventory cycle within a kanban-driven pull system is referred to as a *kanban loop*—a source of supply and a consuming destination sometimes called a *supermarket*. The supplying source for a loop can be:


- Another supermarket
- A manufacturing process

- An external supplier

In addition to the supermarket, another lean manufacturing inventory management technique supported by the Kanban module is the first-in, first-out (FIFO) lane. This lets you move in-process material between operations or work cells when continuous flow is impractical without storing inventory in a supermarket. See “FIFO Lanes” on page 7.

Figure 1.1 is a simplified example of how kanban cards, supermarkets, and FIFO lanes work together.

Fig. 1.1
Simplified Kanban Example

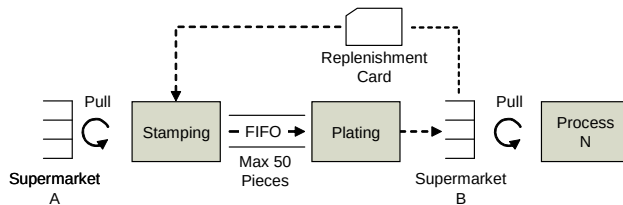

In the example, Process N starts the initial pull cycle by removing items from Supermarket B. When the supermarket inventory level reaches a user-specified order point, Stamping receives a kanban card that authorizes it to produce the kanban quantity. Using material pulled from Supermarket A, Stamping processes items and places them in the FIFO lane—which holds no more than 50 items—as a source of supply for Plating. Stamping cannot produce more until space opens up in the FIFO lane as a result of parts being removed on a first-in, first-out basis by Plating. Plating moves completed items to Supermarket B for use by Process N, completing the loop.

The number of kanbans needed for a given item is determined by demand and the replenishment time. For example, if your company uses 500 of an item per day and it takes 3 days to replace the stock, then you need a minimum of 1,500 in the production process. The system offers a variety of automated tools for calculating the most efficient number of kanbans, as well as the other elements of the kanban loop, including the supermarket size. The system determines such key factors as the average demand for items and the every-part-every interval—a measure of how often a manufacturing process can build all the items it provides. See “Calculated Values” on page 8.

For practical purposes, you should consider maintaining a small safety stock in the process as well. The system offers automated methods of determining the appropriate amount of safety stock without carrying excessive inventory in the supermarket. See “Safety Stock” on page 9.

To track the movement of inventory throughout the system and closely monitor the amount of inventory in the supermarket, the system provides a set of transactions that record cards as they move between supply sources and consuming destinations. See “Kanban Transactions” on page 12.

Transactions can be automatically communicated to supplying sources using QAD’s Supply Chain Portal (SCP) product. Color coding lets the supplier see the status of individual kanbans, as well as view such information as order points, supermarket sizes, and other key loop information to let them respond to demand more effectively.

For information on SCP, see the QAD Web site.

If you frequently run out of stock, there are not enough kanbans in the process and you should add more. If you regularly have an overabundance of stock, there are too many kanbans in the process and some should be inactivated.

It is usually better to have more kanbans with fewer parts in each than a few kanbans with a large number of parts. Smaller kanban sizes make it easier to adjust the number of kanbans in the process to satisfy demand. For example, you could have 15 kanbans containing 100 parts each. When demand for the part increases or decreases, you can adjust the number of kanbans in increments of 100 rather than increasing the kanban size.

The system includes several analytical tools that help make these critical decisions, letting you adjust card sizes and supermarket buffers appropriately to meet requirements without creating excessive inventory levels. See “Using Analysis and Scheduling Tools” on page 136.

The Kanban module expands the view of kanban loops by providing tools to monitor, maintain, and plan the entire process family—all of the items produced by a process, each with its own demand, cycle time, setup time, and buffer quantity. By evaluating the demands of the process instead of individual kanban loops, planners can see the effects of changing demand on the entire process, or supply chain of processes, as opposed to any particular loop.

The following sections provide more information about some of the important concepts supported by the Kanban module.

Kanban Loops

A *kanban loop* is the work flow that controls inventory traffic between a supplying source and a consuming destination using kanban cards. The consuming destination for the loop is a *kanban supermarket*, described in the next section; the source can be:

- Another supermarket, which can provide work-in-process items such as partially completed subassemblies or raw materials, or finished goods
- A manufacturing process, which can consist of a series of routing operations
- An external supplier

Set up kanban loops by associating items with supplying sources and destination supermarkets using Kanban Master Maintenance (17.22.4). See “Define Loops in Kanban Master Maintenance” on page 52.

Depending on the way cards are used to signal inventory movement between the source and destination or authorize production, loops can be set up to use either one or two cards.

Supermarkets

In lean manufacturing, a supermarket is a controlled inventory location used to schedule production at an upstream process. Supermarkets can absorb variations in demand, compensate for differences in processing time among production operations, and allow a single work cell or operation to supply multiple downstream processes with different, variable rates of demand.

A supermarket can serve both as the destination for completed kanban items from one loop and as the source of supply for another loop.

Supermarkets can hold either inventory or work-in-process (WIP) goods.

- Inventory supermarkets typically contain items that are part of perpetual inventory; for example, finished goods, subassemblies, fabricated parts or weldments, mixes or blends, purchased parts, or raw materials.
- WIP supermarkets typically include semi-finished material (partially completed subassemblies, fabrications, and so on) or material that has been issued from stock and is part of work in process.

These two kinds of supermarkets provide flexibility in the way you use kanban loops. For example, you can receive raw material from a supplier directly into stock by defining the destination as an inventory supermarket. You can then set up kanban loops between this inventory supermarket and point-of-use WIP supermarkets on the shop floor—using pull signals to replenish the WIP supermarkets. In a similar scenario that lets you track the inventory in the point-of-use supermarkets as part of the on-hand balance, define them as inventory supermarkets.

Typically, supermarkets are placed at points in the overall work flow when continuous flow is interrupted. For example, they can be placed:

- Between the customer and the pacemaker process to buffer variations in demand. The *pacemaker* is normally the process that responds most directly to orders from external customers. See “Pacemakers” on page 7.
- At a point that reduces the remaining time to completion to less than the customer lead time.
- Between operations where the batch size has to change because the every-part-every interval (EPEI) is too large. The EPEI is the total time required to run the average demand quantity of all the items produced by a process, including changeover times. See “EPEI” on page 8.
- After operations that include unpredictable elements and long changeover times.
- Before a divergence point—a place where the process output begins to supply multiple downstream processes—or assembly operation.
- To store incoming parts and materials from external suppliers.

Define supermarkets in Supermarket Maintenance (17.22.2), and associate them with kanban loops in Kanban Master Maintenance (17.22.4). See “Setting Up Kanban Supermarkets” on page 50.

Use the Supermarket Item Detail frame in Kanban Master Maintenance to define characteristics of how an item is stored at a supermarket for a specific kanban loop. For example, you can specify the maximum quantity that should be stored at the supermarket, the average demand, safety stock data, and buffer tolerances that can be used to evaluate historical and projected performance. See “Supermarket Information” on page 56.

In addition to letting you manually specify the supermarket size, the system provides multiple methods for calculating and setting supermarket quantities that include a variety of flexible, user-defined parameters. Other features let you examine what-if scenarios for supermarket sizing in a workbench before updating the system:

- Use Kanban Sizing Workbench to size supermarkets as part of the process used for determining the number of kanbans in a loop. See page 78.
- Use Supermarket Workbench (17.22.23.2) to view projected buffer performance based on your future forecasts and customer demand. See page 138.

- Use Historical Buffer Evaluation (17.22.20) to view historical buffer data to see how well your supermarkets have performed under real-world conditions, and then adjust buffer sizes accordingly. See page 136.

Processes

In lean manufacturing, a process is a group of activities before and after which flow stops and inventory accumulates. In Kanban, you can define a process as the source of a kanban loop—with inventory accumulating at the loop destination, which is a supermarket.

Use Kanban Process Maintenance (17.22.3) to define the processes that supply kanban loops. Based on the relationship between the process and the kanban loops it supplies, that program lets you define each process as one of the following:

- A pacemaker
- A FIFO lane
- A standard process—a process that is neither a pacemaker nor a FIFO lane

See “Define Processes” on page 42.

Pacemakers

In a lean manufacturing environment, the pacemaker is the process that responds most directly to final demand. Often, this is near the end of the production cycle. For example, the pacemaker might be the final assembly process that supplies a finished-goods supermarket from which customer orders are filled.

You typically schedule production based on the pacemaker process. For example, you can use Preliminary Level Schedule Report (17.22.14) with Pacemakers Only set to Yes to determine the number of units that each shift on the pacemaker process needs to produce to meet demand. Level Mix Workbench (17.22.23.3) only creates level schedules for pacemaker processes.

Note Although an item can be associated with more than one process, when you set up loops in Kanban Master Maintenance or define process items in Kanban Process Maintenance, the system validates that the item at the specified step is associated with only one pacemaker within a site.

FIFO Lanes

First-in, first-out (FIFO) lanes are a way of managing inventory between processes when a supermarket buffer is not necessary, but continuous flow is not practical. For example, a FIFO lane might be used in front of a large batch operation where dissimilar parts go through a process such as welding, plating, anodizing, stamping, painting, and so on.

The first process receives the signal to produce from the supermarket (or from a FIFO lane from a previous process) and moves material to the subsequent process. The item produced at the second process is run in the order that it is received. Completed material moves to the supermarket or to another FIFO lane.

Based on how closely the flow of kanban material is controlled, cards can be recorded using Kanban Ship (17.22.19.4) as the material moves through a series of FIFO lanes. The system tracks the material by assigning the cards an in-process status. When the last FIFO process is completed, the system changes the status to shipped to indicate that the kanban has moved to the supermarket.

In Kanban Master Maintenance, you can specify one or a series of FIFO processes that perform work on a kanban item between the time it leaves the primary supplying process and when it reaches the destination supermarket. See “FIFO Process Data” on page 118.

Calculated Values

The system can calculate various values related to kanbans for use either by other system functions or for analyzing the best way to set up kanban loops. In most cases, you have the option of entering these values manually, although they may be subject to automatic update.

This section describes the main kinds of calculations used by Kanban.

EPEI

Every-part-every interval (EPEI) is an important concept in lean manufacturing. It indicates the time interval over which you can run every regular part produced in a process based on current demand. Knowing the EPEI helps determine the manufacturing lot size and supermarket quantities for each part produced in a particular manufacturing process, as well as the number of kanban cards in the replenishment loop. For example, if you have sufficient time to produce all the items more than once each day, you can consider using smaller lot sizes—leading to improved agility.

You can prevent the system from including rarely or irregularly produced items in process EPEI calculations by setting EPEI Auto to No for the item detail in Kanban Process Maintenance. In that case, the EPEI value is for reference only. Additionally, you can specify minimum EPEI values for both a process and an individual item—for example, if you do not want to set up a process more than once during a given period. If the system-calculated value is less than the minimum, the system uses the specified minimum instead.

While Kanban Process Maintenance includes several options for displaying EPEI, it often is expressed in days. For example, when you are using days as the display option, an EPEI of 0.5 means that, allowing for changeover times, the process can produce all of its items twice each day. See “Define Processes” on page 42.

Example Runtime for the three items made by a process requires 450 minutes, and there are 600 minutes available in the day. The total setup—or *changeover*—time for all three items is 60 minutes.

$$600 - 450 = 150 \text{ minutes available for changeover}$$

To determine the number of intervals in a day, divide the time available for changeover by the time required for changeover:

$$150 / 60 = 2.5 \text{ intervals}$$

The reciprocal of the number of intervals provides the EPEI for the process:

$$EPEI = 1 / 2.5 = 0.4$$

Average Demand

Average demand is the average total quantity of a kanban item required during each day over a specified historical or future period. Individual item average demand is required to determine supermarket size and kanban sizes for kanban loops, as well as for mix analysis and level scheduling activities. Average demand for all the items produced by a kanban process is needed to calculate takt time, pitch time, and EPEI.

The system can calculate average demand based on actual historical demand, projected future demand, or a combination of both. Use Demand Calculation Template Maintenance (17.22.6) to set up definitions of demand patterns, and associate a demand template with loop records in Kanban Master Maintenance. The system bases its calculation on that template when you run Average Demand Calculation. See “Calculate Average Demand and Safety Stock” on page 74.

Note The system also can update average demand based on calculations performed in Historical Buffer Evaluation, the kanban workbenches, or Supermarket Workbench. Optionally, you can enter average demand for a kanban loop in the Daily Demand field in Kanban Master Maintenance. However, automated calculations overwrite any manual entry in this field.

When the template specifies only historical days, the system searches for issue transactions in inventory history for kanban items within the specified site range and number of historical days. For example, it includes ISS-UNP, ISS-SO, ISS-FAS, ISS-WO, and similar transaction records. Transactions by item are aggregated for the specified number of days, then the average quantity issued per day is calculated.

When the template includes only future days, the system looks for both independent and dependent demand, performing BOM explosions as needed to find dependent demand from parent items for kanban items in MRP demand-type detail records.

- If both independent and dependent demand are found, the system first aggregates independent demand by item and time period, then calculates an average over the number of specified days. Next, it calculates dependent demand from parent items, as determined by the BOM explosion, and determines a daily average. Finally, it adds independent demand to dependent demand for the item.
- If only independent demand exists for the item, the system calculates the average based on the number of days.

When the template specifies both historical and future days, the system performs the same calculations individually. It then combines historical demand with future independent and dependent (if any) demand, then divides this by the total number of days.

Safety Stock

Safety stock is a type of buffer inventory that guards against running out of stock during the time it takes to replenish a supermarket’s regular inventory. For example, it is useful when actual usage exceeds forecasted demand. However, because a key lean manufacturing principle is to reduce inventory to the lowest practical level, accurate safety stock calculations are required to avoid excessive buffer inventories.

Use the Safety Stock Method field in Kanban Master Maintenance to define how you want to set up safety stock for an item supermarket. That field offers three options:

- Manual

- Simple
- Peak

When you choose a method other than Manual, the system calculates safety stock based on the safety stock template specified in Kanban Master Maintenance. Set up templates in Demand Calc Template Maintenance (17.22.6) and associate a template with each kanban loop in Kanban Master Maintenance. You can then update safety stock using Safety Stock Calculation. Additionally, the system automatically updates safety stock based on related modifications and calculations in the kanban workbenches or Historical Buffer Evaluation. See “Supermarket Information” on page 56.

Manual Safety Stock

With this method, you can enter a quantity of items that you want to maintain as safety stock. Alternatively, enter the number of days of average demand required. The system calculates the safety stock level by multiplying this number of days by the calculated average demand.

Note If you enter both a quantity and a number of days, the safety stock is the total of both. The system stores this total in the database and makes it available to Kanban Visualization.

Simple Safety Stock Method

With this method, the system calculates a standard deviation of average demand over the number of days in the planning horizon, which is the total number of historical and future days specified in Demand Calculation Template Maintenance. It then multiplies this demand by a service factor associated with the specified service level.

The service level is the percentage of time that inventory for this item will typically not run out before the replenishment time has been reached. For example, 50.00 means that 50% of the time, you will run out of this item before there is time to restock. Higher numbers mean that the supermarket maintains more inventory for the item in the form of safety stock.

Peak Safety Stock Method

With the peak method, the system calculates the average demand for each n -day period within the planning horizon defined in Demand Calculation Template Maintenance, where n is the value specified in Peak Average Days. Safety stock is based on the highest average demand during an n -day period

Card Accumulators

The size of a kanban does not have to be the same as the order quantity. To provide the agility to respond quickly to demand changes, the order quantity is typically set to a multiple of the kanban replenishment card quantity.

When you define kanban loops using Kanban Master Maintenance, you can set up accumulators to combine quantities from multiple kanbans—automatically authorizing production based on a cumulative quantity, an amount of time expired, or a schedule.

In a manual environment, this would be the equivalent of accumulating cards in a slot and defining a rule to prohibit production until the specified number of empty cards is returned, until a certain amount of time has expired, or only on specified days of the week—assuming that the order

quantity has been met. See “Card Tracking Information” on page 61.

When kanban transactions are processed for replenishment cards, the system accumulates quantities based on the type of accumulator specified in Kanban Master Maintenance:

- **Quantity:** When the sum of empty replenishment cards reaches the value in the Order Quantity field, the system authorizes all empty cards in the kanban loop.
- **Time:** After a specified time has elapsed, the system checks for empty cards. If the total of empty cards is equal to or greater than the order quantity, all the cards are authorized.
- **Schedule:** At user-specified days and times, the system checks for empty cards. If the total of empty cards is equal to or greater than the order quantity, all the cards are authorized.

Run Accumulator Monitor (17.22.19.6) to automatically authorize cards based on time and schedule parameters. See page 114.

Limited-Use Cards

Sometimes it is useful to introduce one or more cards within a kanban loop for a short period of time. Some reasons might be:

- An item is produced infrequently.
- An item is scheduled to be phased out after one last production run.
- A need may exist to increase production for an item for a specified period of time; for example, cards that authorize production on a Saturday.
- A new kanban card needs to be introduced one or more times to temporarily build inventory for a new supermarket, or to meet a short, seasonal change in demand.

Controlling the card’s active status lets a planner temporarily increase a kanban’s supermarket buffer and at the same time define when that buffer can be reduced again.

Use Kanban Card Maintenance (17.22.16.1) or Kanban Multi-Card Maintenance (17.22.16.2) to define one or more limited-use cards for a kanban loop. Additionally, if you use the Increase Cards in Loop function of Kanban Card Management (17.22.16.16), you can specify limited-use parameters for the new cards.

You can define a limited-use card based on:

- **Number of fill/consume cycles.** After the card has been used for the specified number of cycles, the system automatically inactivates it.
- **Effective date.** The card can be recorded only during the specified date range. The first time the card completes a fill/consume cycle after the specified end date, the system automatically inactivates it.

See “Managing Kanban Cards” on page 98.

While a limited-use card is active, the system automatically updates the working buffer size for the loop to account for the additional kanban quantity. See “Working Buffer” on page 56.

Kanban Transactions

Kanban transactions convert visual replenishment signals to electronic signals. Kanban transactions track the movement of components into the production process and the movement of final products out of the production process. In a more controlled environment, transactions can also track material at a finer level; for example, as items pass along FIFO lanes between process operations.

When materials or components are required in the production process, they are pulled from raw material inventory or received directly from an external supplier. At the end of the production process, final products are transferred to finished goods inventory where they are available for shipment.

Depending on the life cycle of the kanban and how you choose to control the work flow within your plant, the system can process kanban transactions in several modes. The system creates a kanban history record each time you record a card. The card is assigned a status, shown in Table 1.1, based on where in the cycle the transaction is recorded. See “Record Kanban Transactions” on page 115.

Table 1.1
Kanban Status

Status	Description
Empty Accumulate	Based on how the loop is set up, the system may accumulate cards until specified parameters are met. Cards with this status do not authorize production. See “Card Accumulators” on page 10.
Authorized	The kanban is empty and production is authorized.
Acknowledged	The source of the loop has acknowledged receipt of a replenishment signal.
Shipped	Replenishment is completed, and the items are on the way to the consuming supermarket.
Filled	The supermarket or consuming destination has received the full kanban from the source.
In FIFO Process	This special-use status applies only to FIFO processes. It indicates that the card is still moving through a series of FIFO lanes. See “FIFO Lanes” on page 7.

Table 1.2 summarizes the available transactions and where in the cycle they are used.

Table 1.2
Kanban Transactions

Transaction	Purpose
Kanban Consume/Post (17.22.19.1)	Indicates that a move card has been consumed or a replenishment card has been posted. Sets status to Authorized or Empty Accumulate, depending on accumulator settings. Note: You can also record consume transactions for batches of cards either by entering loop selection criteria or by importing a data file. See “Batch Consume Programs” on page 120.
Kanban Authorize (17.22.19.2)	Authorizes production of the items on a consumed/posted replenishment card. Sets status to Authorized. Required only when accumulator settings do not trigger authorization, or to override accumulators to manually authorize production.
Kanban Acknowledge (17.22.19.3)	Acknowledges that an authorized replenishment card has been received by the supplying source.
Kanban Ship (17.22.19.4)	Indicates that the quantity on an authorized replenishment card has been produced and is being moved to the supermarket. For FIFO processes, can record movement along a FIFO lane. See “FIFO Lanes” on page 7. Note: When you import an advance ship notice (ASN) from your supplier using EDI ECommerce Document Import (35.1), the system can automatically record ship transactions. See “Automatic Ship Transactions” on page 123.
Kanban Fill/Receive (17.22.19.5)	Indicates that a kanban has been filled or received. Based on setup data and source of items, creates production receipt and backflushes material, as well as generates PO receipt or performs inventory transfer. See “Inventory Effects” on page 16. Note: When you confirm delivery of supplier kanban items using PO Shipper Receipt (5.13.20), the system can automatically record fill transactions. See “Automatic Fill Transactions” on page 124.

The points at which you record transactions by entering or scanning kanban cards vary based on how your kanban loops are configured and how closely you want to track in-process items; for example:

- You can use Kanban Acknowledge to record that an external supplier has received a replenishment authorization. However, this transaction is not required.
- When your manufacturing processes use FIFO lanes, you can choose to record cards using Kanban Ship as they move between FIFO processes, or only when they complete the last process.

Dispatch Lists

When items are consumed and corresponding kanban cards are recorded using Kanban Consume/Post, you can send a replenishment order in the form of a dispatch list to replace what was used. When items are produced as part of a FIFO process, you also can generate dispatch lists for cards recorded using Kanban Ship to authorize production by a subsequent FIFO process. You

also can produce a report on cards that have already been included on a dispatch list. See “Generate Dispatch Lists” on page 127.

Optionally, you can use EDI ECommerce to export the dispatch list to the loop supplier in electronic data interchange (EDI) format. See page 19.

Sequence Enforcement

Based on Kanban Control and Kanban Master Maintenance settings, you can control whether the system requires cards to be recorded in a specific sequence using the programs on the Kanban Transactions Menu. See “Using Kanban Transactions” on page 113.

Using Sequence Enforcement

Sequence enforcement functions assume the following expected transaction sequence for replenishment loops:

- 1 Consume
- 2 Authorize
- 3 Acknowledge
- 4 Ship/Move
- 5 Ship/FIFO (only on process loops with FIFO lanes)
- 6 Fill

For move loops, the expected sequence is:

- 1 Consume
- 2 Fill

When enforcing sequences, the system uses this order of transaction events to determine the expected event, based on the current transaction being recorded. It then determines the actual transaction from card detail records. If the expected and actual transactions are not the same, the system uses the enforcement level associated with the expected transaction to determine whether to accept the transaction, display a warning message, or issue an error. The system checks for error-level enforcement settings first; if none are defined, it then checks for warning-level enforcement.

Example Users are required to record replenishment cards in both Kanban Fill/Receive and Kanban Consume/Post. Set the appropriate sequence enforcement fields to Error. If a user attempts to record the same card consecutive times in either program, the system displays an error message and does not allow the transaction.

Enable sequence enforcement on the system level by setting Replenishment Sequence Enforcement or Move Sequence Enforcement to Yes in Kanban Control. You also use Kanban Control to set the enforcement level for each type of transaction. Depending on the value of Use Control Prog Tran Settings in Kanban Master Maintenance, the system either enforces sequences based on the Kanban Control settings or uses loop-specific values.

Implementing Sequence Enforcement

Sequence enforcement is controlled on three levels:

- At the system level, based on the setting of Replenishment Sequence Enforcement or Move Sequence Enforcement in Kanban Control. Settings on other levels apply only when this field is Yes. See page 34.
- Directly from Kanban Control. When Replenishment Sequence Enforcement is Yes, specify a type of enforcement (none, warning, error) for each event in the Kanban Transaction Event Control frame. Then set Use Control Prog Tran Settings to Yes for individual loops in Kanban Master Maintenance. See page 35.
- Based on individual loop definitions set up in Kanban Master Maintenance. Set the fields in Kanban Control to the values you want to default to new loop records. Then—in Kanban Master Maintenance—set Use Control Prog Tran Settings to No for individual loops and modify the default enforcement settings as needed to control loop-specific behavior. See page 72.

If you do not record transactions at certain steps in the kanban life cycle—for example, when your company does not record acknowledgements from suppliers—set the sequence enforcement level for that transaction event to None.

Integration with Advanced Repetitive

Some kanban transactions support Advanced Repetitive reporting logic, allowing you to record transactions against cumulative orders. If you choose not to use this method, transactions are recorded using Unplanned Receipts logic.

When you use this feature for kanban process loops, Kanban Fill/Receive and Kanban Ship create the same kinds of inventory and GL transactions that Advanced Repetitive does. Additional fields in the transaction user interface allow you to enter actual runtime and determine whether the system backflushes the setup time specified for the routing. See “Repetitive Transactions” on page 119.

The system uses the same logic as Advanced Repetitive to find an open cumulative order. If no order is found, the system creates a new one.

A difference is in the way kanban identifies locations when backflushing components. Kanban bases the backflush location on the Location field in Kanban Process Maintenance (17.22.3). For the receipt location, it uses the Location field in the Kanban Transaction Control frame of Kanban Master Maintenance (17.22.4). (By default, Advanced Repetitive uses the workcenter or item master location during backflush.)

Basic prerequisites for using this functionality include:


- 1 Set up standard Advanced Repetitive data—items, routings, BOMs, production lines, and so on. See *User Guide: Manufacturing* for information on Advanced Repetitive.
- 2 Associate the kanban item with the repetitive production line in Production Line Maintenance (18.22.1.1).
- 3 Optionally, associate the repetitive production line with kanban in Kanban Process Maintenance. See “Setting Up Kanban Processes” on page 41.

- 4 Enable repetitive reporting for the kanban loop by setting Use Cumulative Order to Yes in the Transaction Control frame of Kanban Master Maintenance. See “Transaction Control Information” on page 68.

Inventory Effects

Based on the source type and control settings for the kanban loop defined in Kanban Master Maintenance, the system can automatically generate inventory and backflush transactions when the kanban is recorded in Kanban Fill/Receive.

Fig. 1.2
Kanban Inventory Transactions

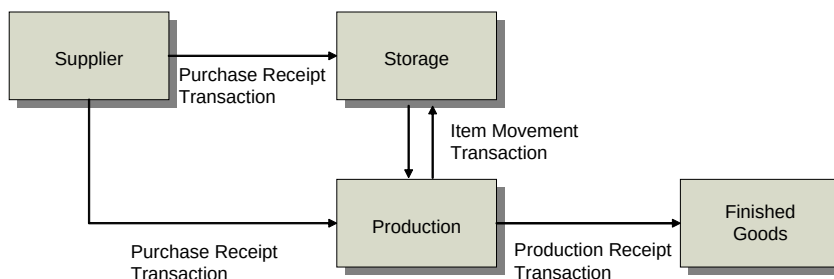

When Impact Inventory is Yes in the Kanban Transaction Control frame, the system automatically generates inventory transactions when the kanban card is recorded using Kanban Fill/Receive. Specific transactions depend on the source type:

- When the item is provided by a supplier, processing the replenishment card using Kanban Fill/Receive generates a purchase receipt for the purchase order (PO). You can associate a PO or blanket PO number with the supplier in the Source Master Data frame. If you do not, you are prompted for a PO number and line number in Kanban Fill/Receive. The system records the receipt at the consuming site and location (RCT-PO; for consignment orders, RCT-CN), increasing the quantity on hand at the supermarket.
- When the source is inventory from a kanban supermarket, filling the kanban by moving the items creates an inventory transfer from the supplying source to the consuming supermarket (ISS-TR and RCT-TR). When one of the supermarkets is a WIP location, moving the items creates an ISS-UNP or RCT-RS transaction, depending on the direction of the movement. If both the source and destination are WIP supermarkets, no transactions are created unless the source and destination supermarkets are in different sites. In that case, the system generates RCT-RS, ISS-TR, RCT-TR, and ISS-UNP transactions to account for intersite inventory movement.
- When the source is a manufacturing process, filling the kanban receives a production item at the consuming inventory supermarket location (RCT-WO), as well as creating a RCT-PO transaction if the routing record for the supplying process includes a subcontract operation that references a purchase order. If the destination is a WIP supermarket, the system creates inventory transactions only when subcontract operations are involved.

Note Associate BOM codes with items in Kanban Item Master Maintenance (17.22.1).

When Backflush Components is also set to Yes for a loop supplied by a process, the components on the bill of material (BOM) for the item are backflushed from the supplying source (ISS-WO) when you run Kanban Fill/Receive. Additionally, if Modify Inventory Data is set to Yes in Kanban Master Maintenance, scrap quantities and optional reason codes can be recorded during the fill/receive and ship transactions.

When Use Cumulative Order is Yes for a process loop, you can also record the actual runtime for the received quantity. Additionally, you can choose to have the system backflush the setup time specified for the routing. In this case, these values are recorded against an Advanced Repetitive cumulative order.

Some programs that display inventory transaction history records, such as Transactions Detail Inquiry (3.21.1), include the card ID in the Remarks field for kanban transactions. You also can use the view programs on the Kanban Transactions Menu (17.22.19), which display both kanban and inventory transaction history. See “Transaction Control Information” on page 68.

Validating Inventory

If you do not record inventory transactions at the same time as kanban transactions—Impact Inventory is No in Kanban Master Maintenance—the inventory represented by full kanbans and the actual on-hand balance at inventory supermarket locations can be significantly different.

Based on related loop parameters, you can use Inventory Validation Report (17.22.15) to identify loops with potential problems that might require you to verify the card status or perform a cycle count. See “Generating Reports” on page 151.

General Ledger (GL) Transactions

Inventory transactions created when you process a kanban card using Kanban Fill/Receive also result in GL transactions.

Purchase receipts for supplier kanbans:

- Debit the Inventory account for the item product line and receiving supermarket location. For consignment orders, this is the PO Consigned Offset account.
- Debit (or credit) the PO Price Variance account defined in Purchasing Account Maintenance for the item product line, order site, and supplier type.
- Credit the PO Receipts account defined in Purchasing Account Maintenance for the product line, order site, and supplier type. For consignment orders, this is the PO Consigned Inventory account.
- Credit the Overhead Applied account defined in Purchasing Account Maintenance for the item product line, order site, and supplier type to apply the fixed overhead portion of GL cost prior to calculating variance.

Item movements for inventory kanbans:

- Debit the Inventory account for the item product line and receiving supermarket location.
- Credit the Inventory account for the item product line and supplying source.

Production receipts for process kanbans:

- Debit the Inventory account for the item product line and receiving supermarket location.

- Credit the Work in Process (WIP) account defined in Work Order Account Maintenance for the item product line and supplying source/reference.

Component issues for process kanbans that include backflush:

- Debit the Inventory account for the item product line and receiving supermarket location.
- Credit the Inventory account for the item product line and supplying source/reference.

Note To prevent labor and burden from being recorded twice against standard cost—once during backflush and again with the RCT-WO transaction generated with the production receipt—the system uses the following logic to determine when to record them:

- The transactions are recorded only in op_hist when there is a routing with operations.
- When no operations are specified, the transactions are recorded only in tr_hist.

To provide consistency with standard cost-creation functionality, order quantities are based on item master values rather than those in the kanban loop record.

You can define inventory accounts for product line, site, and location combinations in Inventory Account Maintenance (1.2.13); for consignment accounts, use Purchasing Account Maintenance (1.2.5). Otherwise, the system uses the default accounts set up by product line in Product Line Maintenance (1.2.1).

When inventory transactions affect more than one site, costs may differ between the two sites. Cost variances are posted to the Transfer Variance account defined in Site Maintenance (1.1.13). The system automatically generates the appropriate balancing transactions in the GL for each site.

- When the transfer-from and transfer-to sites are in different entities, a balancing entry is posted to the appropriate Intercompany Inventory Control debit and credit account defined in Entity Code Maintenance (25.3.1.1).
- When the two sites are in the same entity, a balancing debit or credit is posted to the Transfer Clearing account defined in Inventory Control (3.24).

You can use the view programs on the Kanban Transactions Menu to review the GL transactions that were created with a card was recorded.

Card Reconciliation

When the number of cards shown in Kanban Master Maintenance is not the same as the actual number of active cards, you can have the system bring the loop back into balance by adding or removing cards.

Note The total number of active cards does not include limited-use cards, which have an active code of Close, Period, or Cycles. See page 11.

Set Card Reconciliation to Yes in Kanban Control to enable this feature and set the default value for the following programs:

- Kanban Sizing Workbench and Kanban Process Workbench. See page 78.
- Kanban Workbench Import. See page 157.
- Supermarket Workbench. See page 138.
- Kanban Card Management (17.22.16.16), Loop Analysis and Recommendations function. See page 108.

When you reconcile cards from one of the workbenches, use Move Card Sizing to specify how move cards in two-card loops are adjusted when replenishment cards are reconciled.

The programs also let you print any cards that were created or activated as part of reconciliation.

Note When kanban cards are created manually—outside of any sizing logic like that in the kanban workbenches—and Kanban Control is set for automatic reconciliation, the system will retire the cards when they complete one cycle. In other words, when the card is emptied using Kanban Consume/ Post, the system will determine that the card is not needed, because the working buffer exceeds the maximum buffer. The card will be either closed or deactivate, based on how cards are to be retired in the system.

For customers who want to size externally and still use the auto reconcile features, the solution is to set the Maximum Buffer field for the loop so that it includes all the cards they have created.

EDI ECommerce

You can use the advanced electronic data interchange (EDI) module, EDI ECommerce, to exchange kanban-related information with loop suppliers. You can:

- When you create a dispatch list to communicate demand to the loop supplier, export the list as an EDI transaction. See “Generate Dispatch Lists” on page 127.
- When the supplier sends an advance ship notice (ASN) to inform you that the order has been shipped, import the ASN using Document Import (35.1), automatically change the status of the associated kanban cards, and generate transaction records. See “Automatic Ship Transactions” on page 123.


Kanban Work Flow

Figure 1.3 summarizes the activities for setting up and managing Kanban.

Note You will not necessarily need to perform all of these tasks, or perform them in the exact sequence described. Kanban offers a wide range of options, and you are required to do only the activities that support your business model. For example, it is possible to size kanban loops and supermarkets manually, based on manually entered card and quantity data. In this case, setup for system calculation and analysis is unnecessary. For examples of potential ways to begin using Kanban with a minimum amount of setup, see “Setup Shortcuts” on page 22.

This work flow example assumes that your business model requires you use all the tools available in the Kanban module.

Fig. 1.3
Kanban Work Flow

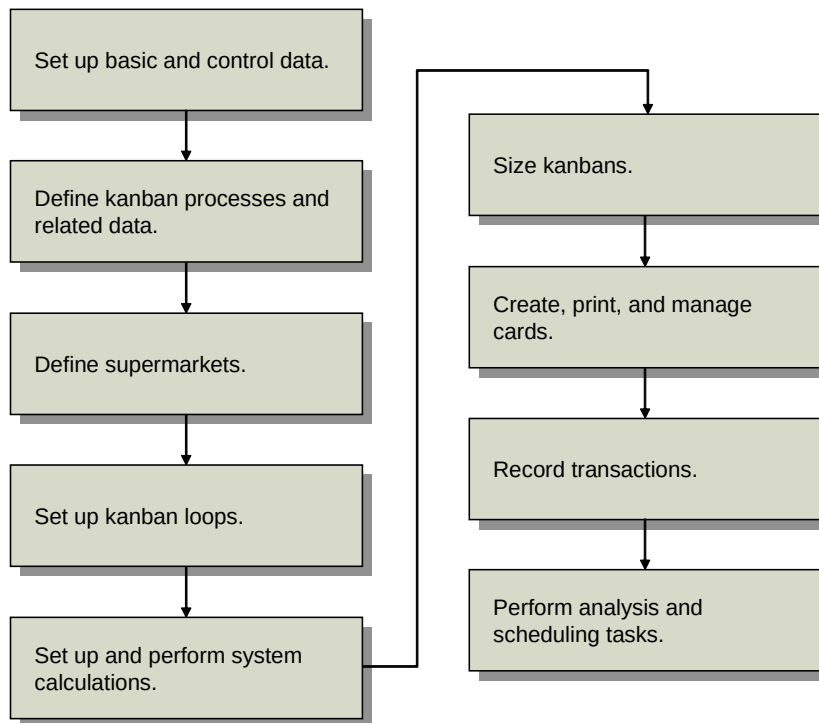

Set Up Basic and Control Data

Kanban requires the following setup information:

- Basic system data
- Settings in Kanban Control
- Generalized codes
- Kanban item master records
- Optional EDI ECommerce data

See “Setting Up Base and Control Data” on page 23.

Define Kanban Processes and Related Data

If your kanban loops will be supplied by manufacturing processes, you must:

- Define kanban processes.
- Set up process work calendars.
- If your processes use routings, roll up item routing data.

See “Setting Up Kanban Processes” on page 41.

Define Supermarkets

Each kanban loop supplies a supermarket with either raw materials, subassemblies, or finished products. Before you set up the loops, you need to define the supermarkets used in your system. See “Setting Up Kanban Supermarkets” on page 50.

Set Up Kanban Loops

Set up a master definition for each loop, including the supplying source, the destination supermarket, and information about the kanban cards themselves. Optionally, you can size kanbans manually by entering the number of cards and the number of items they represent, or you can use the kanban workbenches. See “Setting Up Kanban Loops” on page 52.

Set Up and Perform System Calculations

During the kanban life cycle, the system can perform a wide variety of automated calculations related to kanban sizing and supermarket buffer size. Initially, you should:

- Set up demand calculation templates.
- Calculate average demand for kanban items, as well as safety stock levels for supermarkets.
- Calculate EPEI for kanban processes.

See “Performing System Calculations” on page 74.

Size Kanbans

While you can size kanbans manually while defining the loops, you can use Kanban Sizing Workbench either as an initial sizing tool or to set up what-if scenarios to explore alternative sizing schemes. See “Using the Kanban Workbenches” on page 78.

Create, Print, and Manage Cards

Regardless of whether you size kanban loops manually or automatically, you must create and print the cards using menu programs. System calculations recommend the appropriate number of cards, but it is up to you to create and print them. See “Managing Kanban Cards” on page 98.

Additionally, you can add limited-use cards to kanban loops for such purposes as building initial inventory. See “Limited-Use Cards” on page 11.

Record Transactions

Throughout the kanban life cycle, use programs on the Kanban Transactions menu to record and track the status of kanbans, as well as to generate dispatch lists to notify supplying sources that kanbans are ready for replenishment.

When transaction records are no longer needed online, you can archive and delete the related history.

See “Using Kanban Transactions” on page 113.

Perform Analysis Tasks

Kanban provides several tools for scheduling and analyzing the performance of your kanban configuration. For example, you can:

- Display a preliminary report on the number of units that must be produced on each shift to meet the process takt time.
- Use a workbench to produce a detailed level schedule for your pacemaker processes, taking into account the appropriate product mix for each shift. You also can update the master production schedule with modified flow schedules based on the level schedule.
- Evaluate the historical performance of kanban supermarkets to determine how well they performed under actual conditions.
- Based on projected future demand, determine whether minimum supermarket buffer levels will avoid stock shortages without creating excessive inventory.
- Compare the kanban quantity on hand—calculated as the number of full kanbans times the quantity per kanban—with the standard quantity on hand. This can give you a better idea of your actual inventory, for example, when you do not record inventory transactions at the same time you record kanban transactions.
- Export kanban data for analysis and update by external programs such as spreadsheets, and import it back to the database. See “Using External Applications” on page 153.

See “Using Analysis and Scheduling Tools” on page 136.

Setup Shortcuts

Kanban offers flexible setup alternatives that let you start recording transactions in a short time. Within the context of some minimum requirements, you can basically define a few kinds of data to get started, and use system features to complete the setup.

Note Scenarios described here assume that you have set up certain types of base data to support the Kanban features you are using. For example, supplier loops require existing records in Supplier Maintenance (2.3.1). If loops are sourced by processes and you want to roll up routing information to use in setup time, cycle time, and EPEI calculations, you must already have routings defined. You must also set up items in Item Master Maintenance (1.4.1) before you can define them as kanban items.

If your loops are supplied by an external supplier or a supermarket—rather than a process—you need only the following kanban-specific data to start recording kanban transactions:

- Kanban item records, which in the simplest case include just the item number and a default zero value for the process step. See page 36.
- Kanban supermarket definitions. See page 50.
- Kanban master records—set up in Kanban Master Maintenance (17.22.4)—to define the supplying source and some basic information about the card. See page 52.

Note Use Kanban Control (17.22.24) to set the most common defaults for new loop records, such as whether you want the system to warn you if cards have been recorded more than once within a specified period. See page 25.

Optionally, you can create kanban master records by importing a properly formatted comma-delimited file. The system combines values in the file with default values to create the new loops, which you can then further refine using Kanban Master Maintenance. See page 157.

In the simplest scenario, you can manually enter the number of cards and quantity represented by each directly in Kanban Master Maintenance. Otherwise, you can use the kanban workbenches to calculate this information for you, based on demand data that you can enter manually in the loop record or even directly in the workbench. See page 78.

- Kanban cards, generated using Kanban Create (17.22.16.12). Depending on whether you use physical cards to manage loops, you do not even have to print cards to track kanbans using programs on the Kanban Transactions menu. See page 99.

Once you start using the basic functionality, you can use Kanban Sizing Workbench to model different sizing alternatives for loop records. For example, if a supermarket stocks items supplied by multiple loops, you can enter the supermarket site and ID in the workbench selection frame to view all the associated loops, then update several kinds of data for all the loops at the same time. This lets you avoid accessing each loop record individually in Kanban Master Maintenance.

If your kanban loops are sourced by manufacturing processes, you also need to set up process definitions in Kanban Process Maintenance. Like loop records, process records can be defined with a minimum of data, using defaults established in Kanban Control and Kanban Item Master Maintenance.

Based on how extensively you want to use Kanban features, you can enter cycle and setup times for items, or—if there are existing routing records—just specify operation ranges and have the system determine process item cycle and setup times by running Process Item Operation Rollup.

Next, you can optionally run Basic Process Calculations and specify which kinds of information the system calculates and updates for each process. Several types of process-related data can be updated in Kanban Process Workbench, so you can update it there for the process or individual items without having to use Kanban Process Maintenance.

If you use advanced features such as EPEI calculations, the system needs to know average demand for each loop—which is also used in takt time and sizing. Again, the system offers flexibility in how it obtains this data. You can:

- Enter average daily loop demand manually in Kanban Master Maintenance.
- Enter or update demand in the kanban workbenches.
- Using Demand Calculation Template Maintenance and Average Demand Calculation, have the system calculate average demand based on the past and/or future time period you select.

Kanban Master Copy (17.22.8) provides a useful setup shortcut. To set up multiple loops that have a significant amount of common data, define one, then copy it to as many additional records as you need. The copy program lets you directly access the features of Kanban Master Maintenance, so you can customize the copied loop records while you are creating them. See “Copy Kanban Data” on page 73.

Setting Up Base and Control Data

Before you use Kanban, define the following:

- Basic system data

- Generalized codes
- Settings in Kanban Control
- Kanban item master records
- Optionally, kanban container types and label definitions
- Optionally, EDI ECommerce records

Note Depending on your version, you should ensure that one-time conversion utilities have been run. See “Update Utilities” on page 41.

System Data

Although much of the data used by Kanban is specific to that module, Kanban also relies on several kinds of base data set up elsewhere in the system. Table 1.3 summarizes the kinds of data required.

Table 1.3
Basic Data Setup

Data	Program	Where Used
Sites	Site Maintenance (1.1.13)	Required to set up kanban supermarkets, loops, and processes. Note: Based on your security setup, you may need to use Site Security Maintenance (36.3.15) to give users access to selected sites.
Locations	Location Maintenance (1.1.18)	Required to associate locations with supermarkets in Kanban Master Maintenance and with supplying processes in Kanban Process Maintenance.
Items	Item Master Maintenance (1.4.1)	Required before kanban-specific setup in Kanban Item Master Maintenance.
Routings	Routing Maintenance (14.13.1)	Optional; needed if processes reference operation records used to roll up manufacturing times.
Suppliers	Supplier Maintenance (2.3.1)	Optional; needed for Kanban Master Maintenance records with Source Type set to Supplier.
Bills of Material (BOMs)	Product Structure Maintenance (13.5)	Optional; needed if components are backflushed when received from a manufacturing process.
Dispatch ID Sequence	Number Range Maintenance (36.2.21.1)	Optional; needed only if you want to communicate demand to kanban suppliers, processes, or supermarkets using dispatch lists.
EDI Setup Information	Various programs on the EDI ECommerce menu (35)	Optional; needed only if you want to exchange dispatch lists and ASNs with your suppliers in EDI format.

Validated Fields

You can use generalized codes, which you define in Generalized Codes Maintenance (36.2.13), to specify valid values for some fields. They give you flexibility in organizing and implementing functions, since you can define values that are meaningful in your own business environment.

Table 1.4 lists the fields using generalized codes referenced by kanban functions. Use this table to plan which codes to set up for your implementation.

Table 1.4
Generalized Codes in Kanban

Field	Label	Where Used
knp_planner_id	Process Planner ID	Kanban Process Maintenance Level Mix Workbench
knb_planner	Kanban Planner	Kanban Master Maintenance Kanban Card Management
knbi_run_out_qty_um	UM	Kanban Item Master Maintenance
knbi_run_out_qtyper_um	UM	
sch_sd_pat	Ship/Deliver Pattern (SDP) Code	Kanban Master Maintenance
cont_hwl_um	UM	Container Type Maintenance
cont_weight_um	UM	
cont_volume_um	UM	
cont_thickness_um	UM	
cont_id_method	Container ID Method	
cont_reference1–5	Reference 1–5	
cont_color	Color	
cont_class	Class	
cont_composition	Composition	

Control Program

Use Kanban Control (17.22.24) to specify several system-level parameters that determine how kanban processing is done, as well as default values for various programs. If you use sequence enforcement and auto-print functions, you can also specify control settings that apply directly to some or all of your kanban loops.

Note Depending on how you use Kanban, you may need to perform some additional setup tasks prior to entering default values in Kanban Control. See the individual field descriptions for more information.

The program consists of several frames, which are described in the following sections.

Initial Frame

Use the first frame to define default values for several programs.

Fig. 1.4
Kanban Control (17.22.24), Initial Frame

Average Demand Template and Safety Stock Template. Enter the default templates for the system to use when it calculates average demand and safety stock, either when you run Average Demand Calculation (17.22.9) or Safety Stock Calculation (17.22.10), or when related information is updated from a workbench program.

These values default to the supermarket item detail records for new loops in Kanban Master Maintenance (17.22.4).

See “Defining Demand Templates” on page 74.

Print Kanban ID Barcode. This field indicates the default print setting for new kanban loop records defined in Kanban Master Maintenance (17.22.4). Enter Yes to print kanban ID barcodes on kanban cards.

To implement barcodes, you must have a barcode-capable printer. You may also need to add printer-control codes in the Bar Code Control frame in Printer Setup Maintenance (36.13.2).

Print Item Number Barcode. This field indicates the default print setting for new kanban records. Enter Yes to print item number barcodes on kanban cards. See *User Guide: Manager Functions* for details.

Barcode External and Barcode Internal. Optionally, enter codes representing the barcode formats used outside or inside your company. For example:

- The external code can be the format used on shipping labels received from your suppliers.
- The internal code can be the format recognized by the scanners used to record kanban transactions between assembly processes in your plant.

Print Quantity. This field indicates the default print setting for new kanban loop records. Enter Yes to print the kanban container quantity on each kanban card.

Level Mix Workbench Tolerance. Specify the allowable tolerance percentage between the total amount planned to be scheduled and the total amount actually scheduled in Level Mix Workbench (17.22.23.3). This value defaults to the Tolerance % field in Level Mix Workbench. You can change it when you run the program. See page 143.

Example The tolerance percent is 5% and the total amount planned to be scheduled is 1000 units. The system displays a warning message if you complete entry in the workbench and the actual quantity planned is less than 950 units or greater than 1050 units.

Level Mix Workbench Time Fence. Specify the default number of calendar days into the future, starting from today, where flow scheduled orders are considered frozen and will not be automatically rescheduled by Level Mix Workbench. This value defaults to the Time Fence Days field in Level Mix Workbench. You can change it when you run the program.

Example Assume today is December 4 and Time Fence Days is 5. Any flow orders imported into Level Mix Workbench up to and including December 8 will not be automatically replanned.

When the workbench value is 0 (zero), the system does not freeze any flow schedules.

See *User Guide: Manufacturing* for information on flow schedules.

Card Reconciliation. Enter Yes to activate automatic kanban card reconciliation functionality. This is also the default setting for the same field in the following programs:

- Kanban Sizing Workbench
- Kanban Process Workbench
- Supermarket Workbench
- Kanban Workbench Import

When Card Reconciliation is Yes in one of those programs, the system automatically creates or modifies replenishment cards so the total of all active cards multiplied by the kanban quantity is equal to the maximum buffer size for the loop.

Example The kanban size is 10, and the maximum buffer is modified to 50 by one of the workbench programs. The card-reconciliation function adds or removes cards as needed to result in 5 active replenishment cards.

Note The system disregards limited-use cards (those with Active Code set to Close, Cycles, or Period) when determining the number of active cards. See “Limited-Use Cards” on page 11.

If reconciliation requires cards to be added, the system uses the phase-in method defined in Kanban Control to determine whether to activate any available inactive cards before creating new ones. See “Phase-In Method” on page 30.

If cards must be removed, the system first looks at the Decrease at Consume value specified for the loop in Kanban Master Maintenance:

- When Decrease at Consume is Yes or Yes Conf, the reconciliation function does not inactivate or close unneeded cards. Instead, the system reconciles the number of cards in the loop each time you record a card in Kanban Consume/Post. If a card is no longer needed, the system either inactivates it automatically (when Decrease at Consume is Yes) or prompts you to confirm the card’s inactivation (when Decrease at Consume is Yes Conf) and physically remove it from the shop floor.

Important Even if you do not use automatic reconciliation in the workbenches, Card Reconciliation must be Yes in Kanban Control for the Decrease at Consume functionality to work during Kanban Consume/Post.

- When it is No, cards are removed from the loop based on the phase-out method specified in Kanban Control.

See “Decrease at Consume” on page 30.

For two-card loops, use Move Card Sizing to control how card reconciliation affects move cards.

Move Card Sizing. Specify whether you typically update the number of move cards in two-card loops in response to changes made by the automatic card-reconciliation function. This is the default setting for the same field in the following programs:

- Kanban Sizing Workbench
- Kanban Process
- Supermarket Workbench

Valid values are:

- None (the default). The workbench does not adjust the number of move cards regardless of replenishment card changes.
- MaxBuf. The workbench adds or removes move cards as needed to balance the new maximum buffer size without changing the kanban quantity.

Example The replenishment card has a kanban quantity of 10, while the move card has a kanban quantity of 20. Automatic card reconciliation has changed the actual number of replenishment cards to 8, resulting in a maximum buffer size of 80. The number of move cards is adjusted to 4 (maximum buffer size / kanban quantity).

If not evenly divisible, the number of move cards is rounded to the nearest whole integer value.

- ReplCrd. The system sets the number and kanban quantity of move cards to match the reconciled replenishment cards. If the kanban quantity has changed, all move cards are closed or inactivated based on the Kanban Control Phase-Out Method field. New move cards are created.

Schedule Time Adjustments. Optionally enter up to five reference codes related to calendar adjustments specified in Process Shift Maintenance (17.22.13). The system validates entries against that program.

These fields default to Preliminary Level Schedule Report (17.22.14), Level Mix Workbench (17.22.23.3), and Level Mix Workbench Export (17.22.23.19).

Time adjustments are typically used to identify such exceptions to the standard shift calendar as holidays or irregularly scheduled meetings that cannot be accounted for by shortening the shift hours.

See “Set Up Process Shifts” on page 49.

Workbench Export and Import Directory. Optionally enter the default paths to the directories where the workbench export and import programs place output files and look for import files. You can change these directories when you export or import data.

The workbench export and import programs are typically required only if you do not use the QAD-provided versions of the workbench programs. In that case, use the export programs to create comma-delimited files containing the same records provided to the workbenches. You can then manipulate the data with a custom external program, export the results to a data file, and use the associated workbench import program to load the updates into the database.

See Chapter 2, “Using External Applications,” on page 153.

Note One of these programs—Kanban Workbench Import (17.22.23.14)—serves an additional function. You can use it to load a comma-delimited file that can automatically create new loops and supporting records. See “Importing Kanban Workbench Data” on page 157.

Minimum Process EPEI. Optionally enter the default minimum EPEI for new processes defined in Kanban Process Maintenance (17.22.3). The default is 0 (zero).

The Kanban Control field uses decimal days. However, in Kanban Process Maintenance, the system converts the value to the units specified in the EPEI Display Option field for the process.

Specify a minimum process EPEI, for example, when you never want to set up the machines in your processes more than once each day. If the calculated EPEI is less than the specified minimum, the system uses the minimum value instead.

See “EPEI” on page 8.

Lead Time Method. Specify the default method the system uses for calculating the lead time for each item produced by a kanban process. This value defaults to Kanban Process Maintenance. You can change it for individual processes.

Valid values are:

- **Variable** (the default). In Kanban Sizing Workbench and Kanban Process Workbench, the system calculates the item lead time dynamically based on the potential queue of other items. The item lead time is the sum of the setup and cycle times for the order quantity of all other items produced by the process, plus the setup and cycle time for one kanban quantity of the item itself.
- **Fixed.** In the kanban workbenches, the system sets the item lead time to the replenishment time for the loop specified in Kanban Master Maintenance.

Card Reporting. Specify the default method used for kanban card piece reporting. This value defaults to Kanban Master Maintenance. You can change it for individual loops.

Valid values are:

- **Standard.** The kanban is recorded as consumed when the first piece is removed from the container. This is the default value.
- **Add.** The kanban is not recorded until the last piece is removed. The system increases the order point by an additional kanban quantity.
- **Remove.** The system reduces the loop size by decreasing the order point by one card.

This setting affects kanban sizing calculations performed using the kanban workbenches.

Note For a loop with only one or two kanbans that has Card Reporting set to Add or Remove, sizing in the kanban workbenches can result in a logical inconsistency based on the value of Fractional Kanban for the loop that could remove card requirements for both the order point and the order quantity. This would result in a card requirement of zero. When this occurs, the system displays a warning message and sizes the loop as one kanban. See “Fractional Kanban” on page 30.

Load Limit. Specify the percentage of the total calculated time available during the EPE interval that the system can use for planning the load on a kanban process. The default is 80%. This value defaults to Kanban Process Maintenance. You can change it for individual processes.

If the planned load for a process based on the time required for setups and the cycle time is greater than this percentage, the system displays a warning message in the workbench.

Note When the setting for a loop is 0, the system does not use fractional kanban logic.

Fractional Kanban. Specify the default fractional kanban percentage for new kanban loops. The default is 0 (zero). It cannot be greater than 99%. This value defaults to Kanban Master Maintenance. You can change it for individual loops.

When you use Kanban Sizing Workbench to size loops, the Fractional Kanban value for the loop lets you control the point at which the system increases the order quantity to provide an additional card. When both the preliminary order point and the preliminary order quantity are greater than zero but less than this percentage of the kanban quantity, the revised order quantity is set to zero. Otherwise, it is set to the revised kanban quantity, resulting in an additional card in the loop.

Note The Kanban Master Maintenance setting can have special significance when Card Reporting is set to Add or Remove. In that case, the workbench calculation may produce a logical inconsistency that would result in removing all cards from the loop because of the fractional kanban logic. When this occurs, the system displays a warning message and sizes the loop as one kanban.

Phase-In Method. Specify the method used by card management and automatic reconciliation functions when adding cards to kanban loops. This is a system-wide control; all kanban loops use the value specified here.

- Create (the default): The system automatically creates the required number of new cards even if the loop has existing inactive cards.
- Activate: If the loop already has inactive cards, the system activates them first, then creates more cards if needed to meet the total requirement.

Phase-Out Method. Specify the method used by card management and automatic reconciliation functions when removing cards from kanban loops. This is a system-wide control; all kanban loops use the value specified here.

- Close (the default): The system changes the active status on unneeded cards to Close. They are automatically inactivated the next time they complete a kanban cycle.
- Inactivate: The system inactivates unneeded cards immediately, even if they are full. They can no longer be used to record kanban transactions.

Note Cards with a status of Empty Accumulate are inactivated immediately during reconciliation regardless of this setting.

Decrease at Consume. Specify whether you typically want to have cards that are no longer needed based on card management or automatic reconciliation functions removed from the loop the next time they are consumed. This is the default setting for the same field in new Kanban Master Maintenance records.

- No (the default): Card management and automatic card reconciliation functions use the phase-out method specified in Kanban Control to determine how cards are removed from the loop.
- Yes: The next time an unneeded card is recorded in Kanban Consume/Post, the system automatically inactivates it without prompting the user for confirmation.
- Yes Conf: When an unneeded card is recorded, the system displays a confirmation prompt before inactivating the card.

Note Card Reconciliation must be Yes in Kanban Control to activate the Decrease at Consume feature on the system level. When it is No, the loop-level field has no effect.

Cost Set. Optionally enter the identifier for the cost set used in inventory value calculations in the kanban workbenches. The default is blank. Entries are validated against records defined in Cost Set Maintenance (30.1).

Dispatch ID. Enter an optional sequence identifier used to generate the batch number assigned to cards when they are dispatched using Kanban Dispatch List Processing. This value must be defined in Number Range Maintenance (36.2.21.1) for target dataset knbd.dispatch_id.

This field is required only if you use dispatch lists to communicate kanban demand data to source suppliers, processes, or supermarkets.

When this field is blank, Kanban Dispatch List Processing does not generate dispatch ID numbers. Although you can still generate non-EDI dispatch lists in simulation mode by setting Update Dispatched Cards to No, the actual processing can take place only when a sequence is defined.

While creating a dispatch list using this sequence, the system stores the number as a dispatch ID associated with the cards included in that dispatch session. You can use this ID in several programs on the Kanban Dispatch Menu (17.22.18) to retrieve information about dispatched cards.

See *User Guide: Manager Functions* for information on number ranges.

Note Although you can define longer generated numbers in Number Range Maintenance, the kanban card detail and history fields where they are stored are limited to 24 characters. You should consider this when setting up the sequence definition.

Kanban Transaction Control Settings

The next frame includes settings that control processing for programs on the Kanban Transactions Menu (17.22.19).

Fig. 1.5
Kanban Control, Kanban Transaction Control

The screenshot shows the 'Kanban Control' dialog box with the 'Kanban Transaction Control' frame selected. The settings are as follows:

- Trans Display Pause in Seconds: 0
- Effective Date Entry: ☐
- FIFO During Ship Trans Entry: ☒
- Controlled Kanban Entry: None
- PO Receipt Data Entry: ☒
- Lot Entry: ☒
- Regeneration Enforcement: Warning
- Kanban Cycle Enforcement: None
- Minimum Cycle (D H:M:S): 0
- Maximum Cycle (D H:M:S): 0
- Replenishment Sequence Enforcement: ☐
- Move Sequence Enforcement: ☐

Transaction Display Pause in Seconds. Enter the period of time, in seconds, to display a frame containing kanban card information during a kanban transaction session. The information frame displays for the number of seconds specified before the system prompts for the next kanban ID. The kanban information is used for verification purposes only. Enter 0 (zero) if you do not want to display the kanban information frame.

See “Record Kanban Transactions” on page 115.

Important When you use the QAD Desktop or QAD .NET user interface and this field includes a value, the system does not automatically clear the display. You must press the spacebar each time to input a new card. To avoid this, leave the field set to 0.

Effective Date Entry. This field indicates whether the system prompts for an effective date at the beginning of a kanban transaction session. Enter Yes to allow the entry of an effective date for a kanban transaction session. Enter No to use the system date for kanban transactions.

FIFO During Ship Trans Entry. Enter Yes to display a prompt during Kanban Ship (17.22.19.4) that lets you update the current FIFO process as the source of the kanban transaction.

This setting applies only to kanban loops that have Use FIFO set to Yes in Kanban Master Maintenance.

When this field is No, the prompt does not display during Kanban Ship. The system records the current process as the source of the transaction.

See “FIFO Process Data” on page 118.

Controlled Kanban Entry. Indicate the level of control placed on kanban data entry during a kanban transaction session. Use controlled entry to mandate that selected kanban data must be the same for the duration of a kanban transaction session. For example, you can limit kanban entry to kanban cards associated with a specific supplier.

- None: Kanban entry is not controlled.
- Warning: When the kanban data does not match the control data, a warning displays. The warning can be accepted or overridden.
- Error: When the kanban data does not match the control data, an error displays and the kanban entry is automatically rejected.

When this field is set to Warning or Error, a frame displays during a kanban transaction session allowing entry of control data. The control data is used for all transactions during that session.

PO Receipt Data Entry. Specify whether the system typically prompts for purchase order receiving information when a card is recorded in Kanban Fill/Receive. This is the default for new loop records in Kanban Master Maintenance.

When the field is Yes in the loop record, the system displays optional data-entry fields for a receiving note and packing slip number when the card is recorded.

Lot Entry. Specify whether the system typically prompts for a lot number and reference when a card is recorded in Kanban Fill/Receive. This is the default for new loop records in Kanban Master Maintenance.

When the field is Yes in the loop record, the system displays optional data-entry fields for a lot number and reference when the card is recorded.

Modify Inventory Data. Specify whether users are typically allowed to update default values when recording kanban fill/receive or ship transactions. This sets the default value for new loop records in Kanban Master Maintenance.

When Modify Inventory Data is Yes for a loop, Kanban Fill/Receive and Kanban Ship display editable fields for certain kinds of inventory data. Depending on the source of the loop (supplier, inventory, process) and the transaction, fields can include:

Quantity Accepted

Quantity Scrapped
Reason (with multiple-entry option)
Receipt Location
Issuing Location

Enabling this option lets you record receipt and shipment transactions on which the quantity processed does not have to equal the kanban quantity. For example, you can record the quantity scrapped when receiving a card for a process loop. In a similar situation, with the loop Modify Inventory Data field set to No, Kanban Fill/Receive automatically records the kanban quantity. You cannot account for scrap.

Modify Inventory Threshold. Specify the default maximum percentage of the kanban quantity that is considered an acceptable difference between the kanban quantity and the quantity actually recorded in Kanban Fill/Receive or Kanban Ship.

This value defaults to new loop records in Kanban Master Maintenance.

When Modify Inventory Data is Yes for a loop and the user changes the actual quantity received or shipped from the default (the kanban quantity), the system calculates the difference as a percentage of the kanban quantity. If the percentage is equal to or greater than the specified threshold, a warning message displays.

Note The system calculation is based on an absolute value, so the threshold applies to recorded quantities both greater than and less than the kanban quantity.

When this field is 0 in the loop record, the system does not validate the quantity entered.

Example A Kanban Master Maintenance record for a loop has the following settings:

Kanban Quantity is 50.
Modify Inventory Data is Yes.
Modify Inventory Threshold is 10.00%.

When recording a card for this loop in Kanban Fill/Receive, you enter 40 in the Quantity Accepted field. The system calculates the difference between this and the kanban quantity ($50 - 40 = 10$). It then determines the percentage of the kanban quantity represented by the difference ($10 / 50 = 0.20$). Since 20% is greater than the specified threshold of 10%, the system prompts you to confirm the quantity accepted.

However, if you enter 48 in Quantity Accepted, the difference is only 2 ($50 - 48$). This represents only 4% of the kanban quantity ($2 / 50 = 0.04$). Since that is less than the specified threshold, the system accepts the quantity without a warning prompt.

Regeneration Enforcement. Specify how cards are typically managed when they are recorded in one of the programs on the Kanban Transactions Menu and the system determines that certain card and loop values are no longer identical. This is the default for new loop records in Kanban Master Maintenance.

Valid values are:

- None (the default): The system records the transaction.
- Warning: The system displays a warning and prompts you to continue. You can complete the transaction.
- Error: The system displays an error. You cannot complete the transaction.

Regeneration is required when one of the following is true:

- The kanban quantity and source ID on the card are not the same as the quantity and source ID in Kanban Master Maintenance.
- The routing and BOM codes on the card are not the same as the loop codes. The system searches for the loop's routing and BOM codes in the following sequence:
 1. Item/step records defined in Kanban Item Master Maintenance
 2. Item/site detail records
 3. Item master records
 4. Routing and BOM codes that are the same as the item number

Kanban Cycle Enforcement. Indicate the level of enforcement for minimum kanban cycles. Use minimum kanban cycles to control how quickly kanban data for the same card can be entered into the system. Enforcing a minimum kanban cycle prevents the problem of inadvertently entering the same kanban card twice during a kanban transaction session.

- None: A minimum kanban cycle is not enforced, regardless of the time period specified in the Minimum Cycle fields.
- Warning: When the same kanban ID is entered in a time cycle less than the minimum cycle defined for that card, a warning displays. The warning can be accepted or overridden. When the warning is accepted, the kanban entry is rejected.
- Error: An error displays and the kanban entry is automatically rejected when the time cycle for a kanban entry is less than the minimum cycle defined for that card.

The minimum kanban cycle is the sum of the days, hours, minutes, and seconds entered in the Minimum Cycle fields for each kanban card.

This field sets the default for new kanban loop records defined in Kanban Master Maintenance.

Minimum Cycle Days, Hrs, Min, Sec. A minimum kanban cycle is the sum of the days, hours, minutes, and seconds entered in these fields. These fields set the default for new kanban loop records.

Maximum Cycle Days, Hrs, Min, Sec. Maximum kanban cycle is used by Missing Kanbans Report (17.22.19.18) to determine whether a kanban card is misplaced. A kanban card is considered missing when the elapsed time between the last transaction for that card and the current date and time exceeds the maximum kanban cycle.

The maximum kanban cycle is the sum of the days, hours, minutes, and seconds entered in these fields. These fields are used as the default for new kanban records. A maximum kanban cycle is not enforced when a maximum cycle time is not specified.

See “Generating Reports” on page 151.

Replenishment and Move Sequence Enforcement. Specify whether the system enforces the sequence in which kanban replenishment or move card transactions are recorded.

- No (the default): The associated card type can be recorded in any sequence. The system disregards settings for individual transaction types in Kanban Control or Kanban Master Maintenance.
- Yes: Depending on the value of User Control Prog Tran Settings in Kanban Master Maintenance, the system enforces the transaction sequence as defined in Kanban Control or Kanban Master Maintenance.

See “Sequence Enforcement” on page 14.

Accumulator Monitor Pause Time. Specify the number of seconds the system pauses each time before cycling through applicable loop records when Accumulator Monitor is running. Valid values are 1 to 999. See “Monitor Accumulator Quantities” on page 114.

Transaction Event Settings

The next frame includes two types of values:

- Sequence enforcement settings
- Auto-print settings

Depending on the value of Use Control Prog Tran Settings specified for individual loops in Kanban Master Maintenance, these settings can be used in two ways:

- When Use Control Prog Tran Settings is No, the values specified becomes the defaults for new kanban loop records. You can update them in the Kanban Transactions Event Control frame in Kanban Master Maintenance. See page 72.
- When Use Control Prog Tran Settings is Yes, the loop uses the values specified in Kanban Control.

Fig. 1.6

Kanban Control, Kanban Transaction Event Control Frame

Event	Sequence Enforcement	Auto Print
Repl Consume	Warning	☐
Repl Authorize	Warning	☐
Repl Acknowledge	Warning	☐
Repl Ship	Warning	☐
Repl FIFO	Warn All	☐
Repl Fill	Warning	☐
Move Consume	Warning	☐
Move Fill	Warning	☐

Sequence Enforcement. Use these fields to specify the level of sequence enforcement associated with each kanban transaction event. Valid values for both move card transactions and most replenishment card transactions are:

- None (the default): The system does not check the sequence of events for this transaction.
- Warning: If events for this transaction are recorded out of sequence, the system displays a warning message. You can still record the card.
- Error: If transaction events are recorded out of sequence, you cannot complete the transaction.

See “Sequence Enforcement” on page 14.

The Repl FIFO field applies only to loops that are supplied by FIFO processes. It includes additional options that let you control whether warning or error messages apply only to the first FIFO process in the loop or to all FIFO processes.

Auto-Print. Use each field to specify whether you typically reprint cards after they are recorded using the associated transaction. When it is Yes, recording the card sets the Auto Print field in the card detail record to Yes. When you run Kanban Multi-Card Print (17.22.16.5), you can control whether the system includes these cards in the selection.

Note You can update the card auto-print value manually in Kanban Card Maintenance (17.22.16.1) or Kanban Multi-Card Maintenance (17.22.16.2). See “Maintain Cards” on page 100.

Kanban Items

Use Kanban Item Master Maintenance (17.22.1) to identify items that are supplied using kanban loops, as well as specify default values for loop and process records. You must define items with this program before you can:

- Associate them with kanban loops using Kanban Master Maintenance (17.22.4)
- Set up process item records for them using Kanban Process Maintenance (17.22.3)

Important You must define items using Item Master Maintenance (1.4.1) before you can set them up as kanban items.

Fig. 1.7
Kanban Item Master Maintenance (17.22.1)

The screenshot shows the 'Kanban Item Master Maintenance' window for item 20001a. The fields are as follows:

Field	Value
Item Number	20001a
Step	0
Routing Code	
BOM Code	
Container Type	
Minimum Item EPEI	0.000
Cost Allocation	100.0%
Average Inv Calc Method	Standard
Run-Out Option	No
Run-Out Setup (D H:M:S)	0 00:00:00
Run-Out Material	
Run-Out Quantity	0.0
Run-Out Quantity Per	0.0
Run-Out UM Conversion Factor	1.0000
Comments	

Additional fields on the right side of the window include: EA, Days, Standard Method, Do not invoke run out, UM, and UM.

Note When creating a new loop based on records imported using Kanban Workbench Import (17.22.23.14), the system creates a new kanban item master record if the item/step specified in the import file does not already exist. See page 160.

You can associate process steps, routings, and bills of material (BOMs) with kanban items. Because items may use different routings or BOMs depending on where they are in the manufacturing process, you can create multiple item records with different steps to differentiate them.

When they are specified, the initial routing and BOM codes default from Item Master Maintenance (1.4.1). If you do not specify a routing or BOM code for the kanban item, the system uses standard logic to determine the value associated with kanban loops for the item. For example, if no routing code is specified for a kanban item, Kanban Card Create searches for a routing record specified for the item-site, then the item. If those records do not include a routing, the system looks for a routing code that is the same as the item number.

You can also specify the following values for a kanban item:

Container Type. Specify the type of container used to store and move this kanban item. This value must be defined in Container Type Maintenance (17.22.5). It defaults to new loop records for this item in Kanban Master Maintenance. See “Kanban Containers and Labels” on page 39.

Minimum Item EPEI. Optionally enter the default minimum EPEI for this item when it is added to a process in Kanban Process Maintenance. The default is 0 (zero).

The Kanban Item Master Maintenance field uses decimal days. However, if you enter a value here, the system converts it to the units specified in the EPEI Display Option field in Kanban Process Maintenance.

Specify a minimum item EPEI, for example, when you never want to set up the machines to make a given item more than once every three days. If the calculated process EPEI is less than the specified minimum item EPEI, the system uses the minimum value instead.

See “EPEI” on page 8.

Cost Allocation. Specify the percentage of the total cost of this item represented by its value at this process step. The default is 100%.

The system uses this percentage in kanban workbench average inventory and safety stock value calculations. The kanban item cost at a given process step is calculated by multiplying the cost of the item from the cost set specified in the workbench by this percentage.

Defining the cost of an item as less than 100% is useful when the item at a step is still work in process, and the total components and labor required for the completed item have been only partially used.

Average Inventory Calculation Method. Specify the default average inventory calculation method for new kanban loops. This value defaults to Kanban Master Maintenance. You can change it for individual loops.

The system calculates the value of the Average Inventory Units field in the workbench based on the method specified for the loop, as well as various other values from the workbench.

Valid values are either Standard (the default) or Mfg1.

For Standard, average inventory is calculated as follows:

*If Order Quantity is greater than 0, then Average Inventory = (Order Quantity * 0.5) + (Average Daily Demand * FIFO Time) + (Total Safety Stock and Safety Time) + Container Size Safety Stock*

*If Order Quantity is 0, then Average Inventory = ((Fixed Interval Time * Average Daily Demand) * 0.5) + (Average Daily Demand * FIFO Time) + (Total Safety Stock and Safety Time) + Container Size Safety Stock*

If Order Quantity and Fixed Interval are both 0, and Daily Demand is 0, then Average Inventory = (Total Safety Stock and Safety Time) + Container Size Safety Stock

*If Order Quantity and Fixed Interval are both 0, and Daily Demand is greater than 0, then Average Inventory = (Kanban Quantity * 0.5) + (Average Daily Demand * FIFO Time) + (Total Safety Stock and Safety Time) + Container Size Safety Stock*

For Mfg1, average inventory is calculated as follows:

*1/4 * (3 * Final Order Quantity + Average Daily Demand * Run Time in Days) + (Total Safety Stock and Safety Time) + ((FIFO Time in Days * Average Daily Demand) rounded up to the kanban quantity) + Container Size Safety Stock*

Where:

*Run Time in Days = (Loop Final Order Quantity * Cycle Time) / Process Time in a Day + (Item Setup Time / Process Time in a Day)*

Note Method Mfg1 is designed for loops that have Source Type set to Process.

Run-Out Option. Enter Yes if the source that supplies this item at this step typically runs the quantity needed to use the entire supply of a given material regardless of the kanban quantity. Otherwise, enter No. This value defaults to Kanban Master Maintenance. You can change it for individual loops.

Especially in situations with extensive setup times to change over to a key material, setting up a work center for just the kanban quantity may not be efficient. Instead, the process produces enough items to consume an entire bulk quantity of that material. For example, if changing over a process to set up a coil of steel takes significant time, it may be more efficient to use the entire coil each time you run the item. The total amount of material available, the quantity required to produce each item, and the amount of time required to change over to a new supply can be useful information for analyzing kanban setup and sizing alternatives.

This field is for reference. The value specified in Kanban Master Maintenance displays in the kanban workbenches and is included in files created by Kanban Workbench Export, along with the related run-out parameters defined in Kanban Item Master Maintenance.

Run-Out Setup. Enter the time (in days, hours, minutes, and seconds) required to change over this run-out material when it needs to be replenished.

Note These run-out reference fields display in the workbenches and are included in files created by Kanban Workbench Export.

Run-Out Material. Enter the run-out material associated with this item. For example, this could be a coil of wire.

Run-Out Quantity and UM. Enter the quantity and unit of measure of this run-out material. For example, this can be the number of feet of wire in a coil. The UM field is validated against values entered in Generalized Codes Maintenance for field knbi_run_out_qty_um.

If you also enter the unit of measure for Run-Out Quantity Per, the system looks for a conversion factor defined in Unit of Measure Maintenance. If one is available, it defaults to the Run-Out UM Conversion Factor field.

Run-Out Quantity Per and UM. Enter the quantity of this run-out material used to produce a single kanban item. The UM field is validated against values entered in Generalized Codes Maintenance for field knbi_run_out_qty_per_um.

Run-Out UM Conversion Factor. Enter the conversion factor between the Run-Out Quantity and the Run-Out Quantity Per. For example, if the run-out material is a coil of hose 500 feet long and each kanban item requires a 3-inch length, you would specify a foot-to-inch conversion factor of 0.08333333.

When you first define a record in this program, this field is blank. If you specify values in the two UM fields that have a conversion factor defined in Unit of Measure Maintenance, the system automatically adds that value to the field. If you change it, the system displays a warning message.

When you save a record with the field blank, it defaults to 1. To add new units of measure that have conversion factors defined, enter them in the UM fields, set Run-Out UM Conversion Factor to 0 (zero), and press Go. The system displays the conversion factor.

Comments. Enter Yes to update or enter comments related to this kanban item; otherwise, enter No. Comments defaults to Yes if comments are already associated with the item; otherwise, the default is No.

When Comments is Yes, the transaction comments screen displays for you to enter or review comments regarding this item.

Kanban Containers and Labels

Two programs let you define reference records for containers and labels that can be associated with kanban master records.

Defining Kanban Containers

Use Container Type Maintenance (17.22.5) to define containers used for storing and transporting kanban-controlled items.

You can identify a variety of characteristics of a container, including several dimension and weight parameters, the owner—your own company, your supplier, or your customer—and the method used to identify kanban information. Additionally, five user-defined reference fields provide more options for setting up container types.

Many of the fields can be validated against generalized codes, so you can define your own conventions for how each field is used.

Associate a default container type with a kanban item in Kanban Item Master Maintenance (17.22.1). You can update the default value for each kanban loop in Kanban Master Maintenance (17.22.4).

Most of the fields in this program are currently for reference only.

See Table 1.4 on page 25.

Fig. 1.8
Container Type Maintenance (17.22.5)

Defining Kanban Labels

Use Kanban Label Definition Maint (17.22.16.18) to specify the kinds of label information that you want to associate with a kanban loop. For example, you might use this to determine the data you want an external supplier to provide on their shipping labels.

Associate a label definition record with a loop in Kanban Master Maintenance.

Note Label definitions are currently not associated with any system processing. They are for reference only.

The program consists of three frames.

In the first frame, enter identifying data and specify label characteristics. The only required field is Label Name. All fields default to blank; no field values are validated.

Fig. 1.9
Kanban Label Definition Maint (17.22.16.18)

In the Source Type Data Fields frames, select the kinds of source-related data to be associated with supplier, process, and inventory loops that use this label definition. All fields default to No.

Fig. 1.10
Kanban Label Definition Maint, Source Type Data

In the Fields to be Printed frame, select the kinds of card data that are associated with this label definition. With the exception of Kanban ID, all fields default to No. Kanban ID is set to Yes and cannot be changed.

Fig. 1.11
Kanban Label Definition Maint, Fields to be Printed

The screenshot shows the 'Kanban Label Definition Maint' window. At the top, it displays 'Label Name: External' and 'Label Description: supplier shipping label'. Below this, there is a section titled 'Fields to be Printed' which contains three columns of fields. Each field has a checkbox or a text input field next to it. The fields are as follows:

Field	Field	Field
Kanban ID: ☒	Supermarket Desc: ☐	Accum Type Desc: ☐
Item Number: ☒	Inventory Location: ☒	Cycles: ☐
Item Desc 1: ☐	Kanban Quantity: ☒	Active Start: ☐
Item Desc 2: ☐	Container Capacity: ☐	Active End: ☐
Item Revision: ☐	Container Type: ☐	Print Date: ☐
Item UM: ☐	Card Type: ☐	Print Time: ☐
Item Step: ☒	Card Type Description: ☐	Card Comment Page: 0
Routing Code: ☐	Second Card ID: ☐	Card Comment Page: 0
BOM Code: ☐	Delivery Location: ☒	Card Comment Page: 0
Supermarket Site: ☒	Point Of Use Location: ☐	Card Comment Page: 0
SM Site Desc: ☐	Accumulator Type: ☐	Card Comment Page: 0
Supermarket ID: ☒		

EDI ECommerce

If you want to send replenishment authorizations to your suppliers in EDI format when generating dispatch lists, you must set up several types of data in EDI ECommerce.

EDI setup requirements are summarized in “EDI Dispatch List Transmittal” on page 131.

Update Utilities

QAD has delivered enhancements to the Kanban module as software patches during the life cycle of Standard Edition. Utilities support the following ECOs, which were added with QAD 2008 SE (SP7). If you upgraded from version eB2 or from QAD 2007.1 (SP 6) or earlier to the current version of Standard Edition, you should run these utilities.

- ECO Q19Z updates the way component backflush occurs relative to kanban ship transactions. Run Reset Cards with SHIP Status (17.22.25.3, uxkbcrds.p).
- ECO Q1FF adds a new Quantity Accepted field to card records. Run Reset Card Quantity Accepted (17.22.25.5, uxkbcrd1.p) to update existing cards by setting the new field to the kanban quantity.

Setting Up Kanban Processes

You need to define kanban processes when you have kanban loops that are supplied directly by a manufacturing process, rather than by an external supplier or from the inventory of a supermarket.

Depending on your manufacturing environment, use as many as three programs as part of the process definition task:

- Define the process itself using Kanban Process Maintenance (17.22.3).
- Specify the number and length of work shifts using Process Shift Maintenance (17.22.13).
- Optionally combine times required by manufacturing operations using Process Item Operation Rollup (17.22.12).

See “Processes” on page 7.

Define Processes

Use Kanban Process Maintenance (17.22.3) to define production processes that are sources for kanban loops. You can specify characteristics of the process items for each kanban loop the process supports, including ranges of routing operations that produce the item.

You also can associate items with processes in Kanban Master Maintenance and then update the process-related characteristics as needed using this program.

See “Define Loops in Kanban Master Maintenance” on page 52.

Use the initial frame to define information about the process itself, including the site where it is located and a unique identifier. Several display-only fields are updated automatically when you run one of the following programs:

- Basic Process Calculations (17.22.11). See page 77.
- The kanban workbenches. See page 78.

Fig. 1.12
Kanban Process Maintenance (17.22.3)

Available Time. Optionally enter the time, in hours, minutes, and seconds, that this process is typically available for production during a working day. The system uses this value in capacity calculations for supermarket and kanban sizing activities.

Note You cannot enter a value greater than 24 hours.

You can have the system calculate this value using Basic Process Calculations when Available Time is set to Yes. The calculation is based on the process calendar defined in Process Shift Maintenance (17.22.13), along with the number of days specified when you run Basic Process Calculations.

This value defaults to the kanban workbenches. If you modify it there and save your changes, the system updates this field.

Process Function. Specify the way this process is used in a kanban loop. Valid values are:

- STD (Standard): This process is not a pacemaker or a FIFO lane.

- **PACE:** This is a pacemaker process. In a lean manufacturing environment, the pacemaker is the process that responds most directly to demand from the end customer. Typically, it is associated with a limiting resource that controls the maximum speed at which the process can operate.

When you run Preliminary Level Schedule Report (17.22.14), you can limit the selection of processes to pacemakers. You can update process information using Level Mix Workbench only for pacemaker processes. See “Pacemakers” on page 7.

- **FIFO:** This process represents a FIFO lane. FIFO lanes are a flow-control technique used between two manufacturing processes. The first process receives the signal to produce from the supermarket (or from a FIFO lane from a previous process) and moves material to the following process. The product produced at the second process is run in the order it is received. The completed material is then moved to the supermarket or to another FIFO lane.

Only FIFO processes can be included in the FIFO Lane Detail frame in Kanban Master Maintenance.

See “FIFO Lanes” on page 7.

Uptime. Specify the percentage of the standard work day when this process is available to do work. For example, if the machines used on this process are typically down for routine maintenance 5% of the time, set this field to 95.00. The default is 100%.

This value defaults to the kanban workbenches. If you modify it in Kanban Process Workbench and save your changes, the system updates this field.

Resources. Enter the number of resources assigned to this process. The default is 1. You cannot enter a negative number.

When it calculates the amount of time this process is available to manufacture kanban items, the system uses this value as a multiplier for the Available Time field. For example, if the process is available for 7 hours each day but has 2 machines available, enter 2.0 in Resources. Process calculations then are based on a total of 14 available hours.

Production Line. If you use flow schedules or want to record transactions against cumulative orders created in Advanced Repetitive, specify the production line associated with this process. Production lines must be defined in Production Line Maintenance (17.21.1.4 in Flow Scheduling or 18.22.1.1 in Advanced Repetitive).

Note When Process Function is set to PACE, the system verifies that the specified production line is not referenced by another pacemaker process at the same site.

With Flow Scheduling, the system uses the specified production line when you run Level Mix Workbench to determine which flow schedules need to be updated or created. With Advanced Repetitive, the system uses the production line as part of the logic for identifying cumulative orders for recording kanban inventory transactions.

Location. Optionally enter a location code associated with this process. This value must be defined in Location Maintenance (1.1.18).

When Component/Op Transactions is Yes in the Card Control Data frame of Kanban Master Maintenance for a loop supplied by this process, the system backflushes component materials from this location when the card is recorded using Kanban Fill/Receive. When this field is blank, the system uses item-site and item master data to determine the backflush location.

Load Limit. Specify the percentage of the total calculated time available during the EPE interval that the system can use for planning the load on a kanban process. This value defaults from Kanban Control.

If the planned load for a process based on the time required for setups and cycle time is greater than this percentage, the system displays a warning message in the workbench.

Process Planner ID. Optionally enter a code representing the person who is responsible for planning this process. When you run Level Mix Workbench, you can select processes based on this code.

This field is validated against values defined in Generalized Codes Maintenance for field name knp_planner_id.

Note This is not the same as the buyer/planner code used elsewhere in the system.

Level Mix Sequence. Specify how the system determines the order in which items are processed when you use Level Mix Workbench.

- **MFG_SEQ:** This is the default for new process item records. The system uses the value in the Manufacturing Sequence field in the Kanban Process Detail frame. The workbench finds the last order processed (either the last item in a frozen period or, if no periods are frozen, the last item in the day just prior to the first schedule date used), and then increments by 1. For example, there are 10 items in the process with Manufacturing Sequence values of 1 through 10. If the last item processed was sequence number 4, then the workbench starts with item 5. When item 10 is processed, the system loops back to sequence number 1.
- **OPER_ASC:** The system uses the number of operators required in ascending order to determine the item sequence. The logic is similar to MFG_SEQ except the number of operators is used instead of the Manufacturing Sequence number. The system starts with the next item (using ascending number of operators as the sort criteria) and loops around after the item with the lowest number of operators is processed. If multiple items exist with the same number of operators, the items are processed in ascending sequence of item number. The number of operators required is calculated by Basic Process Calculations or Kanban Process Workbench. For example, you can use this method if you want to start the day with the minimum number of operators on the shop floor, and add operators as needed during the day.
- **OPER_DSC:** This is similar to OPER_ASC, except that the system begins by selecting the item that requires the highest number of operators. This option is useful when you start the day with the most operators that will be needed, then reduce the number as tasks are completed.

Note When you use one of the operator-based methods, Level Mix Workbench uses the required-operator values as of the time you launch the program. If you add, delete, or change orders from within the workbench, the system does not adjust the required number of operators before generating the level schedule.

Takt Time Calculation. Enter the source of the system-generated takt time calculation for this kanban process. Takt time is the time in seconds required to produce one unit at the customer's rate of demand. Valid values are:

- **EPEICalc:** The system calculates takt time when you run Basic Process Calculations or Kanban Process Workbench.

- **LvlMixWB:** The system calculates takt time when you run Level Mix Workbench. This is valid only for pacemaker processes.

Note If you run Level Mix Workbench for a process and click Save, the system updates takt time regardless of the value of this field and sets the Takt Time Calculation field to LvlMixWB.

Lead Time Method. Specify the method the system uses in the kanban workbenches for calculating the lead time for items produced by this kanban process. This value defaults from Kanban Control.

Valid values are:

- **Variable (the default):** The system calculates the item lead time dynamically based on the potential queue of other items. The item lead time is the sum of the setup and cycle times for the order quantity of all other items produced by the process, plus the setup and cycle time for one kanban quantity of the item itself.
- **Fixed:** The system sets the item lead time to the replenishment time for the loop specified in Kanban Master Maintenance.

EPEI Display Option. Specify the unit of time used in the EPE Interval field for this process:

- Months
- Weeks
- Days (default)
- Hours
- Minutes
- Seconds

The EPE interval is the minimum time a process needs to make all the items it produces based on average demand. This is often expressed in days. For example, when you are using days as the display option, an EPEI of 0.5 means that, allowing for changeover times, the process can produce all of its items twice each day.

Minimum Process EPEI. Optionally enter the minimum every-part-every interval (EPEI) for this process. This value defaults from Kanban Control.

This field displays in the time units specified in the EPEI Display Option field.

Note This may not be the same as the Kanban Control value, which is entered in decimal days.

Specify a minimum process EPEI, for example, when you never want to set up the machines in your processes more than once each day. If the calculated EPEI is less than the specified minimum, the system uses the minimum value instead.

Pitch Quantity. Enter the item quantity associated with the pitch for this process. This should be a multiple of the value specified in the Kanban Quantity field for all the process items in the Card Tracking Control frame of Kanban Master Maintenance. Otherwise, the system displays a warning message and recommends an appropriate value to enter in the field.

The system multiplies this value by the takt time to determine the pitch interval.

Pitch is a management time frame representing the frequency at which you withdraw finished goods from a pacemaker process as well as the corresponding amount of schedule you can release to that process.

Note Current functionality supports only fixed-pitch processes. If the user-specified process pitch quantity is not a common multiple of all the kanban quantities of the loops using the process, the system applies a threshold of 100X the largest kanban size when calculating a recommended pitch size. Otherwise—when a process supports many loops with various kanban quantities—the quantity recommended could be unrealistically large. The calculation time involved could also have a significant impact on system performance.

As soon as the calculated lowest common multiple exceeds the threshold, the system assumes that this is a variable-pitch process. It displays a message recommending that you set the pitch to the largest kanban quantity.

Pitch Interval. Optionally enter the time frame over which performance of this kanban process is measured based on the value of Pitch Quantity.

When you run Basic Process Calculations with Pitch Interval set to Yes, the system updates this field by multiplying the pitch quantity by the takt time.

Pitch UM. Enter the unit of measure associated with the value specified in Pitch Quantity.

If this is not the same as the UM specified in Item Master Maintenance (1.4.1), a conversion must be defined in Unit of Measure Maintenance (1.13). The conversion factor displays in Kanban Process Workbench.

Comments. Enter Yes to update or enter comments related to this kanban process; otherwise, enter No. Comments defaults to Yes if comments are already associated with the process; otherwise, the default is No.

When Comments is Yes, the transaction comments screen displays for you to enter or review comments regarding the process.

The system next displays summary lines of kanban items that have already been defined for this process. If this process has been specified as the source of any kanban loops in Kanban Master Maintenance, item records associated with those loops default to the Kanban Process Detail summary frame. Use the fields at the bottom of the screen to update or add process item details as needed.

Note When creating a new loop based on records imported using Kanban Workbench Import (17.22.23.14), the system adds new item detail records to an existing process as needed when the source type for the new loop is Process. See page 162.

Fig. 1.13
Kanban Process Maintenance, Process Detail Frames

Item Number	Step	UM	UM Conv	Kanban Qty	Site	Supermkt
20001a	0	EA	1.0000	1.0	2005a	sm100a
20002a	0	EA	1.0000	1.0	2005a	sm100a
20003a	0	EA	1.0000	1.0	2005a	sm100a

Item: 20001a
EPEI: 0.07474196
EPEI Auto: ☒
Min EPEI: 0.000
Yield: 100.00%
Start Op: 30
Req Oper: 1.075

Step: 0
End Op: 40

Mfg Seq #: 0
Setup Time (D H:M:S): 00:10:01
Cycle Time (D H:M:S): 00:00:00
Work Time (D H:M:S): 00:00:00
Lead Time (D H:M:S): 00:00:00
Move Time (D H:M:S): 00:00:00
Equipment Time (D H:M:S): 00:00:00

02.5000
04.3000

Item and Step. Specify an item number/process step combination defined in Kanban Item Master Maintenance.

Using step numbers lets you identify an item at a stage of the manufacturing cycle independent of any associated routing information.

Note Although an item can be handled by multiple processes, it can go through only one pacemaker at each step. You cannot assign an item at a step to more than one process at the same site that has Process Function set to PACE.

Mfg Seq Number. Optionally enter a number to indicate the sequence in which this item is manufactured relative to all items in this process. The default is 0 (zero).

When you run Level Mix Workbench for a process that has Level Mix Sequence set to MFG_SEQ, the system uses this number to determine the scheduling sequence.

The system does not validate this number. If you leave it set to the default or assign the same sequence number to more than one item, the system sequences items alphanumerically by item number.

EPEI. Optionally enter an EPEI interval for the individual item. To prevent the system from overwriting the field when it calculates the overall process EPEI, set EPEI Auto to No.

Use EPEI Display Option in the first frame to control which unit of time the system uses.

EPEI Auto. Specify whether the system automatically calculates the EPEI interval for this process.

- Yes: The system updates the EPEI field when you run Basic Process Calculations or Kanban Process Workbench for this process, overwriting any manually entered value. This is the default for new process item records.
- No: You can manually enter a value in the EPEI field. System calculations do not update that field, and requirements for the item are not included in EPEI calculations.

You can use manual EPEI entry to prevent the system from including rarely produced items in process EPEI calculations. In that case, the EPEI value is for reference only.

Note EPEI is updated automatically only when the system determines that adequate time exists to perform the required changeovers and production cycles. If not, a warning message displays when the calculation is being done, and EPEI is left set to 0 (zero) regardless of the EPEI Auto setting.

Minimum EPEI. Optionally enter the minimum EPEI for this item. This value defaults from Kanban Item Master Maintenance.

This field displays in the time units specified in the EPEI Display Option field.

Note This may not be the same as the Kanban Item Master Maintenance value, which is entered in decimal days.

Specify a minimum item EPEI, for example, when you never want to set up the machines to make a given item more than once every three days. If the calculated process EPEI is less than the specified minimum item EPEI and EPEI Auto is Yes, the system uses the minimum value instead.

Start Op and End Op. Enter a range of routing operations that will be considered in determining the setup, cycle, and work time for this process.

When you run Process Item Operation Rollup for this process, the system uses this range to select operations from the routing specified in Kanban Item Master Maintenance. If one is not specified, the item number is used to search for a routing.

If you do not want to use times from routing records, you can optionally enter times for the process in the appropriate fields.

See “Roll Up Item Data” on page 50.

Note The system overwrites manual yield and time entries with calculated values based on this operation range if you run Process Item Operation Rollup for this process.

Req Oper. Based on the current demand, this is the number of operators needed to meet the production requirements. The system calculates this value as the item work time (in seconds) divided by the process takt time.

Note Yield is the percentage of any order expected to be in usable condition after this process.

Yield. Optionally enter the normal yield percentage for this item at this process. This value defaults from Item-Site Planning Maintenance or Item Master Maintenance.

When you run Kanban Process Item Rollup, the system multiplies the yield values of all the individual specified operations and sets this field to the result.

Note The system calculation overwrites any manual entry in this field.

When you modify the Yield % (Revised) field in Kanban Process Workbench and save your changes, the system updates this field.

The system uses yield in calculating EPEI in Basic Process Calculations, as well as Kanban Process Workbench. Additionally, yield is factored into average demand calculations when considering future demand based on exploded MRP detail records.

Setup Time. Optionally enter the time, in days, hours, minutes, and seconds, required to prepare the process to manufacture this item, independent of order quantity. This value is used in process EPEI calculations.

When you run Kanban Process Item Rollup, the system sets this value to the total of all the setup times defined in Routing Maintenance for the specified operations.

Cycle Time. Optionally enter the total time interval, in days, hours, minutes, and seconds, between individual items being completed by this process. When the process consists of multiple operations that run simultaneously, this is typically the run time for the longest operation. This value is used in process EPEI calculations.

You can enter the number of seconds as a decimal value.

You can have the system determine this value by running Kanban Process Item Rollup. The field is set to the longest run time among the operations in the Start/End Op range.

Note When you roll up routing times, rounding may display a slightly different result than manual calculations of the values specified for operations. However, the database stores the number to 10 decimal places, and this level of precision is available to EPEI calculations.

Work Time. Optionally enter the total time, in days, hours, minutes, and seconds, required by all operations included in the process to complete one unit of this item.

You can enter the number of seconds as a decimal value.

You can have the system determine this value by running Kanban Process Item Rollup. The field is set to the total of the run times for all the operations in the Start/End Op range.

Lead Time. Optionally enter the total time, in days, hours, minutes, and seconds, required to deliver this kanban item.

This value is currently for reference only.

Move Time. Optionally enter the total time, in days, hours, minutes, and seconds, required to move items between operations in this process.

This value is currently for reference only.

Equip Time. Optionally enter the total time, in days, hours, minutes, and seconds, required by automated equipment to complete items within this process. For example, you can use this field to contrast machine time with labor, which is represented by work time.

This value is currently for reference only.


Set Up Process Shifts

Use Process Shift Maintenance (17.22.13) to define the normal hours for each shift associated with a kanban process. You can also define any exceptions to that normal pattern.

System calculations use process shift records to determine the amount of time available. For example, when you update process data using Basic Process Calculations (17.22.11), the system examines shift records during the specified period to calculate the available time for each work day.

See “Perform Process Calculations” on page 77.

Fig. 1.14
Process Shift Maintenance (17.22.13)

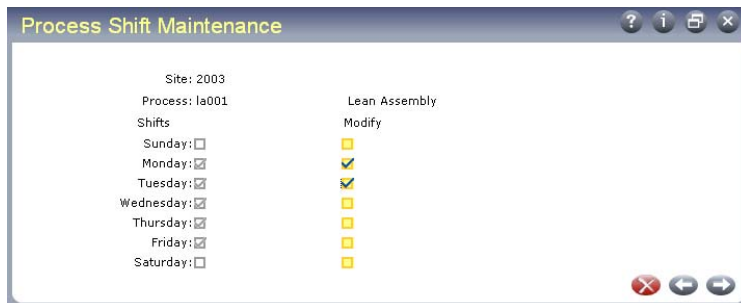

Set up shifts for a site or for a process at a site. You can define up to four shifts for each day of the week. A working day should have at least one shift with some number of hours greater than zero.

The hours per shift is the number of hours the shift is capable of producing, rather than the total number of working hours for the shift.

Note Although—because of shift overlaps—the total number of hours for all shifts can exceed 24, this is not recommended. It can result in invalid system calculations.

The hours worked by a particular shift can change because of holidays, planned shutdowns, or periods with planned overtime. Manage exceptions by specifying adjustment hours to shifts by effective date. When you run Preliminary Level Schedule Report (17.22.14) or Level Mix Workbench (17.22.23.3) for a process, you can specify the reference codes associated with these exceptions. The system adjusts available production time as appropriate and displays each code and the associated number of hours in an individual column.

See “Preliminary Level Schedule Report” on page 142 and “Level Mix Workbench” on page 143.

Roll Up Item Data

Use Process Item Operation Rollup (17.22.12) to calculate setup, cycle time, run time, and yield percent data for process operations from standard routing records. This data is then available for use in supermarket and kanban sizing calculations.

Note You should not run this program if you enter process times and yield percentages manually in Kanban Process Maintenance (17.22.3). If you do and the system finds routing records for the item, it will overwrite the manual values. See “Define Processes” on page 42.

Fig. 1.15
Process Item Operation Rollup (17.22.12)

Enter ranges of sites and kanban processes to select items for rollup. The system validates that you have security access to all sites within the specified range.

Only routing records with effective date ranges that include the specified date are selected.

To run the rollup in simulation mode without updating the database, set Update to No.

The system searches for items associated in Kanban Process Maintenance with processes matching the selection criteria. If a routing code is specified in Kanban Item Master Maintenance (17.22.1), that routing is used. Otherwise, the system uses the item number to find the default routing. It then calculates process-level values based on all the operations specified in Kanban Process Maintenance and updates the appropriate process item detail record in that program:

- Setup Time is set to the total of all the setup times defined in Routing Maintenance for operations in the Start/End Op range.
- Cycle Time is set to the longest run time among the operations.
- Work Time is set to the total of the run times for all the operations.
- Yield is set to the result of multiplying the yield percentages of all the operations.

See “Kanban Items” on page 36.

Note When you roll up routing times, rounding in the seconds field may display a slightly different result than manual calculations of the values specified for operations. However, the database stores the number to 10 decimal places, and this level of precision is available to system calculations.

Setting Up Kanban Supermarkets

A kanban supermarket is a controlled and managed inventory point for in-process goods or finished items. It typically is supplied by a kanban loop and also can serve as the source for other loops.

Use Supermarket Maintenance (17.22.2) to set up supermarkets that can then be specified as the source or destination of a kanban loop in Kanban Master Maintenance.

See “Supermarkets” on page 5.

Fig. 1.16
Supermarket Maintenance (17.22.2)

The screenshot shows a window titled "Supermarket Maintenance". It contains several input fields: "Site: 2005", "Supermarket: sm300", "Location Type: INV" (with a dropdown arrow), "Inventory Location:" (with a dropdown arrow), "Comments:" (with a dropdown arrow), "Supermarket Fax:" (with a dropdown arrow), "Supermarket Fax [2]:" (with a dropdown arrow), and "Email:" (with a dropdown arrow). There are also buttons for help, info, and close at the top right, and buttons for cancel, back, and forward at the bottom right.

Specify a site, alphanumeric identifier, and optional description for each supermarket. Use the other fields to define the following characteristics:

Location Type. Specify the type of inventory that is stored at this supermarket.

Inv: Finished items, where the supermarket inventory is part of the on-hand balance. Finished items typically include finished goods, subassemblies, fabricated parts or weldments, mixes or blends, and purchased parts or raw material. This is the default value.

WIP: Work-in-process goods, such as partially completed subassemblies or finished items—typically raw materials—that have been issued out of inventory and that are part of work in process.

Inventory Location. Optionally enter the location code associated with this supermarket. For inventory supermarkets, you should identify the location to be used in inventory transactions.

Comments. Enter Yes to update or enter comments related to this kanban supermarket; otherwise, enter No. Comments defaults to Yes if comments are already associated with the supermarket; otherwise, the default is No.

When Comments is Yes, the transaction comments screen displays for you to enter or review comments regarding this supermarket.

Supermarket Fax and E-mail. Optionally enter fax and e-mail information for this kanban supermarket to be used in dispatch list processing.

Note You also can enter a secondary fax number.

When dispatch lists are processed, kanban data can be sorted by supplying source and/or consuming destination. The dispatch list can be faxed to the supplying source, consuming destination, or both.

The system first looks for a loop-specific supermarket fax or e-mail number defined for the destination supermarket in Kanban Master Maintenance. If not specified, it uses values defined here.

See “Generate Dispatch Lists” on page 127.

Note When creating a new loop based on records imported using Kanban Workbench Import (17.22.23.14), the system creates a supermarket master record if the destination supermarket specified in the import file does not already exist. For a new loop with a source type of Inv, the system also creates a source supermarket if required. See page 161.

Setting Up Kanban Loops

Kanban loops are the flow mechanisms that control the flow of items between a source process, external supplier, or inventory supermarket and a destination supermarket.

See “Kanban Loops” on page 5.

You can define loops in three ways:

- By entering new loop data using Kanban Master Maintenance (17.22.4)
- To save data-entry time for multiple loops with similar information, by copying existing loop master records using Kanban Master Copy (17.22.8) and then modifying them as required. See page 73.
- By importing a correctly formatted record in a comma-delimited file using Kanban Workbench Import (22.17.23.14). See page 157.

Define Loops in Kanban Master Maintenance

Typically, you use this program to set up base data for the loop. Although you can manually size kanbans and supermarkets, a number of other programs on the Kanban menu can automatically calculate detailed data and update the values for the kanban loop:

- Average Demand Calculation (17.22.9) updates the Daily Demand field by calculating average demand over the period specified in Demand Calculation Template Maintenance (17.22.6). See page 74.
- Safety Stock Calculation (17.22.10) calculates safety stock based on the method and template you specify in Kanban Master Maintenance.
- Kanban Sizing Workbench calculates the number of kanban cards or kanban quantity, the maximum buffer size, the order quantity, and the order point. See page 78.
- Supermarket Workbench (17.22.23.2), Level Mix Workbench (17.22.23.3), and Historical Buffer Evaluation (17.22.20) are analysis tools that can be used to simulate the effects of modified loop data, then update the loop record with new maximum buffer size, kanban quantity or number of cards, safety stock, variability, and replenishment lead time data. See page 136.

Kanban Master Maintenance consists of multiple frames that let you:

- Set up basic data about the loop.
- Define the source of the loop.
- Optionally, associate a sequence of FIFO processes with the source.
- Specify supermarket details, including sizing and safety stock data.
- Define detailed card information, such as sizing and the method the system uses for accumulating cards to reach the order quantity.
- Control transaction-related processing such as sequence enforcement.

Basic Loop Data

The initial frame includes basic information about the kanban loop, including the item it supplies, an optional step number associated with the item at this loop, the kanban supermarket the loop supplies, and the source type.

Fig. 1.17

Kanban Master Maintenance (17.22.4), Initial Frame

Item. Enter the number of the item that is replenished with this kanban loop. It must be defined in Kanban Item Master Maintenance (17.22.1).

The same item can have more than one loop. For example, one loop for a purchased item could identify a supplier as the supplying source and a storeroom as the consuming destination. Another loop for the same item could identify the storeroom as the supplying source and a location in production as the consuming destination.

Step. Specify a step number associated with this item for this kanban loop. When you are defining a new kanban loop, the item/step combination must already be defined in Kanban Item Master Maintenance.

Using step numbers lets you identify an item at a stage of the manufacturing process independent of any associated routing information. By using step numbers, you can distinguish between multiple loops with the same item, site, and supermarket.

Example Item A goes through processes P1, P2, and P3 during the manufacturing cycle. P1 supplies supermarket S1, which in turn supplies P2 through a kanban loop defined as step 10. Another loop is defined between P2 and supermarket S2 (step 20), which then supplies P3 through another loop (step 30). Identifying each loop with a step number gives you a method of seeing the manufacturing cycle as a series of sequential steps, rather than a collection of sometimes unrelated operation numbers.

SM Site. Enter the site code where the kanban supermarket is located. This value must be defined in Site Maintenance (1.1.13).

Supermarket. Enter the identifier representing the kanban supermarket that is supplied by this loop. This value must be defined for the specified site in Supermarket Maintenance (17.22.2). See “Setting Up Kanban Supermarkets” on page 50.

Source Type. Enter the kind of source that provides this kanban item to this loop:

- **Process:** The item is manufactured by a kanban process. This is the default for new kanban master records.
- **Inv:** The item is supplied from the inventory of a kanban supermarket.
- **Supplier:** The item is purchased from an external supplier.

If you modify an existing record by changing this field, the system prompts you to confirm the change.

Note The content of the next frame depends on this setting.

Source Data

The Source Master Data frame identifies the source of the item. The source can be a manufacturing process, an external supplier, or another kanban supermarket.

The content of the frame varies based on the value of Source Type in the first frame:


- When the source is a process, the system displays the range of manufacturing operations associated with the process in Kanban Process Maintenance. You also can set Use FIFO to Yes to display an additional frame that lets you add FIFO lane processes to the loop.
- When the loop is supplied by an external supplier, you can add optional purchase order data.
- When the source is an inventory supermarket, simply specify the site code and supermarket identifier.

Figure 1.18 illustrates each type of frame.

Fig. 1.18

Kanban Master Maintenance, Source Master Data Frame


Source Type: Process

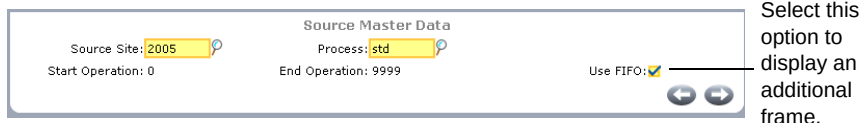

Source Site: 2005 Start Operation: 0 Process: std End Operation: 9999 Use FIFO: ☒

Select this option to display an additional frame.


Source Type: Supplier



Supplier: VN10005 Purchase Order: PO234156 Line:

Purchase order information is optional.

Source Type: Inventory



Source Site: 2005 Supermarket: 300 Site: 2005 Stock

Source Site. Enter the site code associated with the process or inventory supermarket that supplies this loop. This field does not display when Source Type is Supplier.

Process. Enter a process defined in Kanban Process Maintenance (17.22.3) as either a pacemaker or a standard process. This field displays only when Source Type is Process. See page 42.

Note The primary process source cannot be a FIFO lane.

When you have associated a range of routing operations with this process in Kanban Process Maintenance, the system displays them at the bottom of the frame.

Note If the specified item has not been associated with this process in Kanban Process Maintenance, the system automatically adds it as a process item.

Use FIFO. Enter Yes to display an additional frame that lets you enter one or more references to FIFO lane processes used to produce this kanban item.

This field defaults to No for new kanban master records. When FIFO processes have been entered, the field defaults to Yes. Set it to No if you do not want to enter, delete, or resequence FIFO processes for the kanban loop.

See page 55.

Supermarket. Enter a supermarket defined in Supermarket Maintenance (17.22.2) that supplies this kanban loop. This field displays only when Source Type is Inventory. See page 50.

Additional fields display only when Source Type is Supplier:

Supplier. Enter a supplier code defined in Supplier Maintenance (2.3.1).

Purchase Order and Line. Optionally identify the purchase order used to obtain this kanban item from the supplier. This must be a valid, open purchase order. It is validated against the item number only when you also specify a line number.

This can be a discrete PO, a supplier schedule, or a blanket PO. For a blanket PO, when you send a dispatch list to the supplier authorizing replenishment of an empty kanban, you can have the system attempt to release a PO against the blanket by:

See “Generate Dispatch Lists” on page 127.

- Setting Blanket PO Release to Yes in the second Card Tracking Control frame. See page 67.
- Setting Release Blanket POs to Yes in Kanban Dispatch List Processing (17.22.18.1)

When Impact Inventory is Yes in the Kanban Transaction Control frame, the system automatically generates purchase receipt transactions for the specified purchase order when you process replenishment cards for this loop using Kanban Fill/Receive (17.22.19.5). If you leave these fields blank, the system prompts you for PO information when you record the card.

See “Inventory Effects” on page 16.

FIFO Information

When Use FIFO is Yes in the Source Master Data frame for a process loop, the FIFO Lane Detail frames let you specify a sequence of FIFO lane processes that support this kanban loop. The first frame displays any existing FIFO records so you can select them; the second lets you add, delete, or resequence FIFO processes for the kanban loop.

See “FIFO Lanes” on page 7.

Fig. 1.19
Kanban Master Maintenance, FIFO Frames

FIFO Lane Detail				
Seq	Process	Description	Start Op	End Op
1	CON001	Configure and Test	50	9999
				

Seq	Process	Description	Start Op	End Op
1.0	CON001	Configure and Test	50	9999
				

Seq. Enter the sequence in which material goes through FIFO lanes during this process. You can resequence existing records by entering a decimal. For example, if you want to insert a new FIFO process between existing sequence numbers 1 and 2, enter sequence 1.5 for the new process. When you save your changes, the system reassigns sequences 1, 2, and 3 to the process records.

Process. Enter a valid FIFO process ID. This must be defined in Kanban Process Maintenance with Process Function set to FIFO.

If the Kanban Process Maintenance record includes a range of operations, the system displays it for reference.

See “Process Function” on page 42.

Note All operation numbers should be greater than the operation range specified for the primary process identified in the Source field. If operation numbers overlap or if they are not in the same sequence as the specified FIFO process sequence, a warning message displays. This is because this situation can cause components and labor to be backflushed more than once when Component/Op Transactions is Yes.

Supermarket Information

Use two Supermarket Item Detail frames to specify detailed information about the supermarket that is supplied by the kanban loop.

The first frame includes such details as quantities and buffer warning and critical limits. Display-only fields indicate whether manually entered quantities have been automatically updated by system calculations.

Fig. 1.20
Kanban Master Maintenance, First Supermarket Item Detail Frame

Supermarket Item Detail	
Order Point: 719.0	Location Type: WIP
Working Buffer: 0.0	Inventory Location: 200
Buffer Maximum: 818.0	Buffer Modified: ☐
Limit Display: PCT	Critical Limit: 33.0
Limit Modified:	Warning Limit: 66.0
Daily Demand: 500.0	Average Demand Template: fut30
Variability: 1.00	Demand Modified: ☒
Demand Percent: 100.00%	Average Inv. Calc Method: Standard
Pack Quantity: 1.0	Package Type:
Count Tolerance: 5.0%	Lag Factor: 0.0

Order Point. Optionally specify the supermarket inventory level at which a replenishment order is signaled to the supplying process. When you run the kanban workbenches, the system updates this field based on kanban and supermarket sizing calculations.

This should be a multiple of the value specified in Pack Quantity.

Working Buffer. The system displays the actual current supermarket size based on the number of active replenishment cards using the following formula:

$$\text{Target Buffer} = \text{Kanban Quantity} * \text{Number of Active Cards}$$

For example, inactivating a card in Kanban Card Maintenance (17.22.16.1) does not automatically reduce the Buffer Maximum value. It does, however, reduce the value of Working Buffer.

Buffer Maximum. Optionally specify the maximum quantity of the item to be maintained in inventory at this supermarket. When you run the kanban workbenches, the system updates this field based on kanban and supermarket sizing calculations.

When you review actual or projected supermarket performance using Historical Buffer Evaluation (17.22.20) or Supermarket Workbench (17.22.23.2), you can update this field based on a system-calculated optimized maximum buffer size.

This should be a multiple of the value specified in Pack Quantity.

Buffer Modified. The system indicates whether the initial buffer size has been updated.

Limit Display. Indicate how the values in the Critical Limit and Warning Limit fields are specified.

- Pct: Limits are entered as a percentage of the value of Buffer Maximum.
- Qty: Limits are entered as a quantity of items.

This value displays for reference in Historical Buffer Evaluation.

Limit Modified. The system displays the last date when the value of Critical Limit or Warning Limit was modified. A blank indicates that the fields are still set to their initial values.

Critical Limit. Specify the percentage of the Buffer Maximum value or quantity of items the system should use in determining whether the supermarket buffer size is too small. Use Limit Display to control whether this value is a percentage or a quantity.

When you run Historical Buffer Evaluation or Supermarket Workbench, the system analyzes the actual or projected performance of the buffer size as it relates to this value. Based on the result, it may display recommendations for increasing the buffer maximum.

This cannot be greater than the value in Warning Limit.

You also can update this field using Historical Buffer Evaluation.

See “Evaluate Supermarkets” on page 136.

Warning Limit. Specify the percentage of the Buffer Maximum value or quantity of items the system should use in determining whether the supermarket buffer size is too large. Use Limit Display to control whether this value is a percentage or a quantity.

When you run Historical Buffer Evaluation or Supermarket Workbench, the system analyzes the actual or projected performance of the buffer size as it relates to this value. Based on the result, it may display recommendations for increasing the buffer maximum.

This cannot be less than the value in Critical Limit.

You also can update this field using Historical Buffer Evaluation.

Daily Demand. Optionally enter the expected daily demand for the item supplied by this kanban loop.

The system automatically updates this value when you run Average Demand Calculation (17.22.9), as well as when you perform kanban and supermarket sizing using Kanban Sizing Workbench. See page 74.

Note When this field is blank, the system does not calculate average demand for the loop.

Average Demand Template. Optionally specify the template used to calculate the value in Daily Demand when you run Average Demand Calculation or update demand using the kanban workbenches. The template specifies the number of past and future days used in the demand calculation. The field is validated against records set up in Demand Calculation Template Maintenance (17.22.6).

Note Use Demand Calculation Template Update (17.22.7) to update the average demand template for multiple kanban loops at the same time.

See page 76.

Demand Modified. The system indicates whether the value of Daily Demand has been updated from its initial setting.

Variability. Enter the variability factor for this item. This value is used in order point and order quantity calculations.

Variability must be greater than zero. The default is 1.

Use this field to limit or increase the amount of inventory in the supermarket buffer.

Variability factor is similar to safety stock, but can be a more convenient means of estimating variations for factors such as seasonality or sales promotions.

If you adjust the variability factor when performing kanban and supermarket sizing using the kanban workbenches, the system updates this field.

Note Under most circumstances, this field should be left set to 1. Because of the compounding effect produced by safety stock, even small changes in the variability factor can have significant impact on sizing calculations.

Demand Percent. If the supplying source for this loop provides the same item to more than one supermarket, enter the percentage of that source's total demand consumed by this supermarket.

When you adjust the percentage in the kanban workbenches and save your changes, the system updates this field.

Pack Quantity. Specify the number of items that are included in the standard packaging for this item. For example, if an item is packaged in a box of 25, set the field to 25.

The system uses this value to calculate the quantity per kanban.

Order Quantity and Buffer Maximum should be multiples of this value.

Package Type. Optionally specify the type of packaging that holds the quantity shown in Pack Quantity. For example, this could be Box or Case. This field is for reference only. Its value is not validated.

Average Inventory Calculation Method. Specify the average inventory calculation method for this loop.

The system calculates the value of the Average Inventory Units field in the kanban workbenches based on this method, as well as various other values from the workbench. See "Workbench Data" on page 88.

Valid values are Standard and Mfg1. This field defaults from Kanban Item Master Maintenance (17.22.1). The calculation methods are described in the discussion of that program.

See "Average Inventory Calculation Method" on page 37.

Count Tolerance. Specify the allowable percentage of variation between the kanban inventory or WIP quantity (depending on the location type specified in Supermarket Maintenance), calculated as the number of full kanbans times the kanban quantity, and the standard inventory balance, adjusted by the quantity represented by Lag Factor. The default is 5%.

Inventory Validation Report (17.22.15) marks the loop as out of tolerance if the difference between the inventory quantities varies by more than this percentage.

See page 151.

Lag Factor. Specify the number of kanbans that are expected to be in process at any particular time. The default is 0 (zero).

When you run Inventory Validation Report for this loop, the system accounts for the kanban quantity currently in process by multiplying the Lag Factor value by the kanban quantity, then subtracting the result from the standard quantity on hand. It then compares the result with the kanban inventory level and determines if the difference is out of tolerance based on the specified percentage.

You can specify a lag factor when a kanban item is a component that is backflushed when the parent item is received sometime later than when the kanban is reported as consumed.

The second Supermarket Item Detail frame includes safety stock information. You can either enter data manually or specify the method the system uses to calculate it automatically.

The frame also includes supermarket fax and e-mail contact information used by Dispatch List Processing (17.22.18.1).

See page 127.

Fig. 1.21
Kanban Master Maintenance, Second Supermarket Item Detail Frame

The screenshot shows the 'Supermarket Item Detail' window with the following fields and values:

- Safety Stock: 0.0
- Safety Days: 0.0
- Service Level: 50.00%
- Supermarket Fax: (empty)
- Email: (empty)
- One/Two Card: One
- Carrier: (empty)
- Carrier Email: (empty)
- Safety Stock Template: (empty)
- Safety Stock Method: Manual
- Peak Average Days: 0
- Supermarket Fax [2]: (empty)
- Kanban Planner: (empty)

Safety Stock. Optionally enter the quantity that is maintained at the supermarket as a buffer to offset unanticipated fluctuations in supply or demand, such as material shortages or special customer orders. See “Safety Stock” on page 9.7

Leave this field set to 0 (zero) to have the system calculate a quantity based on the settings in Safety Stock Method, Service Level, and Peak Average Days when you run Safety Stock Calculation (17.22.10). Additionally, if you update the safety stock in the kanban workbenches and save your changes, the system updates this field. Other programs that can update safety stock include Supermarket Workbench and Historical Buffer Evaluation.

This must be less than the values entered in Order Point and Buffer Maximum.

See “Calculate Average Demand and Safety Stock” on page 74.

Safety Stock Template. Optionally specify the template used to calculate safety stock when you run Safety Stock Calculation (17.22.10) or update safety stock using the kanban workbenches. The template specifies the number of past and future days used as the basis of demand for safety stock calculations. The field is validated against records set up in Demand Calculation Template Maintenance (17.22.6).

Note Use Demand Calculation Template Update (17.22.7) to update the safety stock template for multiple kanban loops at the same time. See page 76.

Safety Stock Method. Specify the method used to determine safety stock for this item when you run a program that updates safety stock.

- **Manual:** No safety stock calculation takes place. Specify safety stock for this item by entering a quantity in Safety Stock or a number of days in Safety Days. If there is a value in the Daily Demand Field in the Supermarket Item Detail frame, the system calculates a value for Service Level based on standard deviations on the daily demand and an associated service factor. Otherwise, the service level is not calculated.
- **Simple:** The system calculates a standard deviation of average demand over the number of days in the planning horizon, which is the total number of historical and future days specified in Demand Calculation Template Maintenance (17.22.6). It then multiplies this demand by a service factor associated with the specified service level. To use this method, you must enter a valid value in Service Level.
- **Peak:** The system calculates the average demand for each n -day period within the planning horizon defined in Demand Calculation Template Maintenance, where n is the value specified in Peak Average Days. Safety stock is based on the highest demand during an n -day period. When you use this method, the Service Level is calculated based on standard deviations on daily demand.

Safety Days. Enter the number of days of demand to be covered by safety stock quantity. When you run Safety Stock Calculation or other programs that update safety stock such as the kanban workbenches or Historical Buffer Evaluation, the system updates the safety stock quantity based on the average demand over this number of days.

If you update the safety days in the kanban workbenches and save your changes, the system updates this field.

Note When Safety Stock Method is Manual, the system uses both Safety Stock and Safety Days to determine safety stock. For example, if the average daily demand is 50 and you enter 50 in Safety Stock and 1 in Safety Days, the system combines these to provide total safety stock of 100.

Service Level. Enter a service level associated with this item for this kanban loop. This number cannot be less than 50.00 (the default) or greater than 99.99.

The service level is the percentage of time that inventory for this item does not typically run out before the replenishment time has been reached. For example, 50.00 means that 50% of the time, you will run out of this item before reaching the replenishment time. Higher numbers mean that the supermarket maintains more inventory for the item in the form of safety stock.

The way this field is used varies by the value of Safety Stock Method.

- **Manual:** Do not enter a value in Service Level. When Daily Demand in the Supermarket Item Detail frame is greater than 0 (zero), the system calculates the service level based on standard deviations on average demand. When Daily Demand is 0, the system does not update the Service Level field.
- **Simple:** Enter a value in Service Level. It is required to determine a system-defined service factor that is used in the safety stock calculation.
- **Peak:** The service level is calculated based on standard deviations on daily demand.

Peak Average Days. When Safety Stock Method is Peak, enter the number of days the system should use as a basis for determining peak average demand. The system calculates the average demand for each period of this number of days over the horizon defined in Demand Calculation Template Maintenance. The highest average demand over one of those periods is the basis of the safety stock calculation.

When Safety Stock Method is Peak, you must enter a value in this field.

Supermarket Fax and E-mail. Optionally enter a fax number and an e-mail address for the supermarket supplied by this kanban loop.

These values are used when a kanban dispatch list is output as a fax or e-mail. When dispatch lists are processed, kanban data can be sorted by supplying source and/or consuming destination. The dispatch list can be faxed or e-mailed to the supplying source, consuming destination, or both.

When these fields are blank, the system uses the information specified in Supermarket Maintenance (17.22.2).

You also can enter an alternate fax number. When primary and secondary fax numbers are specified, both numbers, separated by a comma, are printed on the first line of the fax report.

See page 127.

One/Two Card. Enter either One or Two to indicate the number of cards printed per container.

- In a one-card loop, a single card both controls inventory movement and authorizes replenishment of the kanban quantity.
- A two-card system has a move kanban and a replenishment kanban. A two-card system is used when the movement of a container of parts may not trigger an immediate replenishment of that part.

See page 3.

The layout of the first Card Tracking Control frame varies based on this setting. When it is One, the card tracking frame includes a single set of fields for the replenishment card. When it is Two, the frame displays separate columns so that you can define replenishment and move cards independently.

See “Card Tracking Information” on page 61.

Kanban Planner. Optionally, enter the code for the planner who is responsible for this kanban loop. If you enter a value, it is validated against codes entered in Generalized Codes Maintenance for field knb_planner.

Carrier. Optionally, enter the identifier of a freight carrier associated with a supplier kanban loop. This value must be defined in Carrier Maintenance (2.17.1). The default is the carrier specified for the supplier in Supplier Maintenance (2.3.1).

If an e-mail address is specified in Carrier Maintenance, it defaults to the Carrier E-Mail field. You cannot update it.

Note This field is accessible only when Source Type is Supplier.

Card Tracking Information

Use two Card Tracking Control frames to specify detailed information about the cards used in a kanban loop.

The first frame lets you enter sizing and control information for the kanban cards. When you use the kanban workbenches, you can have the system update much of this data based on kanban sizing calculations.

If you do not choose to use the kanban workbenches to size cards, you can enter the size and number of cards in this frame. Depending on the data you enter, the system may display warning messages recommending changes to some values.

See “Using the Kanban Workbenches” on page 78.

After you finish setting up and sizing the loop, create and print the cards using Kanban Card Create (17.22.16.12).

See “Create or Regenerate Cards” on page 99.

If you are setting up a two-card loop, two sets of fields display so you can enter different data for the replenishment card and the move card, as shown in Figure 1.22.

Fig. 1.22
Kanban Master Maintenance, First Card Tracking Control Frame

Order Quantity. Enter the number of units the supplying source will replenish when the inventory level at the supermarket reaches the order point. This can be represented by a single card or by an accumulated quantity from multiple cards. Use the next frame to specify whether multiple cards are accumulated based only on the quantity or on a combination of the quantity and interval-based factors.

You can enter a value manually or have the system update the field when you size the kanban loop using the kanban workbenches.

This should be a multiple of the value specified in Kanban Quantity.

Number of Cards. Enter the number of cards to be included in this kanban loop. The system may update this field when the supermarket maximum buffer size is modified.

Kanban Quantity. Enter the number of items per kanban.

Kanban Quantity represents the actual quantity to be placed in each container, regardless of the capacity of that container. For example, you use a standard container that holds 100 items, but you only want 50 items at a time.

Kanban Quantity must be the same as or less than Container Capacity. It should be a multiple of the value specified in Pack Quantity.

Container Capacity. This field identifies a physical constraint placed on the container or item, which could be any of the following:

- Maximum quantity held by a carton or container
- Standard supplier package size
- Production constraint such as size of an oven tray
- For unwieldy or heavy items, the maximum amount that can be handled

The system displays a warning message if you set this field to 0 (zero).

Container Type. Optionally enter the type of container associated with this kanban item when it is replenished, such as bin or carton. This field defaults from Kanban Item Master Maintenance (17.22.1).

If you enter a value, it must be defined in Container Type Maintenance (17.22.5).

This information is printed on kanban cards.

See page 39.

Print Quantity. Enter Yes to print the kanban quantity on each kanban card. This value defaults from Kanban Control.

Print ID Barcode. Enter Yes to print a kanban ID barcode on each kanban card. This value defaults from Kanban Control.

Print Item Number Barcode. Enter Yes to print an item barcode on each kanban card. This value defaults from Kanban Control.

User Reference. Optionally enter an alphanumeric reference (up to eight characters) to this kanban loop. This value displays on various reports and inquiries.

Order Quantity Multiple. Optionally, enter the number of kanbans that serves as the lowest common denominator for system loop-sizing calculations. If you do not want to enforce an order quantity multiple, leave the field set to the default 0 (zero).

If you enter a value here, the kanban workbenches increase the order quantity until it is a multiple of this value. For example, if you enter 3, the system cannot size the loop at 2 or 5 cards. Instead, it rounds up the order quantity to the next multiple of 3, resulting in a number of cards that is also a multiple of 3: a loop size of 2 would become 3, a loop size of 5 would become 6, and so on.

Note The system applies fractional kanban and card reporting method logic before adjusting the order quantity to meet the order quantity multiple requirement.

Ship/Delivery Pattern. Optionally enter a one or two-character code specifying the required routine ship or delivery patterns for this kanban loop. Entries are validated against codes defined in Generalized Codes Maintenance for field sch_sd_pat.

The ship/delivery pattern typically specifies the frequency when shipments or deliveries are accepted; for example, any day Monday through Friday, or Tuesday only.

This field is for reference only and can appear on some selected reports and inquiries.

SDT Code. Optionally enter a two-character shipping delivery time (SDT) code associated with this kanban loop.

SDT codes typically relate to exact times for supplier deliveries. Daily item requirements can be split into hour and minute buckets based on these codes.

This field is for reference only. It is not associated with SDT codes used elsewhere in the system.

Point of Use Location. Optionally enter a code representing the location where the kanban item supplied by this loop is used. Entries are validated against codes defined in Location Maintenance.

This field is for reference only.

Delivery Location. Optionally enter a code representing the location where the kanban item supplied by this loop is delivered. Entries are validated against codes defined in Location Maintenance.

This field is for reference only.

Comments. Enter Yes to update or enter comments related to cards in this kanban loop; otherwise, enter No. Comments defaults to Yes if comments are already associated with the cards; otherwise, the default is No.

When Comments is Yes, the transaction comments screen displays for you to enter or review comments regarding the cards.

The second Card Tracking Control frame includes additional settings that control loop behavior. For example, use this frame to define the accumulator method for the loop to control how empty cards are authorized for production based on specified quantity or interval parameters.

Fig. 1.23
Kanban Master Maintenance, Second Card Tracking Control Frame

Access to these fields varies with the setting of Accumulator Type.

Dispatch List. Indicate whether to allow selection of this kanban when dispatch lists are processed.

No: This kanban is ignored when dispatch lists are generated.

Yes: This kanban can be selected for dispatch list processing. When you press Go, the Dispatch Options frame displays.

See page 67.

Replenishment Time. Enter the time required to replenish the item in days, hours, minutes, and seconds. This value is used in the calculations performed by the kanban workbenches. If you modify the replenishment time in that program and save your changes, the system updates this value.

Replenishment time includes the total time between recognizing that a product should be reordered and having the product supply available for use. This field represents a contract between supplying and consuming sites, reflecting maximum turnaround time.

FIFO Time Internal. Enter the amount of time—in days, hours, minutes, and seconds—required for this item to complete the total number of internal FIFO processes defined for the kanban loop.

See “FIFO Lanes” on page 7.

Note You can track lead time associated with subcontract operations separately using the FIFO Time External field.

This value is used in due date calculations and the calculations performed by the kanban workbenches. If you modify the internal FIFO time in that program and save your changes, the system updates this value.

This field applies only to loops that are supplied by a primary process that includes one or more FIFO processes.

FIFO Time External. Enter the amount of time—in days, hours, minutes, and seconds—required for this item to complete the externally performed FIFO processes defined for the kanban loop.

When you run Process Item Operation Rollup for a process that includes operations with subcontract lead times specified in Routing Maintenance, the system adds the lead times for all those operations and enters the total here.

This value is used in due date calculations and the calculations performed by the kanban workbenches. If you modify the external FIFO time in that program and save your changes, the system updates this value.

This field applies only to loops that are supplied by a primary process that includes one or more FIFO processes with subcontract operations.

Card Reporting. Specify the method used for kanban card piece reporting. This value defaults from Kanban Control.

Valid values are:

- Standard
- Add
- Remove

This setting affects kanban sizing calculations performed using the kanban workbenches.

See page 29 for more information.

Fractional Kanban. Specify the fractional kanban percentage for this loop. It cannot be greater than 99%. This field defaults from Kanban Control. See page 30 for more information.

Run-Out Option. Enter Yes if the source that supplies this item runs the quantity needed to use the entire supply of a given material regardless of the kanban quantity. Otherwise, enter No. This value defaults from Kanban Item Master Maintenance.

Especially in situations with extensive setup times to change over to a key material, it is not always efficient to set up a work center for just the kanban quantity. Instead, you can make enough items to consume an entire bulk quantity of that material. For example, if changing over a process to set up a coil of steel takes significant time, you could consider using the

entire coil each time you run the item. The total amount of material available, the quantity required to produce each item, and the amount of time required to change over to a new supply can be useful information for analyzing kanban setup and sizing alternatives.

This field is for reference. The value displays in the kanban workbenches and is included in files created by Kanban Workbench Export, along with the related run-out parameters defined in Kanban Item Master Maintenance.

Accumulator Type. Specify how the system accumulates replenishment cards for this kanban item after you record them using Kanban Consume/Post. You can accumulate cards based on either quantity-based or interval-based criteria.

- **Quantity:** When the sum of empty replenishment cards reaches the total amount specified in Order Quantity, the system authorizes all empty cards in the kanban loop regardless of how much time has elapsed.
- **Time:** When you use this type, enter a time in Accum Interval. Each time the specified interval elapses, the system looks at all empty cards in the loop. If the total of the individual cards meets the order quantity, all cards are automatically authorized.
- **Schedule:** Access the fields on the right side of the frame to specify days and times when the system evaluates the number of empty cards. If the total of the individual cards meets the order quantity, all cards are automatically authorized.

See “Card Accumulators” on page 10.

Run Accumulator Monitor (17.22.19.6) to update card status and display the status changes in real time.

See page 114.

Accumulator Interval. When Accumulator Type is set to Time, specify in days, hours, minutes, and seconds how often the system can authorize empty kanbans for this item, assuming that the total of empty kanbans has reached the value in Order Quantity.

Note Accumulator Interval and Next Date are not accessible when Accumulator Type is Quantity.

Next Date and Time. When Accumulator Type is Time or Schedule, the system calculates and displays the next date and time that Accumulator Monitor will check for empty cards for this loop, based on the value of Accumulator Interval or the Work Day and Time settings.

You can manually override these system-calculated values to check accumulators earlier or later.

Work Day and Time. When Accumulator Type is Schedule, specify whether the system can authorize empty kanbans for this item on this day of the week, assuming that the total of empty kanbans has reached the value in Order Quantity.

For each day that is set to Yes, you can specify the time of day that the system searches for empty cards.

Note These fields are accessible only when Accumulator Type is Schedule.

Regenerate Required. This display-only field indicates whether loop information has changed that might require you to regenerate and reprint kanban cards using Kanban Card Create (17.22.16.12). For example, if you print the kanban quantity on your cards and loop resizing updates that quantity, you can regenerate and print correct cards. See “Create or Regenerate Cards” on page 99.

Kanban Label. Enter the optional identifier for a kanban label definition associated with this loop. This value must be defined in Kanban Label Definition Maint (17.22.16.18).

Kanban label definitions are currently for reference only.

See “Defining Kanban Labels” on page 40.

Dispatch List Information

Use this frame to define how dispatch lists will be used for this loop. Dispatch lists are generated in report format and can also be printed in fax format, or sent using e-mail or EDI ECommerce. You can generate and send dispatch lists sorted by supplying source, consuming destination, or both.

See “Generate Dispatch Lists” on page 127.

Note This frame displays only when Dispatch List is Yes in the previous Card Tracking Control frame. See page 64.

Fig. 1.24
Kanban Master Maintenance, Dispatch Options

Dispatch Options

Blanket PO Release: ☐

Fax Dispatch List: ☐

Source Fax:

E-mail Dispatch List: ☐

Source E-mail:

EDI: ☐

Src Fax[2]:

Blanket PO Release. Specify whether dispatch list processing attempts to release a PO from a blanket order. When this is Yes and you enter a valid blanket PO number in the Purchase Order field in the Source Master Data frame, dispatch list processing uses that blanket order as the default. When the loop does not specify a blanket PO number, the system attempts to find an available blanket order matching the supplier and item. See page 55.

Fax Dispatch List. Indicate whether to allow selection of this kanban when dispatch lists are processed in fax format. When set to No, this kanban is not included in dispatch list fax reports.

Source Fax. Enter the fax number for the supplying source. This number is used when dispatch lists are reported by source. When this field is blank, the system uses the fax number defined in the supplier or site address. When a dispatch list is sorted by supplying source and printed in fax format, this fax number, preceded by a # symbol, is printed on the first line of the report.

E-mail Dispatch List. Indicate whether to e-mail dispatch lists for this kanban. When set to No, this kanban is not e-mailed or included in dispatch list e-mail reports.

Source E-mail. Enter the e-mail address for the supplying source. This address is used when dispatch lists are reported by supplying source. When this field is blank for a loop supplied by an external supplier and you are using the PRO/PLUS Supplier Performance module, the e-mail address defined for the supplier is used. Otherwise, the system does not search further. For details on Supplier Performance, see *User Guide: PRO/PLUS*.

EDI. Enter Yes to generate dispatch lists for this loop in electronic data interchange format for export to the loop supplier using EDI ECommerce. The default is No.

When you select this option for a supplier kanban, the system verifies that an EDI ECommerce trading parameter called Send Kanban Dispatch exists for the supplier and has been set to Yes. This is a logical parameter in Trading Partner Parameter Maintenance (35.13.10). If this is not defined, a warning displays.

See “EDI Dispatch List Transmittal” on page 131.

Transaction Control Information

The Kanban Transaction Control frame includes settings that control system behavior when transactions are recorded for the loop, including time parameters to prevent kanban transactions from being entered multiple times and to help identify missing cards.

The frame also includes inventory control settings that specify whether recording transactions for the loop records inventory receipts and creates operation-related transactions such as component backflush.

Fig. 1.25

Kanban Master Maintenance, Kanban Transaction Control Frame

Set to No to display an additional frame.

Regeneration Enforcement. Specify how cards are managed for this loop when they are recorded in one of the programs on the Kanban Transactions Menu and the system determines that cards should be regenerated. This occurs when certain card-detail values are no longer synchronized with loop values. This field defaults from Kanban Control.

Valid values are:

- None (the default)
- Warning
- Error

See page 33 for more information.

Kanban Cycle Enforcement. Indicate the level of minimum kanban loop cycle enforcement. This field defaults from Kanban Control.

Valid values are:

- None (the default)
- Warning
- Error

See page 34 for more information.

Quantity Mismatch Method. Use this field in combination with Rounding Threshold to control how the system manages partial kanban quantities for this loop during certain automated processing functions. These functions determine which cards are selected based on loop and quantity information rather than card ID. They are associated with the following programs:

- Kanban Consumption Import (17.22.19.20)
- EDI ECommerce Document Import (35.1) when used to import advance ship notices (ASNs)
- PO Shipper Receipt (5.13.20)

The system uses the logic defined here when the item quantity called for does not represent an exact number of kanbans.

Example A file imported using Kanban Consumption Import includes a quantity of 47. However, the kanban quantity is 20—or 2 cards with a remaining quantity of 7. The system uses Quantity Mismatch Method and Rounding Threshold to determine whether to round the number of cards selected up to 3 or down to 2, or to display an error message and not select any cards for update.

Valid values are:

- Round (the default). The system rounds the remaining quantity based on the value specified in Rounding Threshold and generates kanban history records without acknowledging that rounding took place.
- Warning. The system rounds the remaining quantity as specified in Rounding Threshold, creates kanban history records, and displays a warning message on the output report.
- Error. The system does not complete processing for the loop unless the quantity specified is an exact multiple of the kanban quantity. An error message displays on the output report.

Rounding Threshold. Specify the percentage of kanban size the system uses to round off partial kanban quantities in determining the number of cards to select for automated processing.

This value is used in combination with Quantity Mismatch Method. It applies only when that field is set to Round or Warning. When it is Error, the system does not process loops unless the specified quantity is an exact multiple of the kanban quantity.

Leave Rounding Threshold set to the default 100.00 to always round partial quantities down. Change it to 0.00 to always round them up.

Any other value represents the percent of the kanban quantity that must exist before the system rounds up to select an additional card. If the excess quantity is less than this percentage, the system rounds down.

Example The kanban quantity is 20, and Rounding Threshold is 25.00%. This means that any remaining quantity of 5 or more will be rounded up. A record imported using Kanban Consumption Import includes a quantity of 47, or 2 cards with a remaining quantity of 7. Since 7 is greater than the threshold of 5, the system rounds up and selects 3 cards. In the same scenario with Rounding Threshold set to 50.00%, the system would only select 2 cards, since the remaining quantity of 7 does not meet the threshold requirement of 10.

Minimum Cycle. Enter the minimum kanban loop cycle time in days, hours, minutes, and seconds. Values default from Kanban Control.

Leave these fields blank if you do not want to enforce a minimum kanban loop cycle.

See page 34 for more information.

Maximum Cycle. Enter the maximum kanban loop cycle time in days, hours, minutes, and seconds. Values default from Kanban Control.

Leave these fields blank if you do not want to enforce a maximum kanban cycle.

See page 34 for more information.

Decrease at Consume. Specify whether you want to have cards that are no longer needed removed from this loop the next time they are consumed, as well as whether the system prompts for confirmation before removing them. This value defaults from Kanban Control. See page 30 for more information.

Note Card Reconciliation must be Yes in Kanban Control to activate the Decrease at Consume feature on the system level. When it is No, this field has no effect.

Backflush Components. Indicate whether the system should automatically generate the following types of transactions when this kanban-controlled item is received into the supermarket:

- Backflush components from the bill of material.
- Record labor based on routing information.
- For loops that include subcontract operations, create a purchase receipt.

This field defaults to Yes when the supplying source is a manufacturing process. Otherwise, it defaults to No and you cannot update it.

See “Inventory Effects” on page 16.

PO Receipt Data Entry. Specify whether the system prompts for purchase order receiving information when a replenishment card from this loop is recorded in Kanban Fill/Receive. This value defaults from Kanban Control.

When the field is Yes, the system displays optional data-entry fields for a receiving note and packing slip number when the card is recorded.

Lot Entry. Specify whether the system prompts for a lot number and reference when a replenishment card from this loop is recorded in Kanban Fill/Receive. This value defaults from Kanban Control.

When the field is Yes, the system displays optional data-entry fields for a lot number and reference when the card is recorded.

Impact Inventory. Indicate whether kanban transactions for this item will impact inventory and the GL.

- Yes: The system automatically generates the appropriate inventory and GL transactions for each type of kanban transaction. This is the default value for new kanban loops when the consuming supermarket is an inventory location.
- No: Kanban transactions do not affect inventory balances or the GL. Only a kanban transaction record is created. In a high-volume manufacturing environment where inventory is tracked on a summary level, you should set this to No. This is the default value when the consuming supermarket is a WIP location.

You cannot set this field to Yes for an item that has one of the following characteristics:

- Family or configured item (Purchase/Manufacture is F or C in Item Master Maintenance or Item-Site Planning Maintenance for the supplying site)

- Phantom item (Phantom is Yes in Item Master Maintenance or Item-Site Planning Maintenance for the supplying site)
- Lot/serial-controlled item (Lot/Serial Control is not blank in Item Master Maintenance or Item Inventory Data Maintenance for the supplying site)
- Base process or co/by-product item (set up in Co/By-Product Maintenance or Process/Formula Maintenance)

Use Cumulative Order. Indicate whether the system should use Advanced Repetitive logic to report transactions against cumulative orders when recording fill or ship transactions on replenishment cards for this loop. The default is No. You can only set this field to Yes under these conditions:

- Impact Inventory is Yes.
- Enable New Repetitive is Yes in Repetitive Control.

When the field is Yes, a valid routing must exist for the item.

By generating quantity and cost postings to the cumulative order and associated operation and bill of material records, this feature ensures that cumulative orders include accurate information for items that use kanban.

See “Integration with Advanced Repetitive” on page 15.

Location Type. The system displays the value set in Supermarket Maintenance.

Inventory Location. When Impact Inventory is Yes, specify the location affected by inventory transactions created by Kanban Fill/Receive. This defaults from Supermarket Maintenance. When Impact Inventory is No, you cannot update the field.

The system validates this field based on the Automatic Locations setting in Site Maintenance:

- When Automatic Locations is Yes, the system displays a warning if the location has not been defined. It creates a temporary location the first time a card for the loop is processed by Kanban Fill/Receive.
- When Automatic Locations is No, the system displays an error message if the location has not been defined in Location Maintenance.

Modify Inventory Data. Specify whether users can update default values when recording kanban fill/receive or ship transactions for this loop.

This defaults from Kanban Control.

See “Modify Inventory Data” on page 32.

Modify Inventory Threshold. Specify the maximum percentage of the kanban quantity that is considered an acceptable difference between the kanban quantity and the quantity actually recorded in Kanban Fill/Receive or Kanban Ship.

This defaults from Kanban Control.

See “Modify Inventory Threshold” on page 33.

Receipt Shortfall. Specify the cumulative difference between the expected total receipt quantity (based on the number of times a card was received and the kanban quantity) and the actual receipts.

For new loop records, this field defaults to 0 (zero). Each time a card is recorded in Kanban Fill/Receive, the system determines if the quantity received is different from the kanban quantity. If so, the difference is applied to this field:

- For over-receipts, the additional quantity is subtracted from the Receipt Shortfall total.
- For under-receipts, the quantity is added.

This field is updated automatically only when Modify Inv Data is Yes. Otherwise, the amount received is automatically set to the kanban quantity, so differences do not occur.

The system uses this value when you run Kanban Card Management function 7, Process Accumulated Shortfall.

See “Process Accumulated Shortfall” on page 112.

Use Control Program Transaction Settings. Specify whether sequence enforcement and automatic card print values for this loop are determined by Kanban Control or by Kanban Master Maintenance.

- No (the default): The system displays the frame shown in Figure 1.26. Use it to specify sequence enforcement and automatic print values that apply only to this loop.
- Yes: This loop uses the values specified in Kanban Control. You cannot update them for this loop record. The frame shown in Figure 1.26 does not display.

Fig. 1.26
Kanban Master Maintenance, Kanban Transaction Event Control Frame

Event	Sequence Enforcement	Auto Print
Repl Consume	Warning	☐
Repl Authorize	None	☒
Repl Acknowledge	None	☐
Repl Ship	None	☒
Repl FIFO	None	☐
Repl Fill	Warning	☒
Move Consume	Warning	☐
Move Fill	Warning	☐

Sequence Enforcement. Use these fields to specify the level of sequence enforcement associated with each kanban transaction event for this loop. Values default from Kanban Control.

Valid values for both move card transactions and most replenishment card transactions are:

- None: The system does not check the sequence of events for this transaction.
- Warning: If events for this transaction are recorded out of sequence, the system displays a warning message. You can still record the card.
- Error: If transaction events are recorded out of sequence, you cannot complete the transaction.

The Repl FIFO field applies only to loops that are supplied by FIFO processes. It includes additional options that let you control whether warning or error messages apply only to the first FIFO process in the loop or to all FIFO processes.

See “Sequence Enforcement” on page 14.

Auto-Print. Use each field to specify whether you reprint cards after they are recorded using the associated transaction. When it is Yes, recording the card sets the Auto Print field in the card detail record to Yes. When you run Kanban Multi-Card Print (17.22.16.5), you can control whether the system includes these cards in the selection.

Note You can update the card auto-print value manually in Kanban Card Maintenance (17.22.16.1) or Kanban Multi-Card Maintenance (17.22.16.2). See “Maintain Cards” on page 100.

Copy Kanban Data

Use Kanban Master Copy (17.22.8) to copy and modify kanban data for an item at one kanban loop to a new loop record. This lets you set up data quickly for multiple similar loops.

Enter key information about the source loop in the left column. You can enter an item number and use next/previous to scroll through existing loop records. The system displays basic information about the loop in the bottom frame. When you have identified the source loop, enter the key fields for the target loop.

Note You must define the target item using Kanban Item Master Maintenance before you can create a new loop.

Fig. 1.27
Kanban Master Copy (17.22.8)

The screenshot shows the 'Kanban Master Copy' window. It has a title bar with standard window controls. The main area is split into two columns: 'Source' and 'Target'. The 'Source' column has four input fields: 'Item Number: 20001', 'Process Step: 1', 'Supermarket Site: 2005', and 'Supermarket: 200'. The 'Target' column has four input fields: 'Copy To: 20001', 'Copy To: 5', 'Copy To: 2005', and 'Copy To: FAB005'. Below these columns is a larger section titled 'Process Kanban' which displays a list of attributes for the selected source loop: Item Description: FG20001, Unit of Measure: EA, Site Description: Site 2005, Supermarket Desc: Sub Assy, One/Two Card: One, Source Type: Process, Source Site: 2005, Process: std, Use FIFO: ☒, Start Operation: 0, and End Operation: 9999. Navigation arrows are visible at the bottom of the 'Process Kanban' section.

When you press Go, the system prompts you for confirmation. It then creates a new kanban record and assigns it the same values as the source, with the following exceptions:

- The next date and time values used by the accumulator function, defined in the Card Control Data frame in Kanban Master Maintenance, are set to blank. See page 66.
- When the source and target item number are not the same, the system sets Daily Demand to 0 (zero) and Demand Percent to 100% in the Supermarket Item Detail frame. Otherwise, the values are copied from the source loop record. See page 57.
- For process and inventory loops with different source and supermarket sites, the system determines the source site in the new record using the following logic:
 - If the source site and supermarket site in the original loop are the same but the Copy To supermarket site is different, the Copy To source site is the same as the Copy To supermarket site.
 - If the source site and supermarket site in the original loop are not the same, the Copy To source site is the same as the original source site.

Note Source sites are not associated with supplier loops.

- When Copy Number of Cards is Yes, the system sets the corresponding field on the new loop to the same value as the source loop. Otherwise, the new loop does not specify the number of replenishment and move cards. Update those values in Kanban Master Maintenance or Kanban Sizing Workbench.

You can then modify the kanban data values and make any necessary adjustments directly in Kanban Master Copy. The program works the same way as Kanban Master Maintenance.

Performing System Calculations

The system performs several kinds of calculations to help you determine the best possible sizing for your kanbans and supermarket buffers.

Some calculated values can be updated automatically when you run sizing and analysis tools such as the kanban workbenches. However, you can also use menu programs to have the system calculate the following kinds of data:

- Average demand
- Safety stock
- Basic process data, including EPEI

See “Calculated Values” on page 8 for descriptions of the major types of data that can be calculated.

Calculate Average Demand and Safety Stock

Use the following programs to set up the system and calculate average demand and safety stock:

- Demand Calculation Template Maintenance (17.22.6)
- Demand Calculation Template Update (17.22.7)
- Average Demand Calculation (17.22.9)
- Safety Stock Calculation (17.22.10)

Defining Demand Templates

Before you can calculate average demand or safety stock, you need to define the number of days the system uses in the calculation.

See “Average Demand” on page 9 for information on how the system uses historical and future days.

Use Demand Calculation Template Maintenance (17.22.6) to specify the number of days of historical and future demand the system uses when calculating average demand and safety stock.

Specify the template you want to use in Kanban Master Maintenance. That program uses default templates specified in Kanban Control (17.22.24), but you can change them for individual loops.

Use Demand Calculation Template Update (17.22.7) to update the average demand or safety stock template for multiple kanban loops at the same time.

See page 76.

Note For the same loop, you can use different templates for average demand and for safety stock.

Fig. 1.28
Demand Calculation Template Maintenance (17.22.6)

In some manufacturing environments, historical demand usage is a good indicator of projected demand for an item; in others, forecast and future orders are better indicators of demand. You can define multiple templates with various combinations of historical and future days.

You can use any combination of historical and future days. To include only historical or only future days, leave the appropriate field set to 0 (zero).

Note The Historical Demand Source and Future Demand Source fields are display only. The system currently uses only inventory history (tr_hist) records for determining past demand and MRP detail records for determining future demand.

Performing Calculations

After defining templates, use Average Demand Calculation (17.22.9) and Safety Stock Calculation (17.22.10) to calculate two types of planning data used in such activities as kanban sizing, supermarket setup, and level mix scheduling:

- Average demand is the average total quantity of a kanban item required during each day over a specified historical or future period. See page 9.
- Safety stock is reserve inventory that guards against running out of stock during the time it takes to replenish a supermarket's regular inventory. See page 9.

Fig. 1.29
Average Demand Calculation (17.22.9)

Note The user interfaces for both programs are nearly identical.

To display loops that do not specify a template in Kanban Master Maintenance, set Display Blank Template to Yes. The output report from the program includes those loops, but no calculations are made. Previous and new values are the same.

Set Update to No to review a report of simulated results before updating the database. The report output shows both the previous and new average demand and safety stock for each kanban item within the site range, as well as various supermarket and kanban information.

When Update is Yes, the system modifies kanban loop and process records to include the recalculated data.

Note The system also can update average demand and safety stock when you run the workbench programs or Historical Buffer Evaluation.

Updating Templates

Use Demand Calculation Template Update (17.22.7) to change the templates used in average demand or safety stock calculations for multiple kanban loops at the same time. A demand template, which is defined in Demand Calculation Template Maintenance, is a combination of numbers of historical and future days used to select demand records needed as the basis of system calculations.

You also can update those values for individual loops in Kanban Master Maintenance by manually changing the Average Demand Template or Safety Stock Template field.

Fig. 1.30
Demand Calculation Template Update (17.22.7)

The screenshot shows the 'Demand Calc Template Update' window with the following fields and values:

- Supermarket Site: [Empty]
- Item Number: [Empty]
- Step: 0
- Supermarket: [Empty]
- Average Demand Template: [Empty]
- Safety Stock Template: [Empty]
- Product Line: [Empty]
- Buyer/Planner: [Empty]
- Item Type: [Empty]
- Group: [Empty]
- Purchase/Manufacture: [Empty]
- Set Average Demand Template: ☒
- New Average Demand Template: [Empty]
- Set Safety Stock Template: ☒
- New Safety Stock Template: [Empty]
- Sort By: 1
- Update: ☐
- To: [Empty]
- To: [Empty]
- To: 99999
- To: [Empty]
- To: [Empty]
- To: [Empty]
- To: [Empty]
- To: [Empty]
- To: [Empty]
- Master Schedule: Yes
- Site, Item, Step, Supermarket
- Output: [Empty]
- Batch ID: [Empty]

Set selection criteria based on item master and kanban master data to select kanban loops. For example, you can limit the selection to loops that currently use a specified range of templates.

Use Set Average Demand Template and Set Safety Stock Template to determine which fields are updated. If you specify a new value, it must be defined in Demand Calculation Template Maintenance. To set blank template values for selected loops, leave New Average Demand Template or New Safety Stock Template blank.

To determine the effects of the selection criteria, run the program first with Update set to No to generate an audit report.

Perform Process Calculations

Use Basic Process Calculations (17.22.11) to calculate and optionally update several kanban-related parameters for specified ranges of sites and processes.

Fig. 1.31

Basic Process Calculations (17.22.11)

Selected fields are updated in Kanban Process Maintenance.

Select processes based on a combination of site and process code, and specify whether the selection should include FIFO lane processes—those with Process Function set to FIFO in Kanban Process Maintenance (17.22.3).

See “FIFO Lanes” on page 7.

Set a date range for the system to use in determining how much time is available based on calendar records defined in Process Shift Maintenance (17.22.13).

See “Set Up Process Shifts” on page 49.

Use individual fields to update the following types of system-calculated process data. When Update is Yes for a data type, the process record is automatically updated in Kanban Process Maintenance.

- The every-part-every interval (EPEI) for selected processes. This is the time interval over which the process can produce every item associated with it.
- The time available for each process to be completed.
- The total cycle time for all items in each selected process.
- The changeover time needed each time the process is required to produce a different item.
- The total changeover time available to the process.
- The takt time for the processes. Takt time is the number of seconds the process has to produce each item to match the rate of customer demand.
- The number of items in the pitch. Pitch is a user-defined method of specifying the interval over which the performance of a process can be measured.
- The time required to produce the pitch quantity.
- The number of operators required to produce the current average demand.

See “Setting Up Kanban Processes” on page 41.

The system generates a report that shows the current and revised time available, EPEI, takt time, pitch, and pitch quantity.

Using the Kanban Workbenches

The QAD .NET UI offers two menu options—Kanban Sizing Workbench and Kanban Process Workbench—that let you select, view, and modify kanban sizing (calculating the number of cards in the loop and the maximum amount of buffer stock) and process data in two ways:

- Directly in a grid; this is similar to spreadsheet applications such as Microsoft Excel. Modifiable fields are white; blue fields are read-only.
- In individual data frames, in which fields are grouped logically based on their functions. In many cases, the layout of the frames indicates the relationships between calculated fields and source values. Note that the majority of grid fields display on the tabs. However, a limited number of values display only in the grid.

Important Although the workbenches display as menu items in the character user interface, they run only in QAD .NET UI.

For the most part, the workbenches display the same data. Major differences are:

- The search criteria. In the Sizing workbench, you can search on several criteria related to kanban loops sourced by processes, external suppliers, or inventory supermarkets. The Process workbench provides search criteria to let you drill down to specific kanban processes.
- The information available in the grid. The Process workbench shows process, process-item, and loop sizing data for each process found by the search criteria. The Sizing workbench is limited to the same loop sizing data.
- The values you can update. For example, you can view process information related to a specific loop in the Sizing workbench for reference. However, since the process typically supports several loops, you must use the Process workbench to modify related values. When a field is modifiable in one workbench but not the other, the read-only version is shaded in gray.

Use the workbenches to calculate the number of cards in a kanban loop and the maximum amount of buffer stock. You can manipulate various factors, including the every-part-every interval (EPEI) for the supplying process and the quantity of kanban containers, and have the system calculate the optimum number of cards based on the EPEI.

If the sizing or process activity needs to be done in more than a single workbench session, you can save your work as a simulation, return to it later, continue to make changes, and then finally commit the updates to the database when you are finished.

When you have finalized the workbench activity, you can update process, supermarket, and kanban loop records with the revised detail, then create and print cards using tools on the Kanban Card Management menu. For loops that have already been sized, the system recommends changes in the number of kanban cards. You can then inactivate, activate, delete, create, or print cards as needed.

You also can reconcile cards from within the workbench. The system compares the current number of active cards to the optimum number and displays the number of out-of-balance loops on the Reconcile/Print Cards button. See “Reconcile Cards” on page 83 for information. This feature even lets you print new or reactivated cards from within the workbench.

Note Unless you use the automatic card reconciliation feature, resizing loops does not automatically inactivate or delete unneeded cards, or create new ones. You must do this manually using tools on the Kanban Card Management menu. See “Managing Kanban Cards” on page 98.

Typically, you use the workbenches as a first-time sizing tool for new kanban loops or adjusting processes. Individual menu programs are available for such activities as recalculating EPEI, updating safety stock, and determining buffer and kanban sizes using historical and projected supermarket performance data. Some programs give you the option of automatically updating loop data with the new calculations. However, you can use the two workbenches at any time to resize loops and adjust processes.

The workbenches lets you adjust the following factors to affect kanban sizing for individual items:

- Average daily demand
- Demand percent
- Replenishment time
- FIFO time (internal and external)
- Safety days and safety stock
- Variability factor
- Number of packs per kanban
- Card reporting method
- Fractional kanban setting
- Order quantity multiple (in kanbans)
- Card reconciliation option
- Material run-out option
- Average inventory calculation method

Additionally, in Kanban Process Workbench, you can recalculate, analyze, and update the following attributes of the process:

- Number of resources available
- Minimum process EPEI data
- Lead time calculation method
- Load limit percent
- Minimum item EPEI
- Item EPEI Automatic setting
- Cycle and setup times
- Item yield percentage

The Analyst Data frame displays a variety of information about the selected process or kanban loops to help the planner make decisions about appropriate loop setup and sizing. See “Analyst Data” on page 96.

Before using these workbenches, be sure you have set up the following data:

- Kanban item records using Kanban Item Master Maintenance
- Manufacturing process definitions using Kanban Process Maintenance
- Supermarket definitions using Supermarket Maintenance
- Kanban item loop definitions using Kanban Master Maintenance

- Optionally, supermarket demand data either in Kanban Master Maintenance or using Average Demand Calculation and Safety Stock Calculation

Note You can manually enter the demand in the workbenches. However, the recommended method is to first use the Average Demand Calculation.


Workbench Elements

Each kanban workbench contains several common structural elements, illustrated in Figure 1.32:

- 1 Tool Bar:** Click buttons to control workbench actions.
- 2 Search Frame:** Use standard .NET UI filtering tools to select records for display.
- 3 Sizing Option Panel:** Access from the Preference button to set default values for fields used on the workbenches.
- 4 Navigator Frame:** Use a tree structure to select filtered records.
- 5 Main Grid Frame:** View and update sizing or process data in a user-configurable, Excel-style UI.
- 6 Tabbed Detail Frames:** View and update sizing or process data in logically arranged collections of fields.

The following topics describe the features of each element.

Fig. 1.32
Structure of Kanban Workbenches

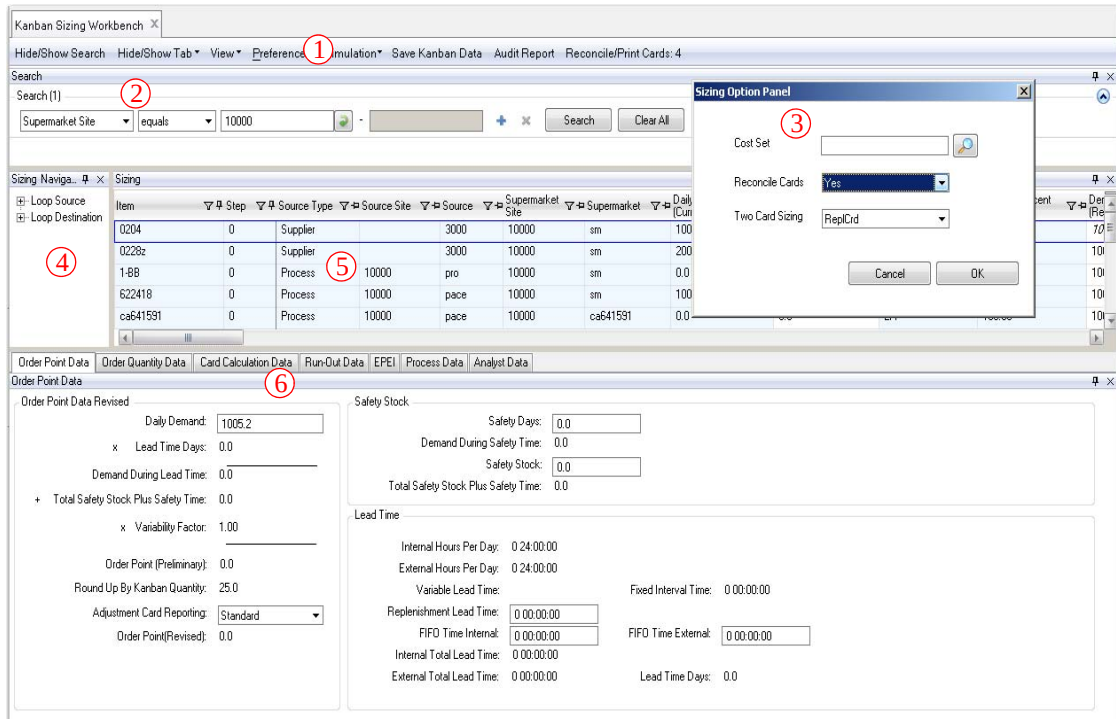

Tool Bar



Use the buttons on the tool bar to perform the following functions:

- **Hide/Show Search.** Click this button to toggle the display of the search panel. For example, you might want to hide the filter criteria after selecting records to provide more vertical space for the workbench.
- **Hide/Show Tab.** Use this pull-down button to toggle the display of the individual tabbed frames at the bottom of the workbench window. You can also close the tabbed frames by right-clicking the tab and choosing Hide. To show hidden tabs, select them from the Hide/Show Tab button.
- **View.** Use this pull-down button to save the current UI configuration under a user-specified name. For example, you might want to hide some columns or tabs under certain circumstances, or rearrange columns. After you save the configuration using Save As, its name displays under the pull-down on the View button. If you make further changes, use Save to update the configuration record. Each workbench has separate user-defined records; for example, if you customize the layout and save it from Kanban Sizing Workbench, it is not available Kanban Process Workbench.

Note This feature only saves the UI layout. It does not store the current selection criteria in the Search frame.

When user-defined layouts exist, the View menu includes a Default option. Choose it to return to the standard QAD-provided layout.

When you are using a custom configuration, choose Clear All to temporarily remove the Default option, as well as the current custom configuration, from the View menu. From that point on, anytime you choose Save, any UI changes are saved to the custom configuration that is currently in use. The Default and any custom configuration names are reinstituted when you exit and relaunch the program.

- **Preference.** Select Option from this pull-down button to set default values used during loop sizing activities. See “Sizing Option Panel” on page 82.
- **Simulation.** Use the controls on this button to save the current workbench values to a temporary file and reload them later.

Note Updated field values are not committed to the database until you click Save Kanban Data.


- **Save Kanban Data:** Click this button when you are finished analyzing the effects of your changes and want to update the kanban loop and process records in the database.
- **Audit Report:** View a report comparing the baseline data with updates that will take place when you click Save Kanban Data. Use this feature to analyze the effects of your changes before modifying the database. When you are using card reconciliation functions, the audit report shows the impact of reconciling the loops.

Note If you make changes, save, and then click Audit Report, the system does not detect any updates. For this feature to be effective, you should review the report before saving.

- **Reconcile/Print Cards:** This button displays the number of loops included in the selection criteria in which the calculated number of cards needed to support the loop no longer equals the actual number of active cards. This can result either from changes made during the

workbench session, or from loop changes made previously that have not yet been reconciled. See “Reconcile Cards” on page 83.

Search Frame

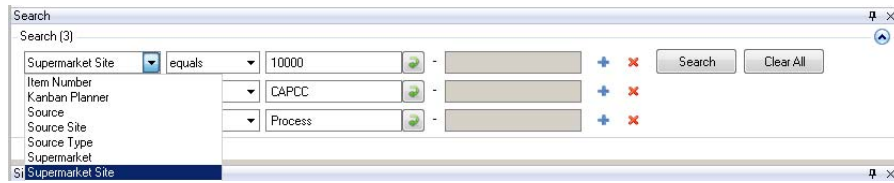


The Search frame in each workbench is a standard .NET UI filter screen. For more information on the QAD .NET UI, see *User Guide: Introduction to QAD Enterprise Applications*.

Use it to find kanban process and loop records by defining one or more search conditions, using operators such as equals, range, contains, and so on. Click the Add icon (+) to add another condition; click the Delete icon (X) to remove an existing condition. Available search criteria include:

- Kanban Sizing Workbench
 - Item Number
 - Kanban Planner
 - Source
 - Source Site
 - Source Type
 - Supermarket
 - Supermarket Site
- Kanban Process Workbench
 - Process Planner
 - Source
 - Source Site

Sizing Option Panel

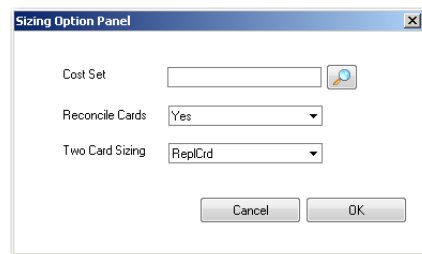

Select Options from the Preference tool bar button to display three fields that provide default values to workbench functions.

Reconcile Cards

This field sets the default for the same field on the Card Calculation Data tab. The initial value is from Kanban Control.

When the system-recommended number of cards in Kanban Master Maintenance is not the same as the actual number of active cards, you can have the system automatically bring the loop back into balance by clicking the Reconcile/Print Cards button.

Note The total number of active cards does not include limited-use cards, which have an active code of Close, Period, or Cycles.

When Card Reconciliation is Yes in the Card Calculation Data tab for one or more loops and you save your changes, the system records the number of loops needing reconciliation on the Reconcile/Print Loops button on the Tool Bar to indicate that cards are available for printing.

Note Even before you do any workbench sizing, the system may determine that one or more loops in the selection criteria need to be reconciled. If this is the case, a value displays on the button when you initially enter the workbench. Optionally, you can reconcile those loops immediately by clicking Reconcile/Print Loops. No save is needed.

After completing sizing activities and saving your changes, click Reconcile/Print Loops. This removes or adds replenishment cards as needed and displays an additional frame that lets you print any new cards before leaving the workbench.

Fig. 1.33
Reconcile/Print Cards Frame

Cards Created:	9	Cards Closed:	0
Cards Activated:	0	Cards Inactivated:	3

Print Created Cards:	Yes	
Print Activated Cards:	No	
Print Comments:	Yes	
Kanban Card Output:	Page	
Print Kanban Actions Report:	Yes	
Report Output:	Page	

OK Cancel

If a loop requires fewer cards, reconciliation may decrease the number of cards by inactivating some, using the following rules:

- When Decrease at Consume is Yes in the loop's Kanban Master Maintenance record and Card Reconciliation is Yes in Kanban Control, cards are not reduced by the workbench reconciliation function. Instead, the system counts all active, non-limited cards for the loop each time a card is recorded in Kanban Consume/Post and compares this to the optimum number of cards. If the current card is not needed, the user is prompted to inactivate it and physically remove it.
- When either of those two fields is No, the system uses the phase-out method specified in Kanban Control to determine whether cards are inactivated immediately or next time they are consumed.

If the reconciliation function indicates that additional cards are required, the Kanban Control phase-in method determines whether any current inactive cards are reactivated before new ones are created.

Move Card Sizing

For two-card loops, you can use the Move Card Sizing field to specify whether and how the number of move cards is adjusted when replenishment cards are reconciled.

The default is set in Kanban Control. The value in the Option Panel applies to all loops for the workbench session.

You can:

- Leave the number of move cards as-is, regardless of replenishment card changes.
- Add or remove move cards as needed to balance the new maximum buffer size.

Note This is based on the kanban quantity of the move loop stored in the kanban master. Buffer maximum / kanban quantity equals the number of cards.


- Set the number and kanban quantity of move cards to match the reconciled replenishment cards.

See “Move Card Sizing” on page 28 for more information.

Cost Set

Optionally enter the identifier for the cost set used in inventory value calculations. The default comes from Kanban Control, if one is specified. Entries are validated against records defined in Cost Set Maintenance (30.1).

Navigator Frame

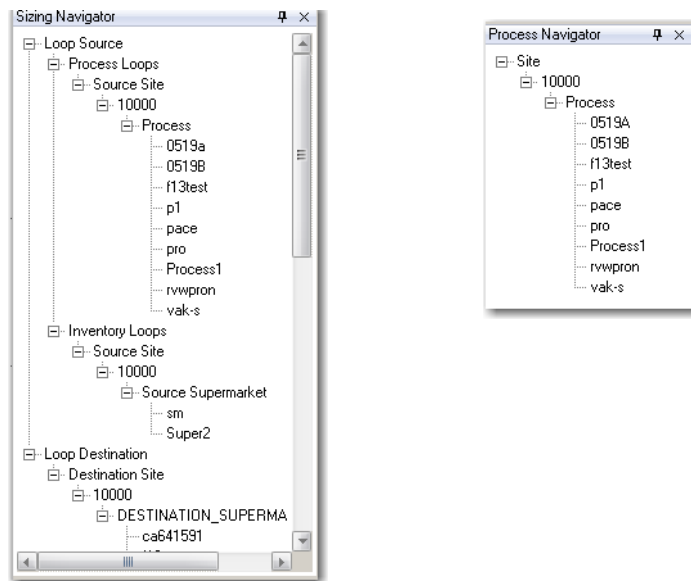

The Navigator Frame displays the results of the filtered selection in a tree structure. By clicking the plus sign (+) on a node, you can view lower-level records. Click the node name to view all the available child records in the Main Grid.

Example In Kanban Sizing Workbench, you define a search filter to equal a Source Site and specify a site number. The Main Grid frame shows only loops sourced from that site. By drilling down through the tree structure, you can select down to the level of individual processes and inventory supermarkets. When you click one of these, the Main Grid displays only the individual loop records associated with that supermarket.

Note The structure of the tree varies both by which workbench you are using and the criteria specified in the Search frame.

Main Grid Frame

This frame displays selected kanban loop and process records in a spreadsheet-like view. Use the horizontal scroll bar to view additional columns.

You can edit fields in some columns; they are shown in white. When you select a row, the current values of editable columns are shown in italic type. Blue columns are read-only.

Grid Display Options

You can control several aspects of the display using QAD .NET UI features.

- Right-click the grid heading row and choose Columns to select or deselect columns to be displayed.
- Resize column width by dragging the borders.
- Move columns to the right or left by dragging and dropping the column heading.
- Click on a column heading to sort records based on values in that column. On headings with an arrowhead icon, click the icon to reverse the sort order.
- Use the pushpin icon to freeze columns in place during horizontal scrolling. Click a left-pointing icon so that it points down. The column moves to the left side of the frame and is locked in place. To unfreeze a column, click the icon so that it points to the left.

Note On other UI elements, this same icon serves to auto-hide or minimize/maximize the frame.

- Click the filter icon to display a list of all the values in the current column, as well as All, Custom, Blank, and NonBlank options. Chose a value to filter the records in the grid.
- Choose the right-click option Return to Factory Settings to reverse all modifications to column settings.

Important Click View|Save As to save your display changes to a specified file name. Otherwise, the workbench returns to the default settings next time you access it.

Note Changes to display options apply to all users of the computer from which the changes are made.

Grids

The Kanban Sizing Workbench includes a single grid containing data related to loop sizing.

The Kanban Process Workbench has a three-part grid:

- The top grid has data related to the overall process.
- The middle grid provides process-item detail fields.

- The bottom grid is identical to the Kanban Sizing Workbench grid.

When you click on a process record in the top grid, the system displays process-item details and loop sizing information for the items produced by that process in the middle and bottom grids, respectively.

Fig. 1.34
Main Grid, Kanban Sizing Workbench

Item	Step	Source Type	Source Site	Source	SM Site	Supermarket	Daily Demand (Current)	Daily Demand (Revised)	Daily Demand (Revised)
1-BB	0	Process	10000	pro	10000	sm	0.0	0.0	EA
622418	0	Process	10000	pace	10000	sm	100.0	100.0	EA
ca641591	0	Process	10000	pace	10000	ca641591	0.0	0.0	EA
CAPCC-B-0001	0	Process	10000	0519B	10000	SUPRMKT2	0.0	0.0	EA
CAPCC-DP-0001	0	Process	10000	0519a	10000	SMKT_0.5	0.0	0.0	EA
f13	0	Process	10000	f13test	10000	f13spr	0.0	0.0	ea
Kanban1	0	Process	10000	Process1	10000	Super1	142.857	142.857	EA
Kanban1	1	Process	10000	Process1	10000	Super1	142.857	142.857	EA
Kanban3	0	Inv	10000	Super2	10000	Super1	0.0	0.0	EA
rvwitemn	0	Process	10000	rvwprn	10000	rvwsmn	0.0	0.0	EA
sritem1	0	Process	10000	p1	10000	sm1	0.0	0.0	EA
sritem1	10	Process	10000	p1	10000	sm1	0.0	0.0	EA
sritem2	1	Inv	10000	sm	10000	sm1	0.0	0.0	EA
vak-s	0	Process	10000	vak-s	10000	vak	0.0	0.0	EA

Scroll to view additional columns. White columns can be edited.

Fig. 1.35
Main Grid, Kanban Process Workbench

Process	Process Site	Available Time Per Day (Current)	Available Time Per Day (Revised)	Number of Resources (Current)	Number of Resources (Revised)	Total Time Avail
0519A	10000	24:00:00	24:00:00	1.0	1.0	24:00:00
0519B	10000	24:00:00	24:00:00	1.0	1.0	24:00:00
f13test	10000	00:00:00	08:00:00	1.0	1.0	00:00:00
p1	10000	16:00:00	16:00:00	1.0	1.0	16:00:00
pace	10000	16:00:00	16:00:00	1.0	1.0	16:00:00
pro	10000	16:00:00	16:00:00	1.0	1.0	16:00:00
Process1	10000	00:00:00	08:00:00	1.0	1.0	00:00:00
rvwprn	10000	16:00:00	16:00:00	1.0	1.0	16:00:00
vak-s	10000	16:00:00	16:00:00	1.0	1.0	16:00:00

Item	Step	Process Site	Minimum Item EPEI (Current)	Minimum Item EPEI (Revised)	EPEI Current	EPEI UM	EPEI Automatic (Current)	EPEI Revised	EPEI Automatic (Revised)	Setup Currier
622418	0	EA	1.000	1.000	1.000	Days	Yes	1.000	Yes	1 01:0
ca641591	0	EA	0.000	0.000	0.000	Days	Yes	0.000	Yes	0 00:0

Item	Step	Source Site	Source	Supermarket Site	Supermarket	Daily Demand (Current)	Daily Demand (Revised)	Daily Demand (Revised)	Demand Percent (Current)	Demand Percent (Revised)
622418	0	10000	pace	10000	sm	100.0	100.0	EA	100.00	100.00
ca641591	0	10000	pace	10000	ca641591	0.0	0.0	EA	100.00	100.00

Select a process in the top grid to show associated process-item details and loop sizing data below.

For descriptions of the fields available in the grids, see “Workbench Data” on page 88.

Tabbed Detail Frames

Each workbench provides a collection of seven tabbed frames. Each frame contains a logically related collection of fields, in some cases grouped in sub-frames.

Drag and drop the tabs to change their display order. If you do not want a tab to display, use the Hide/Show Tab button on the tool bar to toggle the display of individual tabs. You also can right-click on a tab and select Hide, but you must then use Hide/Show Tab to view it again.

The tabbed frames (sequenced as shown in the default Kanban Sizing Workbench) are:

- Order Point Data
- Order Quantity Data
- Card Calculation Data
- Run-Out Data
- EPEI
- Process Data
- Analyst Data

The tabs are the same in both workbenches (although their default sequence is different); however, their use sometimes varies between the workbenches. For example:

- In Kanban Sizing Workbench, information on the EPEI and Process Data tabs is relevant only when the selected loop is sourced by a process. For inventory and supplier loops, labels display on those tabs, but none of the fields are populated.
- In some cases, fields display in one workbench with gray shading to indicate that they are read-only, but can be modified in the other workbench. For example, even when a loop is sourced by a process, you cannot update process master data from Kanban Sizing Workbench. That data applies to the process itself, rather than the item represented by a kanban loop. Instead, the system displays process information for reference. The fields are gray, indicating that the values can be modified in Kanban Process Workbench.

A feature of the tabbed display not available in the grid is the relationships between fields. For example, Figure 1.36 shows the structure of the Order Point Data tab. The field groupings—along with sub-frames—show how calculated values are derived.

Fig. 1.36
Calculated Fields in Order Point Data Tab

The screenshot displays the 'Order Point Data' tab with the following fields and calculations:

- Order Point Data Revised:**
 - Daily Demand: 25.0
 - x Lead Time Days: 0.208333
 - Demand During Lead Time: 5.208
 - + Total Safety Stock Plus Safety Time: 10.0
 - x Variability Factor: 1.00
 - Order Point (Preliminary): 15.208
 - Round Up By Kanban Quantity: 10.0
 - Adjustment Card Reporting: Standard
 - Order Point(Revised): 20.0
- Safety Stock:**
 - Safety Days: 0.0
 - Demand During Safety Time: 0.0
 - Safety Stock: 10.0
 - Total Safety Stock Plus Safety Time: 10.0
- Lead Time:**
 - Internal Hours Per Day: 08:00:00
 - External Hours Per Day: 0 24:00:00
 - Variable Lead Time: 0 01:40:00
 - Fixed Interval Time: 0 00:00:00
 - Replenishment Lead Time: 0 01:40:00
 - FIFO Time Internal: 0 00:00:00
 - FIFO Time External: 0 00:00:00
 - Internal Total Lead Time: 0 01:40:00
 - External Total Lead Time: 0 00:00:00
 - Lead Time Days: 0.208333

Red circles and arrows indicate the calculation flow: 'Lead Time Days' (0.208333) is used to calculate 'Demand During Lead Time' (5.208) and 'Total Safety Stock Plus Safety Time' (10.0). 'Total Safety Stock Plus Safety Time' (10.0) is also used to calculate 'Lead Time Days' (0.208333).

For descriptions of the fields available in the tabs, see “Workbench Data” on page 88.

Workbench Data

Tables 1.5 through 1.8 describe the fields in the two kanban workbenches.

Process Master Data

Table 1.5
Process Master Data Fields

Field	Description
Available Time Per Day (Current and Revised)	The system displays the available time for each work day, as defined in Kanban Process Maintenance. If you revise the current value and save your changes, the system updates that record.
Number of Resources (Current and Revised)	The system displays the number of resources available to the process, as defined in Kanban Process Maintenance. If you revise the current value and save your changes, the system updates that record.
Total Time Available Per Day (Current and Revised)	The system displays the current available time for each work day multiplied by the number of resources, as defined in Kanban Process Maintenance. If you update the number of resources or the time available per day, the system calculates and displays the revised total.
Uptime Percent (Current and Revised)	The system displays the percentage of the available time for each work day that the process is actually producing, as defined in Kanban Process Maintenance. If you revise the current value and save your changes, the system updates that record.
Adjust Time Available per Day (Current and Revised)	These fields display on the Process Data tab only (not on the grid). They are directly associated with the Available Cycle and Setup Time Per Day field in the process grid. - The Current value displays the value as it was when you entered the workbench. It is initially the same as the Available Cycle and Setup Time Per Day grid field. It updates to match the revised value of that field when you save your changes. - The Revised value is the same as Available Cycle and Setup Time Per Day. Any changes automatically update Available Cycle and Setup Time Per Day.
Available Cycle and Setup Time Per Day	The system displays the result of: $\text{Available Time Per Day (Revised)} * \text{Uptime Percent (Revised)} * \text{Number of Resources (Revised)}$
Total Cycle Time Per Day	The system displays the total of all individual cycle times multiplied by the daily demand for the items produced by this process. When you modify values in the process data grid, the system updates this field.
Total Fixed EPEI Setup Time Per Day	The system displays the daily total setup time for items that have EPEI Auto set to No in Kanban Master Maintenance.
Available Setup Time Per Day	The system displays the result of: $\text{Total Time Available Per Day (Revised)} - \text{Total Cycle Time Per Day} - \text{Total Fixed EPEI Setup Time per Day}$
Total Setup Time Per Interval	The system displays the total of all individual setup times for the items produced by this process that have EPEI Auto set to Yes. When you modify values in the process data grid, the system updates this field.
Intervals per Day	This is the number of times all setups can be performed each day. The system displays the result of: $\text{Available Setup Time Per Day} / \text{Total Setup Time Per Interval}$

Table 1.5 — Process Master Data Fields — (Page 1 of 3)

Field	Description
EPEI (Current)	The system displays the process every-part-every interval (EPEI) value from Kanban Process Maintenance. This is the time interval during which all parts produced by this process can be made while still meeting demand. EPEI is expressed in the interval defined in Kanban Process Maintenance. For example, when you choose Days as the interval, an EPEI of 1 means that the process can produce each part every day.
Minimum Process EPEI (Current and Revised)	The system displays the minimum process EPEI defined in Kanban Process Maintenance. If you revise this value and save your changes, the system updates that record.
EPEI (Calculated)	The system displays the EPEI value initially calculated by the workbench. If the value is negative, an error message displays.
EPEI (Revised)	The system displays the updated EPEI value. If the calculated EPEI is less than the value of Minimum Process EPEI (Revised), the system sets EPEI (Revised) to that value.
Lead Time Method (Current and Revised)	The system displays the process item lead time calculation method defined in Kanban Process Maintenance. If you revise this field, the system updates the Variable Lead Time field in the Sizing Data grid based on the new method. When you save your changes, the Kanban Process Maintenance record is updated. Valid values are: • Variable. Default the value of Lead Time to Replenishment Time (Revised). Replenishment Time (Revised) cannot be updated. • Fixed. Default the value of Replenishment Time (Current) to Replenishment Time (Revised).
Item Count	The system displays the number of items produced by this process, as defined in Kanban Master Maintenance or Kanban Process Maintenance.
Total Item Volume per Day	The system displays the total demand quantity of all the items produced by the process. This is calculated as the sum of the values in the Daily Demand Total column in the process item data grid.
Takt Time per Unit	The system displays the takt time for this process. Takt time is the time in which the process must produce one unit in order to match the rate of demand. It is calculated as: $\text{Available Cycle and Setup Time per Day} / \text{Total Item Volume per Day}$
Pitch Time	The system displays the Pitch Interval value specified in Kanban Process Maintenance.
Pitch Quantity and UM	The system displays the pitch quantity and unit of measure specified in Kanban Process Maintenance. If an individual item is defined in a different UM, the conversion factor displays in the last column of the process item data grid.
Process Function	The system displays the process function specified in Kanban Process Maintenance. Processes can be defined as standard, pacemaker, or FIFO processes.
Load Limit Percent	The system displays the load limit specified in Kanban Process Maintenance. If you revise the current value and save your changes, the system updates that record.
Load Limit Time Per Day	The system displays the total time represented by the specified load limit percent, calculated as: $(\text{Total Cycle Time Per Day} + \text{Available Setup Time Per Day}) * \text{Load Limit Percent}$
Current Load Percent	The system displays the percentage of total time available represented by the time required to produce this process item. It is calculated as: $\text{Current Load Time} / \text{Total Time Available Per Day (Current)}$

Table 1.5 — Process Master Data Fields — (Page 2 of 3)

Field	Description
Current Load Time Per Day	The system displays the total amount of time needed each day to set up and run the current daily demand for this process or for all items in the process. If this is greater than the value of Load Limit Time or Total Time Available Per Day, the system displays a warning message. If either Order Quantity (Revised) in the sizing data grid or EPEI (Revised) is 0, the system uses 0 in the Current Load Time calculation.
Days Per Week	The system displays the number of days in a standard work week. These are days with any number of hours assigned to at least one shift in Process Shift Maintenance.
Number of Changeovers Per Week	The system displays the number of times the process can be set up each week, calculated as: $(SUM (Revised Item EPEI * Daily Demand / Revised Order Quantity)) * Days Per Week / Revised Process EPEI$
Changeover Hours Per Week	The system displays the total time required for setup each week, calculated as: $(SUM (Item Setup Time * Daily Demand / Revised Order Quantity)) * Days Per Week$
Percent Changeover in Operating Cycle	The system displays the percentage of total load time represented by changeover time, calculated as: $SUM (Revised EPEI for process / Revised EPEI for item) * Setup Time in seconds / (Total Time Available Per Day in seconds * Revised EPEI for process)$

Table 1.5 — Process Master Data Fields — (Page 3 of 3)

Process Detail Data

Table 1.6
Process Detail Data Fields

Field	Description
Item	Display only. This field displays the identifier for a kanban item.
Step	Display only. If a process step is defined for this item in Kanban Master Maintenance, it displays here.
Process UM	Display only. The system displays the item unit of measure specified in Item Master Maintenance. If this is not the same as the pitch UM defined in Kanban Process Maintenance, the system displays the conversion factor.
Minimum Item EPEI (Current and Revised)	The system displays the minimum item EPEI specified for the loop in Kanban Master Maintenance. When EPEI Automatic (Revised) is Yes, the system sets the item EPEI (Revised) to either the value of the EPEI (Revised) field in the process data frame or Minimum Item EPEI (Revised), whichever is greater. If you update Minimum Item EPEI (Revised) and save your changes, the system updates the corresponding value in Kanban Master Maintenance.
EPEI (Current and Revised)	When EPEI Automatic (Revised) is Yes, the system displays the calculated process EPEI. When it is No, the system displays the reference value entered for the item in Kanban Process Maintenance. Based on whether you change the value of EPEI Automatic (Revised), you can either update the manual entry here or have the system automatically update the field based on the process EPEI.

Table 1.6 — Process Detail Data Fields — (Page 1 of 2)

Field	Description
EPEI Automatic (Current and Revised)	The system displays the EPEI Automatic setting specified for the item in Kanban Master Maintenance. This setting determines whether the system uses information for this item when calculating process EPEI. When it is No, the setup time is fixed and is removed from the calculation of the time available for changeover during EPEI calculation. You can enter EPEI manually as a reference value. If you change it, the system updates the process EPEI, either including or excluding the item based on the new setting. Additionally, the system updates the Kanban Master Maintenance record when you save your changes.
Setup Time (Current and Revised)	The system displays the setup time for the item from the Kanban Process Maintenance record. If you change this number and click Save Kanban Data, the system updates that record with the value of Setup Time (Revised).
Cycle Time (Current and Revised)	The system displays the cycle time for the item from the Kanban Process Maintenance record. If you change this number and click Save Kanban Data, the system updates that record with the value of Cycle Time (Revised).
Yield (Current and Revised)	The system displays the item yield percentage from the Kanban Process Maintenance record. If you change this number and click Save Kanban Data, the system updates that record with the value of Yield (Revised).
Yielded Daily Demand Total	Display only. Calculated as: $\text{Daily Demand (Revised)} / \text{Yield (Revised)}$
Cycle Time Total	The system displays the total cycle time for the quantity daily demand, calculated as: $\text{Yielded Daily Demand Total} * \text{Cycle Time (Revised)}$ If you update either Daily Demand (Revised) in the sizing data grid or Cycle Time (Revised), the system updates Cycle Time Total.
Conversion Factor to Pitch UM	Display only. When the item unit of measure defined in Item Master Maintenance is not the same as the pitch UM specified in Kanban Process Maintenance, the system displays the conversion factor. If the units are the same, the field defaults to 1.0.

Table 1.6 — Process Detail Data Fields — (Page 2 of 2)

Sizing Data

Table 1.7
Sizing Data Fields

Field	Description
Item	Display only. This field displays the identifier for a kanban item.
Step	Display only. If a process step is defined for this item in Kanban Master Maintenance, it displays here.
Source Type	Display only. This field indicates whether the source of this item, defined in Kanban Master Maintenance, is a supplier, an inventory supermarket, or a manufacturing process.
Source Site	Display only. This field displays the site where source process or supermarket is located.
Source	Display only. This field displays the source of the item, defined in Kanban Master Maintenance. Depending on the source type, it can be a supplier address code, a supermarket ID, or a kanban process ID.
Supermarket Site	Display only. This field displays the site where the kanban supermarket is located.
Supermarket	Display only. This field displays the supermarket ID associated with the item in Kanban Master Maintenance.

Table 1.7 — Sizing Data Fields — (Page 1 of 6)

Field	Description
Daily Demand (Current and Revised)	The system displays the current average daily demand for this item. It defaults from the item detail in Kanban Master Maintenance, where it is either entered manually or calculated using Average Demand Calculation. If you modify it in the Revised field and save your changes, the system updates the item detail and sets the Demand Modified field to Yes in Kanban Master Maintenance.
Daily Demand UM	Display only. The system displays the item unit of measure specified in Item Master Maintenance.
Demand Percent (Current and Revised)	The system displays the current Demand Percent value specified in Kanban Master Maintenance. If an item is supplied to more than one supermarket, this field indicates the percentage of total demand represented by this loop. If you modify it in the Revised field and save your changes, the system updates the Kanban Master Maintenance value.
Variable Lead Time	The system displays the variable lead time for kanban items. The value depends on the method used for selecting information in Kanban Workbench. When you select kanban loops by specifying a source site and process in the Selection Criteria frame, the system calculates variable item lead time as the sum of the setup and cycle times for the order quantity of all other items produced by the process, plus the setup and cycle time for one kanban quantity of the item itself. This total is divided by the number of resources available to the process. When Lead Time Method (Revised) is Variable, the system defaults the calculated value to the Replenishment Time (Revised) field. When Lead Time Method (Revised) is Fixed, Replenishment Time (Revised) defaults from Replenishment Time (Current). When you select loops by item, supermarket, or site/source rather than by process, the system sets Variable Lead Time to 0 (zero). Replenishment Time (Revised) defaults from Replenishment Time (Current) regardless of the lead time calculation method.
Internal Hours Per Day	If Available Time Per Day (Current), which is the available time in Kanban Process Maintenance, in Kanban Sizing Workbench is not zero, Available Time Per Day (Revised) should equal Available Time Per Day (Current). If Source Type is Process and Available Time Per Day (Current) is zero, Available Time Per Day (Revised) is determined by the following steps: 1. The system searches for a record in Process Shift Maintenance matching the site and process. If one exists, the defined shift hours will be used. 2. If no record matching site and process exists, the system looks for a record defined for the same site with no process specified. If one exists, the defined shift hours will be used. 3. If no record matches the site, the system determines whether a site calendar exists in Calendar Maintenance. If it does, the calendar hours will be used. 4. If no calendar is defined for that site, the system looks for a record with blank site and blank process in Process Shift Maintenance. If one exists, the defined shift hours will be used. 5. If no matching record is found in Process Shift Maintenance, the system will use the working hours defined in the domain calendar: • Available Time Per Day (Revised) = SUM (working hours of this month) / number of working day: • Internal Hours Per Day = Available Time per day (Revised) If Source Type is Supplier, Internal Hours Per Day = 24. If Source Type is Inventory, Internal Hours Per Day is calculated as the Daily time available for 1 week by summing up the total hours scheduled on work days / number of work days in the site calendar. If no site calendar is defined, the system uses the domain calendar..
External Hours Per Day	This should always equal 24.

Table 1.7 — Sizing Data Fields — (Page 2 of 6)

Field	Description
Replenishment Time (Current and Revised) Note The “Current” value displays as Replenishment Lead Time on the Order Point Data tab.	The system displays the total time between recognizing that an item should be reordered and having the item available for use. The current value defaults from the item detail in Kanban Master Maintenance. The default revised value is determined by the Variable Lead Time field. When you save your changes, the system updates the Replenishment Time field in Kanban Master Maintenance based on the revised value.
Fixed Interval Time	Display only. This is the amount of time that elapses before the system checks for empty cards for this loop and determines whether the total number of empty cards has reached the order quantity. When Accumulator Type is set to Time in the Card Control Detail Frame of Kanban Master Maintenance, this field displays the value of Accumulator Interval. When Accumulator Type is Schedule, the field is set to the longest time between any two scheduled intervals. When Accumulator Type is Quantity, no Fixed Interval Time is displayed.
Internal FIFO Time (Current and Revised)	The system displays the time that the item spends in processes defined as first-in, first-out lanes. The current value defaults from the item detail in Kanban Master Maintenance. If you modify the Revised field and save your changes, the system updates that record.
External FIFO Time (Current and Revised)	The system displays the time that the item spends in external FIFO processes such as subcontract operations. The current value defaults from the item detail in Kanban Master Maintenance. If you modify the Revised field and save your changes, the system updates that record.
Internal Total Lead Time	Display only. Calculated as: • Process and inventory loops: Replenishment Time (Revised) + Fixed Interval Time + Internal FIFO Time (Revised) • Supplier loops: Same as Internal FIFO Time (Revised)
External Total Lead Time	External Total Lead Time. Display only. Calculated as: • Process and inventory loops: Same as External FIFO Time (Revised) • Supplier loops: Replenishment Time (Revised) + Fixed Interval Time + External FIFO Time (Revised)
Lead Time (Days)	Display only. For process loops, calculated as: $\text{Internal Total Lead Time} / \text{Internal Hours Per Day} + \text{External Total Lead Time} / (24 * 60 * 60)$ For supplier loops, this is assumed to be 24 hours. For loops supplied by a supermarket, it is based on site calendar data.
Demand During Lead Time	Display only. Calculated as: $\text{Daily Demand (Revised)} * \text{Lead Time (Days)}$
Safety Days (Current and Revised)	This is the number of days of demand to be used as the basis of determining safety stock for this item. It defaults from the Supermarket Item Detail frame of Kanban Master Maintenance. If you update it, the system recalculates the value of Demand During Safety Time. When you click Save Kanban Data, the system updates the Kanban Master Maintenance record.
Demand During Safety Time	Display only. Calculated as: $\text{Daily Demand (Revised)} * \text{Safety Days (Revised)}$
Safety Stock (Current and Revised)	This is the quantity of safety stock maintained at the kanban supermarket. It defaults from the Supermarket Item Detail frame of Kanban Master Maintenance. When you change this field and click Save Kanban Data, the system updates the Kanban Master Maintenance record.

Table 1.7 — Sizing Data Fields — (Page 3 of 6)

Field	Description
Total Safety Stock Plus Safety Time	Display only. Calculated as: $\text{Demand During Safety Time} + \text{Safety Stock (Revised)}$ The system updates the loop record in the database with this value when you click Save Kanban Data. Although the value does not display in Kanban Master Maintenance, it is included in the information available to Kanban Visualization.
Variability Factor (Current and Revised)	This is a factor that can be applied to the supermarket buffer quantity to account for such things as seasonal demand. It defaults from the Supermarket Item Detail frame of Kanban Master Maintenance. When you change this field and click Save Kanban Data, the system updates the Kanban Master Maintenance record.
Order Point (Current)	This is the supermarket inventory level at which a replenishment order is signaled to the supplying process. It defaults from the Supermarket Item Detail frame of Kanban Master Maintenance.
Order Point (Preliminary)	Display only. This is the supermarket inventory level at which the supplying process is signaled to replenish the stock. When the source type is Supplier or Inventory, this is equal to Order Quantity (Current) When the source type is Process and it is non-pacemaker, this is calculated as: $\text{Daily Demand} * \text{EPEI}$ When the source type is Process, it is a pacemaker, EPEI Auto is Yes, EPEI = 0, and Minimum EPEI = 0, it is also calculated as: $\text{Daily Demand} * \text{EPEI}$ Under all other conditions, the field is set to 0.
EPE Interval	Display only. When Type is Process, the system displays the value of EPEI (Revised) from the process data grid. Otherwise, the system sets this field to blank. EPEI calculations are most significant when you are sizing kanbans and supermarkets for all the items in a process.
Order Quantity (Current)	This is the number of units the supplying source will produce at any one time. It defaults from the Card Control Detail frame of Kanban Master Maintenance.
Order Quantity (Preliminary)	Use of this field depends on the source of the kanban loop: - For pacemaker processes, the field defaults from Order Quantity (Current) and can be updated. - For non-pacemaker processes, the field is calculated by the workbench. It cannot be updated. - For loops with a source type of supplier or inventory, the field defaults to the Order Qty current value and can be updated.
Pack Quantity	Display only. Defaults from the supermarket item detail specified in Kanban Master Maintenance.
Packs per Kanban (Current and Revised)	Can be updated. The default value is calculated by dividing the kanban quantity specified in Kanban Master Maintenance by the pack quantity. If you change it, the system updates Kanban Quantity (Revised). When you click Save Kanban Data, the system updates the fields in Kanban Master Maintenance.
Kanban Quantity (Current and Revised) Note Kanban Quantity (Revised) displays as Round Up By Kanban Quantity on the Order Point tab.	Display only. The current value defaults from the Card Tracking Control frame in Kanban Master Maintenance. The revised value is set to: $\text{Pack Quantity} * \text{Packs per Kanban (Revised)}$

Table 1.7 — Sizing Data Fields — (Page 4 of 6)

Field	Description
Card Reporting Note This displays as Adjustment Card Reporting on the Order Point Data tab.	Can be updated. The field defaults from Kanban Master Maintenance. If you modify it and save your changes, the system updates the loop record. Valid values are: • Standard. This kanban is reported as empty when the first piece is removed from the container. This has no effect on the order point. • Add. This kanban is not reported as empty until the last piece is removed from the container. The system increases Order Point (Revised) by the value of Kanban Quantity (Revised). • Remove. To prevent the number of kanbans required from being overstated by a kanban quantity in loops that should require only one card, the system reduces the Standard calculation by one card. When this field is Add or Remove, the value of Fractional Kanban can result in a logical inconsistency that causes Order Point (Revised) to equal zero. In this case, the system displays a warning message.
Fractional Kanban	Can be updated. The field defaults from Kanban Master Maintenance. If you modify it and save your changes, the system updates the loop record. Valid values cannot be more than 0.99 or less than 0. This setting lets you control the point at which the system automatically sizes a loop with a second card when it might more logically have only one. The system uses the following logic: • If Order Quantity (Preliminary) and Order Point (Preliminary) are both greater than zero but less than Kanban Quantity (Revised), and Order Quantity (Preliminary) divided by Kanban Quantity (Revised) is less than or equal to Fractional Kanban, the system sets Order Quantity (Revised) to 0. • If Order Point (Preliminary) divided by Kanban Quantity (Revised) is greater than Fractional Kanban, the system sets Order Quantity (Revised) to Kanban Quantity (Revised).
Order Point (Revised)	Display only. The field initially defaults from the Order Point field in Kanban Master Maintenance. The system updates the value based on sizing calculations. The field is automatically rounded up to an integer multiple of Kanban Quantity (Revised).
Order Point (Revised) in Kanbans	Display only. Calculated as: $\text{Order Point (Revised)} / \text{Kanban Quantity (Revised)}$
Order Quantity Multiple in Kanbans (Current and Revised)	The system displays the value of Order Quantity Multiple from Kanban Master Maintenance. If you modify the Revised field and save your changes, the system updates that record. When this value is greater than 0, the system increases Order Quantity (Revised) until it is a multiple of this value. Any quantity changes occur after the system makes adjustments based on card reporting and fractional kanban logic.
Order Quantity (Revised)	Display only. Calculated as Order Quantity (Preliminary) rounded up to be an integer multiple of Kanban Quantity (Revised). When you save your changes, the system modifies the Card Tracking Control frame in Kanban Master Maintenance. This value can be affected by fractional kanban and card reporting settings.
Order Quantity (Revised) in Kanbans	Display only. Calculated as: $\text{Order Quantity (Revised)} / \text{Kanban Quantity (Revised)}$
Maximum Buffer Size (Current and Revised)	Display only. Current value defaults from the Buffer Maximum field in Kanban Master Maintenance. Revised value is calculated as: $\text{Order Point (Revised)} + \text{Order Quantity (Revised)}$ When you click Save Kanban Data, the system displays the revised value in the Buffer Maximum field in Kanban Master Maintenance.

Table 1.7 — Sizing Data Fields — (Page 5 of 6)

Field	Description
Number of Cards (Current and Revised)	Display only. Current value defaults from the Number of Cards field in the Card Tracking Control frame of Kanban Master Maintenance. Revised value is calculated as: <i>Order Point (Revised) in Kanbans + Order Quantity (Revised) in Kanbans</i> When you click Save Kanban Data, the system displays the new value in the Number of Cards field in the Card Tracking Control frame of Kanban Master Maintenance.
Number of Cards (Change)	Display only. Calculated as: <i>Number of Cards (Current) – Number of Cards (Revised)</i>
Card Reconciliation	Can be updated. Defaults from the Options setting under the tool bar Preferences button. See “Reconcile Cards” on page 83.
Run-Out Option	Can be updated for loops supplied by a process. This field defaults from Kanban Master Maintenance. It is used to indicate that this item is typically made in a quantity large enough to use the entire amount of a specified material regardless of the kanban quantity. Valid values are Yes and No. If you modify this field and save your changes, the system updates the loop record. This field is for reference only; it has no effect on workbench calculations.
Other Run-Out Data	Display only. The system displays several reference fields related to material run-out. They default from the Kanban Item Master Maintenance record for the item/step.

Table 1.7 — Sizing Data Fields — (Page 6 of 6)

Analyst Data

Analyst data is designed to help planners make decisions by providing summary-level information about kanban loops. You can update the Average Inventory Calculation Method field to view the effects of changing the method; all other fields are display only.

The columns in the Analyst Data frame include standard identification data about each loop, including the item, step, source type, source, supermarket, and site. Table 1.8 describes the additional fields.

Table 1.8
Analyst Data Fields

Field	Description
Actual Run Interval	The system bases this calculation on the value of Fixed Interval in the Sizing Data frame. When Fixed Interval is 0, the system divides Order Quantity (Revised) by Average Daily Demand and displays the result in Actual Run Interval. When Fixed Interval is greater than 0, the system compares Order Quantity (Revised) with Fixed Interval multiplied by Average Daily Demand and determines the value of Actual Run Interval as follows: • When Order Quantity (Revised) is greater, divide Order Quantity (Revised) by (Fixed Interval * Daily Demand) and round up to the next whole number. Multiply by Fixed Interval and display result in Actual Run Interval. • When (Fixed Interval * Daily Demand) is greater, display Fixed Interval in Actual Run Interval. The system displays Actual Run Interval based on the EPEI display option for the process.
Cost Allocation Percent	The system displays the percentage of the overall item cost allocated to this loop in Kanban Item Master Maintenance.

Table 1.8 — Analyst Data Fields — (Page 1 of 3)

Field	Description
Kanban Item Cost	The system calculates this value by multiplying the item master cost for the cost set specified in the Process Option Panel by Cost Allocation Percent. This field displays in the base currency, which is shown in the column heading.
Average Inventory Calculation Method	This is the method the system uses for calculating average inventory for a kanban loop. It defaults from Kanban Master Maintenance. If you change it to view the effects of a different calculation method and save your changes, the system updates the loop record. The following methods are available. - Standard. Average inventory is calculated as follows: $\text{If Order Quantity is greater than 0, then Average Inventory} = (\text{Order Quantity} * 0.5) + (\text{Average Daily Demand} * \text{FIFO Time}) + \text{Safety Stock} + \text{Container Size Safety Stock}$ $\text{If Order Quantity is 0, then Average Inventory} = ((\text{Fixed Interval Time} * \text{Average Daily Demand}) * 0.5) + (\text{Average Daily Demand} * \text{FIFO Time}) + \text{Safety Stock} + \text{Container Size Safety Stock}$ $\text{If Order Quantity and Fixed Interval are both 0, then Average Inventory} = (\text{Kanban Quantity} * 0.5) + (\text{Average Daily Demand} * \text{FIFO Time}) + \text{Safety Stock} + \text{Container Size Safety Stock}$ - Mfg1. Average inventory is calculated as follows: $1/4 * (3 * \text{Order Quantity Revised} + \text{Average Daily Demand} * \text{Run Time in Days}) + \text{Total Safety Stock Units} + ((\text{FIFO Time in Days} * \text{Average Daily Demand}) \text{ rounded up to the kanban quantity}) + \text{Container Size Safety Stock}$ In this calculation, $\text{Run Time in Days} = (\text{Loop Order Quantity Revised} * \text{Cycle Time}) / \text{Process Time in a Day} + (\text{Item Setup Time} / \text{Process Time in a Day})$ Note: Method Mfg1 is designed for loops that have Source Type set to Process.
Average Inventory Units	The system displays the average inventory level based on the specified calculation method, including the unit of measure from Item Master Maintenance.
Average Days of Supply	The system calculates the number of days of demand that can be met out of inventory by dividing Average Inventory Units by the value of Daily Demand (Revised) from the sizing data frame.
Average Inventory Value	The system calculates the base-currency value of the average inventory quantity by multiplying Average Inventory Units by Kanban Item Cost.
FIFO Stock	The system calculates the average amount of inventory that is in production at a first-in, first-out (FIFO) process: $\text{FiFO Stock} = \text{FIFO Time In Days} * \text{Daily Demand}$ where: $\text{FIFO Time in Days} = (\text{External FIFO/day}) + (\text{Internal FIFO} / \text{Internal Hours Per Day [using Available Time Per Day when source type is Process]})$
Run Time Days	The system calculates this value as follows: $\text{Run Time Days} = (\text{Revised Order Quantity} * \text{Revised Cycle Time}) / \text{Revised Total Time Available Per Day} + (\text{Revised Setup Time} / \text{Revised Total Time Available Per Day})$ This field is relevant only to loops supplied by a process. It is set to 0 for other source types.

Table 1.8 — Analyst Data Fields — (Page 2 of 3)

Field	Description
Total Safety Stock plus Safety Time	The system displays the safety stock for the item from the Sizing Data frame.
Container Size Safety Stock	The system displays the amount of safety stock that results from the container size. For example, sizing calculations that round up to a container size may result in additional inventory that should be considered safety stock. This field is calculated using values from the sizing data frame: $\text{Container Size Safety Stock} = \text{Order Point (Revised)} - \text{Order Point (Preliminary)}$
Safety Factor Percent	The system displays total safety stock represented as a percentage of demand during the EPEI.
Total Safety Stock Value	The system calculates the base-currency value of the safety stock by adding Total Safety Stock Plus Safety Time to Container Size Safety Stock and multiplying the result by Kanban Item Cost.
Total Cycle Time/Day (theoretical)	For loops with a source type of Process, the system displays the result of multiplying Daily Demand (Revised) by Cycle Time (Revised). For other source types, this field is 0.
Setup Time Per Standard EPEI	For loops with a source type of Process, the system displays the result of dividing EPEI (Revised) for the process by the actual Run Interval. For other source types, this field is 0.
Setup Time Per Day	For loops with a source type of Process, the system displays the result of dividing Setup Time Per Standard EPEI by EPEI (Revised) for the process, then multiplying by Total Time Available Per Day (Revised). Both EPEI-related values are converted to days before this calculation. For other source types, this field is 0.
Load Percent	The system displays the load percentage of total available time represented by the individual process item. It uses the following calculation: $\text{Item Total Cycle Time/Day (Theoretical)} + \text{Item Setup Time Per Day} / \text{Total Cycle Time/Day (Theoretical) for all process items} + \text{Setup Time Per Day for all process items}$

Table 1.8 — Analyst Data Fields — (Page 3 of 3)

Managing Kanban Cards

Use programs on the Card Management Menu (17.22.16) to:

- Create cards for a newly sized loop.
- Regenerate cards for an existing loop when card data has changed.
- Maintain data on existing cards; for example, you can change card status, as well as activate or inactivate cards, or define limited-use cards for special purposes such as building initial supermarket inventory. See “Limited-Use Cards” on page 11.
- Print new cards, or reprint existing cards when they have been reactivated, lost, or damaged.
- Manage one or more loops by analyzing and optionally implementing system-generated recommendations to bring loops back into conformance with optimum sizing. You can also add or remove a specified number of cards from multiple loops, as well as deleting inactive cards.

Create or Regenerate Cards

Use Kanban Card Create (17.22.16.12) to:

- Create kanban cards for a new loop that has been manually sized by entering the number of cards and quantity per card in Kanban Master Maintenance (17.22.4).
- Create cards for a loop that has been sized using the kanban workbenches.

Important Although kanban sizing activities determine how many cards are needed to support a loop, the system does not actually create the cards. You must use this program to create them.

- Regenerate a new set of cards when loop information has been changed, making the information on the existing cards out of date.
- Add a limited-use card to a loop that has already had the required number of cards created, then use Kanban Card Maintenance (17.22.16.1) to set limited-use parameters.

Note You also can use Kanban Multi-Card Maintenance (17.22.16.2) to create, define, and print one or more limited-use cards with a single application. See page 105.

In the initial frame, enter data to identify the loop for which cards will be created. You also can enter an item number and use next/previous processing to scroll through all the loops defined for the item. The system displays values from the Source Master Data frame in Kanban Master Maintenance.

Fig. 1.37
Kanban Card Create (17.22.16.12)

The system indicates whether loop data has changed.

For loops that have already had cards created, the system determines whether cards need to be regenerated, depending on whether loop information has changed. Regenerate Required is set to Yes when the kanban quantity, source, bill of materials (BOM), or routing has changed.

The system displays the phase-out method specified in Kanban Control. When cards are regenerated, this determines whether the old cards are inactivated immediately or have their active status set to Close. See “Phase-Out Method” on page 30.

Note You can prevent the system from recording cards for loops that require regeneration using the Regeneration Enforcement setting in Kanban Master Maintenance. See “Regeneration Enforcement” on page 68.

For new loops, the system displays the number of replenishment and move cards from Kanban Master Maintenance. These values are either entered manually or updated automatically based on calculations in the kanban workbenches or other programs that perform resizing.

After creating or regenerating cards, you can optionally print them using this program. Otherwise, you can use Kanban Card Print or Kanban Multi-Card Print.

Note If you print cards using this program, the system prints all active cards for the loop that have not yet been printed—not just those created or regenerated in the current session.

Maintain Cards

Use either Kanban Card Maintenance or Kanban Multi-Card Maintenance to change or specify the following card attributes:

- Active status and active code
- For limited-use cards, the number of cycles or active date range
- For move cards, the point-of-use (POU) reference
- For authorized replenishment cards, the authorization date and time
- The card status
- Settings to control whether a card is available for auto-print or can be selected for dispatch list processing
- Other reference data, such as the system-calculated due date

Kanban Multi-Card Maintenance also lets you:

- Create new cards for a loop
- Print selected cards

Note Additional menu programs are available to activate, inactivate, or close an individual card. See page 105.

Single-Card Maintenance

Use Kanban Card Maintenance (17.22.16.1) to update data associated with a single kanban card. You must know the kanban ID of the card, or scan the card using a barcode reader.

You can use Kanban Card Status Report (17.22.16.13) to identify the kanban IDs of all the cards in a loop.

Fig. 1.38
Kanban Card Maintenance (17.22.16.1), First Frame

Some fields can be updated, depending on card type, status, and active code.

When you enter a valid kanban ID and press Go, the system displays an initial screen of loop and card data. You can update the Active field as needed. Other fields can be edited based on such factors as the type of card.

Active. Specify whether this card is available for use in this kanban loop.

When Active is No, the card cannot be recorded using programs on the Kanban Transactions menu, and the item quantity the card represents is not included in system kanban and supermarket sizing calculations.

When they are created, the default setting for new cards is Yes. However, if a loop has too many cards, you can inactivate individual cards, either permanently or temporarily. For example, if the result of running a workbench simulation indicates that current demand can be met more effectively by fewer kanbans, you can inactivate the recommended number of cards. If subsequent demand increases require more kanbans, you can reset the field to Yes on as many additional cards as needed.

Cards can be automatically inactivated during card reconciliation if the system determines that they are no longer needed to support the optimum loop size.

See “Card Reconciliation” on page 18.

When Active Code is Cycles or Period, the system bases the active status on the number of times a card has been used or the specified active dates.

This field must be No for you to delete the card.

Note You cannot reactivate a card for a loop that has had modifications made to the kanban quantity, source, bill of materials (BOM), or routing since the card was inactivated. You must use Kanban Card Create to regenerate the cards for the loop.

Active Code. When Active is Yes, optionally update the code associated with the active status of this card:

- **Active:** The card can be recorded using programs on the Kanban Transactions menu. The system automatically sets this value when Active is Yes.
- **Inactive:** The card has been inactivated. When you set Active to No, the system automatically sets Active Code to Inactive.
- **Close:** A full card can be recorded for one more cycle. The next time it is consumed, the system automatically inactivates it. If the card is empty, it can be filled once more; then it is inactivated the next time it is consumed.
- **Cycles:** The card can go through the number of fill/consume cycles specified in Cycles. After completing those cycles, it is automatically inactivated. The system displays the current usage in Cycles Used.
- **Period:** The card is active only between the dates specified in Active Start and Active End. The system automatically inactivates it the first time it completes a fill/consume cycle after the end of the range.

Use the Cycles and Period settings, along with the appropriate associated values, to define a limited-use card.

Cycles. Enter the number of cycles for which this limited-use card is active. The default is 1. Each time the card goes through a fill/consume cycle, the system increments the Cycles Used field by 1. When all the specified cycles are used, Active is automatically set to No, and you can no longer record the card using programs on the Kanban Transactions menu.

Note You can access this field only when Active Code is Cycles.

Active Start/End. Enter the range of dates over which this limited-use card is active. The default is the current date.

Note You can access these fields only when Active Code is Period.

POU Reference. Optionally enter or modify a point-of-use reference associated with a kanban move card. For instance, this can be the location code representing where the items are used. You also can assign a POU reference value to a move card when you record it using Kanban Consume/Post (17.22.19.1).

Authorized. Optionally update the system-defined date and time when this card most recently authorized production.

These fields can be updated only for replenishment cards with a card status of Authorized.

Card Status. Optionally update the current status of this kanban card.

Based on the program used to record a card, the system assigns a status code to the card, either when it is recorded or as a result of an automated process. Valid values are:

- **EmptyAcc (Empty Accumulate):** Kanban Consume/Post assigns this status based on the accumulator type for the loop defined in Kanban Master Maintenance. The card is awaiting evaluation by Accumulator Monitor based on quantity, time, or schedule parameters. When the total quantity represented by all the cards with this status reaches the order quantity, the system automatically changes the status of the cards to Authorized. Empty Accumulate is the status assigned to new replenishment cards. They are then analyzed by Accumulator Monitor to see if they should be changed to Authorized.
- **Auth (Authorized):** Production is authorized for the quantity shown on the card. This is the status code assigned to new move cards. Replenishment cards with this status can be included on a dispatch list.
- **Ack (Acknowledged):** The supplying source has acknowledged receipt of a production authorization. For example, when the item is provided by an external supplier, this can mean that the supplier has received a dispatch list that includes this card and the card has been recorded using Kanban Acknowledge (17.22.19.3).
- **Shipped:** The kanban amount has been produced and has left the supplying source; the associated replenishment card has been recorded using Kanban Ship (17.22.19.4). For example, when the item is provided by an external supplier, the item has been produced and is in-transit to the consuming destination. When the source is a manufacturing process that includes a series of first-in, FIFO processes, this status indicates that the items have completed the last FIFO process.
- **Full:** The kanban quantity has been produced and is ready to be consumed or, in a two-card system, moved to the point of use; the card has been recorded using Kanban Fill/Receive (17.22.19.5).
- **In FIFO (In FIFO Process):** When the source is a manufacturing process that includes a series of FIFO processes, this status indicates that the items are still under the control of FIFO processes. This status is assigned when the card is recorded using Kanban Ship. When the card is recorded after completing the last FIFO process, the system changes the status to Shipped.

Note In two-card loops, the only valid status codes for move cards are Authorized and Full.

The second frame includes additional card data. Several fields are currently for reference only.

Fig. 1.39
Kanban Card Maintenance, Second Frame

Delivery Location. Specify an optional code representing the location where the kanban item is delivered. This is for reference only.

Delivery Status Code. Specify an optional status code associated with the shipment or delivery of this kanban. This is for reference only.

Due Date and Time. Optionally enter or modify the date when this kanban is due from the supplying source.

The system calculates this date automatically when:

- Recording the card in Kanban Consume/Post results in card authorization.
- The card is recorded in Kanban Authorize.
- Accumulator Monitor changes the card status to Auth based on accumulator settings defined in Kanban Master Maintenance.
- Card status is changed to Auth in Kanban Card Maintenance or Kanban Multi-Card Maintenance.

The date calculation is based on the source type for the loop.

If the source type is an external supplier, the system assumes a 24-hour clock in calculating due dates.

It determines the due date on supplier loops by adding values specified in Kanban Master Maintenance to the current date, as follows:

Due Date = today's date + Replenishment Time + Fixed Interval Time (for accumulator types Time or Schedule) + FIFO Time External + FIFO Time Internal

If the source type is a manufacturing process or an inventory supermarket, the system bases the date calculation on the source site calendar.

It first calculates the total time required to fill the kanban as follows:

Total time = Replenishment Time + Fixed Interval Time (for accumulator types Time or Schedule) + FIFO Time Internal (using site calendar) + FIFO Time External (using 24-hour clock)

Based on the site calendar, the system then determines how many days it will take using the total time calculated:

Due Date = today + calculated number of days from above

Example The source site calendar specifies a single shift that runs from 8 AM until 5 PM Monday through Friday. If the card is authorized on Monday at 4 PM:

- If the total time is 2 hours, the due date will be Tuesday.

- If the total time is .5 hours, the due date will be Monday.
- If the total time is 10 hours, the due date will be Wednesday.

Note The due date logic considers holidays defined in Holiday Maintenance when calculating internal times—including dates available for delivery from external suppliers. For example, if the calculated due date falls on a specified holiday, the due date/time is adjusted to the start of the next business day. However, it does not adjust the standard amount of time allowed the supplier. For example, if the typical delivery time is 3 days and a company holiday falls during that time frame, the system does not assume the supplier takes the holiday and does not extend the time to 4 days to compensate.

Second Card ID. Enter an optional card identifier that can be used in addition to the system-assigned kanban ID. This field is for reference only.

Auto Print. Specify whether this card can be selected for automatic printing by Kanban Multi-Card Print.

This value can be updated automatically based on the current card status, as well as the associated Auto Print setting in either Kanban Control or Kanban Master Maintenance. Which setting applies depends on the value of Use Control Prog Tran Setting in Kanban Master Maintenance.

See “Auto-Print” on page 72.

Qty Accepted. Enter the quantity that was considered acceptable for use when the card was last shipped or received. The default value depends on the setting of Modify Inv Data for the loop record in Kanban Master Maintenance:

Yes: The value entered when the card was last recorded in Kanban Ship or Kanban Fill/Receive

No: The kanban quantity

When the loop record has a percentage specified in Modify Inv Threshold, the system calculates the difference between Qty Accepted and the kanban quantity as a percentage of the kanban quantity. If the percentage is equal to or larger than the specified threshold, a warning message displays.

Note The system calculation is based on an absolute value, so the threshold applies to recorded quantities both greater than and less than the kanban quantity.

Qty Scrapped. For process loops, enter the quantity that was considered not acceptable for use when the card was last shipped or received. The default value depends on the setting of Modify Inv Data for the loop record in Kanban Master Maintenance:

Yes: The value entered when the card was last recorded in Kanban Ship or Kanban Fill/Receive

No: 0 (zero)

Dispatch Required. Specify whether this card will be selected the next time Kanban Dispatch List Processing is run with selection criteria that match the kanban loop.

You can update this field only when Active is Yes. Additionally, the card status must be one of the following:

- Auth or Ack, for any kind of loop
- In FIFO, for process loops that include FIFO processes

If you change the value from Yes to No, the system sets the dispatch date and time to the current date and time, and leaves the Dispatch ID field at its current value.

If you change it from No to Yes, the date, time, and dispatch ID are set to blank. The system updates these fields next time the card is selected in Kanban Dispatch List Processing.

Dispatch ID. The system displays the system-generated batch number assigned when the card was placed on a dispatch list.

Comments. Enter Yes to display a standard transaction comments screen for entering comments that apply to this card.

All comments print at the bottom of the kanban card.

Single-Function Programs

Three additional programs let you perform single-function changes to individual cards by simply entering the card number or scanning the barcode:

- Use Kanban Card Activate (17.22.16.8) to set Active to Yes on an inactive card and add the kanban quantity to the working buffer.
- Use Kanban Card Deactivate (17.22.16.9) to set Active to No on an active card and reduce the working buffer by the kanban quantity.
- Use Kanban Card Close (17.22.16.10) to set Active Code to Close on an active card.

Multiple-Card Maintenance

Use Kanban Multi-Card Maintenance (17.22.16.2) to view all the cards in a specified loop and select individual cards for update. You also can create additional cards and print cards using the same program.

Fig. 1.40
Kanban Multi-Card Maintenance (17.22.16.2)

In the first frame, identify the kanban loop. The system displays source master data from Kanban Master Maintenance.

When you press Go, continuing navigation depends on the setting of Card Reconciliation in Kanban Control (17.22.24). When that field is Yes, the frame shown in Figure 1.41 displays. This lets you view the same kinds of card analysis data that is available in Kanban Card Management (17.22.16.16). If you do not want to view analysis data, leave both fields set to No and press Go to proceed.

See “Analyze Card Information” on page 109.

Fig. 1.41
Kanban Multi-Card Maintenance, Analyze Card Information Frame

Display depends on Kanban Control setting

Analyze Card Information

Display Analysis and Recommendations: ☐
 Display State Analysis: ☐

The system next displays a list of all the cards in the loop.

Note For two-card loops, the system prompts you to enter a card type:

- Enter Repl to view replenishment cards.
- Enter Move to view move cards.

Fig. 1.42
Kanban Multi-Card Maintenance, Kanban Cards Frame

Kanban Cards							
Kanban ID	Type	Active	Code	Kanban Qty	UM	Status	Print
715	Repl	☒	Active	10.0	EA	In FIFO	☐
716	Repl	☒	Active	10.0	EA	In FIFO	☐
717	Repl	☒	Active	10.0	EA	Auth	☐
718	Repl	☒	Active	10.0	EA	Auth	☐
719	Repl	☒	Active	10.0	EA	Auth	☐
720	Repl	☒	Active	10.0	EA	Auth	☐

Select a card to display details in the bottom frame.

Fig. 1.43
Kanban Multi-Card Maintenance, Kanban Card Detail Frame

Kanban ID: 715
 Print: ☐
 Active Start:
 Authorized: 01/19/2004 00:31:21

Kanban Card Detail
 Active: ☒
 Cycles: 0
 Active End:
 Card Status: In FIFO

Active Code: Active
 Cycles Used: 0
 POU Reference:
 Card Status: In FIFO

You can update the same fields as in Kanban Card Maintenance. Additionally, you can:

- Create a new card for the loop by clearing the Card ID field and pressing Enter. The system assigns the next available ID number and updates the working buffer by the kanban quantity. Update the remaining fields as required.
- Set Print to Yes to print the card.

See page 100.

When you finish adding or editing card information and press End from the Kanban Cards frame, the system prompts you to print the cards that have Print set to Yes.

Note If no cards are selected for printing, this prompt does not display.

Print Cards


Two programs let you print either a single specified card or a range of cards:

- Use Kanban Card Print (17.22.16.4) to enter a kanban ID or scan a single card for printing.
- Use Kanban Multi-Card Print (17.22.16.5) to select cards by ranges of selection criteria. For example, you can print just the cards in one loop. You also can choose to print only one card type—replenishment or move—for two-card loops, and limit the selection to:

- Active cards
- Cards that have not previously been printed
- Cards that are set to print automatically after specific kanban transactions are recorded. See “Auto-Print” on page 72.

Figure 1.44 shows an example of a printed kanban card.

Fig. 1.44
Sample Kanban Card Output

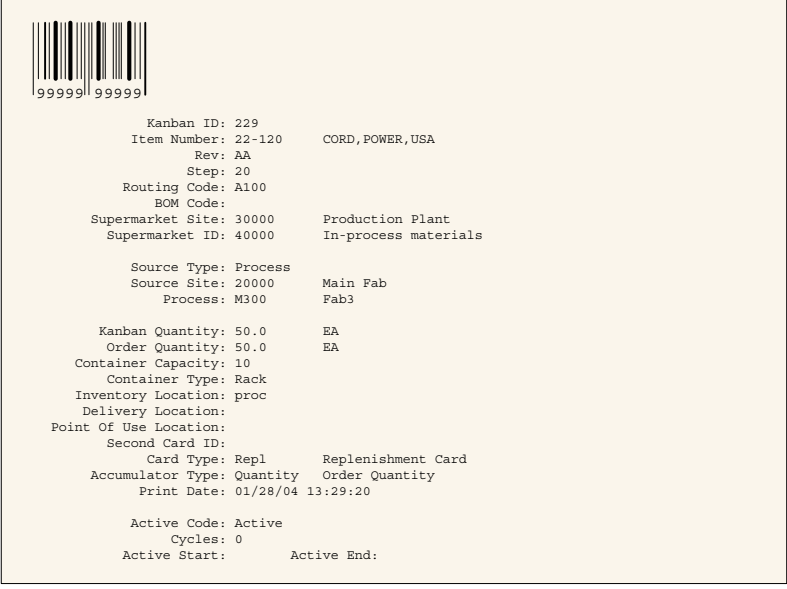

999999 999999

Kanban ID: 229	
Item Number: 22-120	CORD, POWER, USA
Rev: AA	
Step: 20	
Routing Code: A100	
BOM Code:	
Supermarket Site: 30000	Production Plant
Supermarket ID: 40000	In-process materials
Source Type: Process	
Source Site: 20000	Main Fab
Process: M300	Fab3
Kanban Quantity: 50.0	EA
Order Quantity: 50.0	EA
Container Capacity: 10	
Container Type: Rack	
Inventory Location: proc	
Delivery Location:	
Point Of Use Location:	
Second Card ID:	
Card Type: Repl	Replenishment Card
Accumulator Type: Quantity	Order Quantity
Print Date: 01/28/04 13:29:20	
Active Code: Active	
Cycles: 0	
Active Start:	Active End:

Note Whether item and kanban ID barcodes print on the card is determined by settings in Kanban Master Maintenance, which default from Kanban Control. See page 26.

You also can print newly created or reactivated cards directly from one of the following programs when you use card reconciliation to synchronize the actual number of active cards with the optimum number:

- Kanban Sizing Workbench
- Kanban Process Workbench
- Supermarket Workbench
- Kanban Card Management

See “Card Reconciliation” on page 18.

Manage Kanban Loops

Use Kanban Card Management (17.22.16.16) to manage multiple loops by:

- Analyzing and optionally implementing system-generated recommendations to create, activate, close, or inactivate cards to reconcile the loops by bringing them into conformance with optimum loop sizing
- Adding or removing a fixed number of cards from each selected loop
- Deleting inactivated cards when they are no longer needed

- Managing the accumulated shortfall between the kanban quantity and the quantity actually accepted when cards are recorded
- Printing new or activated cards directly from this program

Most of the functions include an Update field. Set it to No to review the effects of the selection criteria entered before actually updating the database.

To use the program, enter selection criteria to identify one or more kanban loops. Then choose the function you want to perform on the selected loops. The system displays additional fields specific to that function. After you finish, focus returns to the Function field; you can continue to use additional card management features on the same loops without having to reenter selection criteria.

Fig. 1.45
Kanban Card Management (17.22.16.16)

The screenshot shows a window titled "Kanban Card Management". It has a top bar with help, info, and window control icons. The main area is divided into two sections. The top section contains selection criteria for a Supermarket Site named "matsite1", with fields for Supermarket, Item Number, Step (0), Source Site, Source, Kanban Planner, and Source Type. The bottom section shows a "Function:" field with a dropdown menu currently set to "1". Below this is a list of five functions: "1 Loop Analysis and Recommendations", "2 Analyze Card Information", "3 Increase Cards in Loop", "4 Decrease Cards in Loop", and "5 Delete Inactive Cards". At the bottom of the window, there is a status bar showing "Cards Created: 15 Activated: 15 Closed: 11 Inactivated: 0" and the instruction "Enter data or press End to end.".

The system maintains running totals of cards created, activated, closed, and inactivated during the current session. Use function 6, Kanban Activity Recap, to print created and activated cards before exiting.

See “Printing Cards” on page 113.

The following sections describe the available functions.

Loop Analysis and Recommendations

Use this function to view buffer and card information by status (active, inactive, and so on), as well as recommendations for synchronizing the number of active cards with the system-recommended maximum number of cards for each loop. This may require creating, activating, closing, or inactivating cards. Optionally, you can have the system implement recommended changes.

Note This function does not do kanban sizing; it only adjusts the number of cards used to support existing buffers.

Fig. 1.46
Kanban Card Management, Loop Analysis and Recommendations Frame

Leave Update set to No to run the report in simulation mode so that you can review the proposed changes. Change Update to Yes to have the system automatically adjust the number of cards in selected loops. When you update kanban loops, the output report includes a list of individual kanban cards that were created, activated, closed, or inactivated. The simulation report does not include card-level information.

For reporting and analysis purposes, you can include loops that the system considers to have the correct number of active cards by setting Display Out of Synch Loops Only to No. When Update is Yes, the system does not modify these loops.

If additional cards are needed, the system uses the phase-in method specified in Kanban Control to determine if inactive cards should be activated before new ones are created.

See page 30 for information on these Kanban Control settings.

If fewer cards are needed, the system first checks the value of the Decrease at Consume field specified for the loop in Kanban Master Maintenance.

- When Decrease at Consume is Yes, the system does not inactivate or close cards as part of this program, although inactivate and close recommendations display on the analysis report. Instead, because of the logic associated with the Decrease at Consume field, the cards are inactivated the next time they are recorded in Kanban Consume/Post. The system displays a message to inform the user that the card should be physically removed from the loop.
- When the field is No, the system uses the phase-out method specified in Kanban Control to determine if cards should be closed or inactivated.

As part of the analysis task, the system verifies that the kanban quantity on the card matches the current kanban quantity for the loop. If it detects cards where this is not true, it sets the Regenerate Required field for the loop to Yes. When you run the program in update mode, this causes all existing cards to be replaced by a new set of cards, regardless of the setting of Decrease at Consume. The phase-out method specified in Kanban Control determines how the cards being replaced are inactivated.

Analyze Card Information

Use this function to analyze kanban card information for all cards in a loop.

You can view loop analysis information and system recommendations, and/or kanban card state analysis information, depending on the settings of the associated fields.

Fig. 1.47
Kanban Card Management, Analyze Card Information Frame

Analyze Card Information

Supermarket Site: matsite1	To: matsite1
Supermarket:	To:
Item Number:	To:
Step: 0	To: 99999
Source Site:	To:
Source:	To:
Kanban Planner:	
Source Type:	

Display Analysis and Recommendations: ☒
 Display State Analysis: ☐

◀ ▶

Initially, the system displays a list of the loops meeting the Kanban Card Management selection criteria. Select a loop and choose Go:

- When Display Analysis and Recommendations is Yes, the system displays a summary of card data, including the kanban quantity and number of cards from the loop record, as well as the number of active cards, limited-use cards, total actual cards, and the difference between the loop number and the actual number of cards. It also summarizes recommendations for making the actual number of cards match the loop number. Two-card loops show replenishment and move cards on separate lines.
- When Display State Analysis is Yes, the system displays the total number of cards in each active status, summarized by the current kanban status. Two-card loops show separate lists for replenishment and move cards.

Increase Cards in Loop

Use this function to increase all selected loops by a constant number of cards.

The system uses the phase-in method specified in Kanban Control to determine if inactive cards should be activated before new ones are created.

Fig. 1.48
Kanban Card Management, Increase Cards in Loop Frame

Increase Cards in Loop

Supermarket Site: matsite1	To: matsite1
Supermarket:	To:
Item Number:	To:
Step: 0	To: 99999
Source Site:	To:
Source:	To:
Kanban Planner:	
Source Type:	

Number of Cards to Increase: 5

Card Type: Repl

Update: ☒

----- Default Values for New Cards -----

Secondary ID:	Card Status:	Active: ☒
Active Code: Active	Active Start:	Active End:
Cycles: 0		Output: printer

◀ ▶

Specify the number of cards to add to each loop, as well as the card type (replenishment, move, or both). The system does not add move cards to one-card loops regardless of this setting.

When Update is Yes, use the Default Values for New Cards frame to specify such information as the card status, active status, and active code for new cards, as well as any that are activated based on phase-in logic.

Note Define limited-use cards by setting Active Code to Period or Cycles.

Regardless of the value of Update, the system generates a report summarizing the effects of the program on each selected loop. It is organized by supermarket site, supermarket, item, step, source site, source, and card type. When Update is Yes, the report also displays the action taken on each individual card, in kanban ID sequence.

Note This function does not perform any resizing functions. Adding cards to a loop may cause sizing to be out of synch with the actual number of cards. Use the kanban workbenches to do any needed sizing, or the Kanban Analysis and Recommendation function in Kanban Card Management to realign the actual cards to the loop's sizing values.

Decrease Cards in Loop

Use this function to decrease all selected loops by a constant number of cards.

Fig. 1.49
Kanban Card Management, Decrease Cards in Loop Frame

The screenshot shows the 'Decrease Cards in Loop' window. It has a title bar and a main area with the following fields:

- Supermarket Site: matsite1
- Supermarket:
- Item Number:
- Step: 0
- Source Site:
- Source:
- Kanban Planner:
- Source Type:
- To: matsite1
- To:
- To: 99999
- To:
- To:
- Number of Cards to Decrease: 0
- Card Type: Repl
- Update: ☐
- Output: [button]

Specify the number of cards to remove from each loop, as well as the card type (replenishment, move, or both).

When Update is Yes, the program always removes cards with a status of Empty Accumulate first by inactivating them immediately. If you want to reduce the loop by more than the available number of empty cards, the system next looks for cards closest to the Empty Accumulate status in the following sequence:

- 1 Full
- 2 Shipped
- 3 In FIFO
- 4 Acknowledged
- 5 Authorized

When more than one card is in the target status, the system begins by selecting cards that have been in that status for the longest time. It uses the phase-out method specified in Kanban Control to determine whether the cards should be inactivated immediately or have their active status set to Close so they can be inactivated the next time they are recorded in Kanban Consume/Post.

The system uses this logic regardless of the Decrease at Consume setting defined in Kanban Master Maintenance.

Regardless of the value of Update, the system generates a report summarizing the effects of the program on each selected loop. It is organized by supermarket site, supermarket, item, step, source site, source, and card type. When Update is Yes, the report also displays the action taken on each individual card, in kanban ID sequence.

Note This function does not perform any resizing functions. Removing cards from a loop may cause sizing to be out of synch with the actual number of cards. Use the kanban workbenches to do any needed sizing, or the Kanban Analysis and Recommendation function in Kanban Card Management to realign the actual number of cards to the loop's sizing values.

Delete Inactive Cards

Use this function to delete all cards with an Active Code value of Inactive from selected loops.

Fig. 1.50
Kanban Card Management, Delete Inactive Cards Frame

Specify the type of inactive cards to remove from each loop (replenishment, move, or both).

Regardless of the value of Update, the system generates a report including the number of inactive cards that will be deleted from each selected loop. When Update is Yes, the report also lists all cards deleted, in kanban ID sequence.

Process Accumulated Shortfall

Use this function to determine how the system manages loops that allow users to enter a quantity accepted in Kanban Fill/Receive. For example, this feature can be used to account for scrap. For those loops (where Modify Inv Data is Yes in Kanban Master Maintenance), the system accumulates differences between the accepted quantity and the kanban quantity in the Receipt Shortfall field in Kanban Master Maintenance.

The Processing Shortfall Option field lets you specify the method to use for loops that match the selection criteria:

Create (the default): When the shortfall value is greater than the kanban quantity, the system creates enough limited-use cards to make the remaining shortfall value less than the kanban quantity. For example, for a kanban quantity of 10 and a shortfall of 22, the system would create 2 new limited-use cards. It would then set the Receipt Shortfall field to 2 for the loop.

Zero All. Set the Receipt Shortfall field to 0 for all selected loops.

Zero Neg. Set the Receipt Shortfall field to 0 for all selected loops that currently have a negative value in that field. These are loops on which the cumulative quantity received is larger than the total kanban quantities of the received cards.

Printing Cards

When you have created or activated cards during the current session, the frame shown in Figure 1.51 displays when you select function 6, Kanban Activity Recap, in the initial frame.

Fig. 1.51

Kanban Card Management, Kanban Activity Recap Frame

The screenshot shows a window titled "Kanban Activity Recap". Inside, the statistics are displayed in two columns: "Cards Created: 15", "Cards Activated: 15", "Print Cards Created: [checked]", and "Print Cards Activated: [checked]" on the left; and "Cards Closed: 41", "Cards Inactivated: 0", and "Output:" on the right. At the bottom right, there are two circular navigation buttons with left and right arrows.

Use the following fields to print cards directly from this program:

- Print Cards Created defaults to Yes when Cards Created is greater than 0.
- Print Cards Activated defaults to Yes when Cards Activated is greater than 0.

Note You cannot print cards that were not created or activated during the current Kanban Card Management session. When no cards were created or activated, the Kanban Activity Recap frame does not display. Instead, the Kanban Activity Recap function just updates the summary at the bottom of the screen.

Cards print in the following sort sequence:

- 1 Supermarket Site
- 2 Supermarket
- 3 Item
- 4 Step
- 5 Source Site
- 6 Source
- 7 Kanban Card ID

Using Kanban Transactions

Kanban transactions let you track the movement of kanban-controlled items in and out of the production process.

Programs on the Kanban Transactions Menu (17.22.19) let you:

- Depending on how you set up kanban loops, run a program that accumulates empty cards and automatically authorizes replenishment when the order quantity is reached.
- Record kanban cards by scanning or entering them using a program specific to where the material is in the production cycle.
- Record consumption transactions for batches of cards based on loop selection criteria or on information in an imported file. See page 120.
- View information about the status of kanban cards. See page 125.

- Archive and delete kanban transaction history records when they are no longer needed online. See page 136.

Note Under some circumstances, the system automatically records certain kanban transactions based on related activities:

- When you import a kanban supplier's ASN. See page 123.
- When you receive a PO shipper from a kanban supplier. See page 124.

Monitor Accumulator Quantities


Use Accumulator Monitor (17.22.19.6) to check the status of cards in kanban loops that are set up as time or schedule accumulators in Kanban Master Maintenance.

See “Card Accumulators” on page 10.

When this program is running, it scans the database for loop records with time or schedule accumulators on which the values in the Next Date and Next Time have been reached. When the total of empty cards reaches the order point, the system automatically authorizes the cards. The length of time the function pauses between scans is specified in Kanban Control.

See “Accumulator Monitor Pause Time” on page 35.

Fig. 1.52
Accumulator Monitor (17.22.19.6)

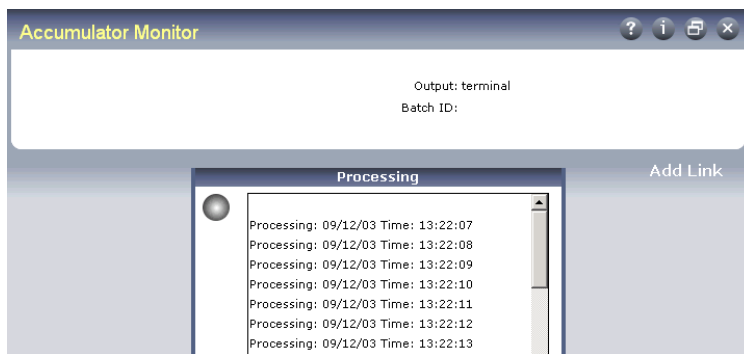

Use the Enter Number of Times to Execute field to avoid potential problems when you run the program in batch mode. The default is 0 (zero). If you do not change this, the process continues to run until you stop it manually.

If you enter a number, the process runs the specified number of times, then exits. This eliminates an issue related to batch processing. Unless you specify a number, the batch processor does not have an exit point for Accumulator Monitor. If other programs are included in the same batch, the processor never gets to them. However, when you enter a value in this field, the batch processor runs Accumulator Monitor the specified number of times, then moves on to the next task in the batch.

You can run this program in several ways:

- Start it manually each day from the menu.
- Set up batch processing to run the program as part of a batch. See *User Guide: Manager Functions* for information on batch processing.

- Modify the script that starts your databases to invoke program `kbacmgr.p`. When you use this method, the monitor is running anytime your system is being used.

Use Stop Accumulator Monitor (17.22.19.7) to stop the monitoring process.

Record Kanban Transactions

Based on how closely you want to track kanban material as it moves through the production cycle, you can use five programs to record cards and update their status.

- Use Kanban Consume/Post (17.22.19.1) to record that the items on a kanban have been used and authorize production of the kanban quantity.

Note Two other menu programs let you record consume transactions for batches of cards. See “Batch Consume Programs” on page 120.

- Use Kanban Authorize (17.22.19.2) to manually authorize cards when required. In two-card loops, this program can be used only for replenishment cards.
- Use Kanban Acknowledge (17.22.19.3) to indicate that the source has received the authorization to replenish a kanban. In two-card loops, this program can be used only for replenishment cards.
- Use Kanban Ship (17.22.19.4) to record that a supplying source has sent the completed kanban items to the supermarket. In two-card loops, this program can be used only for replenishment cards.

Note Ship transactions can also be recorded when you import a kanban supplier’s ASN. See page 123.

- Use Kanban Fill/Receive (17.22.19.5) to indicate that a kanban has been filled. Depending on how the loop is defined, this program can automatically generate system receipt and inventory transactions. See page 16.

Note Fill transactions can also be recorded when you confirm a kanban supplier’s shipping document. See page 124.

Navigation in all five programs is nearly identical, although some frames display based on the type of transaction and control settings.

See “Kanban Transactions” on page 12 for more information.

Initial Frames

Two optional frames may display when the program is launched, depending on settings in Kanban Control (17.22.24):

- When Controlled Kanban Entry is Warning or Error, several optional criteria fields display in the initial frame. When you begin recording cards, the system validates them against the values you enter and displays warning or error messages when a card does not match one of the settings. For example, you can enter a range of item numbers to avoid accidentally recording a card for the wrong item. When Controlled Entry is None, the frame does not display.

Fig. 1.53
Kanban Consume/Post (17.22.19.1), Controlled Entry Frame

- When Allow Entry of Effective Date is Yes, you can change the effective date of the kanban transactions. Otherwise, the system uses the current date.

Fig. 1.54
Kanban Consume/Post, Effective Date Frame

Only when you are recording transactions using Kanban Consume/Post, you can add an optional point-of-use reference for move cards. For example, this can be the location code of the process that uses the items. The system applies the same point-of-use reference to all cards entered during the session. You can update the POU reference using Kanban Card Maintenance (17.22.16.1) or Kanban Multi-Card Maintenance (17.22.16.2).

Fig. 1.55
Kanban Consume/Post, POU Reference Frame

Transaction Frames

Begin recording cards by entering a valid number in the Kanban ID field or by scanning the bar code.

The Transaction Log at the bottom of the screen displays a list of recent transactions. The latest kanban entry is always displayed at the top of the transaction log.

Fig. 1.56
Kanban Consume/Post, Transaction Entry Screen

Time	Kanban ID	Item Number	Super market	Reference	Event
10:26:16	3257	mat-88	matmart	matsupp-mat-88-1	Ship
10:22:44	1020	5030	FA	3000-P1113	Auth
10:22:43	1020	5030	FA	3000-P1113	Consume
10:17:31	3256	mat-88	matmart	matsupp-mat-88	Consume

If Kanban Cycle Enforcement is set to Warning or Error in Kanban Master Maintenance, the system verifies that the card has not been recorded during the specified time interval and displays a warning or error message as needed. Next, the system validates the card against controlled entry values, if any, and displays appropriate messages. A warning can be accepted or overridden. When an error displays, the kanban entry is automatically rejected.

See “Card Tracking Information” on page 61.

Note Sequence enforcement settings may also cause the system to validate whether the current transaction is in the proper sequence. If it is not, a warning or error message displays. See “Sequence Enforcement” on page 14.

After you record a card, the system displays transaction summary data for the amount of time specified in the Transaction Display Pause in Seconds field in Kanban Control. When that field is 0 (zero), the summary does not display.

See “Control Program” on page 25.

Fig. 1.57

Kanban Consume/Post, Kanban Transaction Summary Frame

The screenshot shows a software window titled "Kanban Consume/Post" with a subtitle "Kanban Transaction". The window contains a list of transaction details organized into two columns. The left column lists fields such as Kanban ID, Transaction Type, Item Number, Site, Supermarket ID, Source, Source Site, PO Number, Container Capacity, Kanban Quantity, Inv Location, Card Type, Event, Accumulator, and Loop Type. The right column lists corresponding values or descriptions, such as Supplier (Handlebar, Bicycle), K/V Demo Site, Final assembly, Acme Supply Co., and Replenishment Card (Consume, Order Quantity, One Card Loop). Navigation buttons (back and forward arrows) are visible at the bottom right of the window.

Kanban Transaction	
Kanban ID: 1020	
Transaction Type: Supplier	Supplier
Item Number: 5030	Handlebar, Bicycle
Site: KV100	K/V Demo Site
Supermarket ID: FA	Final assembly
Source: 3000	Acme Supply Co.
Source Site:	
PO Number: P1113	Line:
Container Capacity: 1.0	
Kanban Quantity: 1.0	
Inv Location:	
Card Type: Repl	Replenishment Card
Event: Consume	Consume
Accumulator: Quantity	Order Quantity
Loop Type: One	One Card Loop

Important In QAD .NET UI and QAD Desktop, the system does not automatically clear the display after the specified number of seconds. You must press the spacebar to enter the next card. Leave the Kanban Control setting at 0 to avoid this.

After the card summary displays for the specified time, the Kanban ID field redisplay. When you have recorded all the cards, press End.

Other Frames

Depending on setup data, additional frames may prompt for input when you are entering kanban transactions.

Purchase Order Receiving Data

In Kanban Fill/Receive (17.21.19.5), you are prompted for a purchase order and line number under the following circumstances, based on settings for the loop defined in Kanban Master Maintenance:

- Source Type is Supplier in the Source Data frame.

- Purchase Order and Line are not both specified.
- Impact Inventory is Yes in the Card Control Data frame.

When the kanban master record includes both a PO number and an open line, the system records the receipt against the PO without displaying a prompt. Otherwise, you must specify a valid PO and line before the transaction can be processed. If the kanban master record includes a purchase order without a line, the PO number defaults to the prompt frame, but you still must enter a valid line number. When the order associated with the kanban master record is a blanket PO, the system uses the latest release.

When Impact Inventory is No, the system creates kanban history to show that the kanban transaction was recorded, but does not create a PO receipt. In that case, the PO prompt does not display.

Additionally, prompts for receiving reference data can display based on two settings in Kanban Master Maintenance:

- When PO Receipt Data Entry is Yes, you are prompted for optional receiving note and packing slip numbers. If you leave Receiver Note blank, the system assigns a number based on the receiver prefix and next receiver number maintained in Purchasing Control (5.24).
- When Lot Entry is Yes, you are prompted for optional lot and reference numbers.

See “Inventory Effects” on page 16.

FIFO Process Data

When your manufacturing environment includes FIFO processes and you choose to track kanban items as they move between these processes, you can record that movement using Kanban Ship (17.22.19.4).

See “FIFO Lanes” on page 7.

When you enter a transaction in Kanban Ship, an additional frame displays under the following circumstances:

- Enter FIFO during Ship Transaction is Yes in Kanban Control.
- Source Type in Kanban Master Maintenance is set to Process, and Use FIFO is Yes.
- A series of FIFO processes is defined in Kanban Master Maintenance.

The system displays the ID of the current process. You can accept this value or change it to another valid FIFO process associated with the kanban loop.

Quantity Data

In some cases, the quantity suitable for use is not necessarily the same as the kanban quantity. For example, items can be damaged in transit, or the supplier might ship more items than ordered.

Kanban Ship and Kanban Fill/Receive let you record the actual quantity, rather than the kanban quantity, when Modify Inventory Data is Yes in Kanban Master Maintenance.

Depending on the source of the loop (supplier, inventory, process) and the transaction, fields can include:

Quantity Accepted

Quantity Scrapped

Reason (including multi-entry feature) for scrap

Receipt Location

Issuing Location

Use Kanban Quantity Audit Report (17.6.16) to identify loops with cards on which the recorded quantity does not equal the kanban quantity. You can specify a tolerance percent to limit the selection to cards where the difference exceeds a given threshold.

Additionally, a field in Kanban Master Maintenance tracks cumulative shortfall quantities. You can periodically use Kanban Card Management to create limited-use cards to compensate for cumulative shortages or to set the cumulative shortfall field to zero.

See “Receipt Shortfall” on page 71.

Repetitive Transactions

When Use Cumulative Order is Yes for a loop record in Kanban Master Maintenance, additional fields are accessible in the quantity data frame when you process a replenishment card in Kanban Fill/Receive or Kanban Ship. The transactions are recorded against a cumulative order.

Fig. 1.58
Kanban Ship, Quantity Information

Kanban Ship

Kanban Card ID: 83501 Effective Date: 4/29/2013

Trans: Quantity Accepted: 1.0

Time: Quantity Scrapped: 0.0

15:18: Scrap Reason: Multi: ☐

Issue Location:

Receipt Location:

Reference:

Lot:

Actual Run Time:

Backflush Setup: ☐

You can only edit these two fields when Use Cumulative Order is Yes in Kanban Master Maintenance.

The system uses Advanced Repetitive logic to find the correct cum order, using the site, item number, production line, routing code, BOM code, and transaction effective date.

- The system uses the kanban item master, item-site master, the item master, and finally the item number to determine the routing and BOM.
- If specified, the production line specified in Kanban Process Maintenance is used; otherwise, the system uses MRP line allocation records to determine the production line.

If no open cumulative order available on the effective date matches the criteria, the system creates a new order, using the production line defined for the primary kanban process.

Data recorded includes:

- Actual run time; default is based on the quantity processed and the routing run time. Note that Actual Run Time defaults to 0 when Auto Labor Report is Yes in the routing record.
- Optionally, setup time based on the routing record. Set Backflush Setup to Yes to use this option.

- Quantity scrapped, including an optional reason code.

Note You can record scrap even when Use Cumulative Order is No. However, the quantity is only recorded as kanban transaction data. It is not available to Advanced Repetitive reporting functions.

The system uses Advanced Repetitive logic to determine GL impacts, including scrap, labor, and so on.

During backflush, the system bases the backflush location on the Location field in Kanban Process Maintenance. For the receipt location, it uses the Location field in the Kanban Transaction Control frame of Kanban Master Maintenance.

Other Transaction Methods

In addition to recording kanban transactions for individual cards using menu programs, you also can:

- Record consume transactions for several cards at the same time, based either on loop selection criteria entered in a menu program or on a comma-delimited file imported into the system.
- Automatically record ship transactions based on imported ASNs from the loop supplier.
- Automatically record fill transactions based on PO shipper receipts.

Batch Consume Programs

You can have the system select loops to have cards consumed using one of the following methods:

- Importing a file with consumption data. See page 121.
- Entering selection criteria, then specifying the number of cards to be consumed in each matching loop. See page 122.

After loops are identified using one of these methods, the system then searches eligible loops for active cards that can be consumed without violating transaction sequence rules defined in Kanban Master Maintenance. It searches for cards in the following order, based on the latest recorded kanban transaction event:

- 1 Fill
- 2 Ship
- 3 Acknowledge
- 4 Authorize
- 5 Consume

For multiple cards within an event status, the system selects cards based on the authorize date and time, with the oldest cards selected first.


When a card is consumed using either program, the system changes the card status to Authorized or Empty Accumulate, based on the accumulator logic specified in Kanban Master Maintenance. It also creates a kbtr_hist record for a Consume event.

Importing Consumption Data

Use Kanban Consumption Import (17.22.19.20) to import a comma-delimited file, such as a comma-separated values (CSV) file.

Note This program records consumption events only for cards in loops with Source Type set to Supplier in Kanban Master Maintenance.

Fig. 1.59
Kanban Consumption Import (17.22.19.20)

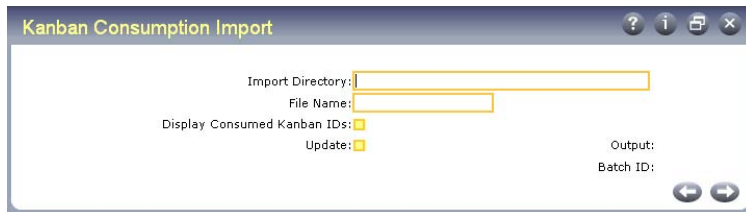

Each record in the file must contain the following three values in the order shown:

- 1 A valid kanban item defined in Kanban Item Master Maintenance (17.22.1)
- 2 A valid supplier code defined in Supplier Maintenance (2.3.1)
- 3 A decimal number representing the quantity to be consumed

The system uses the item and supplier in each record to identify loops that are eligible for card consumption.

Important If multiple loops are identified, the following fields in Kanban Master Maintenance (17.22.4) must have the same values for all selected loops. Otherwise, an error message displays.

- Kanban Quantity
- Quantity Mismatch Method
- Rounding Threshold

After selecting eligible loops for the specified item sourced by the specified supplier, the system calculates the required number of cards by dividing the quantity to consume in the import file by the kanban quantity in Kanban Master Maintenance.

Note A loop must include at least one active card to be considered by this program. If a loop is found but it has no active cards, the system still displays the message No kanban loops exist.

If the quantity to consume is not a multiple of the kanban quantity, the system uses the Quantity Mismatch Method specified in Kanban Master Maintenance to determine rounding rules.

See page 69.

The system searches across all eligible loops for cards that can be consumed.

Important Because the system prioritizes cards based on the authorize date and time, this may result in the selection of cards from more than one loop.

If sufficient cards are not available among eligible loops to account for the required quantity to consume, no cards are updated. An error message displays on the output report.

To determine the specific cards consumed, set Display Consumed Kanban IDs to Yes. Otherwise, the output report includes summary information only.

You can run the program in simulation mode by setting Update to No.

Specifying Consumption by Loop

Use Supplier Kanban Consumption (17.22.19.21) to select a batch of cards to be recorded as consumed. The selection logic is based on loop data rather than specific kanban card IDs. You can limit the number of loops selected by using more specific selection criteria.

Note This program records consumption events only for cards in loops with Source Type set to Supplier in Kanban Master Maintenance.

Fig. 1.60
Supplier Kanban Consumption (17.22.19.21)

In the Kanban Loops frame, the system displays a list of loops that meet the selection criteria. It includes the total number of active cards and the number of cards currently with a Full status.

To specify the number of cards to consume for each loop, select a record from the Kanban Loops frame. The system displays the Kanban Master Data frame for the loop. Enter the number of cards to consume and press Go. The system updates the Consume Cards column in the Kanban Loops frame.

Fig. 1.61
Supplier Kanban Consumption, Kanban Loops and Master Data

Kanban Loops						
Item Number	Item Description	Supermkt Site	Supermkt	Active Cards	Full Cards	Consume Cards
mat-1	process KB item	matsite1	matinv	30	3	0
mat-1	process KB item	matsite1	mat55	10	0	0
mat-3	purchase KB item	matsite1	matinv	1	0	0

Kanban Master Data			
Item Number: mat-1	process KB item		Step: 33
Supplier: matsupp		PO:	Line: 0
SM Site: matsite1	Supermkt: matinv	Kanban Qty: 100.0	
Cards Consumed: 2		Display State Analysis: ☐	

Optionally, set Display State Analysis to Yes to display an additional frame summarizing the number of cards in each transaction state.

Fig. 1.62
Supplier Kanban Consumption, State Analysis

Kanban Card State Totals								
Card Type	Active Code	Empty Accum	Empty Auth	Acknow	Shipped	Full	In Process	Total
Repl	Active	0	20	0	0	0	0	20
Repl	Close	0	0	0	0	0	0	0
Repl	Cycles	0	0	0	0	0	0	0
Repl	Period	0	0	0	0	0	0	0
Repl	Inactive	6	41	0	0	4	0	51
Repl	Total	6	61	0	0	4	0	71

When you have completed entering values and press Go from the Kanban Loops frame, the system displays a summary frame showing the total number of cards that will be updated, as well as the total quantity they represent. Optionally, you can include a list of the IDs of consumed cards on the output report. When you press Go from this frame with Update set to Yes, the system updates the number of cards specified for each loop.

Automatic Ship Transactions

EDI ECommerce Document Import (35.1) imports ASNs to create PO shipper documents. When the shippers are for supplier items controlled using kanban loops, the system automatically updates kanban card status and creates kanban transaction history (kbtr_hist) to indicate that the kanban has been shipped. Because the supplier's ASN does not include a kanban ID, the system searches for loops that have cards to be shipped based on data from the inbound ASN.

Important Before selecting a loop that is eligible to have cards shipped, the system validates that Kanban Supplier is Yes in Supplier Maintenance (2.3.1) for the loop's supplier. Otherwise, kanban data is not updated during import of ASNs from that supplier.

To determine which loops can have cards selected, the system first attempts to match the purchase order and line from the ASN line to loop records set up in Kanban Master Maintenance, first for discrete purchase orders and then for orders released from a blanket PO. If no loops are found, the system continues to search for loops based on item number and supplier address code. If the search does not find any qualifying loops, the system continues to process the ASN without creating kanban records.

Important If the search results in the selection of multiple loops, the following fields in Kanban Master Maintenance must have the same values for all loops. Otherwise, an error message displays and the PO shipper cannot be created from the ASN.

- Kanban Quantity
- Quantity Mismatch Method
- Rounding Threshold

After identifying one or more loops, the system calculates the required number of cards by dividing the quantity shipped (converted into the inventory unit of measure as required) by the kanban quantity in Kanban Master Maintenance.

If the quantity shipped is not a multiple of the kanban quantity, the system uses rounding rules defined in Kanban Master Maintenance.

The system then searches all eligible loops for active cards that can be filled without violating transaction sequence rules defined in Kanban Master Maintenance. It searches for cards across all loops in the following order, based on the latest recorded kanban transaction event, until it finds a sufficient number:

- 1 Acknowledge
- 2 Authorize
- 3 Consume
- 4 Fill
- 5 Ship

For multiple cards within an event status, the system selects cards based on the authorize date and time, with the oldest cards selected first. In some cases, this may result in the selection of cards from more than one loop.

See “Quantity Mismatch Method” on page 69.

Important The ASN creation process can be completed only if each individual shipper line is completed successfully. For example, if sufficient cards are not available to meet the quantity shipped on a line, the system displays an error message and rolls back any database updates that took place as part of import processing.

Automatic Fill Transactions

When you receive items that are tracked using the Kanban module, PO Shipper Receipt (5.13.20) automatically updates kanban card status and creates transaction history (kbtr_hist) to indicate that the kanban has been filled. Because the supplier’s shipping document does not include a kanban ID, the system searches for loops that have cards to be filled based on PO shipper data.

Important Before selecting a loop that is eligible to have cards filled, the system validates that Kanban Supplier is Yes in Supplier Maintenance for the loop’s supplier. Otherwise, kanban data is not updated during receipt of PO shippers from that supplier.

To determine which loops can have cards selected, the system first attempts to match the purchase order and line from the PO shipper to loop records set up in Kanban Master Maintenance, first for discrete purchase orders and then for orders released from a blanket PO. If no loops are found, the system continues to search for loops based on item number and supplier address code. If the search does not find any qualifying loops, the system continues to process inventory receipts without creating kanban records.

Important If the search results in the selection of multiple loops, the following fields in Kanban Master Maintenance must have the same values for all loops. Otherwise, an error message displays and the PO shipper cannot be received.

- Kanban Quantity
- Quantity Mismatch Method
- Rounding Threshold

After identifying one or more loops, the system calculates the required number of cards by dividing the quantity received (converted into the inventory unit of measure as required) by the kanban quantity in Kanban Master Maintenance.

If the quantity received is not a multiple of the kanban quantity, the system uses rounding rules defined in Kanban Master Maintenance.

The system then searches all eligible loops for active cards that can be filled without violating transaction sequence rules defined in Kanban Master Maintenance. It searches for cards across all loops in the following order, based on the latest recorded kanban transaction event, until it finds a sufficient number:

- 1 Ship
- 2 Acknowledge
- 3 Authorize
- 4 Consume
- 5 Fill

For multiple cards within an event status, the system selects cards based on the authorize date and time, with the oldest cards selected first. In some cases, this may result in the selection of cards from more than one loop.

See “Quantity Mismatch Method” on page 69.

The system then changes the card status to Full and creates a Fill kbtr_hist record for each selected card.

Note There is not necessarily a one-to-one relationship between inventory transaction history (tr_hist) and kanban transaction history (kbtr_hist) records created by this program. For example, you receive a PO shipper line for a quantity of 100, with 50 into location 1 and 50 into location 2. This results in two tr_hist records. However, because the kanban quantity is 20, the system generates a kbtr_hist record for each of five cards. Each kbtr_hist record is linked to both tr_hist records.

Important The PO shipper receipt process can be completed only if each individual line is received successfully. For example, if sufficient cards are not available to meet the received quantity requirement for a PO shipper line, the system displays an error message and rolls back the inventory and kanban transactions created by all lines on the shipper.

View Kanban Transactions

You may want to review kanban transaction information, but not know the specific transaction number. The following programs let you start with either the item number or the kanban card ID and use the system to search for transaction details:

- Item/Loop/Card Transaction View (17.22.19.8) lets you display kanban and inventory transaction data for individual cards starting with a specific item. After you enter the item number and, optionally, a transaction date range, all kanban master records associated with the item display. You can select a kanban record to display every kanban card that exists for that kanban. You can view kanban transactions for individual cards and any inventory transaction records that exist for the kanban transaction.

- Item/Loop Transactions View (17.22.19.9) lets you display kanban and inventory transaction data for kanban loops starting with a specific item. After you enter the item number and, optionally, a transaction date range, all kanban master records associated with the item display. You can select a kanban record to display every transaction history record that exists for that kanban, with the most recent transaction first. Then, select a transaction to drill down on the transaction detail.
- Kanban Card Transactions View (17.22.19.10) displays all kanban transactions associated with a specific kanban card. You can select a transaction to view the transaction details and optionally display inventory transactions created by the kanban transaction when they are available.

Fig. 1.63

Item/Loop/Card Transaction View (17.22.19.8)

Fig. 1.64

Item/Loop/Card Transaction View, Kanban Master

Item	Source	Source1	Source2	Source3	SuperMkt	SuperMkt	One/Two
0	Process	MAT	m100		MAT	MFIN	One

Fig. 1.65

Item/Loop/Card Transaction View, Kanban Cards

Kanban	Card	Card	Count	Active	Oldest	Newest	Newest
60889	Repl	Auth	2	☒	06/10/2003 07:58:04	06/10/2003 07:58:12	07:58:12
60890	Repl	Auth	2	☒	06/10/2003 07:58:12	06/10/2003 07:58:12	07:58:12
60891	Repl	Auth	2	☒	06/10/2003 07:58:19	06/10/2003 07:58:27	07:58:27
60892	Repl	Auth	2	☒	06/10/2003 07:58:27	06/10/2003 07:58:27	07:58:27
60893	Repl	Auth	2	☒	06/10/2003 07:58:38	06/10/2003 07:58:42	07:58:42
60894	Repl	Auth	2	☒	06/10/2003 07:58:42	06/10/2003 07:58:42	07:58:42
60895	Repl	Auth	2	☒	06/10/2003 07:58:47	06/10/2003 08:00:17	08:00:17
60896	Repl	Auth	2	☒	06/10/2003 08:00:17	06/10/2003 08:00:17	08:00:17
60897	Repl	Auth	2	☒	06/10/2003 08:00:21	06/10/2003 08:00:27	08:00:27
60898	Repl	Auth	2	☒	06/10/2003 08:00:26	06/10/2003 08:00:27	08:00:27

Generate Dispatch Lists

Use Kanban Dispatch List Processing (17.22.18.1) to generate a report on empty kanbans that are ready for replenishment. Depending on the format you select and the way your system is set up, the system can also communicate the list to the loop supplier by e-mail, fax, or electronic data interchange (EDI).

Use kanban dispatch lists to:

- Communicate from consuming destinations back to their supplying sources that the card is authorized for replenishment.
- Notify a supplying source of all empty kanban containers being returned.
- Notify a consuming destination of all empty kanban containers being picked up.

Additionally, you can use this program to generate a list of cards that have already been dispatched by setting Dispatch Status to Dispatch.

Typically, dispatch lists are used to signal a supplier that empty kanban containers need replenishment. When purchased items are included in a dispatch list, you can automatically release blanket purchase orders (POs) for those items. You can also generate dispatch lists for loops provided by processes and supermarkets.

This program typically selects cards from supplier loops with a current status of authorized, as well as cards in process loops moving between FIFO processes. However, you can control card selection by status code using the associated fields.

Note Only kanban loops with Dispatch List set to Yes in Kanban Master Maintenance are included in dispatch list reports.

Before running this function with Update Dispatched Cards set to Yes, you should run it once with that field set to No. This produces a report of the updates that will be made based on the selection criteria, but does not update the database to indicate that the cards have been dispatched.

Note You cannot run the program in simulation mode when you are sending dispatch lists in EDI format.

Each time the system generates a dispatch list in update mode, it stores a representation of the list in the database. Each list is assigned a unique dispatch ID. When you generate the dispatch list in EDI format, the system uses this identifier to create a kanban schedule release.

See “Dispatch ID” on page 31.

Note The system generates an ID only when Update Dispatched Cards is Yes.

A dispatch record is created for each individual card when it is dispatched, which includes information about the loop as well as the card itself. You can use programs on the Kanban Dispatch Menu (17.22.18) to:

- Update several fields in the dispatch record. See page 132.
- View dispatch records based on the dispatch ID, card ID, or various other selection criteria. See page 133.

Dispatch List Format

You can sort dispatch lists by supplying source, destination supermarket, or both.

Dispatch lists are always output in report format. In addition, you can:

- Create a report in fax format and optionally save the fax report to an output file in your working directory.
- Send dispatch lists to e-mail addresses and create an e-mail report.
- Create the dispatch list in EDI format and communicate it using EDI ECommerce. See “EDI Dispatch List Transmittal” on page 131.

The output mode settings for each loop are defined in Kanban Master Maintenance.

Releasing Purchase Orders

You can choose to release blanket POs for purchase receipt type kanbans when a dispatch list is generated. This option is available only when Update is Yes.

The blanket order number assigned to the supplying source in Kanban Master Maintenance is used to release a PO. If the Purchase Order field is blank, the system searches for the oldest open PO for the item and supplier that can fulfill the entire kanban quantity. If an open PO cannot be found or an open PO cannot fulfill the entire kanban quantity, an error displays and a PO is not released for that item.

Fig. 1.66
Kanban Dispatch List Processing (17.22.18.1)

The screenshot shows the 'Kanban Dispatch List Processing' window with the following fields and options:

- Item Number:** [Field]
- To:** [Field]
- Supermarket Site:** [Field]
- To:** [Field]
- Supermarket:** [Field]
- To:** [Field]
- Source Site:** [Field]
- To:** [Field]
- Source:** [Field]
- To:** [Field]
- Buyer/Planner:** [Field]
- To:** [Field]
- Authorize Date:** [Field] 00:00:00
- To:** [Field] 99:99:99
- Source Type:** Supplier
- Report By:** 1
- Source By Item:** [Field]
- Detail/Summary:** Detail
- Dispatch Status:** Pending
- Incl- Accum:** [Field]
- Auth:** [Field]
- Acknow:** [Field]
- FIFO:** [Field]
- No-Card Loops:** [Field]
- Transmission By- EDI:** [Field]
- E-Mail:** [Field]
- Fax:** [Field]
- Fax File:** [Field]
- Update Dispatched Cards:** [Field]
- Release Blanket POs:** [Field]
- Copy Edited Tax Records from Blanket PO:** [Field]
- Output:** [Field]
- Batch ID:** [Field]

Item Number/To. Enter a range of kanban item numbers to be included in the dispatch list.

Kanban items are identified using Kanban Item Master Maintenance.

Supermarket Site/To. Enter a range of sites that use kanban loops as sources of supply to be included in the dispatch list.

Supermarket/To. Specify a range of supermarkets supplied by kanban loops to be included in the dispatch list.

Source Site/To. Enter a range of sites associated with processes or supermarkets that supply kanban loops to be included in the dispatch list.

Source/To. Enter a range of source identifiers for kanban loops to be included in the dispatch list. Sources can be kanban manufacturing processes, inventory supermarkets, or supplier addresses.

Buyer/Planner/To. Enter a range of buyers or planners for the system to use as selection criteria in choosing kanban transaction records.

The buyer is the person responsible for planning and ordering items.

If you specify a buyer/planner code, the system processes only items associated with this person in Item Master Maintenance (1.4.1).

Authorize Date/To. Enter ranges of dates and times that kanban cards to be included in the dispatch list were authorized for replenishment.

Source Type. Enter a source type to limit the kanban loops included in the dispatch list:

- Inv: The item is supplied from the inventory of a kanban supermarket.
- Process: The item is manufactured by a kanban process.
- Supplier: The item is purchased from an external supplier.

If you set this field to blank, all loops that meet the other selection criteria are included in the dispatch list.

Report By. Specify how the dispatch list is sorted. Valid values are:

- 1: Source, then item (the default)
- 2: Destination supermarket, then item
- 3: Both source and supermarket by item
- 4: Source, then date
- 5: Destination supermarket, then date
- 6: Both source and supermarket by date

Detail/Summary. Specify the level of detail to include on the dispatch list report output.

Detail (the default): The report includes a line for each card.

Summary: The report includes only total quantities for each loop.

Dispatch Status. Specify the dispatch status of cards to be selected for processing.

- Pending (the default): The selection is limited to cards that have the Dispatch field set to Yes on the card record. The system automatically sets Dispatch to Yes when the card is authorized; depending on the card status, you may be able to set the field manually in Kanban Card Maintenance. See “Maintain Cards” on page 100.
- Dispatch: Only cards that have Dispatch set to No are selected. When you select this option and set Update Dispatched Cards to No, you can generate a report on dispatched cards for loops meeting the selection criteria.
- All: Cards meeting the selection criteria are selected regardless of dispatch status.

Accumulate. Specify whether cards with a status of Empty-Accumulate are included in the selection. The default is No.

Authorized. Specify whether cards with a status of Authorized are included in the selection. The default is Yes.

Acknowledged. Specify whether cards with a status of Acknowledged are included in the selection. The default is No.

FIFO. Specify whether cards with a status of In FIFO Process are included in the selection. The default is Yes.

Note This setting only has an effect on process loops that include FIFO processes.

No-Card Loops. Specify whether the report should list a loop even if the loop currently has no cards to be dispatched based on their current status.

- No (the default): Cards are selected for dispatch only when their current status matches the associated selection criteria.
- Yes: The report identifies all loops matching the loop selection criteria. However, when no cards match one of the specified status codes, the report indicates that no cards are available for dispatch.

Note Regardless of this value, loops are only included in the report when Dispatch List is Yes in Kanban Master Maintenance.

E-mail. Enter Yes to e-mail dispatch lists for loops that have E-mail Dispatch List set to Yes in Kanban Master Maintenance. The selected records are grouped and e-mailed by e-mail address using the same sequencing as the printed report.

To determine the e-mail address or addresses to use, the program first looks at the source and supermarket e-mail address fields in Kanban Master Maintenance. If these fields are blank, the system uses the following logic to search for an e-mail address:

- For the destination supermarket, it uses the e-mail address specified in Supermarket Maintenance.
- If the loop's source type is an external supplier, the system uses the e-mail address defined in Supplier Maintenance (2.3.1).

Note You can enter supplier e-mail addresses only if you use the PRO/PLUS Supplier Performance module.

- If the loop's source type is an inventory supermarket or process, the program does not search further.

If an e-mail address cannot be determined, the program ignores the kanban transaction record.

Fax. Enter Yes to create a report in fax format for loops that have Fax Dispatch List set to Yes in Kanban Master Maintenance. The selected records are grouped and printed by fax number using the same sequencing as the printed report.

To determine the fax number or numbers to use, the program first looks at the source and supermarket fax number fields in Kanban Master Maintenance. If these fields are blank, the system uses the following logic to search for a fax number:

- For the destination supermarket, it uses the fax number from Supermarket Maintenance. If no number is specified, it searches for a company address record for the supermarket site and uses the associated fax information.
- If the loop's source type is an external supplier, the system uses the fax number defined in Supplier Maintenance.
- If the loop's source type is an inventory supermarket or process, it searches for a company address record for the supermarket or process site and uses the associated fax information.

If a fax number cannot be determined, the report is printed without a number.

Fax File. Optionally, enter the name of the fax output file. The fax report is saved to a file without an extension in your working directory.

EDI. Enter Yes to create card dispatch records in EDI format and transmit them to the loop supplier using EDI ECommerce. See page 131.

Update Dispatched Cards. Enter Yes to create a report of all kanban transactions selected using the selection criteria. The selected kanban transactions are updated with the current date and time to prevent them from being selected again the next time a dispatch list is processed.

When this field is No, the system generates a simulated report showing the cards that will be included on the dispatch list.

Note Because creating an EDI dispatch list requires EDI ECommerce to create repository records, you cannot run this program with EDI set to Yes and Update Dispatched Cards set to No.

Release Blanket POs. Enter Yes to automatically release POs from blanket orders associated with supplier kanbans during dispatch list processing.

You can access this field only when Update is Yes.

When the purchase order specified in Kanban Master Maintenance is a blanket order, the system will attempt to automatically release a PO from that blanket order. If a kanban loop does not have a blanket order associated with it or the specified order does not have a sufficient open quantity, the program looks for the oldest open PO that can fulfill the entire kanban quantity for the item and supplier. If a PO cannot be found that fulfills the entire kanban quantity, an error displays and a PO is not released for that kanban.

Copy Edited Tax Records from Blanket PO. Enter Yes to copy any manually edited tax details from the blanket orders to the released POs. Otherwise, enter No to overwrite manually edited tax details with the current blanket order tax data. Tax data is defined for the entire blanket order, but the tax details for line items can be manually edited.

EDI Dispatch List Transmittal

You can use EDI ECommerce to export a kanban dispatch list in the form of a special type of shipping schedule that includes typical schedule data such as the item, purchase order number, quantity, and due date, along with kanban-specific data such as the card ID, supermarket site and ID, and so on.

See *User Guide: EDI eCommerce* for information.

To send dispatch lists in EDI format, you must:

- Define EDI ECommerce transformation records, including appropriate definitions for an application document, exchange file, implementation, and transformation map.

Note The export gateway that supports this feature uses the same SNF and the same exchange definition as standard 830 and 862 schedules. Although a kanban-specific implementation definition is required, you can use the current Schedule exchange definition for exporting dispatch lists.

- Correctly set up EDI ECommerce trading partner cross-references between the receiving site and the kanban loop supplier, including the following settings in Trading Partner Parameter Maint (35.13.10):

- Send Kanban Dispatch: logical parameter set to Yes
- Kanban Dispatch Doc Name: character parameter set to Kanban-Dispatch
- Kanban Dispatch Doc Ver: integer parameter set to 1
- Ensure that the loop is associated with a valid, open purchase order in Kanban Master Maintenance, or that a blanket purchase order matching the supplier and item is available for release.
- In the Kanban Master Maintenance Dispatch List Processing frame, set EDI to Yes for the loop.
- In Kanban Dispatch List Processing, set EDI to Yes.

When those conditions are met and Update Dispatched Cards is Yes, the system attempts to create an EDI ECommerce application document repository record and populate it as specified in the applicable implementation definition. If it succeeds, it next begins the export process, transforming the document based on mappings in the transformation definition and creating records in the exchange repository. Finally, the system creates a standards neutral format (SNF) file that can be sent as specified for the supplier's transmission group.

If any errors occur before the system successfully creates the repository record, the Kanban Dispatch List Processing output report displays related error messages and does not dispatch the card. For example, if the purchase order associated with a loop has been closed, cards cannot be added to the dispatch list.

Maintaining Dispatch Records

Use Kanban Dispatch Maintenance (17.22.18.2) to:

- View dispatch-related information associated with a specific card that has been authorized for replenishment and communicated to the loop supplier using Kanban Dispatch List Processing.
- Update several values associated with the kanban dispatch cycle.

Select a dispatch ID and kanban card ID—both are required fields—to display several items of information from the detail record, such as:

- Loop identification information, including the item, step, supermarket, and so on.
- Dispatch list information, including the dispatch date and time, as well as transmittal information for fax and e-mail lists.
- For lists transmitted using EDI ECommerce, the system-displays two system-assigned numbers. These fields are always set to 0 for non-EDI lists.
 - The EDI session number assigned when the system attempts to start the EDI load process. You can use this number in EDI ECommerce to track errors that occurred during list processing.
 - The sequence number assigned when the card record is successfully loaded into the application document repository.

Most of the fields are display only. Depending on card-related events, the date and time fields may include system-created data. As required, you can update them. For example, you might want to associate a ship date with a dispatched card even though it has not been recorded in Kanban Ship.

Fig. 1.67
Kanban Dispatch Maintenance (17.22.18.2)

The screenshot shows the 'Kanban Dispatch Maintenance' window with the following fields and values:

- Dispatch ID: DL050801000000007
- Kanban ID: 12518
- Item Number: kbitem3
- SM Site: kbsite1
- Source Type: Supplier
- Source: kbsup
- Closed: ☐ (highlighted)
- Due Date: 08/03/2005 (calendar icon)
- Ship Date: (calendar icon)
- Fill Date: (calendar icon)
- Source Fax:
- Source E-mail:
- Date: 08/01/2005
- EDI Session Number: 0
- Kanban item 3
- Kanban Site 1
- Source Site:
- PO Number: kbb11010
- Blanket: kbb11
- EDI MFG Sequence: 0
- Step: 0
- Supermarket: kbsm1
- Line: 1
- Line: 1
- Ship Time: 00:00:00 (highlighted)
- Fill Time: 00:00:00 (highlighted)
- Source Fax [2]:

Closed. Specify whether this kanban card dispatch record is closed. When this is Yes, the card has completed the dispatch cycle associated with the current dispatch ID.

When a card is dispatched, this field is set to No. The system updates it to Yes when one of the following takes place:

- The card is recorded as received.
- On a process loop for a FIFO operation, the card is recorded as shipped, but actually is just moving to a subsequent FIFO operation.
- Even if one of those events has not occurred, the card has been dispatched again.

You can update this field manually.

When Closed is Yes, the system does not update the ship or fill date when an associated event takes place.

Due Date. Optionally enter or update the date this kanban is due to be filled at the destination supermarket.

This defaults from the date on the card detail record.

Ship Date and Time. Optionally update or enter the date and time (based on a 24-hour clock) this kanban was shipped by the supplier.

The system updates this field when:

- The card is recorded in Kanban Ship.
- An ASN associated with the card is processed by EDI ECommerce Document Import.

Fill Date and Time. Optionally update or enter the date and time (based on a 24-hour clock) this kanban was filled.

The system updates this field when:

- The card is recorded in Kanban Fill/Receive.
- A shipment associated with the card is received using PO Shipper Receipt.

Viewing Dispatch Records

Three programs on the Kanban Dispatch Menu let you view several types of data regarding dispatched cards.

The two view programs are described here. The third, Dispatch Report (17.22.18.7), is a standard report that lets you generate summary or detailed reports based on a variety of selection criteria.

Dispatch View by Dispatch ID (17.22.18.4)

Use this program to view dispatch data associated with a specific kanban card, based on the assigned dispatch ID.

If you know the dispatch date, you can narrow the list of available records by entering a start date, which defaults to today. Otherwise, you can clear the date field. The system then displays all dispatch IDs when you access the lookup on that field.

Optionally, set Open Only to Yes to limit the selection to cards that have not completed the dispatch cycle.

When you press Go, the system displays all the items included on the selected dispatch list, along with loop information such as the source type, source ID, and purchase order, when appropriate, as well as the total quantity dispatched.

Fig. 1.68

Dispatch View by Dispatch ID (17.22.18.4)

Item Number	UM	Source Type	Source Site	Source	PD Number	PD line	Quantity Dispatched
rvwitem	EA	Supplier	rvwsup		0	10.00	

Select an item and press Go to list all the cards for that item. For each card, the system displays the following dispatch information:

- The card dispatch quantity.
- Whether the dispatch is open or closed; when a dispatch is closed, it has completed the dispatch cycle by being sent to the loop supplier, shipped, and filled.
- As appropriate, the associated due, ship, and fill dates.
- If the card was sent using EDI, the associated document sequence.

Fig. 1.69

Dispatch View by Dispatch ID, Card Selection

Kanban ID	Quantity Dispatched	Status	Due Date	Ship Date	Fill Date	EDI Seq
7146	10.00	Closed	03/01/2005			112233
7147	10.00	Open	03/18/2005			112233

To view an additional level of information, select a card and press Go. The system lists individual kanban transactions and summary data. Select a transaction and press Go to view transaction history details. If the selected transaction has associated inventory history, the system prompts you to display the records.

Fig. 1.70
Dispatch View by Dispatch ID, Transaction Selection

Kanban Transactions						
Trans Number	Kanban Event	Trans Date	Trans Time	Kanban Quantity	User ID	User Reference
47666	Deact	07/06/2005	09:32:20	10.0	rvw	
47663	Dispatch	06/30/2005	13:59:04	10.0	rvw	
47662	Dispatch	06/30/2005	13:47:05	10.0	rvw	
47660	Dispatch	06/30/2005	13:45:32	10.0	rvw	
47658	Dispatch	06/30/2005	13:41:13	10.0	rvw	
47656	Dispatch	06/30/2005	13:37:09	10.0	rvw	
47654	Dispatch	06/30/2005	13:35:25	10.0	rvw	

Dispatch View by Source/Item (17.22.18.5)

This program displays the same data as Dispatch View by Dispatch ID. In this case, the selection is based on loop information.

Fig. 1.71
Dispatch View by Source/Item (17.22.18.5)

Dispatch View By Source/Item

Source Type: Item Number:

To start a specific search, enter both a source type and item number. If you want to start with a more generalized selection, enter a value in only one of the fields.

The system displays another level of selection criteria. The fields displayed are based on the information entered in the first frame.

For example, if you enter Supplier in the Source Type field and do not specify an item, the second frame includes a Supplier field. If you specify both a source type and an item, the second frame prompts you to narrow the selection by specifying the destination site and supermarket for the item, as well as a range of dispatch dates. To see all dispatch lists that include that item, leave these additional fields blank.

Fig. 1.72
Dispatch View by Source/Item, Additional Selection Criteria

Dispatch View By Source/Item

Item Number: 20015 FG20015

Site: Supermarket:

From Date: To Date:

Open Only: ☐

If you do not enter an item number in either of these two frames, the system then displays a list of items matching the selection criteria. Select an item to display associated dispatch IDs, starting with the earliest dispatch date and time. The list includes summary information about the dispatch.

Fig. 1.73
Dispatch View by Source/Item, Dispatch Selection

Dispatch ID	Source Site	Source	PO Number	PO line	Quantity Dispatched
DL050715000000008		matsupp		0	2,100.00
DL050715000000008		matsupp	mat100	2	40.00
DL050722000000001		matsupp	mat100	3	2,000.00
DL050722000000007	matsite1	m100		0	20,500.00
DL050722000000017	matsite1	matwip		0	50.00

Select a dispatch ID to display all the cards included on it. Just as in Dispatch View by Dispatch ID, you can then drill down to kanban and inventory transaction detail records.

Delete and Archive Kanban Transaction Records

The system keeps all of your kanban transaction records online for an unlimited time. There is no automatic purge of this information at period or year end. To delete kanban transaction records along with any associated kanban card dispatch detail records, use Transaction Delete/Archive (17.22.19.23).

First, run the program without actually deleting any records by setting Delete to No. Review the resulting report before setting Delete to Yes, then run the program again to delete the transaction records that match the selection criteria. When Archive is Yes, the system copies the selected records to an ASCII file that can be reloaded using Archive File Reload (36.16.5).

Note When dispatch history records exist, this program deletes and archives them with the related kanban transaction history.

Using Analysis and Scheduling Tools

Kanban includes several tools for analyzing the effectiveness of kanban and supermarket sizing based on actual and projected requirements, as well as generating optimized level schedules.

Evaluate Supermarkets

Two programs let you view the historical or projected performance of kanban supermarkets in meeting demand without holding excessive inventory:

- Use Historical Buffer Evaluation (17.22.20) to determine how often the supermarket buffer dropped below user-defined warning and critical parameters during a specified number of past days.
- Use Supermarket Workbench (17.22.23.2) to analyze the potential future ability of the supermarket buffer to meet projected requirements.

Optionally, you can update the supermarket buffer size from either program. The system modifies the Buffer Maximum field in Kanban Master Maintenance (17.22.4) to reflect the changes.

See “Supermarket Information” on page 56.

Historical Buffer Evaluation

Use Historical Buffer Evaluation (17.22.20) to evaluate how effective your supermarkets are in maintaining an appropriate level of inventory, as well as to update supermarket and kanban loop data based on the evaluation. Ideally, appropriately sized supermarkets contain adequate inventory to avoid stock shortages under all but the most extreme circumstances, without holding excessive amounts of inventory.

You can set up warning and critical limit zones for a supermarket buffer in Kanban Master Maintenance. Historical Buffer Evaluation reports on the number of times, during the specified number of historical days, that the supermarket inventory level fell below the warning and critical

levels. Based on whether inventory has fallen below these levels, the program output includes a recommended new buffer size for the supermarket. When you choose to update the kanban loop based on the new buffer size, the system displays action messages related to kanban sizing.

Fig. 1.74
Historical Buffer Evaluation (17.22.20)

In the first frame, enter a supermarket site, as well as other optional criteria for selecting supermarket buffers for evaluation. Specify the number of historical days to be used in the analysis, and whether the output report should include all items or only those for which the system recommends changes in the supermarket buffer.

Note Site is the only required field.

Fig. 1.75
Historical Buffer Evaluation, Historical Data

Item Number	Step	Below Warning	Below Critical	Exposure Quantity	No Stock	New Buf	Update
0001	1	0	0	0.00	0	No	☐
0002	1	20	20	4412.53	20	Yes	☐
0003	1	2	1	495.00	1	No	☐
0005	1	3	1	15.68	0	No	☐
0006	1	1	1	99.00	1	No	☐
0007	1	3	0	0.00	0	No	☐
0008	1	2	2	56.34	1	Yes	☐
0101	3	3	3	447.00	0	Yes	☐

The second frame displays historical buffer data for the selected items:

Below Warning. The number of times during the evaluation period that a kanban consume/post or fill transaction caused the supermarket inventory to fall below the warning percentage or quantity range.

Below Critical. The number of times during the evaluation period that a kanban consume/post or fill transaction caused the supermarket inventory to fall below the critical percentage or quantity range.

Exposure Quantity. The cumulative total difference between the supermarket inventory level and the critical limit for all the times during the specified period that inventory fell below the critical limit.

No Stock. The number of times during the evaluation period that the supermarket ran out of this item.

New Buffer. When Yes, the system has recommended a new buffer size for this item, displayed in the last frame.

Update. Indicates whether the supermarket buffer will be updated for this item. The system updates this field based on the value of the Update field in the next frame.

Fig. 1.76
Historical Buffer Evaluation, Update Frame

Item Number: 20001	FG20001	Step: 0
Supermarket Site: 2005	Supermarket: 100	UM: EA
Source Site: 2005	Source: pace	
Buffer Size: 250.0	New Buffer Size: 340.0	
Warning Limit: 66.0	Limit Display: PCT	
Critical Limit: 33.0	As Of:	Update: ☐

The next frame displays the recommended maximum buffer size for the supermarket. Set Update to Yes to have the system automatically update the kanban loop quantity, as well as the warning and critical level values, based on the values shown in this frame. You can accept these default values or change them as needed. You also can adjust these three fields manually using Kanban Master Maintenance.

When you finish reviewing and updating data, press End. The system redisplay all the selected items (see Figure 1.75) with Update set to Yes on items that will be updated. When you press End again, the system prompts you to confirm the update. Respond Yes to update the database and generate a report on modified buffer sizes and kanban sizing recommendations. Respond No to exit without changing the database.

The system resizes the appropriate kanban loops to support the updated buffer size. Based on the setting of the Calc Cards/Qty field in Kanban Master Maintenance, the system updates either the number of cards or the kanban quantity. If the number of cards changes, the system displays messages regarding how many cards should be added or activated/inactivated using programs on the Kanban Card Management menu.

Note These are similar to the updates made when you run Supermarket Workbench for a kanban loop.

Supermarket Workbench

Use Supermarket Workbench (17.22.23.2) to simulate the anticipated performance of an inventory supermarket based on future demand. Demand sources include forecast, sales orders, customer schedules, return material authorizations (RMAs), material orders, and intersite demand. For reference, the program calculates and displays level schedules, then calculates the buffer size at the end of each day based on the level schedule and demand for the day.

Color codes identify days when the buffer falls below specified levels. For example, if no buffer quantities have dropped below the critical limit, the supermarket might have too much inventory.

See “Warning and Critical Limit Values” on page 142.

You can simulate the effects of changing the buffer size on supermarket performance by entering a target buffer size, and use the results of the simulation to modify supermarket and kanban sizing parameters.

Optionally, you can view a graph of current and modified supermarket buffer size during the planning horizon period.

When you save your changes, the system updates kanban loop data in the following Kanban Master Maintenance (17.22.4) fields, as appropriate:

- Buffer Maximum

- Number of Cards
- Kanban Quantity
- Safety Stock
- Variability

Click Audit Report to review simulated changes before saving them to the database.

Note This program is most useful when used to evaluate the effectiveness of supermarkets supplied by pacemaker processes, rather than by other supermarkets or external suppliers.

Use Historical Buffer Evaluation (17.22.20) to review the effectiveness of supermarket sizing based on actual, rather than simulated, performance.

See page 136.

Prerequisites

Before evaluating future supermarket buffer performance with this workbench, be sure you have set up the following data:

- Kanban item records using Kanban Item Master Maintenance (17.22.1). See page 36.
- Manufacturing process definitions using Kanban Process Maintenance (17.22.3). See page 42.
- Supermarket definitions using Supermarket Maintenance (17.22.2). See page 50.
- Kanban item loop definitions using Kanban Master Maintenance (17.22.4). See page 52.
- Supermarket demand data using Average Demand Calculation (17.22.9). See page 75.

Using the Program

Important Although the program displays as a menu item in other interfaces, Supermarket Workbench runs only in the QAD Desktop and QAD .NET user interfaces.

Supermarket Workbench consists of multiple frames, as well as several control buttons that display at the bottom of the program screen. Click the appropriate button to perform the following functions:

- **Save:** Click Save when you finish analyzing the effects of a supermarket size change and want to update the database.
- **Refresh:** Replace the workbench data with the original values from the database. If you have updated the Target Buffer Size field, the system prompts you to continue. If you continue the refresh without clicking Save, any changes you made in the workbench are lost.
- **Recalculate:** Update calculated fields based on changes you make to the Target Buffer Size field. This updates the workbench, but no changes are made to the database until you click Save.
- **Audit Report:** View a report comparing the baseline data with updates that will take place when you click Save. Use this feature to analyze the effects of your changes before modifying the database.
- **Graph:** Plot the current and target supermarket buffer quantities remaining over the specified planning horizon.

In the initial frame, select kanban loop records by entering a combination of site and other data to uniquely identify a kanban supermarket, as well as the start date and the number of days the system should include in the planning horizon.

You also can reconcile cards from within the workbench by setting Card Reconciliation to Yes in the Selection Criteria frame. The system compares the current number of active cards to the optimum number and displays the number of out-of-balance loops in the Reconcile/Print Cards frame. This is the same way card reconciliation works in the kanban workbenches. See “Reconcile Cards” on page 83.

Fig. 1.77
Supermarket Workbench (17.22.23.2), Selection Criteria Frame

The system displays two frames of data based on the source type for the loop that supplies the selected supermarket:

- For all source types, the Primary Data frame shows the number of active cards and the kanban size, as well as the critical and warning limit levels set in Kanban Master Maintenance. These limits display as quantities, even when Limit Display is set to Pct in the kanban master record.
- For all source types, the Detail Data frame displays more information from Kanban Master Maintenance, including the order quantity, order point, variability factor, demand percent, safety stock, safety time, and replenishment time.
- Only for loops that are supplied by a process, the Detail Data frame also includes several values from Kanban Process Maintenance, including the every-part-every (EPE) interval for the item, process function, and takt time, as well as the pitch time, quantity, and UM for the process. For loops supplied by an external supplier or a kanban supermarket, these fields are blank.

See “Source Data” on page 54.

Fig. 1.78
Supermarket Workbench, Primary and Detail Data Frames

These fields include values only when the supplying source is a process.

The Data frame at the bottom of the screen includes two fields.

Buffer Maximum. The system displays the current value of the Buffer Maximum field in Kanban Master Maintenance. See “Buffer Maximum” on page 56.

Target Buffer Maximum. You can update this field to analyze the effects of changing the buffer size. The default is the value of Warning Limit, rounded up based on the kanban quantity.

Fig. 1.79
Supermarket Workbench, Data Frame

Date	Demand	Available Time	Current Level Schedule	Buffer Remaining Quantity	Preliminary Level Schedule	Buffer Remaining Quantity	Target Level Schedule	Buffer Remaining Quantity
06/08/2003		00:00:00	0.0	0.0	0.0	100.0	0.0	100.0
06/09/2003		08:00:00	0.0	0.0	50.0	150.0	50.0	150.0
06/10/2003		08:00:00	0.0	0.0	50.0	200.0	50.0	200.0
06/11/2003		08:00:00	0.0	0.0	50.0	250.0	50.0	250.0
06/12/2003		08:00:00	0.0	0.0	50.0	300.0	50.0	300.0

The Data grid displays the information about the supermarket shown in Table 1.9.

Table 1.9
Supermarket Workbench, Data Grid Fields

Field	Description
Date	The grid includes a row for each day in the planning horizon, beginning with the start date.
Demand	The total of actual demand for the date plus daily forecast, calculated by prorating the weekly forecast over the number of active days in the week. Prorating for the current week assumes a Monday start date.
Available Time	The total time available to produce the kanban item. When the loop is supplied by a process, this is derived from the Available Time field in Kanban Process Maintenance. Since level schedules are calculated only for processes, this column is not significant for other source types.
Current Level Schedule	Based on demand and available time over the horizon period, as well as available time for the specific day, the system calculates the number of units to be produced on each day that the item is scheduled for production, rounded based on the kanban quantity. Not all items are necessarily scheduled for each day; for example, this is not possible if the EPE interval is greater than one day.
Buffer Remaining Quantity	The system displays the quantity remaining in the supermarket each day after adding the current level schedule quantity and subtracting the demand. Note The Current Inventory row displays the result of multiplying the kanban quantity by the number of replenishment cards, with the exception of those with a status of Empty Accumulate. Those cards are not yet authorized based on accumulator settings in Kanban Master Maintenance.
Preliminary Level Schedule and Buffer Remaining Quantity	These calculations use the same logic as the current level schedule, but adjust the level schedule based on the supermarket size specified in Buffer Maximum.
Target Level Schedule and Buffer Remaining Quantity	These calculations adjust the level schedule based on the updated value of Target Buffer Maximum.

Warning and Critical Limit Values

The system compares the values of Warning Limit and Critical Limit specified in Kanban Master Maintenance with the Buffer Remaining Quantity values. These values are displayed for reference in the Primary Data frame.

Note If Limit Display is set to Pct in Kanban Master Maintenance, the system multiplies the Buffer Maximum value by that percentage to display the limits as quantities. When Limit Display is Quantity, the system displays the specified limits.

When the remaining buffer falls below a limit, the system color codes the buffer value for the day as follows:

- Yellow: The buffer level is below the critical limit.
- Orange: The buffer level has reached or fallen below 0 (zero).

Generate Level Schedules

A level schedule is a production schedule that indicates the quantity of each item a process must produce during each shift to meet the calculated takt time over the specified planning period.

Kanban provides two methods of calculating and viewing a level schedule for your pacemaker manufacturing processes:

- Use Preliminary Level Schedule Report (17.22.14) to produce a simple, shift-by-shift production schedule.
- Use Level Mix Workbench (17.22.23.3) to analyze the historical mix percentage at pacemaker processes, as well as determine the future mix. You also can update flow schedules to support level scheduling of future demand.

Preliminary Level Schedule Report

Use Preliminary Level Schedule Report (17.22.14) to calculate the number of units that must be produced during each shift to meet takt time requirements of a process.

Takt time is calculated based on the setting of Takt Time Calculation specified in Kanban Process Maintenance:

- When Takt Time Calculation is EPEICalc, takt time is calculated when you run Basic Process Calculations or Kanban Process Workbench.
- When Takt Time Calculation is LvlMixWB, takt time is calculated when you run Level Mix Workbench.

See “Define Processes” on page 42.

Fig. 1.80
Preliminary Level Schedule Report (17.22.14)

Enter selection criteria to select processes to include in the report. The only required fields are the date range. You can include all processes or limit the selection to processes defined as pacemakers in Kanban Process Maintenance (17.22.3).

See “Pacemakers” on page 7.

This program uses calendar records defined in Process Shift Maintenance (17.22.13) to determine the total time available on each daily shift. To display individual types of exceptions defined in that program, enter up to five codes in Schedule Shift Adjustments. These fields default from Kanban Control (17.22.24). The system validates these values against entries in the Reference field in the Process Shift Maintenance Shift Adjustments frame. If more than five adjustment categories are included in the process shift records, the report output combines additional exception times in the Other column.

The system uses the process takt time to calculate a preliminary level schedule for the process, expressed in terms of level schedule units per shift, per day:

$$\text{Level Schedule Units} = \text{Total Available Minutes} / \text{Process Takt Time in Minutes}$$

See “Set Up Process Shifts” on page 49.

Figure 1.81 shows a sample of the report output.

Fig. 1.81
Preliminary Level Schedule Report Output

Site: MAT			Process: m100			Pacemaker: Yes			Process Takt Time (D H:M:S): 0 00:02:24		
Date	Day of Week	Shift	Shift Hours	Meeting	Maint				Other	Available Hours	Level Sch Units
06/09/03	Monday	1	8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200
06/09/03	Total:		8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200
06/10/03	Tuesday	1	8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200
06/10/03	Total:		8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200
06/11/03	Wednesday	1	8.00	-1.00	0.00	0.00	0.00	0.00	0.00	7.00	175
06/11/03	Total:		8.00	-1.00	0.00	0.00	0.00	0.00	0.00	7.00	175
06/12/03	Thursday	1	8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200
06/12/03	Total:		8.00	0.00	0.00	0.00	0.00	0.00	0.00	8.00	200

Level Mix Workbench

Use Level Mix Workbench (17.22.23.3) to perform several major functions for your pacemaker processes:

- Calculate the volume of all parts that must be run each day, based on the time available and the takt time.

- Determine the mix of the various items produced in the process. The past mix is determined by analyzing historical demand to find what percentage the item represented of the total volume of items sold. Additionally, the system looks at forecasts and customer orders to calculate the percentage this item represents in terms of anticipated future volume. You can override the future mix percent of the items based on the total demand volume for the process.
- Calculate a suggested daily level schedule by shift for each item based on the established process volume, mix, pitch, EPEI, and the sequence in which items are produced by a process. This level schedule can be manipulated and modified based upon management decisions and other factors or it can be accepted as calculated. One of the factors that may influence whether the level schedule is accepted or modified is an evaluation of future inventory performance based on calculations in Supermarket Workbench.
- Update the master production schedule (MPS). Once you are satisfied that the leveled mix is within the level volume and the buffer performance is acceptable, you can send the new schedule back to the MPS in the form of updated flow schedules.

See “Pacemakers” on page 7.

Prerequisites

Before calculating level schedules with this workbench, be sure you have set up the following data:

- Kanban base data including:
 - Kanban items using Kanban Item Master Maintenance. See page 36.
 - Default tolerance percent for mix and volume variance using Kanban Control. See page 25.
- Pacemaker processes and the items they produce using Kanban Process Maintenance. See page 42.
- Supermarkets using Supermarket Maintenance. See page 50.
- Kanban loops for the items produced at the pacemaker processes using Kanban Master Maintenance. See page 52.
- The time available at the process for each shift using Process Shift Maintenance. See page 49.
- Optionally, depending on how process items have been defined, item total setup and run times using Process Item Operation Rollup. See page 50.
- Flow schedule base data, including adding the items to the production line referenced in the process record, using programs on the Flow Menu (17.21). Flow schedules may or may not already be set up for the item on the production line. See *User Guide: Manufacturing*.

Using the Program

Important Although Level Mix Workbench displays as a menu item in other interfaces, it runs only in the QAD Desktop and QAD .NET user interfaces.

Level Mix Workbench consists of multiple frames, as well as several control buttons that display at the bottom of the program screen. Click the appropriate button to perform the following functions:

- **Save:** Click Save when you are finished analyzing the effects of changes and want to update the database.

- **Refresh:** Replace the workbench data with the original values from the database. If you modified any fields, the system prompts you to continue. If you continue the refresh without clicking Save, any changes you made in the workbench are lost.
- **Recalculate Totals Only:** Update calculated fields based on changes you have made without creating a level schedule.
- **Recalculate:** Update calculated fields based on changes you have made. This updates the workbench and calculates the level schedule, but no changes are made to the database until you click Save.
- **Audit Report:** View a report comparing the baseline data with updates that will take place when you click Save. The report also shows the level schedule that will be generated using the current workbench values. Use this feature to analyze the effects of your changes before modifying the database.
- **Calculate Audit:** After clicking Update, view a report showing the basis for the level mix calculations, including an interval-by-interval summary of how quantities were allocated to shifts.

Fig. 1.82
Level Mix Workbench (17.22.23.3)

The screenshot shows the 'Level Mix Workbench' window with a 'Selection Criteria' tab. The form contains the following fields and controls:

- Site:** A dropdown menu showing 'MAT' with a magnifying glass icon.
- Process ID:** A dropdown menu showing 'M100' with a magnifying glass icon.
- Historical Days:** A text input field with the value '0'.
- Future Days:** A text input field with the value '30'.
- Tolerance Percent:** A text input field with the value '0'.
- Time Fence Days:** A text input field with the value '0'.
- Schedule Time Adjustments:** A row of buttons labeled 'Meeting' and 'Maint'.

In the Selection Criteria frame, identify a manufacturing process by entering a combination of site and process ID.

Note The system limits the process selection to pacemakers—processes that have Process Function set to PACE in Kanban Process Maintenance. See page 42.

Historical Work Days. Enter the number of days of historical data the system should use in average mix percentage calculations. Default is 30.

Future Days. Enter the number of days the system should use in selecting future demand records. Default is 30.

This value must be greater than 0 (zero) and greater than the value entered in Time Fence Days.

Time Fence Days. Enter the number of calendar days into the future, starting from today, when flow scheduled orders are considered frozen and will not be automatically rescheduled by the workbench—although the system updates these schedules with any manual changes you save in the workbench. This value defaults from Kanban Control (17.22.24).

This must be less than the value entered in Future Days. When the field is 0 (zero), no schedules are frozen.

Tolerance Percent. Specify the allowable tolerance percentage between the total amount planned to be scheduled and the total amount actually scheduled. This value defaults from Kanban Control.

The system displays a warning when scheduled quantities are outside this percentage.

Schedule Time Adjustments. Optionally enter up to five reference codes related to calendar adjustments specified in Process Shift Maintenance (17.22.13). The system validates entries against that program.

These fields default from Kanban Control.

To modify or enter adjustments in Level Schedule Workbench, click the Level Volume and Calendar tab and subtab for the appropriate shift. You can then update hours associated with reference codes as needed. The system updates the adjustment records in Process Shift Maintenance for each day you modify.

Time adjustments are typically used to identify such exceptions to the standard shift calendar as holidays or irregularly scheduled meetings that cannot be accounted for by shortening the shift hours.


See “Set Up Process Shifts” on page 49.

The Process Data frame summarizes information about the process from the record defined using Kanban Process Maintenance (17.22.3).

See “Define Processes” on page 42.

Note If this frame does not display, click the hide/show icon on the right of the Process Data title bar to view it.

Fig. 1.83
Level Mix Workbench, Process Data Frame

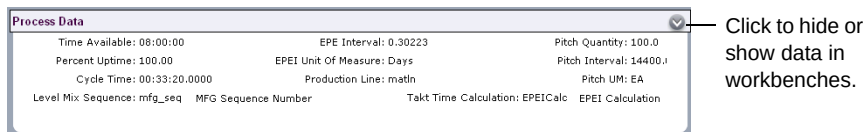

The Data frame displays a set of tabs that you can click to select functions within Level Mix Workbench:

- **Mix Analysis:** This tab is selected when you launch the program. Initially, it displays the average historical mix percent of items produced by the process.
- **Individual shifts:** Use these tabs to adjust quantities per item on each shift.
- **All Shifts:** The system displays updated per-item summaries of the total schedule for the day.
- **Level Volume and Calendar:** Click to display shift subtabs, which let you view calendar and volume information. Optionally, you can enter or update time adjustments for each shift.

Mix Analysis

Use Mix Analysis to analyze the average historical mix percent of items produced at a process during the period specified in the Historical Days field, as well as the future mix percentages based on demand data for the period specified in Future Days. You can update the system-calculated future mix percent as needed, as well as identify a change in the buffer quantity for each item. When you click Recalculate, the system updates the workbench with a shift-by-shift level schedule to support the new mix.

Fig. 1.84
Level Mix Workbench, Mix Analysis Tab

Data									
Mix Analysis Shift1 Shift2 Shift3 Shift4 All Shifts Level Volume and Calendar									
Level Schedule Takt Time: 0 00:34:30.0000					Modified Schedule Takt Time: ?				
Item	EPE Interval	Historical Demand	Historical Demand Mix Percentage	Future Demand	Future Demand Mix Percentage	Override Production Mix Percentage	Override Production	Buffer Adjustment	Quantity to Schedule
20001	1.000	0.0	0.00	95.0	23.75	50	200	0.0	200
20002	1.000	0.0	0.00	70.0	17.50	17.50	70.0	0.0	70.0
20003	1.000	0.0	0.00	40.0	10.00	10.00	40.0	0.0	40.0
20004	1.000	0.0	0.00	0.0	0.00	0.00	0.0	0.0	0.0
20005	1.000	0.0	0.00	100.0	25.00	25.00	100.0	0.0	100.0
20101	0.000	0.0	0.00	95.0	23.75	23.75	95.0	0.0	95.0
Totals		0.0	0.00	400.0	100.00	126.25	505	0.0	505

Note When you modify an editable field, the system does not automatically update all related calculations within the Mix Analysis grid. To update all the related fields without generating a level schedule, click Recalculate Totals Only.

Table 1.10 summarizes the data included on the Mix Analysis tab.

Table 1.10
Mix Analysis Tab Fields

Field	Description
EPE Interval	Display only. The item EPEI from Kanban Process Maintenance. Unless Auto EPEI is set to No, this is the same as the process EPEI from the Process Data frame.
Historical Demand	Display only. The total demand for the item during the period defined in Historical Days.
Historical Demand Mix Percentage	Display only. The percent of total process demand for the specified historical period represented by this item.
Future Demand	Display only. The total demand for this item during the period defined in Future Days. Depending on the Forecast Consumption settings in Sales Order Control (7.1.24), this might include quantities from past-due sales orders.
Future Demand Mix Percentage	Display only. The percent of total process demand for the specified future period represented by this item.
Override Production Mix Percentage	Defaults to percentage of total future demand for all process items represented by this item. You can update this field. The system displays a warning if the total percentage for all items does not equal 100%. When you change the value, the system updates Override Production.
Override Production	Display only. Default is the same as Future Demand. If you update Override Production Mix Percentage, the system displays the product of the new percentage and the total process demand quantity.
Buffer Adjustment	Defaults to 0. Optionally enter a positive or negative number that temporarily changes the quantity of this item being scheduled. For example, you can use this field to increase inventory for seasonal changes in demand.
Quantity to Schedule	Display only. The quantity that will be included in the level schedule, calculated as the sum of Override Production and Buffer Adjustment.

Field	Description
Quantity to Schedule Mix Percentage	Display only. The percentage of the total quantity to schedule represented by this item.
Average Daily Quantity	Display only. The average quantity of this item to be produced during each work day. Calculated by dividing Quantity to Schedule by the number of work days.
Standard Pack	Display only. This is the package size specified in Kanban Master Maintenance for the loop on which this process is the pacemaker. If there is no loop record, the value defaults to 1.
Kanban Quantity	Display only. This is the number of items per kanban specified in Kanban Master Maintenance for the loop on which this process is the pacemaker.
Cycle Time	Display only. The process-item cycle time from Kanban Process Maintenance.
Number of Operators Required	Display only. Based on the current demand, this is the number of operators needed to meet the production requirements. The system calculates this value as the item work time (in seconds) divided by the process takt time.

Shift Tabs

Use the individual shift tabs to view and update daily schedules for each process item. When you click Recalculate, the system updates settings on the Mix Analysis tab to reflect the new values. When you click Save, the system updates flow schedules for the production line supporting this process.

Note Click All Shifts to view a summary by item for all shifts.

Fig. 1.85
Level Mix Workbench, Shift Tab

Use horizontal scrolling to view more items.

Data										
Mix Analysis	Shift1	Shift2	Shift3	Shift4	All Shifts	Level Volume and Calendar				
Date	M001	M002	M003	M004	M005	Available Hours	Current Schedule Hours	Current Schedule Units	Level Schedule Units	
06/06/03	200.0	100.0	100.0	27.0	0.0	8.0	8.0	427.0	426.1904766	
06/07/03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
06/08/03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
06/09/03	150.0	100.0	100.0	77.0	0.0	8.0	8.0	427.0	426.1904766	
06/10/03	150.0	50.0	50.0	114.0	63.0	8.0	8.0	427.0	426.1904766	
Modified Qty to Schedule	3200.0	1650.0	1600.0	1501.0	1016.0	168.0	168.0	8967.0	8950.000009	
Modified Qty to Schedule Mix %	35.69	18.40	17.84	16.74	11.33	Level Schedule Takt Time: 0.019				
Total Planned Qty	3199.6	1600.3	1550.1	1500.0	1100.0	Modified Schedule Takt Time: 0.019				
Total Planned Mix %	35.68	17.85	17.29	16.73	12.27					

Save

Refresh

Recalculate Totals Only

Recalculate

Audit Report

Although the grid includes four shift tabs by default, the system only displays data for shifts that have hours defined in Process Shift Maintenance. Shifts with no hours defined display 0 (zero) values in all fields.

Note Schedules for days within the Time Fence Days period specified in the Selection Criteria frame are shaded in yellow. The system does not update these fields when calculating a level schedule. However, you can modify the fields manually. The system updates the associated flow schedules when you save your changes.

The shift tabs include the display-only fields shown in Table 1.11.

Table 1.11
Shift Tab Fields

Field	Description
Modified Qty to Schedule	The total modified quantity of this item to be scheduled during the planning period.
Modified Qty to Schedule Mix %	The total modified quantity for an item for the shift divided by the total quantity of all items scheduled for the shift during the planning period.
Total Planned Qty	The total quantity of the item planned for the shift during the planning period.
Total Planned Mix %	The total quantity planned for an item for the shift divided by the total quantity of all items scheduled for the shift.
Available Hours	The total hours available for work during the shift. This is the value from the Level Volume and Calendar tab.
Current Schedule Hours	The total hours required on this shift to meet the current schedule.
Current Schedule Unit	The quantity of this item currently scheduled to be produced during this shift, not considering level scheduling.
Level Schedule Units	The level-scheduled quantity of this item to be produced during this shift.

Level Volume and Calendar Tab

Click this tab to display a series of subtabs that let you view a level schedule summary for the selected shift or for all shifts. After you have selected a shift for viewing, click the shift number to maximize or minimize the tab. This lets you view multiple shift records at the same time; you can use horizontal scrolling to move between shifts.

Fig. 1.86
Level Mix Workbench, Level Volume and Calendar Tab

Click subtabs to display additional shifts.

Date	Hours	Meeting	Maint	Other	Available Hours	Level Schedule Units
06/06/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/07/03	0.0	0.0	0.0	0.0	0.0	0.0
06/08/03	0.0	0.0	0.0	0.0	0.0	0.0
06/09/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/10/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/11/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/12/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/13/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/14/03	0.0	0.0	0.0	0.0	0.0	0.0
06/15/03	0.0	0.0	0.0	0.0	0.0	0.0
06/16/03	8.0	0.0	0.0	0.0	8.0	426.1904766
06/17/03	8.0	0.0	0.0	0.0	8.0	426.1904766

For each date in the planning period specified in Future Days, the system displays the data shown in Table 1.12.

Note This is similar to the data generated by Preliminary Level Schedule Report (17.22.14). See page 142.

Table 1.12
Level Volume and Calendar Tab Fields

Field	Description
Hours	The number of hours defined for the shift in Process Shift Maintenance.
Adjustments	Up to five columns display times associated with adjustments identified in the Selection Criteria frame. These adjustments are identified in Process Shift Maintenance; the column label is the value of the Reference field specified in the adjustment record. If you modify a field and click Recalculate, the system adjusts the time available in level schedule calculations. When you click Save, the system updates the adjustment record in Process Shift Maintenance for that date.
Other	This column includes other time adjustments defined in Process Shift Maintenance. The value includes the total of all time adjustments not shown in the other columns. For example, if you do not enter any values in Schedule Time Adjustments, the system totals all the adjustment values and displays the total in Other. This column also displays adjustments entered with Reference left blank. You cannot update this column.
Available Hours	The system adjusts Hours by the values of time adjustments and the Other value to display the total time available to the process on this day.
Level Schedule Units	This is the total quantity of items scheduled for the day, calculated by dividing the available hours (in minutes) by the process takt time (in minutes).

Generating Reports

Table 1.13 lists kanban reports and inquiries with a brief description of their purpose.

Table 1.13
Kanban Reports

Report	Description
Inventory Validation Report (17.22.15)	Shows differences between the inventory represented by full replenishment cards and the on-hand inventory balance of the supermarket location. The report compares the two quantities and uses a tolerance percentage specified in Kanban Master Maintenance to identify out-of-tolerance situations. Another field in Kanban Master Maintenance, Lag Factor, lets you specify the number of kanbans that are typically in process for each loop. The system applies this factor to the on-hand balance before comparing the inventory levels. You can use this report to identify situations that might require an audit of card status or an inventory cycle count.
Kanban Card Inquiry (17.22.16.3)	Shows kanban loop and card data for a specific card.
Kanban Card Status Report (17.22.16.13)	Lists kanban status data for all the cards in selected loops.
Kanban Card Audit Report (17.22.16.14)	Compares the system-recommended number of kanban cards for a kanban loop to the actual number of active kanban cards in that loop. You can optionally print the report with a page break inserted at each different supplying source so the report can be distributed to each supermarket for verification of actual kanban card amounts.
Dispatch View by Dispatch ID (17.22.18.4)	Displays dispatch data for individual cards based on dispatch ID and kanban ID.
Dispatch View by Source/Item (17.22.18.5)	Displays dispatch data for individual cards based on loop information.
Dispatch Report (17.22.18.7)	Provides card dispatch information for selected loops; includes option to include card-by-card details.
Item/Loop/Card Transaction View (17.22.19.8)	Displays kanban and inventory transaction data for individual cards based on item number.
Item/Loop Transactions View (17.22.19.9)	Displays kanban and inventory transaction data for kanban loops based on item number.
Kanban Card Transactions View (17.22.19.10)	Displays all kanban transactions associated with a specific kanban card.
Kanban Transaction History Inquiry (17.22.19.10)	Displays transaction history record for a specified kanban transaction.
Kanban Transactions Audit Report (17.22.19.15)	Lists kanban transaction history records by various selection criteria associated with the loop, supplying source, or cards.

Report	Description
Authorized Card Report (17.22.19.17)	Provides summary data on selected replenishment cards that have a status of Auth. For two-card loops, move cards are not included, regardless of their status. When the specified source is a FIFO process, the output also includes replenishment cards with a status of In FIFO. See “FIFO Lanes” on page 7.
Missing Kanbans Report (17.22.19.18)	Kanbans are sized to print the exact number of cards that fulfill the demand for the kanban-controlled item. When a kanban card is lost or destroyed, it can impact inventory levels negatively. This report determines the time elapsed between the last time a transaction was entered for a specific kanban card and the current date and time. If the amount of elapsed time is greater than the maximum kanban cycle specified for that kanban, the missing kanban card is included in the report. Use the Maximum Cycle fields in Kanban Master Maintenance (17.22.1) to define the maximum kanban cycle for each kanban. Kanbans with blank Maximum Cycle fields are ignored by this report.

Using External Applications

This chapter describes how to export Kanban information to data files that can be used by external applications, as well as how to return modified data to your QAD database.

Introduction to External Kanban Applications 154

Explains why there are external kanban applications and lists their names and menu numbers.

Kanban Workbenches 154

Explains how to import and export files and data so workbench functions can be performed by external applications and create new loops and records based on external files.

Supermarket Workbench 166

Explains how to import and export files and data so Supermarket Workbench (17.22.23.2) functions can be performed by external applications.

Level Mix Workbench 169

Explains how to import and export files and data so Level Mix Workbench (17.22.23.3) functions can be performed by external applications.

Introduction to External Kanban Applications

As an alternative to the three workbench programs available through the QAD Desktop and QAD .NET user interfaces, the system includes tools for exporting Kanban data to a comma-delimited file. You can then load the records into your specialized application such as a spreadsheet, manipulate data as needed, and import modified records back to the QAD database. Loop and process data are automatically updated based on the changes you make.

Optionally, you can have the system reconcile loops based on modified data, inactivating or adding cards as needed. You also can create new kanban loop records, as well as other database records needed to support them, based on an imported file.

This chapter describes the export and import programs used to exchange Kanban data with an external application, as well as the record structures of the files used as the interface between the two systems.

Note This field cannot be viewed or updated through the user interface.

Important A critical element of all three export/import procedures is an internal key created in the kanban master table (knb_mstr). The Kanban Loop ID field (knb_primary_key) uniquely defines each loop in the system. This has the following implications on manipulating records with an external application:

- When you use Kanban Workbench Import, the system uses this ID to determine whether you are updating an existing loop or creating a new one. When an imported record does not include a value in the field, the import process attempts to create a new loop.
- With that exception, all records imported back to the system must contain the valid loop ID that was included in the export file.

The following sections describe how to export and import files so that you can use an external application to perform the same functions as the following programs:

- Kanban Sizing Workbench
- Kanban Process Workbench
- Supermarket Workbench (17.22.23.2)
- Level Mix Workbench (17.22.23.3)

Kanban Workbenches

This section describes how to export and import files. Using these features, you can:

- Perform many of the functions of the kanban workbenches using an external application.
- Create new kanban loops and related records based on the content of external files.

See page 78.

Exporting Kanban Workbench Data

Use Kanban Workbench Export (17.22.23.13) to generate a data file containing records that you can use in an external application to size kanban loops, as well as analyze the effects of modifying several other aspects of loops and supplying processes. You can then format the updated values as

an import file, import it into the system, update the associated loop records, and optionally reconcile the number of cards based on the updated values, as well as print new and activated cards.

Fig. 2.1
Kanban Workbench Export (17.22.23.13)

Optionally enter ranges of selection criteria to identify the loop data to be exported. Use the following fields to control other aspects of export processing:

Option. Specify the types of kanban sources to be included in the export. Valid values are:

- 1: Export Only Supplier Sources
- 2: Export Only Inventory Sources
- 3: Export Only Process Sources
- 4: Export All Source Types (default)

Export Directory. Optionally enter the path to the directory where this program places the exported file. This value defaults from Kanban Control (17.22.24).

When the field is blank, the system uses the working directory.

See “Control Program” on page 25.

File Name. Enter the name of the file that will contain the exported data.

Although the system generates a comma-delimited file, it does not add an extension. For example, if you want the file to be accessible to an external application that recognizes comma-separated value files, add `.csv` to the file name.

Export. Enter Yes to export selected data to a comma-delimited file. To review a report on which records will be selected without generating a file, run the program first with this field set to No and Report set to Yes. After reviewing the resulting report and adjusting the selection criteria as needed, run the program again with Export set to Yes.

Report. Enter Yes to generate a report identifying basic data about loops that will be selected for export.

Table 2.1 shows the structure of the file created by Kanban Workbench Export. The values in the fields are the same as those the system loads into the kanban workbenches.

See page 78.

Important This is not the same record structure required by Kanban Workbench Import. Importing a file with the export structure will fail. See Table 2.2 on page 159.

Table 2.1
Kanban Workbench Export File Definition

Field Name	Format	Description
knb_primary_key	decimal	Kanban Loop ID; internal keyid of knb_mstr record
part	character	Item
source_site	character	Source site
source	character	Source ID of the process, supermarket, or supplier
source_type	character	Source Type: Process, Supermarket, or Supplier
supermarket_site	character	Supermarket site
supermarket	character	Supermarket
daily_demand	decimal	Average daily demand
demand_um	character	Demand UM
demand_method	character	Demand method
demand_pct	decimal	Demand percent
replenishment_time	integer	Replenishment time (in seconds)
fifo_time	integer	Internal FIFO time (in seconds)
fifo_ext_time	integer	External FIFO time (in seconds)
fixed_interval	integer	Fixed interval time (in seconds)
setup_time	integer	Setup time (in seconds)
cycle_time	integer	Cycle time (in seconds)
safety_stock	decimal	Safety stock
safety_time	decimal	Safety days (in decimal days)
var_factor	decimal	Variability factor
epei_current	decimal	EPEI—Current
epei_revised	decimal	EPEI—Revised (Defaulted from EPEI Current)
epei_auto_calc	Yes/No	EPEI auto calculation
order_qty	decimal	Order quantity
order_qty_mult	decimal	Order quantity multiple
pack_qty	decimal	Pack quantity
packs_per_kanban	decimal	Packs per kanban
kanban_qty	decimal	Kanban quantity
number_of_cards	integer	Number of cards
pitch_um	character	Pitch UM
pitch_um_demand	decimal	Demand in pitch UM
time_available	integer	Time available (in seconds)
pct_uptime	decimal	Uptime percentage
step	character	Step
pitch_um_conv_factor	decimal	Pitch UM conversion factor
epei_conv_factor	decimal	EPEI conversion factor
epei_display	character	EPEI display: Hours, Days, Weeks, Months
pacemaker	Yes/No	Pacemaker process indicator

Table 2.1 — Kanban Workbench Export File Definition — (Page 1 of 2)

Field Name	Format	Description
no_of_resources	decimal	Number of resources
min_process_epei	decimal	Minimum process EPEI
item_yield_pct	decimal	Item yield percent
lead_time_method	integer	Lead time method
load_limit	decimal	Load limit
min_process_item_epei	decimal	Minimum item EPEI
run_out_option	integer	Run-out option
fraction_kanban_percent	decimal	Fractional kanban
card_reporting	integer	Card reporting
cost_allocation	decimal	Cost allocation
run_out_setup	decimal	Run-out setup time
run_out_quantity	decimal	Run-out quantity
run_out_quantity_um	character	Run-out quantity UM
run_out_quantity_per	decimal	Run-out quantity per
run_out_quantity_per_um	character	Run-out quantity per UM
run_out_conv_factor	decimal	Run-out conversion factor

Table 2.1 — *Kanban Workbench Export File Definition* — (Page 2 of 2)

Importing Kanban Workbench Data

You can use Kanban Workbench Import (17.22.23.14) in two ways:


- After loading the data into an external application, updating it as needed, and saving it to a comma-delimited import file such as a comma-separated values (CSV) file, use Kanban Workbench Import to load data from the file into the system.
- In an import file, set up data records to create new loops, then import the file using Kanban Workbench Import. The system creates a new kanban master record for each loop defined, as well as supporting records as needed. See Table 2.6 on page 162.

As long as the individual records are correctly formatted, you can perform both types of tasks using the same file.

Important For the system to create a new loop based on imported data, the following import file values must already exist:

- Item number, defined in Item Master Maintenance (1.4.1)
- Supermarket site and, for process loops, process site, defined in Site Maintenance (1.1.13)
- For process loops, process ID, defined in Process Maintenance (17.22.3)
- For supplier loops, supplier address, defined in Supplier Maintenance (2.3.1)

Fig. 2.2
Kanban Workbench Import (17.22.23.14)

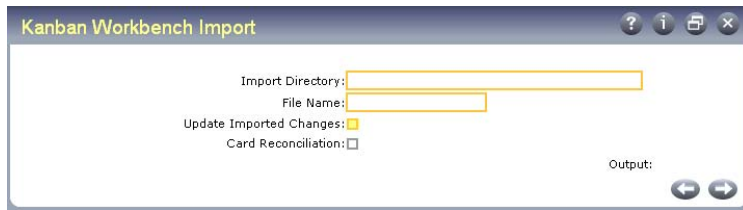

Import Directory. Optionally enter the path to the directory where this program looks for files to import. This value defaults from Kanban Control.

When the field is blank, the system looks for files in the working directory.

File Name. Enter the name of the file that contains the data to be imported into the system. Be sure to use the complete file name, including the extension.

This must be a comma-delimited file. For example, if the external application saves files in comma-separated values format, the file will have an extension of `.csv`.

Update. Specify whether the program immediately updates the database or just generates a report showing simulated before and after values. You can use this report to make sure that the results are what you expect before updating the database.

Card Reconciliation. Specify whether the system reconciles the number of cards in the loop with the optimum number. The value defaults from Kanban Control.

When the field is Yes:

- On updated loops, the system activates or creates new cards if more are needed, or inactivates excess cards, based on settings in Kanban Master Maintenance and Kanban Control. Additionally, if the loop needs to be regenerated because of a change to certain key values such as the kanban quantity, reconciliation creates a new set of cards.
- On loops created based on the imported file, the system creates the number of cards specified in the file.

When Card Reconciliation is No, no reconciliation takes place for existing or new loops.

See “Card Reconciliation” on page 27.

Print New Cards. Specify whether you want to print cards that were activated or created as part of the reconciliation process. This can be set to Yes only when Card Reconciliation is Yes.

This field displays only when Update is Yes.

Table 2.2 shows the structure of the import file that Kanban Workbench Import requires to work properly. The values in these fields are the same values you can update using the kanban workbenches.

See page 78.

Important The first record in the import file must contain only the literal string `kanban workbench`. Each subsequent record must include the fields shown in the table. Figure 2.3 shows an example of a correctly formatted import file. It contains a record that will update an existing loop as well as one that will create a new loop.

Note Fields shown in **bold** type are used only when the record is intended to create a new kanban loop—that is, when knb_primary_key is blank. Leave them blank when the record is intended to update an existing loop.

Table 2.2
Kanban Workbench Import File Definition

Field Name	Format	Description
knb_primary_key	decimal	Kanban Loop ID: Internal keyid of knb_mstr record exported from the system. When this field is blank, the system attempts to create a new kanban loop.
part	character	Item number
step	integer	Process step
site	character	Supermarket site
supermarket_id	character	Supermarket ID
source_type	character	Source type (enter number representing language detail value): • 1 - Supplier • 2 - Inv • 3 - Process
source_ref1	character	Value varies by source type: • Supplier: Supplier address • Process: Process site • Inventory: Source site
source_ref2	character	Value varies by source type: • Supplier: PO number • Process: Process ID • Inventory: Supermarket ID
source_ref3	character	PO line; used only when source type is supplier
epei_rev	decimal	EPEI
daily_demand_rev	decimal	Daily demand
demand_pct_rev	decimal	Demand percent
replenishment_rev	integer	Replenishment time (in seconds)
fifo_time_rev	integer	Internal FIFO time (in seconds)
fifo_ext_time_rev	integer	External FIFO time (in seconds)
safety_stock_rev	decimal	Safety stock
safety_time_rev	decimal	Safety days
var_factor_rev	decimal	Variability
order_qty_rev	decimal	Order quantity
order_qty_mult_rev	decimal	Order quantity multiple
kanban_qty_rev	decimal	Kanban quantity
number_of_cards_rev	integer	Number of cards
buffer_maximum_rev	decimal	Buffer maximum
order_point_rev	decimal	Order point
epei_auto_calc_rev	logical	EPEI auto calculate

Table 2.2 — Kanban Workbench Import File Definition — (Page 1 of 2)

Field Name	Format	Description
epei_conv_factor	decimal	EPEI conversion factor: Used to change the EPEI display value into days (as stored in the database)
no_of_resources	decimal	Number of resources
min_process_epei	decimal	Minimum process EPEI
lead_time_method	integer	Lead time method (enter number representing language detail value): • 1 - Fixed • 2 - Variable
load_limit	decimal	Load limit
min_process_item_epei	decimal	Minimum item EPEI
item_yield_pct_rev	decimal	Item yield percent
run_out_option_rev	integer	Run-out option (enter number representing language detail value): • 0 - No • 1 - Yes
fraction_kanban_percent_rev	decimal	Fractional kanban
card_reporting_rev	integer	Card reporting (enter number representing language detail value): • 1 - Standard • 2 - Add • 3 - Remove

Table 2.2 — Kanban Workbench Import File Definition — (Page 2 of 2)

Fig. 2.3**Sample Kanban Workbench Import File**

A data record beginning with blank key ID and including other key values creates a new loop.

```

Required as first record in file
kanban workbench
,mat-1,99,matsitel,matinv,1,matsupp],,10,,50,100,0,0,0,0,
0,0,100,0,5,100,100,,,1,,2,,,100,0,,1
1076,,,,,,10,,50,100,0,0,0,0,0,0,100,0,5,100,100,,,1,,2,,,
100,0,,1

```

A data record beginning with system-assigned kanban master key ID and no key values updates an existing loop.

Results in default or zero field value for non-mandatory fields.

Field Mapping for New Loops

To create a new loop definition based on the import file, the system generates a number of database table records. Some fields are populated with values from the import file; others default to predetermined values. This section identifies the source of each field in these records and relates the tables to menu programs.

Kanban Items

Table 2.3 shows how the system creates new kanban items when they are needed. These are the same records defined in Kanban Item Master Maintenance (17.22.1).

Table 2.3
Kanban Item Field Mapping

Kanban Item Master Maint Field	Source or Default	Notes
Item	Import file: part	Validated against existing items defined in Item Master Maintenance
Step	Import file: step	If not included in import file, set to 0
Routing Code	Blank	
BOM Code	Blank	
Container Type	Blank	
Minimum Item EPEI	Import file: min_process_item_epei	
Cost Allocation	100%	
Average Inv Calc Method	Standard	
Run-Out Option	No	
Run-Out Setup	0 00:00:00	
Run-Out Material	Blank	
Run-Out Quantity	0.0	
UM	Blank	
Run-Out Quantity Per	0.0	
Run-Out UM Conversion Factor	0.0000	
Comments	No	

Kanban Supermarkets

Table 2.4 shows how the system creates new supermarkets when they are required. These are the same records defined in Supermarket Maintenance (17.22.2).

A new supermarket is required only when:

- The supermarket_ID value in the import file does not exist for the specified site. In this case, the system creates a new destination supermarket.
- For an inventory loop, the source_ref2 value in the import file does not represent a valid supermarket at the site shown in source_ref1. In this case, the system creates a new source supermarket.

Table 2.4
Supermarket Field Mapping

Kanban Supermarket Maint Field	Source or Default
Description	Blank
Location Type	Inv
Inventory Location	Blank
Comments	No
Super Market Fax	Blank
Supermarket Fax[2]	Blank
Email	Blank

Kanban Process Items

Table 2.5 shows how the system creates new process item records when Source Type is Process. These are the same records created when you define process items using the Kanban Process Detail frame in Kanban Process Maintenance (17.22.3).

Table 2.5
Process Item Field Mapping

Kanban Process Maint Field	Source or Default
EPEI	Import file: epei_rev
EPEI Auto	Import file: epei_auto_calc_rev
Min EPEI	Import file: min_process_epei
Yield	100%
Mfg Seq #	0
Cycle Time	0
Setup Time	0
Other Time Fields	00:00:00

Kanban Loop Tables

To build a new kanban loop, the system creates a Kanban Master Maintenance record using the following key values from the import file:

- Item (existing or created by import)
- Step
- Supermarket site
- Supermarket ID (existing or created by import)

Table 2.6 shows how the system determines the remaining Kanban Master Maintenance values for new kanban loops.

Note By default, the system creates only one-card loops. You must manually adjust the loop in Kanban Master Maintenance after running the import if you need to include move cards.

Table 2.6
Kanban Master Field Mapping

Kanban Master Maint Field	Source or Default	Notes
Source Master Data frame		
Source Type	Import file: source_type	Must be either Supplier, Inv, or Process
Supplier (when Source Type is Supplier)	Import file: source_ref1	Must be valid supplier defined in Supplier Maintenance
Purchase Order (when Source Type is Supplier)	Import file: source_ref2	If not blank, must be valid purchase order
Line (when Source Type is Supplier)	Import file: source_ref3	If not blank, must be valid line on specified purchase order

Table 2.6 — Kanban Master Field Mapping — (Page 1 of 5)

Kanban Master Maint Field	Source or Default	Notes
Process Site (when Source Type is Process)	Import file: source_ref1	Must be valid site
Process ID (when Source Type is Process)	Import file: source_ref2	Must be valid process ID
Operation Range (when Source Type is Process)	0–9999	
Use FIFO (when Source Type is Process)	No	
Source Site (when Source Type is Inv)	Import file: source_ref1	Must be valid site
Supermarket (when Source Type is Inv)	Import file: source_ref2	Must be valid supermarket; cannot be same site/supermarket combination as destination site/supermarket
Supermarket Item Detail frames		
Order Point	Import file: order_point_rev	Warning displays when this is not a multiple of Kanban Quantity
Location Type	From Supermarket Maintenance for destination supermarket	Supermarket can already exist or be created by import
Inventory Location	From Supermarket Maintenance for destination supermarket	Supermarket can already exist or be created by import
Average Demand Template	Kanban Control	
Working Buffer	0	
Buffer Maximum	Import file: buffer_maximum_rev	Warning displays if value is less than Order Point or not a multiple of Kanban Quantity, Pack Quantity
Buffer Modified	No	
Limit Display	PCT	
Critical Limit	33	
Limit Modified	Blank	
Warning Limit	66	
Daily Demand	Import file: daily_demand_rev	
Variability	Import file: var_factor_rev	
Demand Modified	No	
Demand Percent	Import file: replenishment_rev	
Average Inv Calc Method	Standard	
Pack Quantity	1	

Table 2.6 — Kanban Master Field Mapping — (Page 2 of 5)

Kanban Master Maint Field	Source or Default	Notes
Package Type	Blank	
Count Tolerance	5	
Lag Factor	0.0	
Safety Stock	Import file: safety_stock_rev	Warning displays if safety stock is more than Buffer Maximum or Order Point
Safety Days	Import file: safety_days_rev	
Service Level	50%	
Safety Stock Template	From Kanban Control	
Safety Stock Method	Manual	
Peak Average Days	0	
SuperMarket Fax	From Supermarket Maintenance for destination supermarket	Supermarket can already exist or be created by import
SuperMarket Fax [2]	From Supermarket Maintenance for destination supermarket	Supermarket can already exist or be created by import
Email	From Supermarket Maintenance for destination supermarket	Supermarket can already exist or be created by import
One/Two Card	One	
Kanban Planner	Buyer/Planner field in Item Planning Maintenance record; if not found, same field in Item Master Maintenance; otherwise, blank	
Carrier (when Source Type is Supplier)	From Supplier Maintenance	
Carrier E-mail (when Source Type is Supplier)	From Supplier Maintenance	
Card Tracking Control frames		
Order Quantity	Import file: order_qty_revised	Warning displays if this is not a multiple of Kanban Quantity
Number of Cards	Import file: number_of_cards_rev	Warning displays if Number of Cards * Kanban quantity is not equal to Buffer Max
Kanban Quantity	Import file: kanban_qty_rev	Warning displays if this is not greater than Container Capacity
Container Capacity	1	Cannot be zero
Container Type	From Kanban Item Master Maintenance	Kanban item can already exist or be created by import

Table 2.6 — Kanban Master Field Mapping — (Page 3 of 5)

Kanban Master Maint Field	Source or Default	Notes
Print Quantity	From Kanban Control	
Print Barcode (Item Number and Kanban ID)	From Kanban Control	
User Reference	Blank	
Ship Delivery Pattern Code	Blank	
Point Of Use Location	Blank	
Delivery Location	Blank	
Order Quantity Multiple	Import file: order_qty_mult	
Ship Delivery Time Code	Blank	
Comments	No	
Dispatch List	Yes	
Fax Dispatch List	No	
E-mail Dispatch List	No	
Blanket PO Release	Yes when value in Purchase Order field represents a blanket PO; otherwise, No	
Source Fax, Src Fax[2], Source E-mail	Varies by source type: • Supplier: from Supplier Maintenance • Inv: from Supermarket Maintenance (existing or created by import) • Process: blank	
Repl Time	Import file: replenishment_revised	
FIFO Time Int	Import file: fifo_time_revised	
Ext	Import file: fifo_ext_time_revised	
Card Reporting	From Kanban Control	
Fractional Kanban	From Kanban Control	
Run Out Option	No	
Accumulator Type	Quantity	
Accum Interval	0	
Next date	Blank	
Next Time	00.00.00	
Regenerate Required	No	
Work Days (Sunday through Saturday)	No	All work times are set to 00:00:00.
Kanban Transaction Control frame		
Regeneration Enforcement	From Kanban Control	
Kanban Cycle Enforcement	From Kanban Control	

Table 2.6 — Kanban Master Field Mapping — (Page 4 of 5)

Kanban Master Maint Field	Source or Default	Notes
Qty Violation Method	Round	
Rounding Threshold	100.00	
Minimum Cycle	From Kanban Control	
Maximum Cycle	From Kanban Control	
Decrease at Consume	From Kanban Control	
PO Receipt Data Entry	From Kanban Control	
Lot Entry	From Kanban Control	
Component/Op Transactions	Yes when Source Type is Process and Destination supermarket's location type is Inv; otherwise, No	
Impact Inventory	No when: • Source Type is Process and destination supermarket's location types is WIP • Source Type is Inv, destination supermarket's location type is WIP, and source supermarket's location type is WIP Otherwise, Yes	
Use Control Prog Tran Settings	Yes	

Table 2.6 — Kanban Master Field Mapping — (Page 5 of 5)

Supermarket Workbench

This section describes how to export and import files that let you perform the functions of Supermarket Workbench (17.22.23.2) using an external application.

See page 138.

Exporting Supermarket Workbench Data

Use Supermarket Workbench Export (17.22.23.16) to generate a data file containing records that you can use with an external application to analyze the projected performance of a kanban supermarket based on future demand data.

Fig. 2.4
Supermarket Workbench Export (17.22.23.16)

The user interface is similar to Kanban Workbench Export. Additional fields include the following:

Pacemakers Only. Enter Yes to limit the data export to processes that have Process Function set to PACE in Kanban Process Maintenance. Otherwise, all processes meeting the other criteria are selected.

Start Date. Enter the first date on which the system selects future demand data for export.

Planning Horizon. Enter the number of days in the future that the system will consider in selecting demand records for export.

The default is 30.

See page 154.

Table 2.7 shows the structure of the file created by Supermarket Workbench Export. The values in the fields are the same as those the system loads into Supermarket Workbench.

See page 138.

The file includes two different record types:

- H: A header record
- D: Records to hold date, demand, and level schedule information (both Current and Preliminary level schedule)

The record type is in the first position of each record.

Table 2.7
Supermarket Workbench Export File Definition

Field Name	Format	Description
RECORD TYPE "H"		
knb_primary_key	decimal	Kanban Loop ID: Internal keyid of knb_mstr record
part	character	Item
step	character	Step
description	character	Item description
pitch_um	character	Pitch unit of measure

Field Name	Format	Description
source_site	character	Source site
source	character	Source ID of the process, supermarket, or supplier
source_type_literal	character	Source type: Process, Supermarket, or Supplier
supermarket_site	character	Supermarket site
supermarket	character	Supermarket
start_date	date	Start date
horizon	integer	Horizon days
buffer_maximum	decimal	Buffer maximum
order_point	decimal	Order point
order_qty	decimal	Order quantity
safety_stock	decimal	Safety stock
safety_time	decimal	Safety days (in decimal days)
replenish_lead_time	integer	Replenishment time (in seconds)
kanban_qty	decimal	Kanban quantity
active_card_count	integer	Active card count
pitch_quantity	decimal	Pitch quantity
pitch_interval	decimal	Pitch interval
takt_time	integer	Takt time (in seconds)
epei_interval	decimal	EPEI
epei_display	character	EPEI display: Hours, Days, Weeks, or Months
current_inventory	decimal	Current inventory quantity (in pitch UM)
pacemaker	Yes/No	Pacemaker process indicator
warning_limit	decimal	Warning limit quantity
critical_limit	decimal	Critical limit quantity
cycle_time	integer	Takt Time/Cycle Time (in seconds) • Pacemakers = Takt Time • Non-Pacemakers = Cycle Time • Non-Processes = 1
first_scheduled_date	date	First scheduled date
epei_in_secs	integer	EPEI in seconds
RECORD TYPE “D”		
knb_primary_key	decimal	Kanban Loop ID: Internal keyid of knb_mstr record
calculated_date	date	Date being scheduled
available_time	integer	Available time (in seconds)
total_demand	decimal	Total independent and dependent demand
level_schedule	decimal	Calculated level schedule
prelim_level_schedule	decimal	Calculated preliminary level schedule

Importing Supermarket Workbench Data

After loading the data into an external application, updating it as needed, and saving it to a comma-separated values (.csv) file, use Supermarket Workbench Import (17.22.23.17) to load data from the file into the system.

The user interface for this program is identical to Kanban Workbench Import.

See page 157.

Table 2.8 shows the structure of the import file that Supermarket Workbench Import requires to work properly. The Buffer Maximum field is the same one you can update using Supermarket Workbench.

See page 138.

Important The first record in the import file must contain only the literal string `supermarket workbench`. Each subsequent record must include the fields shown in the table.

Table 2.8
Supermarket Workbench Import File Definition

Field Name	Format	Description
knb_primary_key	decimal	Kanban Loop ID: Internal keyid of knb_mstr record exported from the system
buffer_maximum_revised	decimal	Buffer maximum

Level Mix Workbench

This section describes how to export and import files that let you perform the functions of Level Mix Workbench (17.22.23.3) using an external application.

See page 143.

Exporting Level Mix Workbench Data

Use Level Mix Workbench Export (17.22.23.19) to generate a data file containing records that you can use with an external application to analyze the historical and projected product mix required in your pacemaker processes. You can use the exported data to generate level schedules based on the product mix as well as to create or update flow schedules to support the level schedules.

Fig. 2.5
Level Mix Workbench Export (17.22.23.19)

Use Site and Process to identify a unique kanban process. Both fields are required.

Note The system exports data for a process only when the following are true for the process record in Kanban Process Maintenance:

- Process Function is set to PACE. See page 42.
- Pitch Quantity is greater than 0. See page 45.

If one of these conditions is not met, the system displays an error message.

Several fields in the program are the same as in Kanban Workbench Export. Unique fields include the following:

Historical Days. Enter the number of days of historical data the system should use in average mix percentage calculations.

Future Days. Enter the number of days the system should use in selecting future demand records for export.

This value must be greater than 0 (zero) and greater than the value entered in Time Fence Days.

Time Fence Days. Enter the number of calendar days into the future, starting from today, when flow scheduled orders are considered frozen. This value defaults from Kanban Control. It is included in the export file.

This must be less than the value entered in Future Days.

Tolerance Percent. Specify the allowable tolerance percentage between the total amount planned to be scheduled and the total amount actually scheduled. This value defaults from Kanban Control. It is included in the export file.

Schedule Time Adjustments. Optionally enter up to five reference codes related to calendar adjustments specified in Process Shift Maintenance (17.22.13). The system validates entries against that program.

These fields default from Kanban Control.

The reference codes and the associated time adjustments are included in the export file.

Time adjustments are typically used to identify such exceptions to the standard shift calendar as holidays or irregularly scheduled meetings that cannot be accounted for by shortening the shift hours.

See “Set Up Process Shifts” on page 49.

See page 155.

Record Selection

The system uses the following rules in determining data to be included in the export file:

- If no future forecast data is found for any items in the form of mrp_det records, average demand is used to determine future demand values. The current date is used to determine the past and future amounts. See “Daily Demand” on page 57.

- Flow orders entered using Flow Schedule Maintenance (17.21.3) are analyzed to find orders matching the site, production line, and item with a due date within the Future Days range. The export file includes data from matching flow schedule detail (flsd_det) records. See *User Guide: Manufacturing* for information on the Flow Scheduling module.

Note The production line specified in Kanban Process Maintenance must match the flow schedule.

If the item in the flow schedule has a different unit of measure than the pitch UM defined in Kanban Process Maintenance, the system converts quantities to the pitch UM before creating the export file.

When you use both Kanban and Flow Scheduling, you should ensure that flow orders are in kanban quantity increments. The actual flow order quantity amount (converted to the process UM if needed) is included in the export file. If this is not in the correct pitch increment, the system displays an error message.

- The system does not select the following flow orders:
 - Orders posted to repetitive
 - Closed orders
 - Fully completed orders
 - Orders that have a work order number specified in Flow Schedule Maintenance

Table 2.9 shows the structure of the export file created by Level Mix Workbench Export, as well as the structure needed when you return revised data to the system using an import file. The values in the fields are the same as those the system loads into Level Mix Workbench.

See page 143 for information on Level Mix Workbench.

The file includes four different record types:

- H: A header record
- P: Records to hold mix analysis data by item
- D: Records to hold date and shift
- Q: Records to hold order quantity data by date, shift, and item

The record type is in the first position of each record.

The export file includes placeholders for updated fields that will be returned to the system for import after processing by the external application. The table shows those fields in *italics*.

Table 2.9
Level Mix Workbench Export and Import File Definition

Field Name	Format	Description
RECORD TYPE "H"		
record_type	character	H
zero_constant	integer	0
site	character	Site of the process
process_id	character	Process

Table 2.9 — Level Mix Workbench Export and Import File Definition — (Page 1 of 3)

Field Name	Format	Description
production_line	character	Production line for process. Any flow orders imported or exported must reference this production line.
hist_work_days	integer	Number of historical days to use to determine average demand
fut_work_days	integer	Number of future days used to calculate average demand
time_fence	integer	Number of days (from today) considered frozen. Flow orders in frozen dates can be changed, but will not be replanned by the workbench recalculation logic.
pitch_quantity	decimal	Pitch size for the process
pitch_um	character	Pitch unit of measure
tolerance_pct	decimal	Difference between total modified orders and total planned orders that will generate a warning message
epei_disp	integer	Indicates how EPEI displays (weeks, days, hours, minutes, etc.)
cycle_time_sec	integer	Cycle time in seconds for the process
time_adj1	character	Shift adjustment reference code
time_adj2	character	Shift adjustment reference code
time_adj3	character	Shift adjustment reference code
time_adj4	character	Shift adjustment reference code
time_adj5	character	Shift adjustment reference code
days_per_period	integer	For future use. Currently always set to 1.
takt_time_revised	decimal	<i>New takt time as a result of order modifications (to be posted to process record)</i>
RECORD TYPE “P”		
record_type	character	P
zero_constant	integer	0
part	character	Item number
epei_disp_amt	decimal	EPEI converted to the desired display format
hist_demand	decimal	Total historical demand
fut_demand	decimal	Total future demand
kanban_quantity	decimal	Kanban quantity
cycle_time_sec	integer	Cycle time for item in seconds
epei_sec	integer	EPEI for item in seconds
seq_nbr	integer	Used to determine the order in which items are to be considered when being planned
seq_work	integer	Work field used to determine sequence number
mfg_seq	integer	User-defined manufacturing sequence number for this item
req_operators	decimal	User-defined required number of operators

Table 2.9 — Level Mix Workbench Export and Import File Definition — (Page 2 of 3)

Field Name	Format	Description
knb_keyid	decimal	Kanban Loop ID: Internal keyid of knb_mstr record exported from the system
max_buffer	decimal	Maximum buffer size for loop
buf_adj_revised	decimal	User-entered change to maximum buffer size (can be positive or negative number)
RECORD TYPE "D"		
record_type	character	D
shift	integer	Shift
date	date	Date
day_of_week	character	Monday, Tuesday, etc.
days_in_period	integer	Number of days in period
total_hours	decimal	Total work hours available in shift
time_adj_amt1	decimal	Time adjustments for adj category 1
time_adj_amt2	decimal	Time adjustments for adj category 2
time_adj_amt3	decimal	Time adjustments for adj category 3
time_adj_amt4	decimal	Time adjustments for adj category 4
time_adj_amt5	decimal	Time adjustments for adj category 5
time_adj_amt_other	decimal	Time adjustments for all other adj categories
avail_hours	decimal	Total hours in shift less all adjustments
frozen	Yes/No	Indicates if this is a date within the time fence horizon
time_adj_amt1_revised	decimal	User-entered amount for adjustment category 1
time_adj_amt2_revised	decimal	User-entered amount for adjustment category 2
time_adj_amt3_revised	decimal	User-entered amount for adjustment category 3
time_adj_amt4_revised	decimal	User-entered amount for adjustment category 4
time_adj_amt5_revised	decimal	User-entered amount for adjustment category 5
RECORD TYPE "Q"		
record_type	character	Q
shift	integer	Shift (1 through 4)
date	date	Flow order date
part	character	Flow order item
ord_qty	decimal	Flow original order quantity
comp_qty	decimal	Flow quantity completed so far
wb_qty	decimal	Calculated value of ord_qty – comp_qty
frozen	Yes/No	Indicates if flow order is within the time fence horizon
seq_nbr	integer	Flow order sequence number
order_qty_revised	decimal	Revised quantity entered by user. If zero found and flow order exists, it will be deleted.

Table 2.9 — Level Mix Workbench Export and Import File Definition — (Page 3 of 3)

Importing Level Mix Workbench Data

After loading the data into an external application, updating it as needed, and saving it to a comma-separated values (.csv) file, use Level Mix Workbench Import (17.22.23.20) to load data from the file into the system.

The user interface for this program is identical to Kanban Workbench Import.

For the import to work correctly, the file structure must be the same as that created by Level Mix Workbench. Table 2.9 on page 171 describes the required file structure. Fields updated in the external application are shown in *italics*.

See page 157.

Important The first record in the import file must contain only the literal string `level mix workbench`. Each subsequent record must include the fields shown in the table.

When you import data, the system makes the following updates based on data from the import file:

- From Record Type H: The system posts the updated takt time value to the process master record and updates the process pitch time accordingly. The Takt Time Calculation field in Kanban Process Maintenance is set to LvlMixWB.
- From Record Type P: Buffer adjustments are added to or subtracted from the maximum buffer size (knbism_max_buf) for kanban loops. The system also updates such things as safety stock and variability factor as needed.
- From Record Type D: Time adjustments made by the user are posted back to the Process Shift Maintenance record.
- From Record Type Q: Flow orders are generated from this record type. If the revised order quantity is different from the input order quantity, the system updates the corresponding flow orders. If the user enters a quantity of 0 (zero) for an item in the external application, any existing flow order is deleted. As needed, the system converts from the pitch UM back to the item UM.

Product Information Resources

QAD offers a number of online resources to help you get more information about using QAD products.

[QAD Forums \(community.qad.com\)](https://community.qad.com)

Ask questions and share information with other members of the user community, including QAD experts.

[QAD Knowledgebase \(knowledgebase.qad.com\)*](https://knowledgebase.qad.com)

Search for answers, tips, or solutions related to any QAD product or topic.

[QAD Document Library \(www.qad.com/documentlibrary\)](https://www.qad.com/documentlibrary)

Get browser-based access to user guides, release notes, training guides, and so on; use powerful search features to find the document you want, then read online, or download and print PDF.

[QAD Learning Center \(learning.qad.com\)*](https://learning.qad.com)

Visit QAD's one-stop destination for all courses and training materials.

*Log-in required

Index

Numerics

- 2.3.1 123, 124
- 5.13.20 124
- 17.21.3 171
- 17.22.1 36
- 17.22.2 50
- 17.22.3 42
- 17.22.4 52
- 17.22.5 39
- 17.22.6 74
- 17.22.7 76
- 17.22.8 73
- 17.22.11 77
- 17.22.12 50
- 17.22.13 49
- 17.22.14 142
- 17.22.15 17, 151
- 17.22.16.1 100
- 17.22.16.2 105
- 17.22.16.4 106
- 17.22.16.5 106
- 17.22.16.12 99
- 17.22.18.1 127
- 17.22.18.2 132
- 17.22.18.4 134
- 17.22.18.5 135
- 17.22.19.6 114
- 17.22.19.18 34, 152
- 17.22.19.20 121
- 17.22.19.21 122
- 17.22.19.23 136
- 17.22.20 136
- 17.22.23.2 138
- 17.22.23.3 143
- 17.22.23.13 154
- 17.22.23.16 166
- 17.22.23.17 169
- 17.22.23.19 169
- 17.22.23.20 174
- 17.22.24 25, 115
- 35.1 123
- 36.2.13 25

A

- Accumulator Monitor 114
- accumulators, card
 - defined 10
 - monitoring 114
 - setting up 66
- advance ship notice (ASN) import
 - kanban ship transactions 123

- Advanced Repetitive, integration with 15
- Analyst Data frame, kanban workbenches 96
- auto-print 35
- available time 42
- average demand
 - calculating 75
 - defined 9
 - setting up templates 74
 - specifying 57

B

- backflush 17, 70
- barcode, printing 26
- Basic Process Calculations 77
- batch numbers, dispatch list 31
- BOM code 36
- buffer limits 57

C

- card reporting method 29
- cards, kanban
 - auto-print 35, 106
 - creating 99
 - inactivating 101
 - maintaining 100
 - printing 83, 106
 - reconciling 18, 27, 83
 - status 102
 - status codes 101
- carrier, in supplier kanbans 61
- consuming multiple cards 120, 121, 122
- Container Type Maintenance 39
- containers, kanban 39
- control program 25
- controlled entry 32, 115
- copying kanban data 73
- cost set, in inventory value calculations 31
- cumulative orders 15
- cycle time 48

D

- data setup 24
- decrease at consume 30
- Demand Calculation Template Maintenance 74
- Demand Calculation Template Update 76
- demand, average. *See* average demand
- dispatch ID 30
- dispatch ID sequence 31
- dispatch lists 127
- dispatch records
 - maintaining 132

- viewing 134, 135
- Dispatch View by Dispatch ID 134
- Dispatch View by Source/Item 135
- display pause, transaction 31
- Document Import 123
- due date calculation 103

E

- ECO Q19Z 41
- ECO Q1FF 41
- electronic data interchange (EDI)
 - ASN import 123
 - dispatch lists 131
- EPEI. *See* every-part-every interval (EPEI)
- evaluating supermarkets 136
- every-part-every interval (EPEI)
 - calculating 47, 77
 - defined 8
 - displaying 45
 - minimum 8, 29, 37
- exporting data 153–174
- external applications 153–174

F

- FIFO lanes
 - defined 7
 - setting up 55
- FIFO time, specifying 65
- fill transactions, on shipper receipt 124
- Flow Schedule Maintenance 171
- flow schedules, updating 149
- fractional kanban logic 30

G

- generalized codes 25
- GL effects 16, 70

H

- Historical Buffer Evaluation 136

I

- importing data 153–174
- inventory effects 16, 70
- Inventory Validation Report 17, 151
- inventory value calculations 31
- inventory, validating 58, 151

J

- just in time 3

K

- kanban
 - cycle
 - maximum 34
 - minimum 34
 - introduction 3
 - loops 5
 - one-card system 3
 - reports 151
 - two-card system 3
 - work flow 19
- Kanban Card Create 99
- Kanban Card Maintenance 100
- Kanban Card Print 106

- kanban cards. *See* cards, kanban
- Kanban Consumption Import 121
- kanban containers, defining 39
- Kanban Control 25, 115
- Kanban Dispatch List Processing 127
- Kanban Dispatch Maintenance 132
- Kanban Item Master Maintenance 36
- Kanban Loop ID field 154
- Kanban Master Copy 73
- Kanban Master Maintenance 52
- Kanban Multi-Card Maintenance 105
- Kanban Multi-Card Print 106
- Kanban Process Maintenance 42
- Kanban Process Workbench 78
- Kanban Sizing Workbench 78
- Kanban Supplier field 123, 124
- Kanban Visualization 4
- Kanban Workbench Export 154
- knb_primary_key 154

L

- lead time method 45
- level mix sequence 44
- Level Mix Workbench 143
- Level Mix Workbench Export 169
- Level Mix Workbench Import 174
- level schedules, generating 142
- limited-use cards
 - creating 101
 - defined 11
- loops, kanban
 - defined 5
 - setting up 52

M

- material run-out logic 38
- maximum cycle enforcement 34
- maximum kanban cycle 34
- minimum cycle enforcement 34
- minimum EPEI 8, 29, 37
- minimum kanban cycle 34
- Missing Kanbans Report 34, 152
- move cards
 - defined 3
 - effects of reconciliation 28

N

- number range sequence, for dispatch ID 31

O

- one-card kanban system 3
- order quantity multiple 63

P

- pacemakers
 - defined 7
 - setting up 43
- phase-in method 27, 30
- phase-out method 30
- planner
 - kanban 61
 - process 44
- planning sequence 44
- PO Shipper Receipt

- kanban fill transactions 124
- Preliminary Level Schedule Report 142
- printing kanban cards 83, 106
 - auto-print settings 35, 106
- process functions 42
- Process Item Operation Rollup 50
- Process Shift Maintenance 49
- processes
 - defined 7
 - setting up 41

Q

- quantity mismatch method 69

R

- receipt shortfall 71
- receiving data, entering 32
- reconciliation, card 18, 27, 83
- regeneration enforcement 33
- reports 151
- resources, number 43
- rounding threshold 69
- routing code 36
- run-out logic, material 38

S

- safety stock
 - calculating 75
 - calculation methods 9
 - defined 9
 - setting up templates 74
 - specifying 59
- sequence enforcement 14, 34, 35
- sequence, planning 44
- service level 60
- setup time 48
- shifts, defining 49
- ship transactions, on ASN import 123
- ship/delivery pattern 63
- shipping delivery time 63
- shortcuts, Kanban setup 22
- shortfall, cumulative 71
- sizing
 - supermarkets 138
- status codes 12

- Supermarket Maintenance 50
- Supermarket Workbench 138
- Supermarket Workbench Export 166
- Supermarket Workbench Import 169
- supermarkets
 - defined 5
 - evaluating performance 136
 - setting up 50, 56
- Supplier Kanban Consumption 122
- Supplier Maintenance 123, 124

T

- takt time
 - calculating 44
- templates, demand
 - defining 74
 - updating 76
- time fence 27, 149
- Transaction Delete/Archive 136
- transactions, kanban
 - cumulative orders 15
 - deleting 136
 - overview 12
 - recording 113
 - sequence enforcement 14, 34, 35
- two-card kanban system 3

U

- update utilities 41
- utkbcrd1.p 41
- uxkbcrds.p 41

V

- validated fields 25
- variability factor 58

W

- work flow, kanban 16, 19
- work time 48
- workbench programs
 - exporting and importing data 153–174
 - Kanban Process Workbench 78
 - Kanban Sizing Workbench 78
 - Level Mix Workbench 143
 - Supermarket Workbench 138

